




Elektro-Automatik

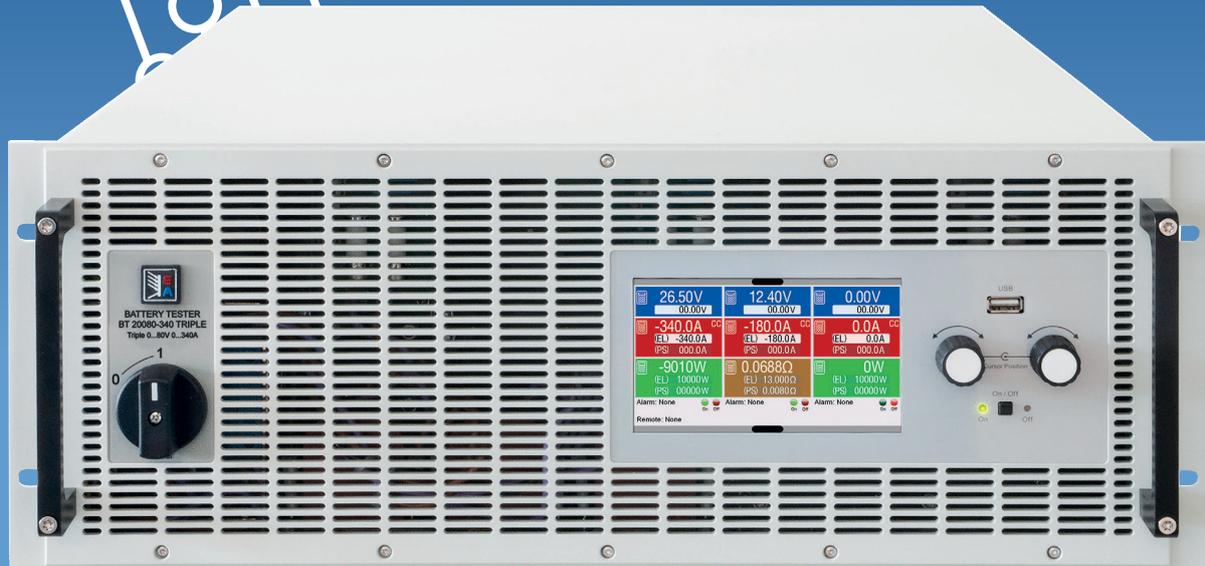

DATASHEET

EA-BT 20000 TRIPLE 4U

Battery Tester
with regenerative energy recovery

EA-BT 20000 TRIPLE 4U

Battery Tester

with regenerative energy recovery



Features

- Wide range input: 208 V - 480 V, $\pm 10\%$, 3ph AC
- Active Power Factor Correction, typical 0.99
- Battery tester, 2-quadrants for charge and discharge
- In discharge operation regenerative with energy recovery into the grid
- Very high efficiency of up to 96%
- High performance with up to 10 kW per channel
- Voltages from 0 - 10 V up to 0 - 920 V per channel
- Currents from 0 - 40 A up to 0 - 600 A per channel
- Flexible power regulated DC output/input stages (auto-ranging)
- Regulation modes CV, CC, CP, CR with fast crossover
- Digital regulation, high resolution with 18 bit, selection of voltage controller speed (normal, fast, slow)
- Parallel operation of the three channels
- Galvanically isolated Share-Bus and Master-Auxiliary bus for parallel operation of multiple battery testers
- Built-in Interfaces with 1 ms communication speed
- Typical battery tester functionality integrated
- Command languages and drivers: SCPI, ModBus, LabVIEW, IVI

Built-in interfaces

- USB
- Ethernet (1 Gbit/s)
- EtherCAT
- CAN FD
- Master-Auxiliary bus
- Share-Bus
- USB Host on front panel
- Digital In/Out

Software

- EA-Power Control
- EA-Battery Simulator

Options

- Water Cooling in stainless steel

Technical data

General specifications	
AC input	
Voltage, Phases	Range 1: 208 V, $\pm 10\%$, 3ph AC Range 2: 380 - 480 V, $\pm 10\%$, 3ph AC
Frequency	45 - 65 Hz
Power factor	ca. 0.99
Leakage current	<10 mA
Inrush current *1	@208 V: ca. 17 A per phase @400 V: ca. 32 A per phase
Overvoltage category	II
DC input/output static	
Load regulation CV	$\leq 0.05\%$ FS (0 - 100% load, at constant AC input voltage and temperature)
Line regulation CV	$\leq 0.01\%$ FS (208 V - 480 V AC $\pm 10\%$, at constant load and constant temperature)
Stability CV	$\leq 0.02\%$ FS (during 8 h of operation, after 30 minutes of warm-up, at constant AC input voltage, load and temperature)
Temperature coefficient CV	≤ 30 ppm/ $^{\circ}$ C (after 30 minutes of warm-up)
Compensation (remote sense)	$\leq 5\%$ U_{Nominal}
Load regulation CC	$\leq 0.1\%$ FS (0 - 100% load, at constant AC input voltage and temperature)
Line regulation CC	$\leq 0.01\%$ FS (208 V - 480 V AC $\pm 10\%$, at constant load and constant temperature)
Stability CC	$\leq 0.02\%$ FS (during 8 h of operation, after 30 minutes of warm-up, at constant AC input voltage, load and temperature)
Temperature coefficient CC	≤ 50 ppm/ $^{\circ}$ C (after 30 minutes of warm-up)
Load regulation CP	$\leq 0.3\%$ FS (0 - 100% load, at constant AC input voltage and temperature)
Load regulation CR	$\leq 0.3\%$ FS + 0.1% FS of current (0 - 100% load, at constant AC input voltage and temperature)
Protective functions	
OVP	Overvoltage protection, adjustable 0 - 110% U_{Nominal}
OCP	Overcurrent protection, adjustable 0 - 110% I_{Nominal}
OPP	Overpower protection, adjustable 0 - 110% P_{Nominal}
OT	Overtemperature protection (DC terminal shuts down in case of insufficient cooling)
DC input/output dynamic	
Rise time 10 - 90% / Fall time 90 - 10%	CV *2: ≤ 10 ms CC *3: ≤ 2 ms
Display & measurement accuracy	
Voltage	$\leq 0.05\%$ FS
Current	$\leq 0.1\%$ FS
Insulation	
AC input to DC terminal	3750 Vrms (1 minute, creepage distance >8 mm) *4
AC input to case (PE)	2500 Vrms
DC terminal to case (PE)	Depending on the model, see model tables
DC terminal to interfaces	1000 V DC (models up to 360 V rating), 1500 V DC (models from 500 V rating)
Communication interfaces	
Rear, galvanically isolated	USB, Ethernet (1 GBit), EtherCAT, CAN FD, all for communication
Communication speed	≥ 1 ms
Front, galvanically isolated	USB host, for data acquisition
Digital In/Out	
Built-in, galvanically isolated	16 pole
Inputs	3x independent, user-configurable
Outputs	3x independent, as dry contact
Sensor inputs	3x independent, for temperature sensor

*1 Calculated for the peak value of the stated voltage including 10% tolerance, at 23°C ambient and first switch-on (cold start)

*2 Valid for power supplies, unidirectional or bidirectional, in source mode operation

*3 Valid for electronic loads or bidirectional power supplies in sink mode operation

*4 Models with up to 80 V DC rating have reinforced insulation while all other models from 200 V DC rating have basic insulation

General specifications	
Device configuration	
Parallel operation with Share bus	BT 20000 series: up to 64 units of this series BT 20000 Triple series: max. 2 units per channel or grouping of all 3 channels of one device
Safety and EMC	
Safety	EN 61010-1 IEC 61010-1 UL 61010-1 CSA C22.2 No 61010-1 BS EN 61010-1
EMC	EN 55011, class A, group 1 CISPR 11, class A, group 1 FCC 47 CFR part 15B, unintentional radiator, class A EN 61326-1 including tests according to: - EN 61000-4-2 - EN 61000-4-3 - EN 61000-4-4 - EN 61000-4-5 - EN 61000-4-6
Appliance class	I
Ingress protection	IP20
Environmental conditions	
Operating temperature	0 - 50 °C (32 - 122 °F)
Storage temperature	-20 - 70 °C (-4 - 158 °F)
Humidity	≤80% relative humidity, non-condensing
Altitude	≤2000 m (≤6,600 ft)
Pollution degree	2
Mechanical construction	
Cooling	Forced air flow from front to rear (temperature controlled fans), optional water cooling
Dimensions (W x H x D)	Enclosure: 483 mm (19 in) x 177 mm (4U) x 668 mm (26.3 in) Overall depth: min. 802 mm (min. 31.6 in)
Weight	50 kg (110 lb)
Weight with water cooling	56 kg (126 lb)

Technical specifications	BT 20010-400 Triple	BT 20010-600 Triple	BT 20060-340 Triple	BT 20080-340 Triple
Number of channels	3	3	3	3
Total device power range *2	0 - 12000 W	0 - 18000 W	0 - 30000 W (0 - 18000 W)	0 - 30000 W (0 - 18000 W)
DC output per channel				
Voltage range	0 - 10 V	0 - 10 V	0 - 60 V	0 - 80 V
Ripple in CV (rms)	≤25 mV (BWL 300 kHz *1)			
Ripple in CV (pp)	≤320 mV (BWL 20 MHz *1)			
U _{Min} for I _{Max} (sink)	0.5 V	0.5 V	0.7 V	0.7 V
Current range	0 - 400 A	0 - 600 A	0 - 340 A	0 - 340 A
Power range *2	0 - 4000 W	0 - 6000 W	0 - 10000 W (0 - 6000 W)	0 - 10000 W (0 - 6000 W)
Output capacitance	8460 µF	8460 µF	8460 µF	8460 µF
Efficiency sink/source (up to)	90.5%	90.5%	95.1%	95.5%
AC input				
P _{Max}	Range 1: 13 kW Range 2: 13 kW	Range 1: 19 kW Range 2: 19 kW	Range 1: 19 kW Range 2: 31 kW	Range 1: 19 kW Range 2: 31 kW
Phase current *4	Range 1: ≤41 A Range 2: ≤22 A	Range 1: ≤61 A Range 2: ≤32 A	Range 1: ≤61 A Range 2: ≤53 A	Range 1: ≤61 A Range 2: ≤53 A
Insulation				
Negative DC pole <-> PE	±600 V DC	±600 V DC	±600 V DC	±600 V DC
Positive DC pole <-> PE	+600 V DC	+600 V DC	+600 V DC	+600 V DC
Channel DC <-> Channel DC	±1200 V DC	±1200 V DC	±1200 V DC	±1200 V DC
Article numbers				
Standard	02133001	02133002	02133003	02133004
Standard + Water Cooling	02143001	02143002	02143003	02143004

*1 BWL = Bandwidth limit on the measuring oscilloscope

*2 The value in brackets applies to the state of derating (power reduction) when standard models run on 208 V ±10% utility

*3 At 100% power and 100% output voltage

*4 Calculated for the default AC supply voltage in the stated range, minus 10% tolerance, at maximum output power and 10% power loss from AC to DC

Technical specifications	BT 20200-140 Triple	BT 20360-80 Triple	BT 20500-60 Triple	BT 20920-40 Triple
Number of channels	3	3	3	3
Total device power range *2	0 - 30000 W (0 - 18000 W)			
DC output per channel				
Voltage range	0 - 200 V	0 - 360 V	0 - 500 V	0 - 920 V
Ripple in CV (rms)	≤40 mV (BWL 300 kHz *1)	≤55 mV (BWL 300 kHz *1)	≤70 mV (BWL 300 kHz *1)	≤250 mV (BWL 300 kHz *1)
Ripple in CV (pp)	≤300 mV (BWL 20 MHz *1)	≤320 mV (BWL 20 MHz *1)	≤350 mV (BWL 20 MHz *1)	≤1200 mV (BWL 20 MHz *1)
U _{Min} for I _{Max} (sink)	1.8 V	2.5 V	2.5 V	2.5 V
Current range	0 - 140 A	0 - 80 A	0 - 60 A	0 - 40 A
Power range *2	0 - 10000 W (0 - 6000 W)	0 - 10000 W (0 - 6000 W)	0 - 10000 W (0 - 6000 W)	0 - 10000 W (0 - 6000 W)
Output capacitance	1800 µF	600 µF	225 µF	100 µF
Efficiency sink/source (up to)	95.3%	95.8%	96.5%	96.5%
AC input				
P _{Max}	Range 1: 19 kW Range 2: 31 kW			
Phase current *4	Range 1: ≤61 A Range 2: ≤53 A			
Insulation				
Negative DC pole <-> PE	±1000 V DC	±1000 V DC	±1500 V DC	±1500 V DC
Positive DC pole <-> PE	+1000 V DC	+1000 V DC	+2000 V DC	+2000 V DC
Channel DC <-> Channel DC	±2000 V DC	±2000 V DC	±2000 V DC	±2000 V DC
Article numbers				
Standard	02133005	02133006	02133007	02133008
Standard + Water Cooling	02143005	02143006	02143007	02143008

*1 BWL = Bandwidth limit on the measuring oscilloscope

*2 The value in brackets applies to the state of derating (power reduction) when standard models run on 208 V ±10% utility

*3 At 100% power and 100% output voltage

*4 Calculated for the default AC supply voltage in the stated range, minus 10% tolerance, at maximum output power and 10% power loss from AC to DC

General

The battery tester with regenerative energy recovery in the BT 20000 Triple series from EA Elektro-Automatik are two quadrant devices with 3 channels which can perform the function of a charger as well as that of an electronic load (discharging). In discharging mode the device is regenerative and feeds the energy back into the local grid with an efficiency of up to over 96%. The BT 20000 triple series includes three phase units which, together with the wide input range, allows use with practically all global mains voltages.

The DC voltages and currents are determined by the application and the spectrum ranges from 0 - 10 V to 0 - 920 V and from 0 - 40 A up to 0 - 600 A per channel in a single device. The DC output is operated by a flexible power block with a constant power characteristic (autoranging) at a wide voltage and current range.

To achieve higher power and current, all units are equipped with an internal grouping. This allows to run the 3 channels, when externally connected in parallel, as one channel with a total power of up to 30 kW and up to 1800 A. In this way, as an example, the end user can build a battery cell tester with 3 channels of 0 - 10 V and 0 - 600 A or one channel with 0 - 10 V and 0 - 1800 A.

Furthermore typical battery tester alarm and warning management, various industrial interfaces, software solutions and many more functions are available.


AC connection

The battery tester in the BT 20000 Triple series are equipped with an active PFC which provides a high efficiency at a low energy consumption. Furthermore, the devices in this series provide a wide AC input voltage range. It reaches from 208 - 240 V and 380 - 480 V. Hence the devices can be operated in the majority of global grids. They adjust automatically, without additional configuration, to the available grid voltage.

In an AC grid with a 3-phase 208 - 240 V, the models rated with 30 kW will automatically set a derating of the DC output power.

Energy recovery

The energy consumed in load mode is fed back into the connected grid with an efficiency of up to 96%. As the energy is not converted to heat as in other loads, the energy costs are reduced. In addition, the devices generate less heat requiring less cost intensive air conditioning. One device can already be sufficient for a while range of applications, reducing investment and installation costs.

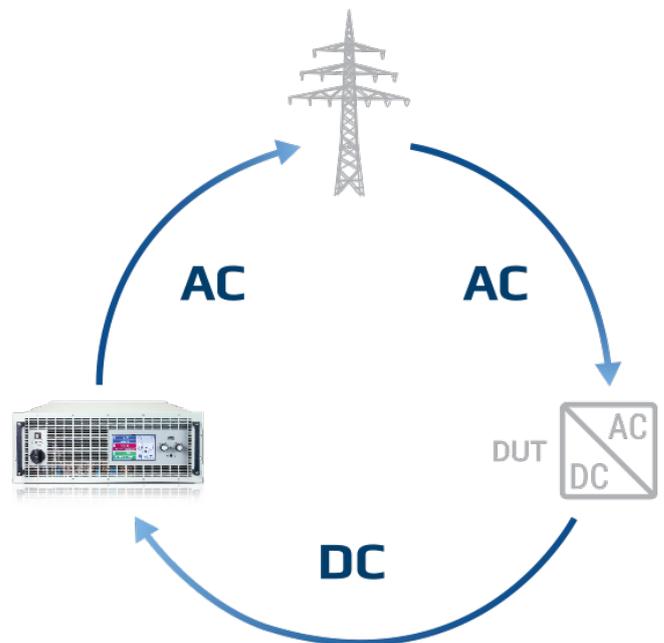

The principle of energy recovery


The figure above demonstrates, based on a typical application, how a „device under test“ consumes energy from the mains, converts it to DC and feeds that into an EA device. The bidirectional power supply PSB 10000 converts this energy back into an AC current and feeds it back into the grid.

DC output

With BT 20000 Triple, the per channel output with voltages of 0 - 10 V up to 0 - 920 V allows positive and negative currents of 0 - 40 A up to 0 - 600 A as a two quadrant device. The flexible output stages (autoranging) provide the user with a wide voltage, current and power range and hence a wider range of applications than traditional battery testers.

DC connection

Connection of the DC outputs is via copper rails on the back side of the device. If a system with higher performance is required, the outputs can be connected in parallel with horizontal copper rails. Covers for contact protection is provided for every channel.

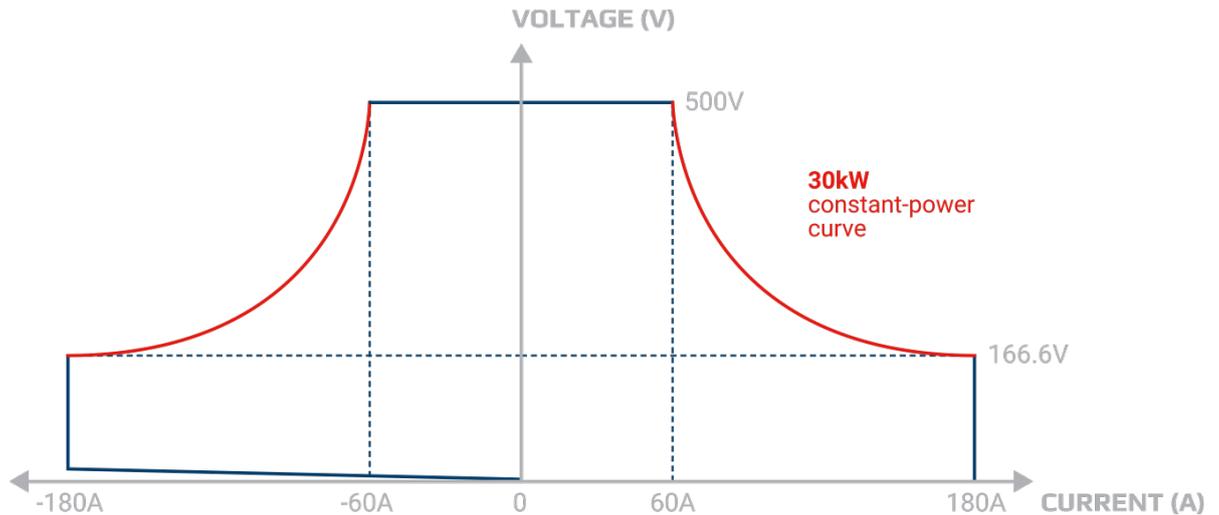

The principle of autoranging

„Autoranging“ is a term when a two quadrant battery tester automatically offers a wide output and input range of both, voltage and current, to maintain full power across a wide operation range. This type of solution allows the use of a single unit to address multiple voltage and current combinations.

Interfaces

As standard, EA-BT 20000 series devices are fitted with the most important interfaces and ports which are all galvanically isolated from the DC side. The communication speed is 1 ms. The following digital interfaces are available to the user:

- USB
- Ethernet (1 Gbit/s)
- EtherCAT
- CAN FD

In addition, there is a Digital In/Out connector per channel with 3 universal inputs, 3 relay contacts and 3 temperature sensor inputs for battery control and false polarity protection.

High performance battery test systems

High power applications can be covered with high power battery test systems of up to 240 kW in one cabinet. These are achieved by using the DC outputs of multiple BT 20000 devices with vertical copper rails in parallel. Thus, a 19" cabinet with 42 U can provide a system with 240 kW occupying only 0.6 m² (6.5 sqft) of floor space. The Master-Auxiliary bus allows for up to 8 cabinets with a maximum of 64 units with up to 30 kW each to behave as one unit.

Master-Auxiliary bus and Share-Bus

If these integrated buses are used, a multi-device system behaves as a single device. The Master-Auxiliary bus and the Share-Bus are simply connected between each unit. With the Master-Auxiliary bus transports the system data, such as total power and total current, which are collected and shown on the master device. Warnings and alarms of the auxiliary devices are shown clearly in the display. The Share-Bus equals load distribution between the individual units.



Example representation

In this illustration you can see a fully assembled and wired 240 kW system

Applications

Battery test for electro mobility

A typical application for the battery tester with regenerative energy recovery from EA Elektro-Automatik is the testing of the electrical characteristics of a battery. The wide application spectrum covers cell, module or pack tests, the determination of the SOH (State-of-Health) for a second life classification as well as the End-of-Line (EOL) test. These applications put many demands on power electronics which are fulfilled by the BT 20000 range. The excellent features of this device range are: measurement of voltage and current with the required accuracy and performance, reproducibility and reliability of these data and the flexible usability. Whether in an automated test system or in an integrated battery test, all possibilities are open to the user. Furthermore, the devices are clearly economical with efficiencies of up to over 96%.



Battery simulation

Additional applications include the simulation of batteries as single cells, modules, or packs. These simulations aid in the optimal configuration of energy storage as well as the supplied components under test. Wherever reproducible data are needed a battery simulator is the first choice. Also, the use of a battery tester as simulator provides protection for the connected consuming component. The overcurrent protection (OCP) can, like a safety fuse, switch off the output and generate an alarm. The voltage can be monitored and can, if over or under limits, trigger various functions, and also generate warnings and alarms. Thus, many integrated functions can be safely performed.


Battery recycling

The battery tester with regenerative energy recovery of the BT 20000 range enable retired batteries from electric vehicles to be considered for a possible further use. Assessment of the battery pack starts with a State of Health (SOH) check to determine if a second life is feasible. This standard integral function can be initiated with one clic. If this check shows too little rest capacity, then the battery must be fully discharged before recycling. The autoranging of the devices guarantees the maximum possible total discharge though the high load current, even with voltages under 2 V. The regenerative energy recovery to the power grid up to 96% efficiency makes this process highly cost effective.


Technical drawings BT 20000 Triple 4U ≤ 200 V

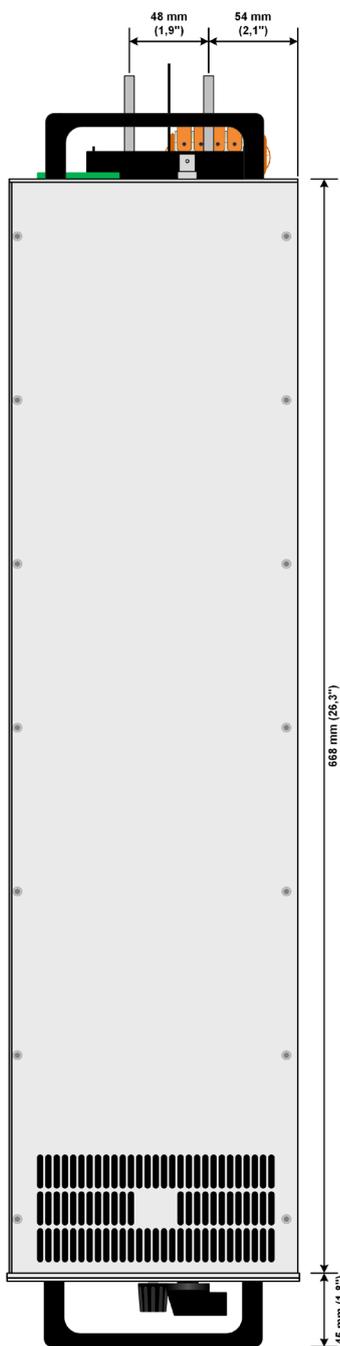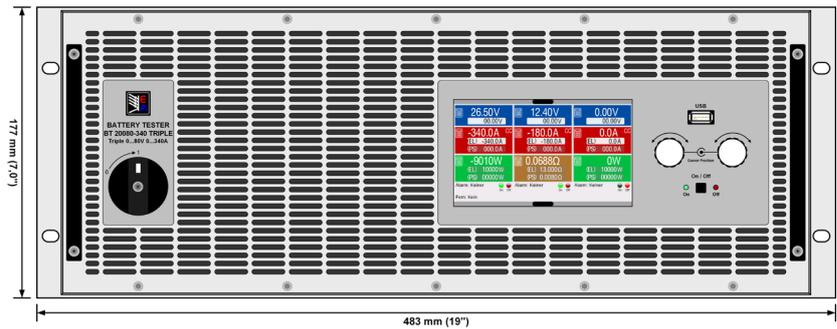

(side view of standard version shown)

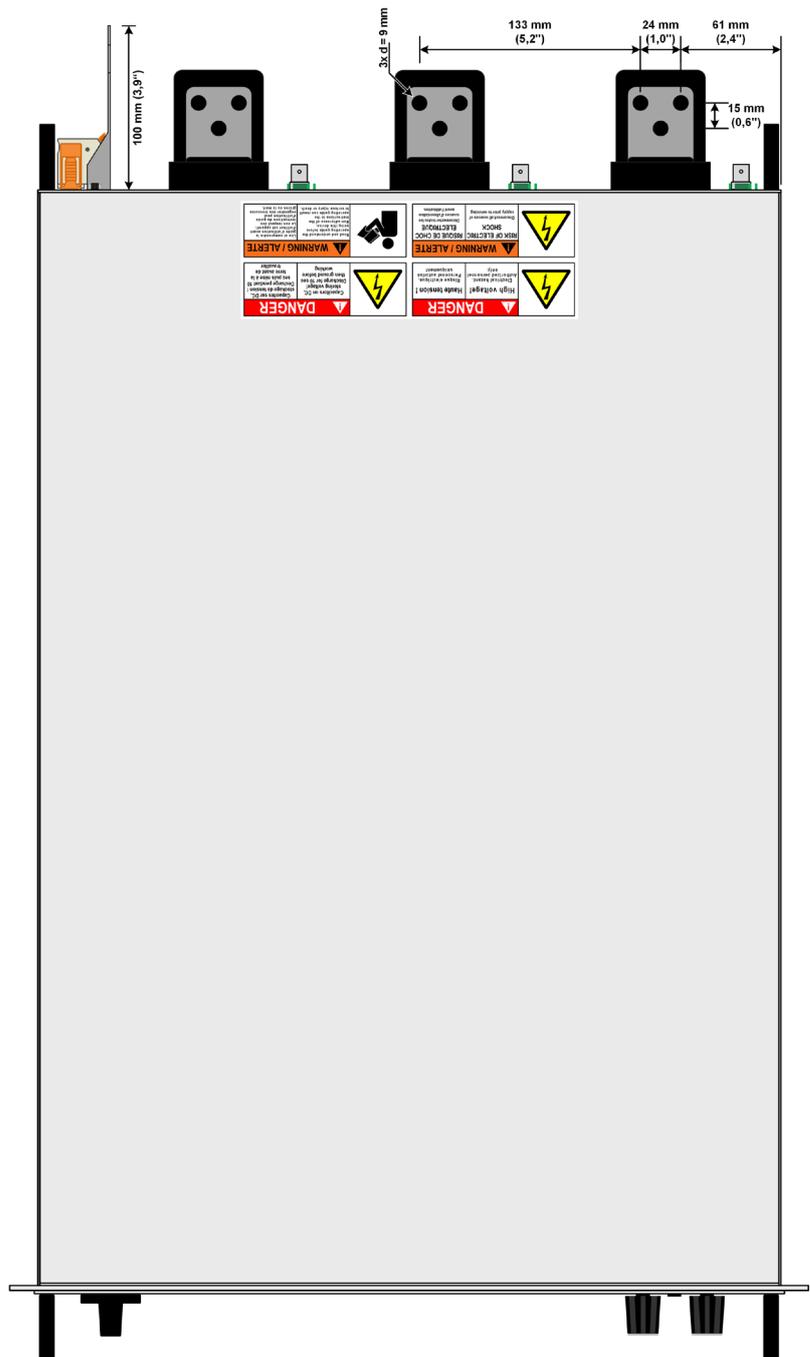


Front panel description BT 20000 Triple 4U

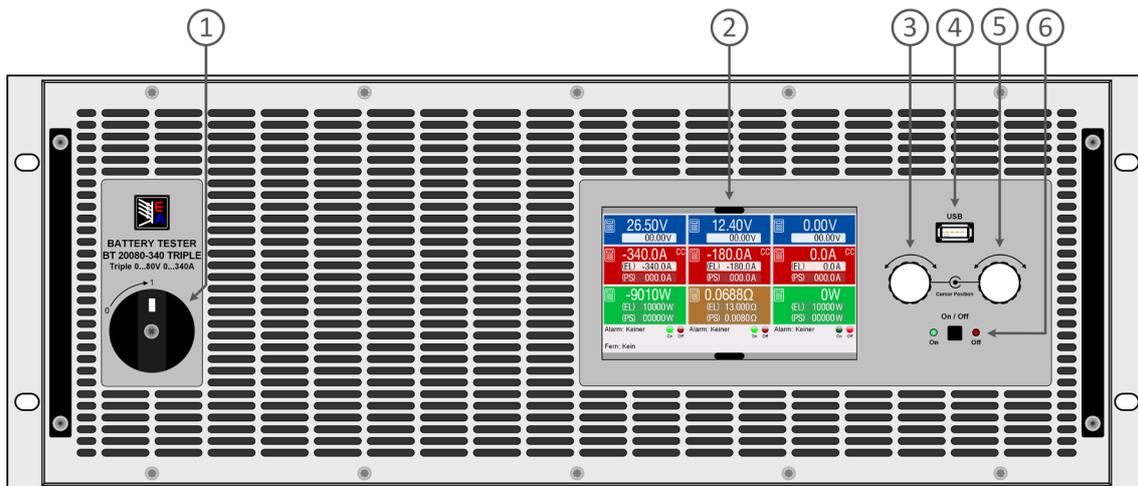



1. Power switch
2. TFT control interface, interactive operation and display
3. Rotary knob with push-button action, for settings and control
4. USB host, uses USB sticks for data logging and sequencing
5. Rotary knob with push-button action, for settings and control
6. On / Off push-button with LED status display

Rear panel description BT 20000 Triple 4U $\leq 200\text{ V}$

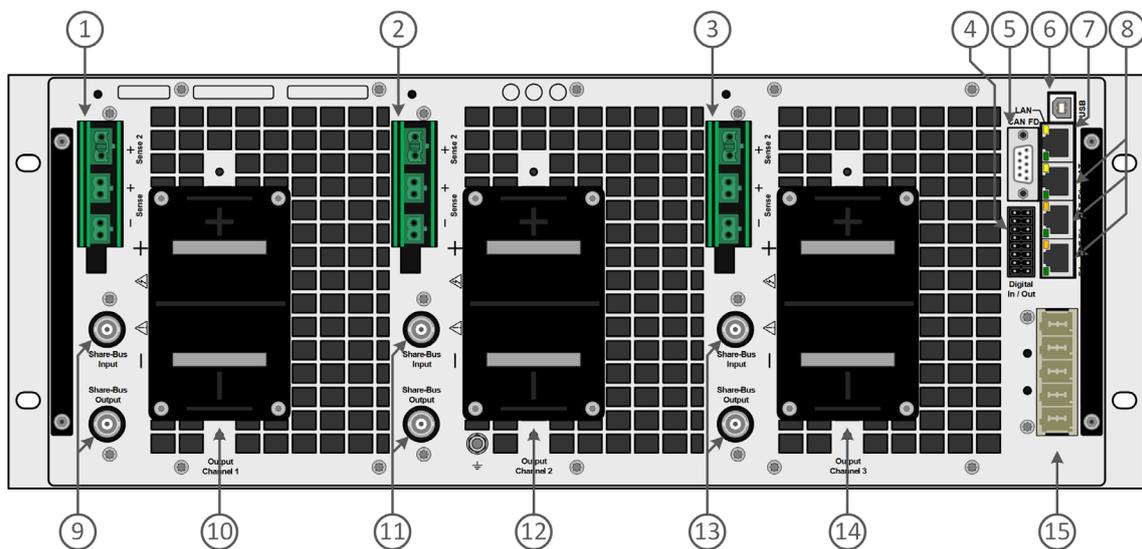


1. Remote sense connectors Channel 1
2. Remote sense connectors Channel 2
3. Remote sense connectors Channel 3
4. Digital In/Out (16 pole connector)
5. CAN FD interface
6. USB interface
7. Ethernet interface
8. EtherCAT ports
9. Share-Bus connectors Channel 1
10. DC output connector (copper blades) Channel 1
11. Share-Bus connectors Channel 2
12. DC output connector (copper blades) Channel 2
13. Share-Bus connectors Channel 3
14. DC output connector (copper blades) Channel 3
15. AC input connector


Technical drawings BT 20000 Triple 4U ≥ 360 V

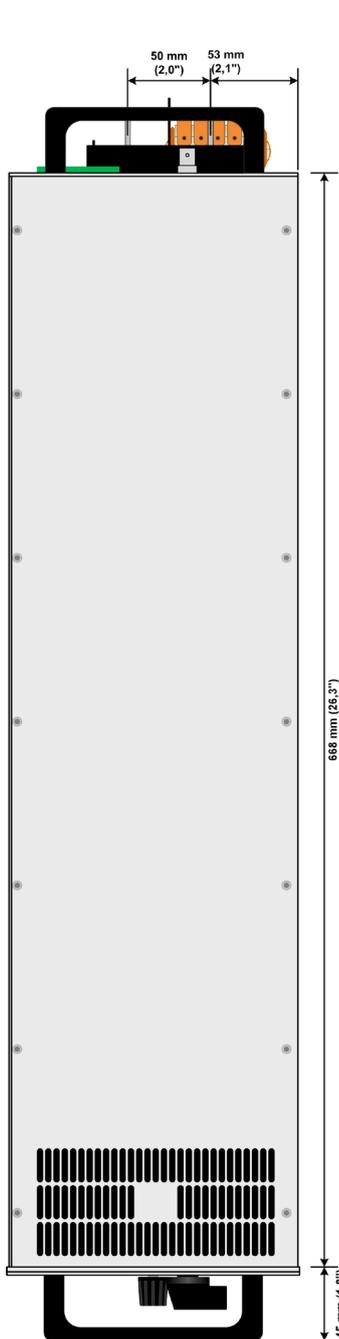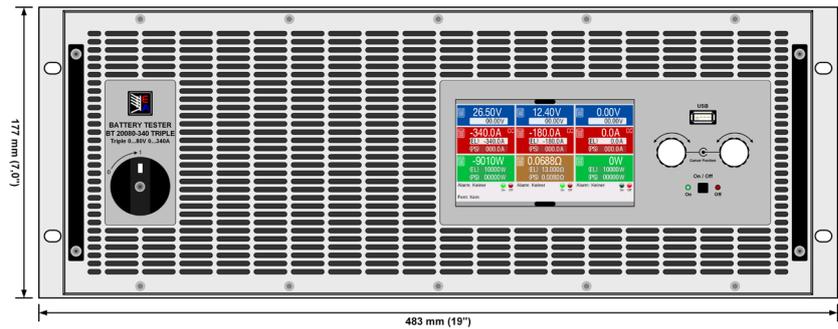

(side view of standard version shown)

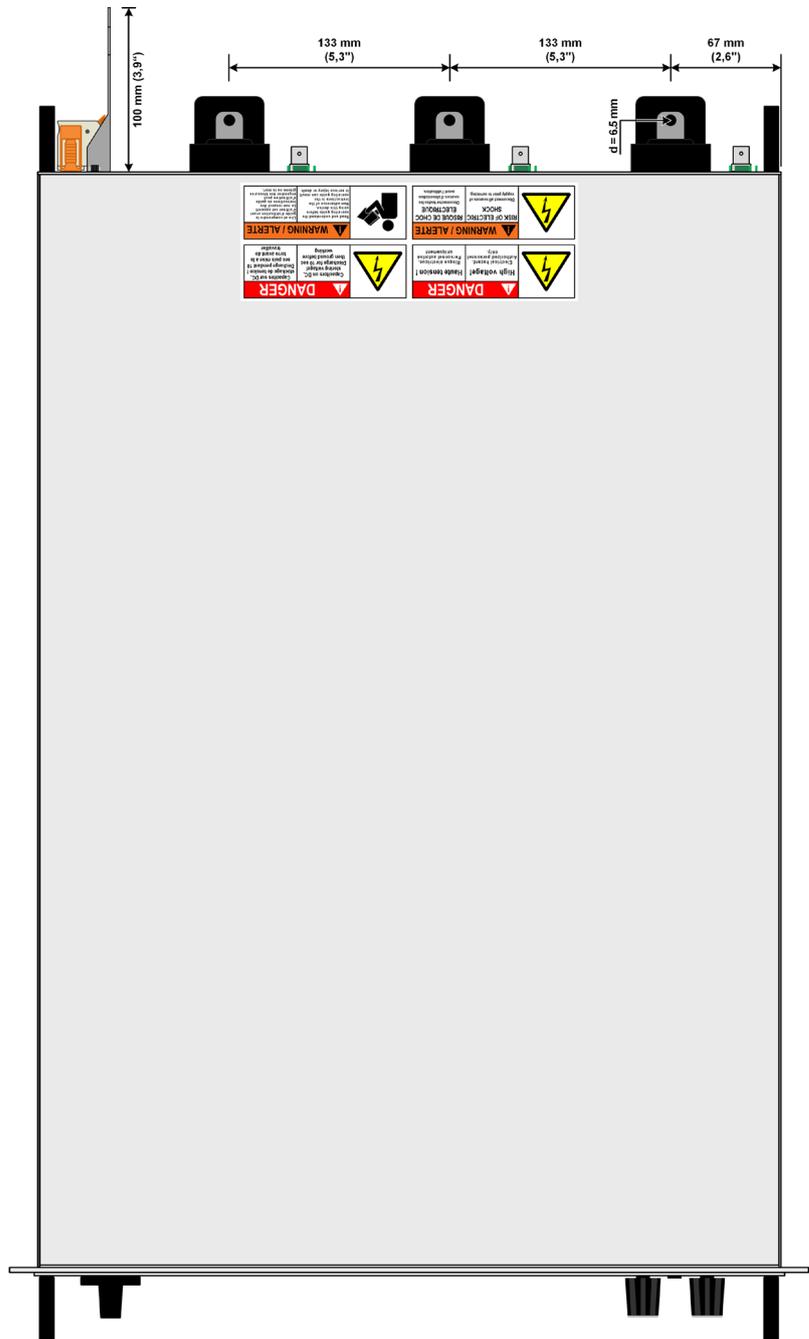


Front panel description BT 20000 Triple 4U

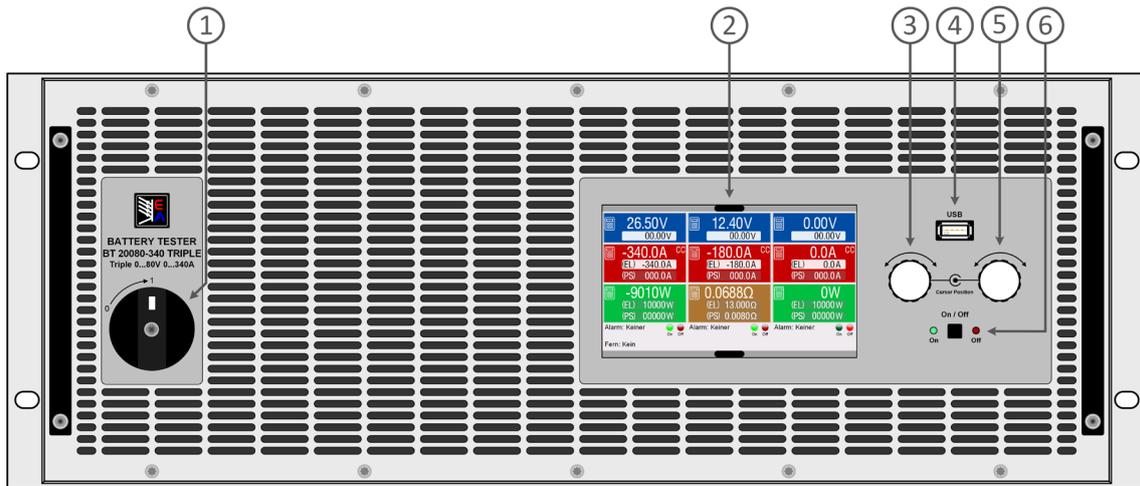


1. Power switch
2. TFT control interface, interactive operation and display
3. Rotary knob with push-button action, for settings and control
4. USB host, uses USB sticks for data logging and sequencing
5. Rotary knob with push-button action, for settings and control
6. On / Off push-button with LED status display

Rear panel description BT 20000 Triple 4U $\geq 360\text{ V}$

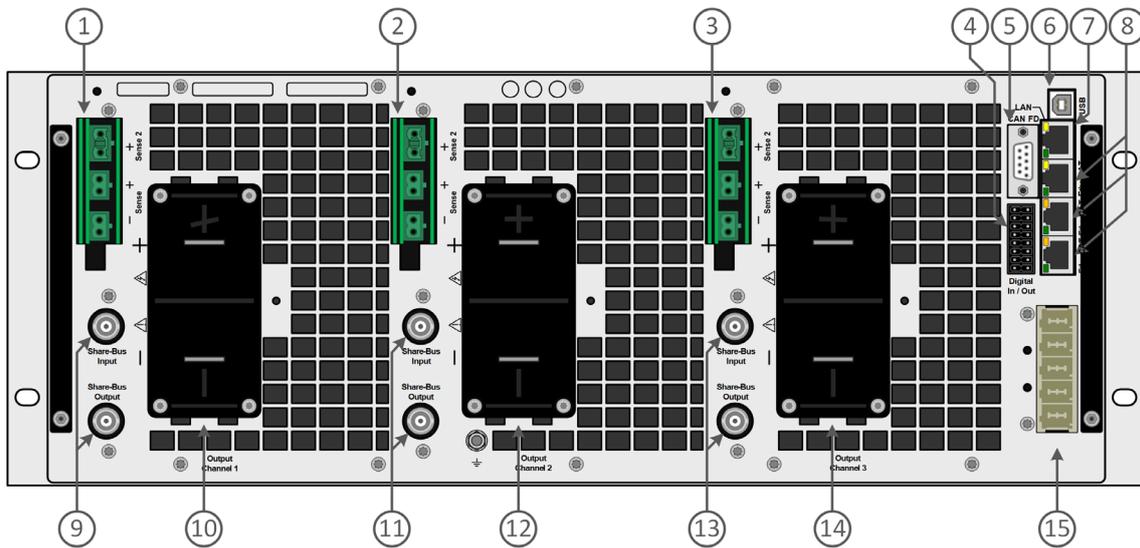


- | | |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ol style="list-style-type: none"> 1. Remote sense connectors Channel 1 2. Remote sense connectors Channel 2 3. Remote sense connectors Channel 3 4. Digital In/Out (16 pole connector) 5. CAN FD interface 6. USB interface 7. Ethernet interface 8. EtherCAT ports | <ol style="list-style-type: none"> 9. Share-Bus connectors Channel 1 10. DC output connector (copper blades) Channel 1 11. Share-Bus connectors Channel 2 12. DC output connector (copper blades) Channel 2 13. Share-Bus connectors Channel 3 14. DC output connector (copper blades) Channel 3 15. AC input connector |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Front panel description BT 20000 Triple 4U WC (water cooling option)

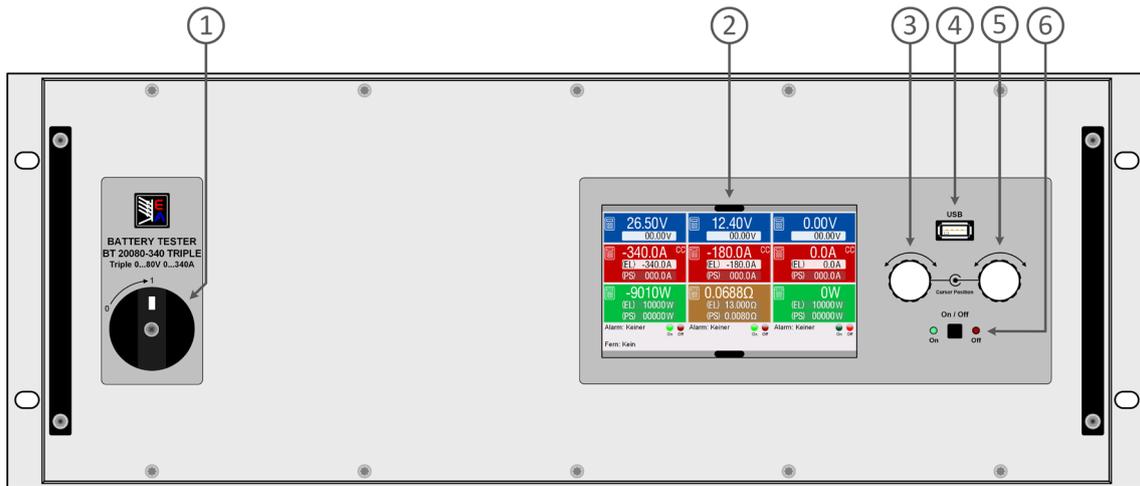

1. Power switch
2. TFT control interface, interactive operation and display
3. Rotary knob with push-button action, for settings and control
4. USB host, uses USB sticks for data logging and sequencing
5. Rotary knob with push-button action, for settings and control
6. On / Off push-button with LED status display

Rear panel description BT 20000 Triple 4U WC (water cooling option)

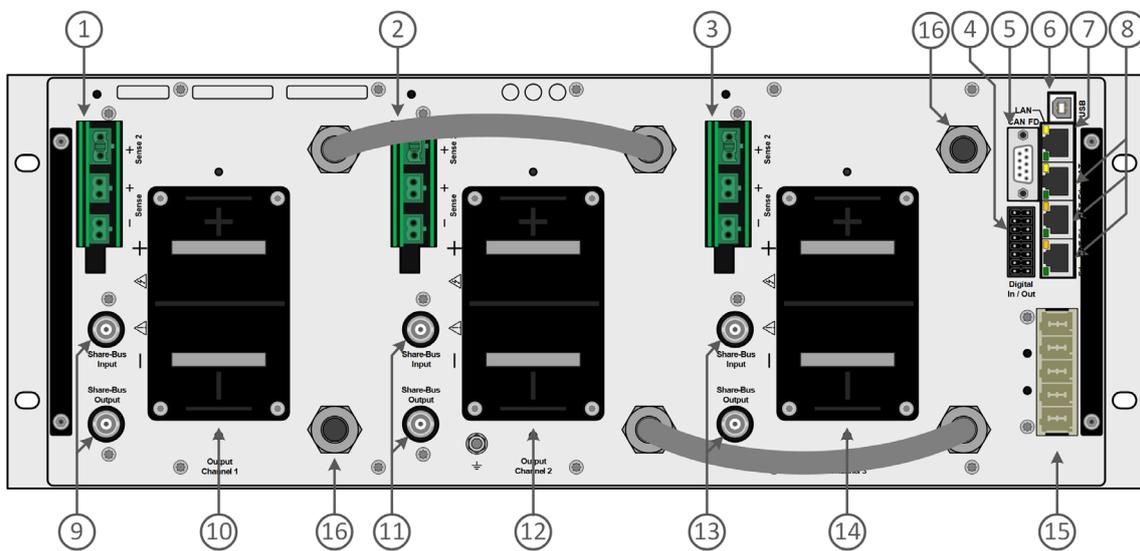

- | | |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ol style="list-style-type: none"> 1. Remote sense connectors Channel 1 2. Remote sense connectors Channel 2 3. Remote sense connectors Channel 3 4. Digital In/Out (16 pole connector) 5. CAN FD interface 6. USB interface 7. Ethernet interface 8. EtherCAT ports | <ol style="list-style-type: none"> 9. Share-Bus connectors Channel 1 10. DC output connector (copper blades) Channel 1 11. Share-Bus connectors Channel 2 12. DC output connector (copper blades) Channel 2 13. Share-Bus connectors Channel 3 14. DC output connector (copper blades) Channel 3 15. AC input connector 16. Water inlet/outlet |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

EA Elektro-Automatik GmbH & Co. KG

Helmholtzstr. 31-37
41747 Viersen

Phone +49 2162 3785 - 0
Fax +49 2162 1623 - 0
ea1974@elektroautomatik.com

www.elektroautomatik.com

EA Elektro-Automatik Inc.

9845 Via Pasar
CA, 92126, San Diego

Phone: +1 (858) 218 2265
sales@elektroautomatik.com

www.eapowered.com

