



Elektro-Automatik



DATASHEET

EA-ELR 10000 4U

Programmable Electronic DC Loads
With Energy Recovery

EA-ELR 10000 4U 30 KW

Programmable electronic DC loads
with energy recovery



Features

- Wide range AC input: 208 V - 480 V, $\pm 10\%$, 3ph AC
- Active Power Factor Correction, typical 0.99
- Regenerative, with energy recovery into the grid
- Very high efficiency of up to 96%
- High performance with 30 kW per unit
- Voltages from 0 - 80 V up to 0 - 2000 V
- Currents from 0 - 40 A up to 0 - 1000 A
- Flexible, power regulated DC input stages (autoranging)
- Regulation modes CV, CC, CP, CR with fast crossover
- Digital regulation, high resolution with 16bit ADCs and DACs, selection of voltage regulation speed: Normal, Fast, Slow
- Color 5" TFT display with touch control and intuitive user interface
- Galvanically isolated Share bus for parallel operation of all power classes in the 10000 series
- Master-Slave bus for parallel operation of up to 64 units of all power classes in the 10000 series
- Integrated function generator with predefined curves
- Battery test mode
- Solar inverter test mode (MPPT)
- Command languages and drivers: SCPI and ModBus, LabVIEW, IVI

Built-in interfaces

- USB
- Ethernet
- Analog
- USB-Host
- Master-Slave-Bus
- Share bus

Optional interfaces

- CAN
- CANopen
- RS232
- Profibus
- EtherCAT
- Profinet, with one or two ports
- Modbus, with one or two ports
- Ethernet, with one or two ports

Software

- EA-Power Control

Options

- Water Cooling in stainless steel

Technical data

General specifications	
AC input	
Voltage, Phases	Range 1: 208 V, $\pm 10\%$, 3ph AC (with DC input power derating to 18 kW) Range 2: 380 - 480 V, $\pm 10\%$, 3ph AC
Frequency	45 - 65 Hz
Power factor	ca. 0.99
Leakage current	<10 mA
Inrush current / Phase current	≤ 56 A
Overvoltage category	2
DC input static	
Load regulation CV	$\leq 0.05\%$ FS (0 - 100% load, constant input voltage and constant temperature)
Line regulation CV	$\leq 0.01\%$ FS (208 V - 480 V AC $\pm 10\%$ input voltage, constant load and constant temperature)
Stability CV	$\leq 0.02\%$ FS (during 8 h of operation, after 30 minutes warm-up, at constant input voltage, load and temperature)
Temperature coefficient CV	≤ 30 ppm/ $^{\circ}$ C (after 30 minutes of warm-up)
Compensation (remote sense)	$\leq 5\%$ U_{Nominal}
Load regulation CC	$\leq 0.1\%$ FS (0 - 100% load, constant input voltage and constant temperature)
Line regulation CC	$\leq 0.01\%$ FS (208 V - 480 V AC $\pm 10\%$ input voltage, constant load and constant temperature)
Stability CC	$\leq 0.02\%$ FS (during 8 h of operation, after 30 minutes warm-up, at constant input voltage, load and temperature)
Temperature coefficient CC	≤ 50 ppm/ $^{\circ}$ C (after 30 minutes of warm-up)
Load regulation CP	$\leq 0.3\%$ FS (0 - 100% load, constant input voltage and constant temperature)
Load regulation CR	$\leq 0.3\%$ FS + 0.1% FS current (0 - 100% load, constant input voltage and constant temperature)
Protective functions	
OVP	Overvoltage protection, adjustable 0 - 110% U_{Nominal}
OCP	Overcurrent protection, adjustable 0 - 110% I_{Nominal}
OPP	Overpower protection, adjustable 0 - 110% P_{Nominal}
OT	Overtemperature protection (DC input shuts down in case of insufficient cooling)
DC input dynamic	
Rise time 10 - 90% CC	≤ 2 ms
Fall time 90 - 10% CC	≤ 2 ms
Display accuracy	
Voltage	$\leq 0.05\%$ FS
Current	$\leq 0.1\%$ FS
Insulation	
AC input to DC input	3750 Vrms (1 minute, creepage distance >8 mm) *1
AC input to case (PE)	2500 Vrms
DC input to case (PE)	Depending on the model, see model tables
DC input to interfaces	1000 V DC (models up to 360 V rating), 1500 V DC (models from 500 V rating)
Interfaces digital	
Built-in, galvanically isolated	USB, Ethernet (100 MBit) for communication, 1x USB host for data acquisition
Optional, galvanically isolated	CAN, CANopen, RS232, ModBus TCP, Profinet, Profibus, EtherCAT, Ethernet
Interfaces analog	
Built-in, galvanically isolated	15 pole D-Sub
Signal range	0 - 10 V or 0 - 5 V (switchable)
Inputs	U, I, P, R, remote control on/off, DC input on/off, resistance mode on/off
Outputs	Monitor U and I, alarms, reference voltage, DC input status, CV/CC regulation mode
Accuracy U / I / P / R	0 - 10 V: $\leq 0.2\%$, 0 - 5 V: $\leq 0.4\%$

*1 The model with 80 V DC rating has a reinforced insulation while all other models from 200 V DC rating have basic insulation

General specifications	
Device configuration	
Parallel operation	Up to 64 units of any power class in series 10000, with master-slave bus and Share bus
Safety and EMC	
Safety	EN 61010-1 IEC 61010-1 UL 61010-1 CSA C22.2 No 61010-1 BS EN 61010-1
EMC	EN 55011, class B CISPR 11, class B FCC 47 CFR Part 15B, unintentional radiator, class B EN 61326-1 include tests according to: - EN 61000-4-2 - EN 61000-4-3 - EN 61000-4-4 - EN 61000-4-5 - EN 61000-4-6
Safety protection class	1
Ingress protection	IP20
Environmental conditions	
Operating temperature	0 - 50 °C (32 - 122 °F)
Storage temperature	-20 - 70 °C (-4 - 158 °F)
Humidity	≤80% relative humidity, non-condensing
Altitude	≤2000 m (≤6,600 ft)
Pollution degree	2
Mechanical construction	
Cooling	Forced air flow from front to rear (temperature controlled fans), optional water cooling
Dimensions (W x H x D)	Enclosure: 19" x 4U x 668 mm (26.3 in) Total: 19" x 4U x min. 785 mm (31 in)
Weight	50 kg (110 lb)
Weight with water cooling	56 kg (126 lb)

Technical specifications	ELR 10080-1000	ELR 10200-420	ELR 10360-240	ELR 10500-180	ELR 10750-120
DC input					
Voltage range	0 - 80 V	0 - 200 V	0 - 360 V	0 - 500 V	0 - 750 V
Ripple in CV (rms)	≤25 mV (BW 300 kHz)	≤40 mV (BW 300 kHz)	≤55 mV (BW 300 kHz)	≤70 mV (BW 300 kHz)	≤200 mV (BW 300 kHz)
Ripple in CV (pp)	≤320 mV (BW 20 MHz)	≤300 mV (BW 20 MHz)	≤320 mV (BW 20 MHz)	≤350 mV (BW 20 MHz)	≤800 mV (BW 20 MHz)
U_{Min} for I_{Max}	0.6 V	1.8 V	2.5 V	1.1 V	1.2 V
Current range	0 - 1000 A	0 - 420 A	0 - 240 A	0 - 180 A	0 - 120 A
Power range	0 - 30000 W				
Resistance range	0.003 Ω - 5 Ω	0.0165 Ω - 25 Ω	0.05 Ω - 90 Ω	0.08 Ω - 170 Ω	0.2 Ω - 370 Ω
Input capacitance	25380 μF	5400 μF	1800 μF	675 μF	450 μF
Efficiency (up to)	95.5% *1	95.3% *1	95.8% *1	96.5% *1	96.5% *1
Insulation					
Negative DC pole <-> PE	±600 V DC	±1000 V DC	±1000 V DC	±1500 V DC	±1500 V DC
Positive DC pole <-> PE	+600 V DC	+1000 V DC	+1000 V DC	+2000 V DC	+2000 V DC
Article numbers					
Standard	33200801	33200802	33200803	33200804	33200805
Standard + Water Cooling	33250801	33250802	33250803	33250804	33250805

*1 At 100% power and 100% input voltage

Technical specifications	ELR 10920-125	ELR 11000-80	ELR 11500-60	ELR 12000-40	
DC input					
Voltage range	0 - 920 V	0 - 1000 V	0 - 1500 V	0 - 2000 V	
Ripple in CV (rms)	≤200 mV (BW 300 kHz)	≤300 mV (BW 300 kHz)	≤400 mV (BW 300 kHz)	≤400 mV (BW 300 kHz)	
Ripple in CV (pp)	≤800 mV (BW 20 MHz)	≤1600 mV (BW 20 MHz)	≤2400 mV (BW 20 MHz)	≤2400 mV (BW 20 MHz)	
U_{Min} for I_{Max}	2 V	3.4 V	3.2 V	3.7 V	
Current range	0 - 125 A	0 - 80 A	0 - 60 A	0 - 40 A	
Power range	0 - 30000 W				
Resistance range	0.25 Ω - 550 Ω	0.4 Ω - 650 Ω	0.8 Ω - 1500 Ω	1.7 Ω - 2700 Ω	
Input capacitance	300 μF	200 μF	75 μF	50 μF	
Efficiency (up to)	96.5% *1	95.8% *1	96.5% *1	96.5% *1	
Insulation					
Negative DC pole <-> PE	±1500 V DC	±1500 V DC	±1500 V DC	±1500 V DC	
Positive DC pole <-> PE	+2000 V DC	+2000 V DC	+2000 V DC	+2000 V DC	
Article numbers					
Standard	33200809	33200806	33200807	33200808	
Standard + Water Cooling	33250809	33250806	33250807	33250808	

*1 At 100% power and 100% input voltage

General

The device series ELR 10000 from EA Elektro-Automatik are programmable electronic loads. The devices are regenerative and feed the consumed DC energy back into the local or public grid with an efficiency of up to 96%. The series offers single-phase and three-phase models which, together with the wide input range, allow operation on practically all global mains voltages. The rated DC voltages and currents are determined by typical applications and the spectrum ranges from 0 - 80 V to 0 - 2000 V and from 0 - 6 A up to 0 - 1000 A in a single device. The DC input operates as a flexible input stage with a constant power characteristic (autoranging) and a wide voltage and current range.

To achieve higher powers and currents all units are equipped with a master-slave bus. This allows for up to 64 parallel connected devices working as one system which can provide a load up to 1920 kW and 64000 A. Such a system works as a single unit and can use different power classes, only the voltage class must remain constant. In this way a user can construct a 75 kW system from two 30 kW 4U and one 15 kW 3U device from the ELR 10000 range.


Furthermore, typical laboratory functionality is provided. This includes an extensive function generator, alarm and warning management, various industrial interfaces, software solutions and many more functions.

AC connection

The electronic loads in the ELR 10000 series are equipped with an active PFC which provides a high efficiency at a low energy consumption. Furthermore, the devices in this series provide a wide input voltage range. It reaches from 110/120 V up to 240 V with 1-phase models and from 208 V to 380/400/480 V with 3-phase models. Hence the devices can be operated in the majority of global grids. They adjust automatically, without additional configuration, to the available grid voltage. In a 110/120 V and 208 V AC grid a derating of the DC input power is automatically set.

Energy recovery

The energy consumed in load mode is fed back into the connected grid with an efficiency of up to 96%. As the energy is not converted to heat as in other loads, the energy costs are reduced. In addition, the devices generate less heat requiring less cost intensive air conditioning. One device can already be sufficient for a while range of applications, reducing investment and installation costs.

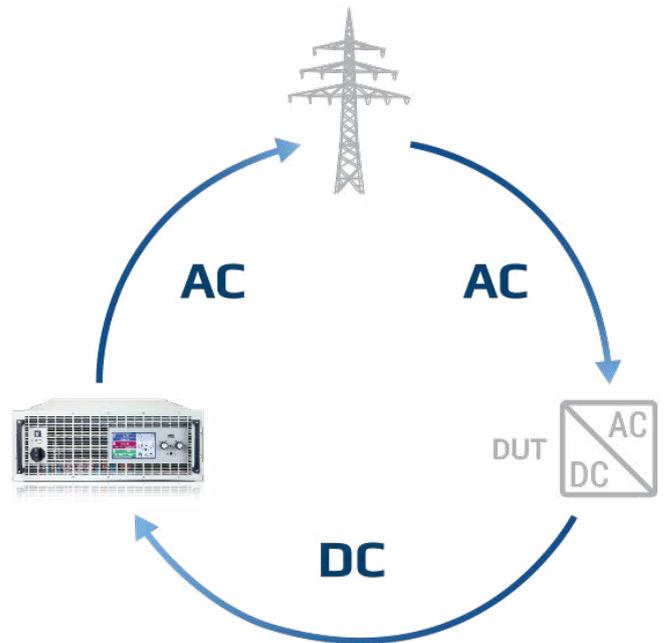

The principle of energy recovery


The figure above demonstrates, based on a typical application, how a „device under test“ consumes energy from the mains, converts it to DC and feeds that into an EA device. The electronic load ELR 10000 converts this energy back into an AC current and feeds it back into the grid.

DC input

The DC input ratings of an electronic load ELR 10000 4U range from 0 - 80 V up to 0 - 2000 V for voltage, allowing currents of 0 - 40 A up to 0 - 1000 A. The flexible input stages (autoranging) provide the user with a wide voltage, current and power range and hence a wider field of working than traditional power supplies.

DC connection

Connection of the DC input is done via copper blades on the back side of the device. If a system with higher performance is required, the devices are simply connected in parallel. With minimal effort devices can be linked with the vertical copper rails. A cover for contact protection is provided.

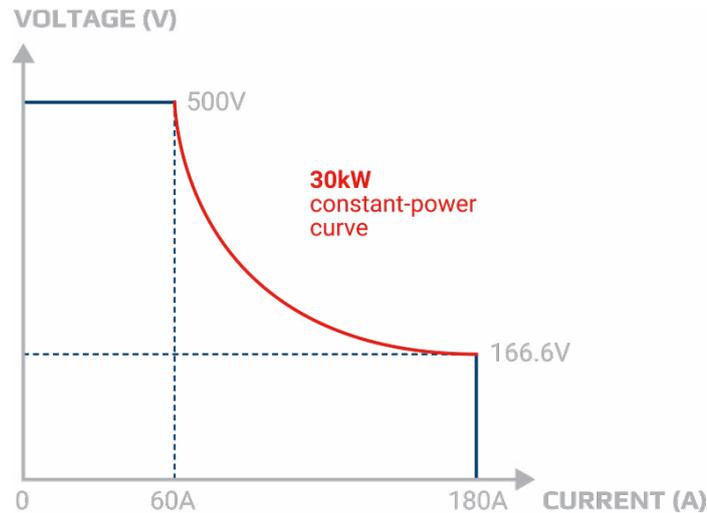

The principle of autoranging

„Autoranging“ is a term used when a programmable electronic DC load automatically offers a wider input range of both, voltage and current, to maintain full power across a wide operation range. This type of solution allows the use of a single unit to address multiple voltage and current combinations.

Function generator

All models in the ELR 10000 series are equipped with a function generator. This allows curve processes such as sine, triangle, square or trapezoid to be simply called up. A ramp function and an arbitrary generator allow voltage and current progression to be freely programmable. Test sequences for repeated tests can be saved on USB thumb drives and reloaded when needed. That helps to save time. As an extended function of this arbitrary generator, the electronic load can simulate the tracking behavior of a solar inverter, allowing tests of solar panels and modules with a wider range of voltages and power covered by just a single model.

Interfaces

As standard, 10000s series devices are fitted with the most important interfaces and ports which are all galvanically isolated from the DC input. There is an analog interface which can be parameterized for input and output, control and monitoring, of 0 - 5 V or 0 - 10 V for voltage, current, power and resistance, assorted inputs and outputs as well as USB and Ethernet ports. Further optional industrial interface for plug & play slot complete the portfolio:

- CAN
- CANopen
- RS232
- Profibus
- EtherCAT
- Profinet, with one or two ports
- Modbus, with one or two ports
- Ethernet, with one or two ports

High performance systems

High power applications can be covered with high power systems of up to 1920 kW. This is achieved by connecting the DC terminals of multiple ELR 10000 4U devices with vertical copper rails in parallel. Thus, a 19" cabinet with 42 U can provide a system with 240 kW occupying only 0.6 m² (6.5 sqft) of floor space. The master-slave bus allows for up to 8 cabinets with a maximum of 64 units with 30 kW each to behave as one unit.

Master-slave bus and Share bus

When the integrated master-slave bus and Share bus are used, a multi device system behaves as a single device. The buses are simply connected between each device. With the master-slave bus the system data, such as total power and total current, are collected and displayed on the master unit. Warnings and alarms of the slave devices are also clearly displayed. The Share bus cares for a balanced load distribution between the individual units.



Example representation

In this illustration you can see a fully assembled and wired 240 kW system

Applications

Battery test for electro mobility

A typical application for the bidirectional power supplies from EA Elektro-Automatik is the testing of the electrical characteristics of a battery. The wide application spectrum covers cell tests, module or pack tests, the determination of the SOH (State-of-Health) for a second life classification as well as the end-of-line (EOL) test. These applications put many demands on power electronics which are fulfilled by the ELR 10000 range. The excellent features of this device range are: measurement of voltage and current with the required accuracy and performance, reproducibility and reliability of these data and the flexible usability. Whether in an automated test system or in an integrated battery test, all possibilities are open to the user. Furthermore, the devices are clearly economical with efficiencies of up to 96%.

Fuel cell test

The devices in the ELR 10000 range may be used for testing the electrical features of fuel cells, fuel cell stacks and fuel cell systems. Here they generate highly accurate and reproducible results in all electrical modes. To test the resistance, performance, and active life of a fuel cell quickly and economically users can readily incorporate the devices into an automatic test system. The feedback capability guarantees high level of energy and cost efficiency. If higher currents are needed for testing a complete fuel cell system, then multiple devices can be connected in parallel in a master-slave system. Here high accuracy and performance are maintained.




On-board charger test

In an on-board charger test (OBC) the electrical features of the charger must be tested under various conditions. This requires a flexible test system which also provides test data. With the sequencing and logging functions of the software EA-Power Control it allows data to be exported and saved. In this way applications can instantly generate reproducible test results based on dynamic and highly accurate set point and measurement data. To avoid competition between two separate control loops of the device under test (DUT) and the testing device, the voltage regulation speed of the electronic load is adjustable. The modes Normal, Fast and Slow allow the ELR 10000 devices to be adapted the control characteristics of the on-board charger. Due to the fact that an electronic load can only operate as a sink, the combination with a source, here a DC power supply of PS 10000 or PSI 10000 series, might be required.


Battery recycling

In combination with the software EA-Power Control it's possible to assess retired batteries from electric vehicles for a possible further use. Assessment of a battery pack starts with a state of health (SOH) check to determine if a second life is feasible. This integrated function can be initiated with one click. If this check shows too little rest capacity, then the battery must be fully discharged before recycling. The autoranging of the devices guarantees the maximum possible total discharge, even with voltages under 2 V. The mains feedback to the power grid at up to 96% efficiency makes this process highly cost effective.

Technical drawings ELR 10000 4U ≤ 200 V

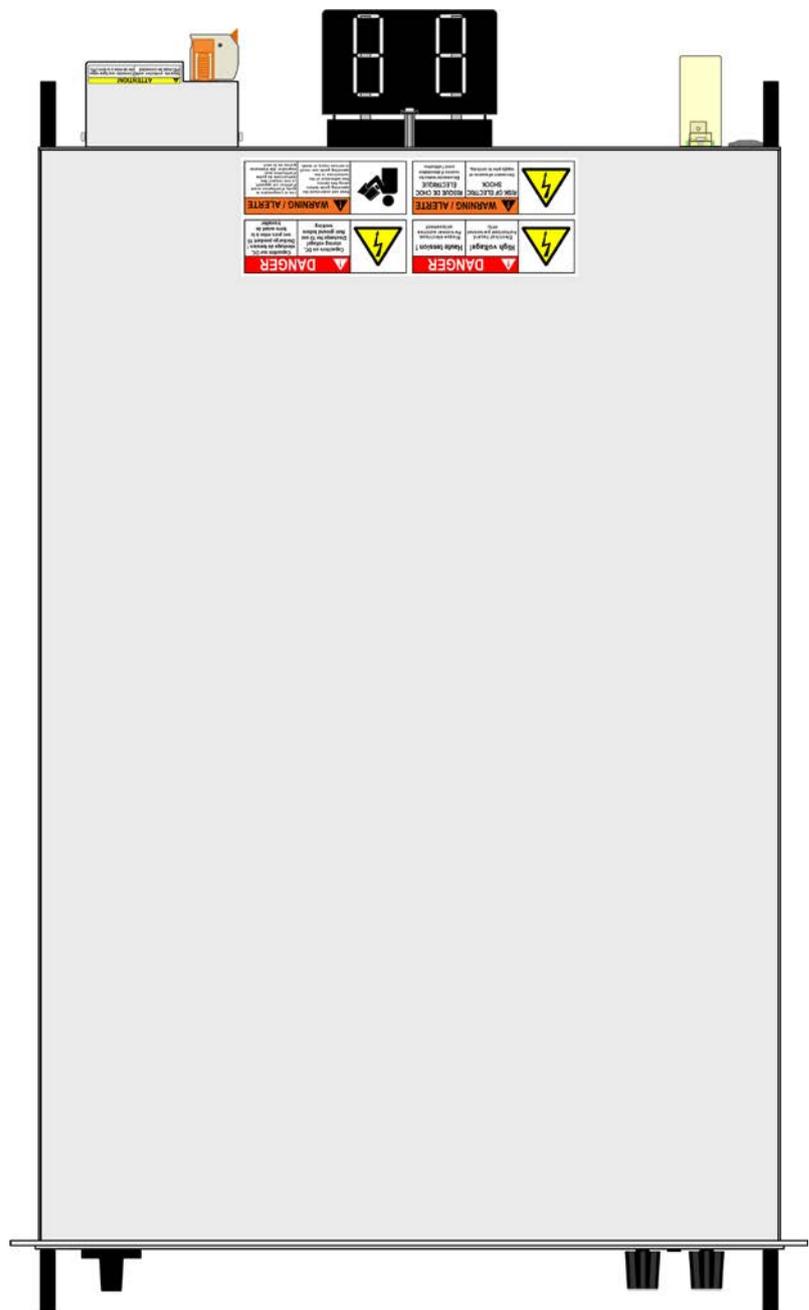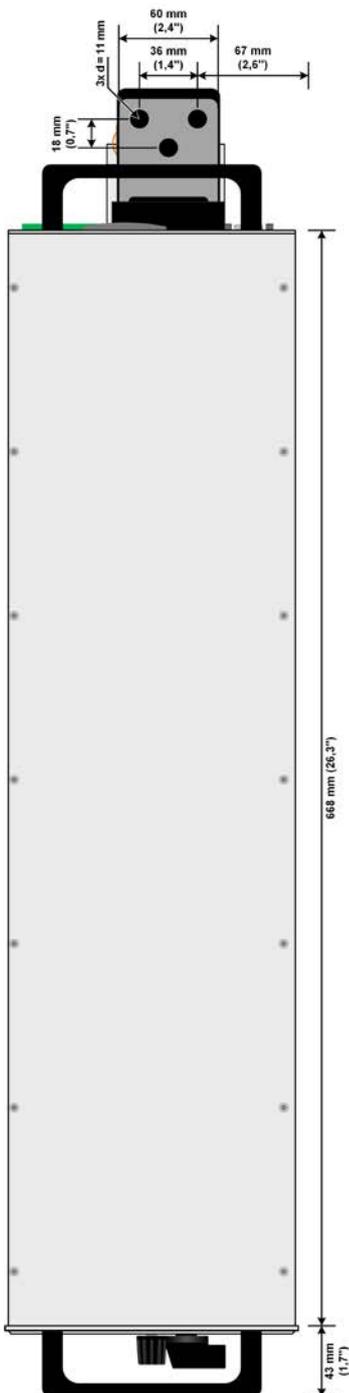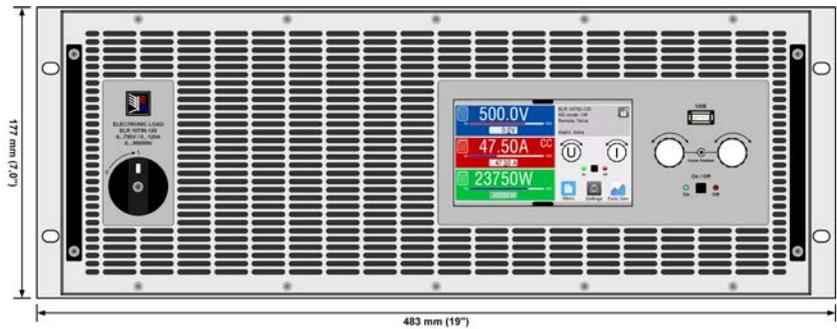


Front panel description ELR 10000 4U

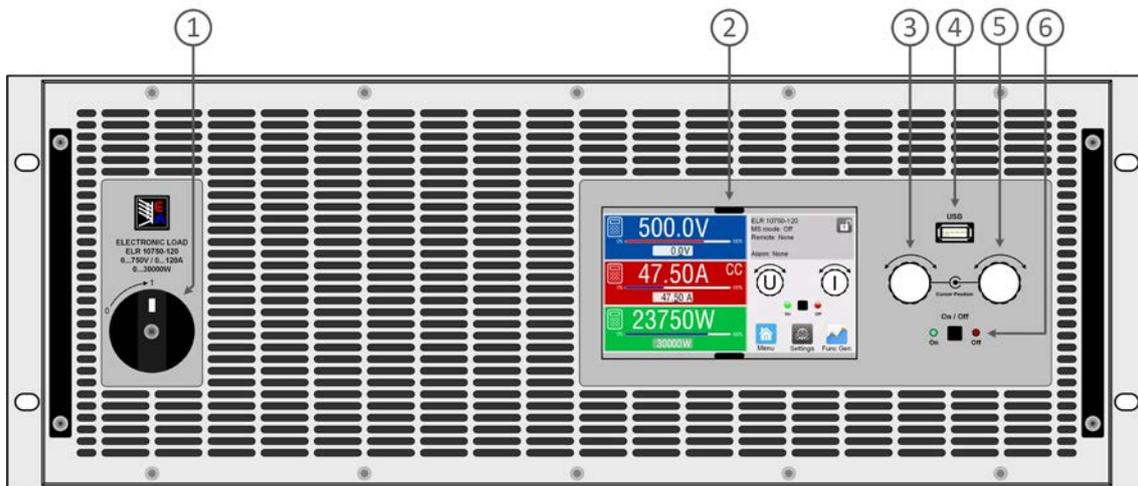




1. Power switch
2. TFT control interface, interactive operation and display
3. Rotary knob with push-button action, for settings and control
4. USB host, uses USB sticks for data logging and sequencing
5. Rotary knob with push-button action, for settings and control
6. On / Off push-button with LED status display

Rear panel description ELR 10000 4U ≤ 200 V

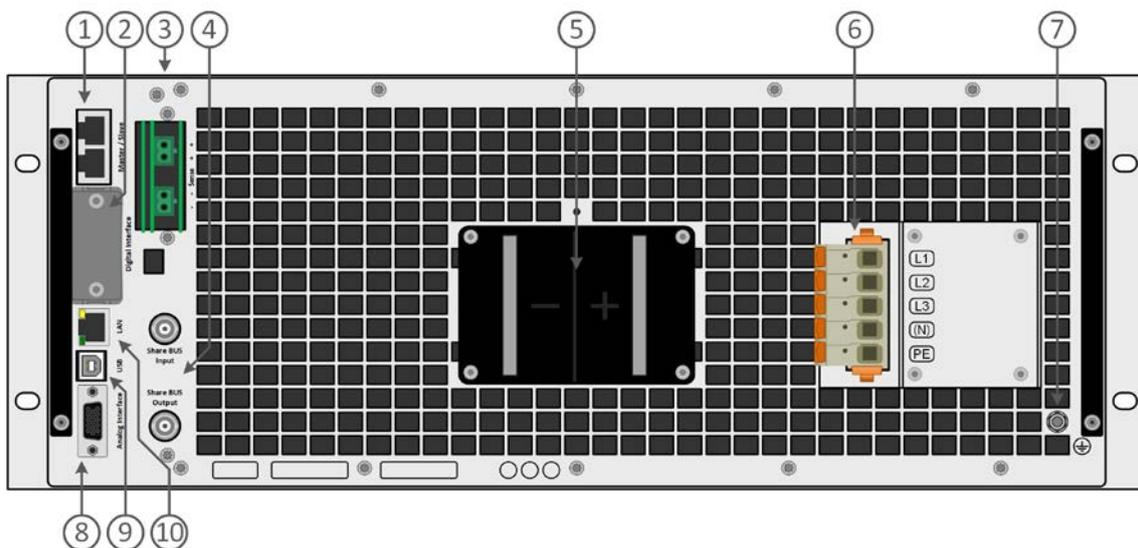


1. Master-Slave bus connectors to set up a system for parallel connection
2. Slot for interfaces
3. Remote sense connectors
4. Share bus connectors to set up a system for parallel connection
5. DC input terminal (copper blades)
6. AC input connector
7. Grounding connection screw (PE)
8. Connector (DB15 female) for isolated analog programming, monitoring and other functions
9. USB interface
10. Ethernet interface

Technical drawings ELR 10000 4U ≥ 360 V

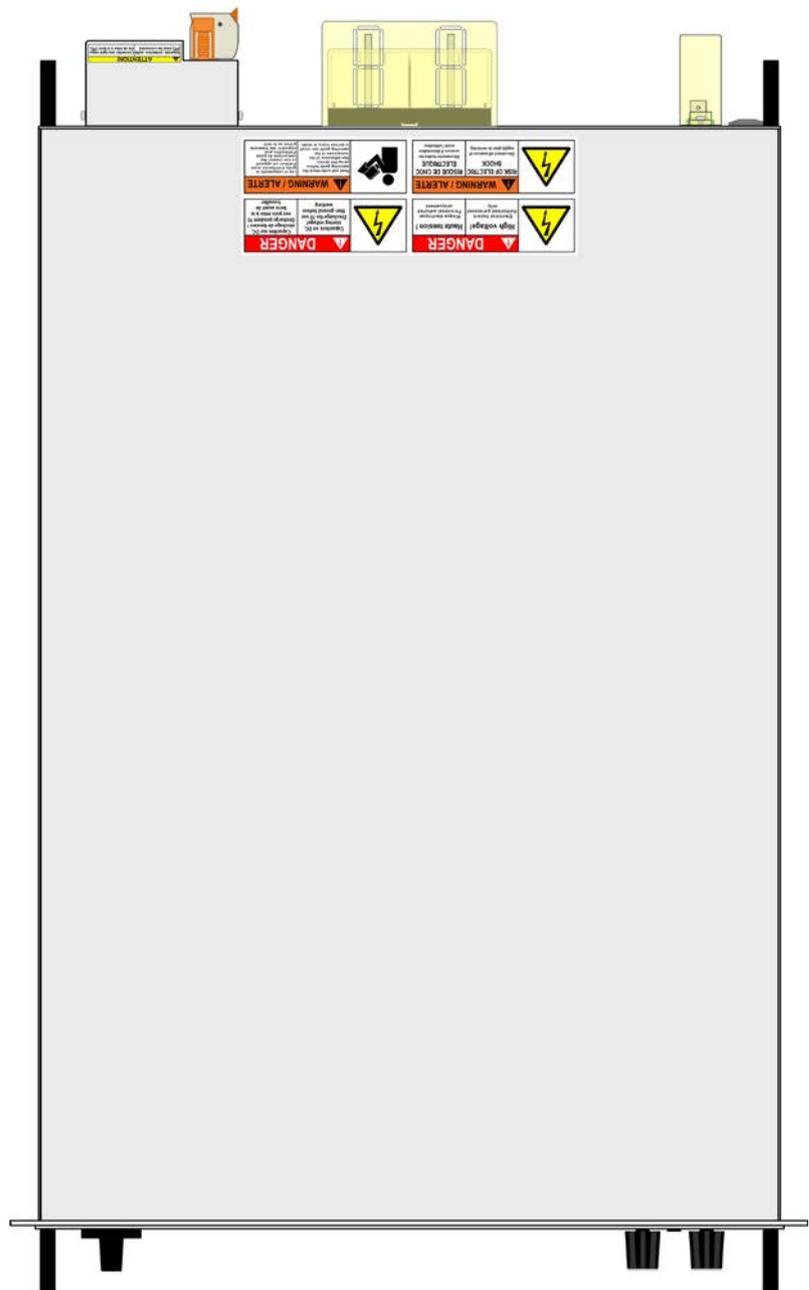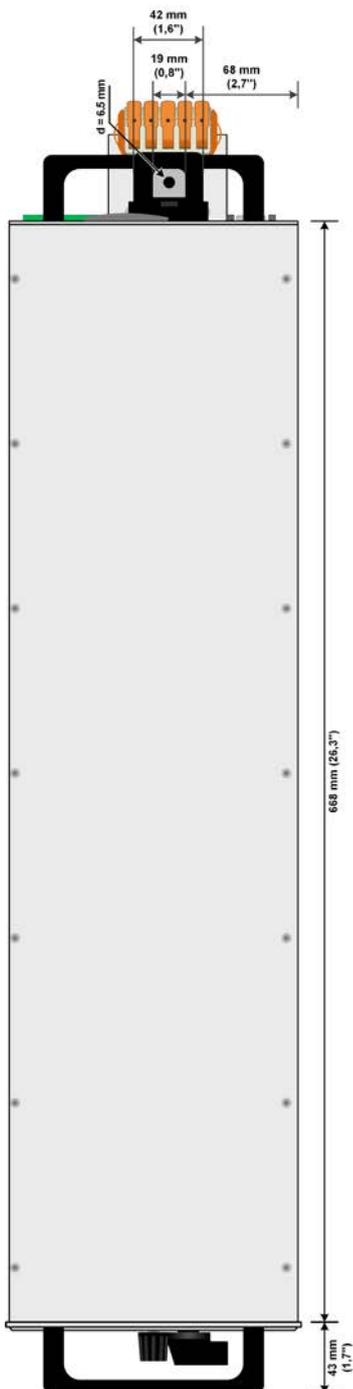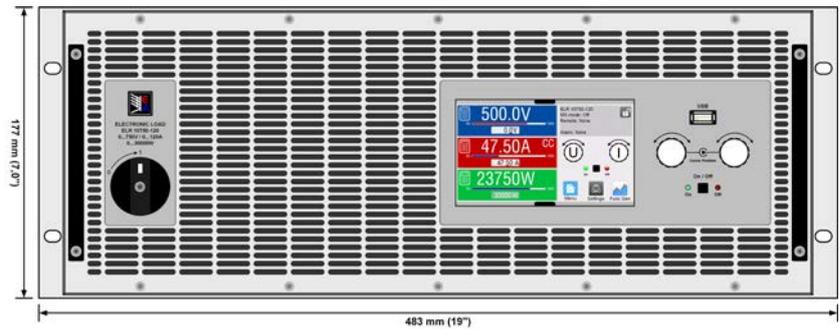


Front panel description ELR 10000 4U

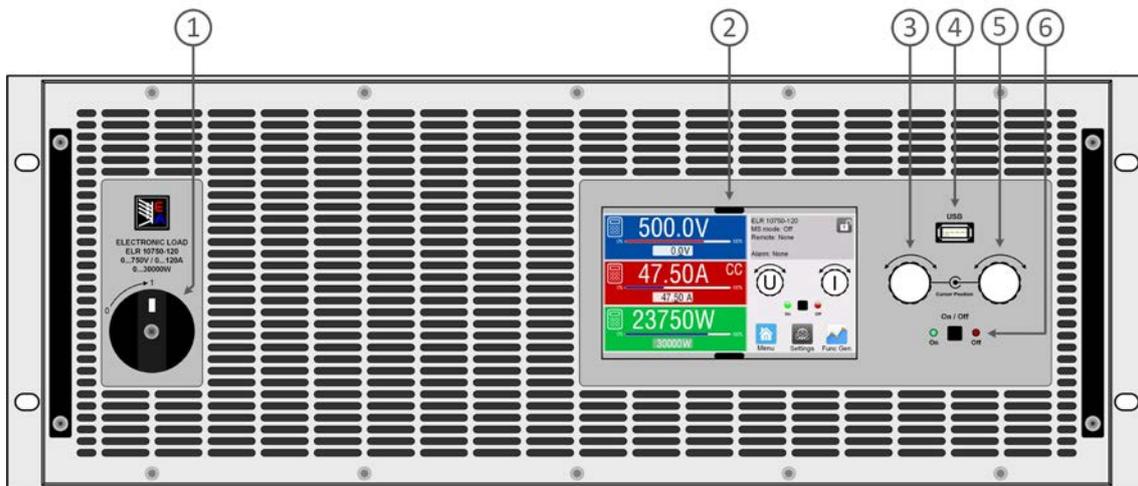


1. Power switch
2. TFT control interface, interactive operation and display
3. Rotary knob with push-button action, for settings and control
4. USB host, uses USB sticks for data logging and sequencing
5. Rotary knob with push-button action, for settings and control
6. On / Off push-button with LED status display

Rear panel description ELR 10000 4U ≥ 360 V

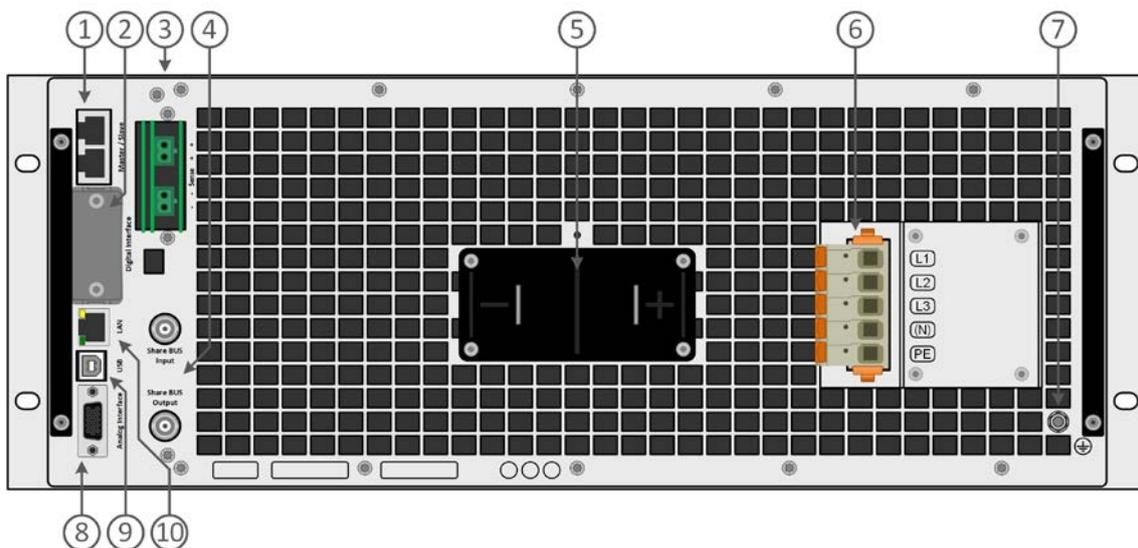


1. Master-Slave bus connectors to set up a system for parallel connection
2. Slot for interfaces
3. Remote sense connectors
4. Share bus connectors to set up a system for parallel connection
5. DC input terminal (copper blades)
6. AC input connector
7. Grounding connection screw (PE)
8. Connector (DB15 female) for isolated analog programming, monitoring and other functions
9. USB interface
10. Ethernet interface

Front panel description ELR 10000 4U with Water Cooling option

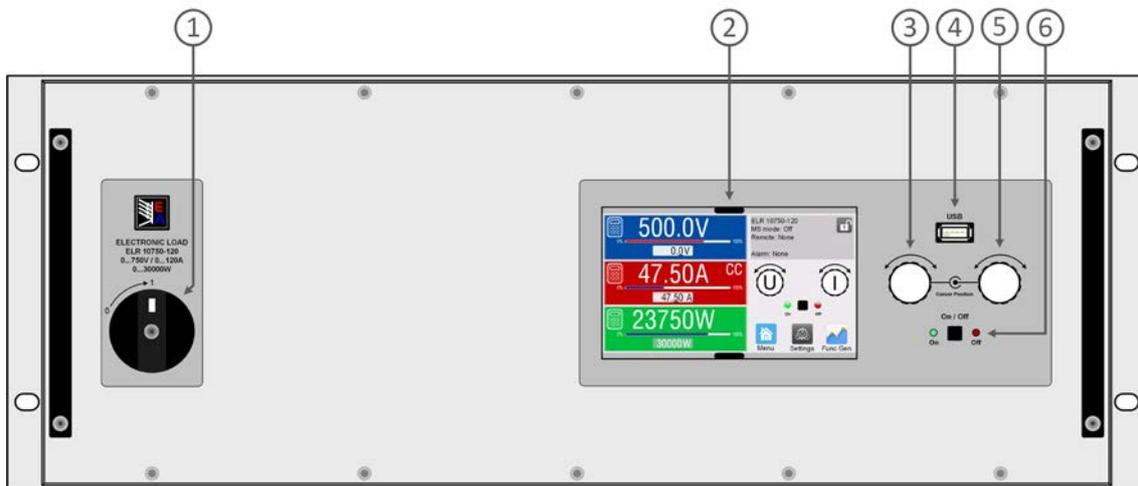

1. Power switch
2. TFT control interface, interactive operation and display
3. Rotary knob with push-button action, for settings and control
4. USB host, uses USB sticks for data logging and sequencing
5. Rotary knob with push-button action, for settings and control
6. On / Off push-button with LED status display

Rear panel description ELR 10000 4U with Water Cooling option

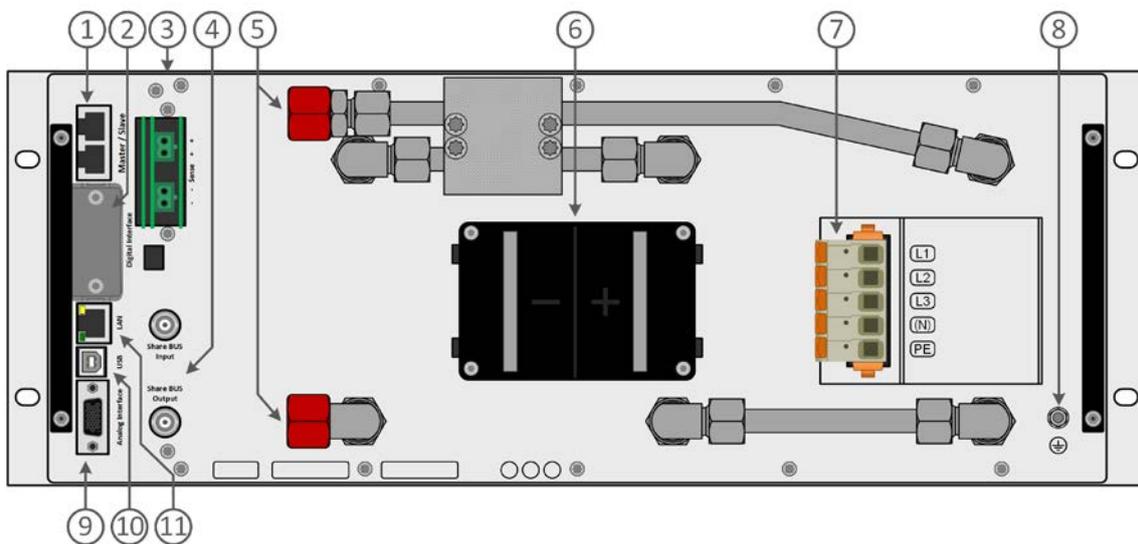

1. Master-Slave bus connectors to set up a system for parallel connection
2. Slot for interfaces
3. Remote Sense connectors
4. Share bus connectors to set up a system for parallel connection
5. Inlets and outlets for water-cooling
6. DC input connector (copper blades)
7. AC input connector
8. Grounding connection screw (PE)
9. Connector (DB15 female) for isolated analog programming, monitoring and other functions
10. USB interface
11. Ethernet interface

EA Elektro-Automatik GmbH

Helmholtzstr. 31-37
41747 Viersen

Phone +49 2162 3785 - 0
Fax +49 2162 1623 - 0
ea1974@elektroautomatik.com

www.elektroautomatik.com

