





# Understanding Colors and Gamut

# Understanding Colors and Gamut

## Diamond display

### Correct Diamond Display

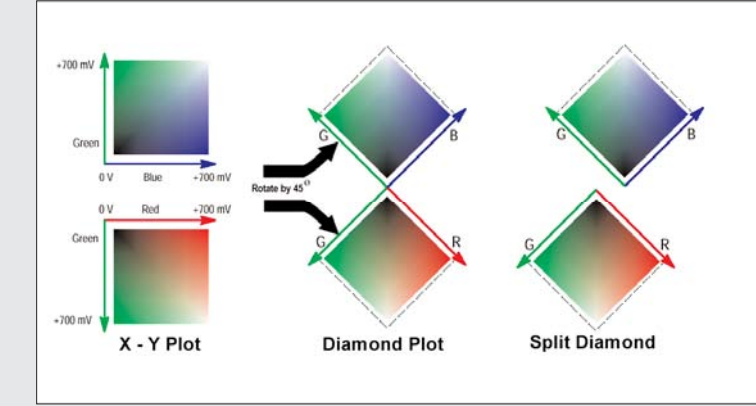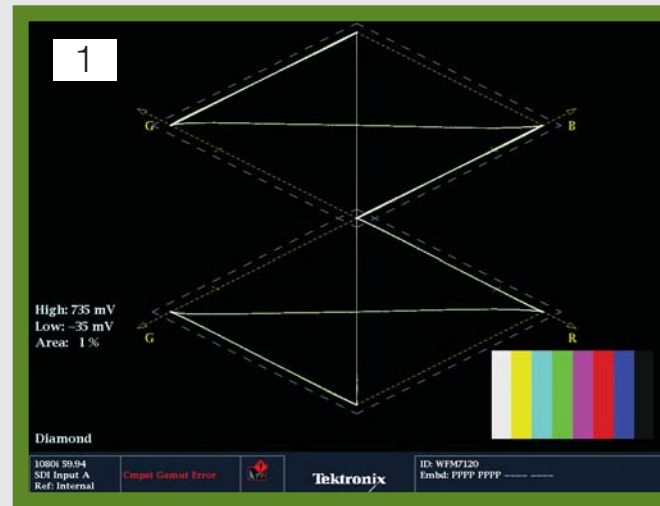

The Tektronix Diamond display is generated by combining R', G', and B' signals. If the video signal is in another format, the components are converted into R', G', and B'. (R'G'B' can be converted into a valid, legal signal in any format that can handle 100% color bars.) To predictably display all three components, they must lie between 700 mV to 0 V. Picture monitors handle excursions outside the standard range (gamut) in different ways. For a signal to be in gamut, all signal vectors must lie within the G-B and G-R diamonds. If a vector extends outside the diamond, it is out of gamut. Errors in green amplitude affect both diamonds equally, while blue errors affect only the top diamond and red errors affect only the bottom diamond. Using a color bars test signal, timing errors can be seen as bending of the transitions.

The Tektronix Diamond display provided on the WFM-WVR Series. The 0 to 700 mV signal range of a 100% color bars signal falls exactly within the graticule. The 100% color bars signal is said to be within the gamut of R'G'B' color space.

## Science Behind The Technology

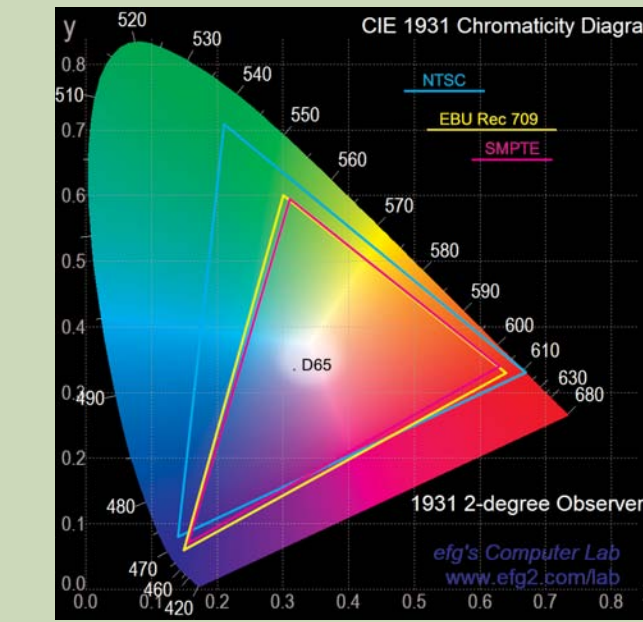


Figure 1  
CIE xy Diagram with color coordinates used by NTSC, SMPTE and EBU Rec. 709

The television color specification is based on standards defined by the CIE (Commission Internationale de L'Eclairage) in 1931. The CIE specified an idealized set of primary XYZ tristimulus values. This set is a group of all-positive values converted from R'G'B' where Y is proportional to the luminance of the additive mix. This specification is used as the basis for color within today's video standards.

Table 2. Luma and chroma video components

Format	RED	GREEN	BLUE
SMPTE 170M	0.630	0.340	0.310
SMPTE 170E	0.630	0.340	0.310
SMPTE 240M	0.630	0.340	0.310
SMPTE 240E	0.630	0.340	0.310
NTSC	0.630	0.340	0.310
EBU Rec 709	0.630	0.340	0.310
ITU-R BT.709	0.630	0.340	0.310
ITU-R BT.2020	0.630	0.340	0.310

Table 1. CIE XY Coordinate Values for Various Formats

Format	RED	GREEN	BLUE
SMPTE 170M	0.630	0.340	0.310
SMPTE 170E	0.630	0.340	0.310
SMPTE 240M	0.630	0.340	0.310
SMPTE 240E	0.630	0.340	0.310
NTSC	0.630	0.340	0.310
EBU Rec 709	0.630	0.340	0.310
ITU-R BT.709	0.630	0.340	0.310
ITU-R BT.2020	0.630	0.340	0.310

The CIE standardized a procedure for normalizing XYZ tristimulus values to obtain a two-dimensional plot of values, x and y, of all colors for a relative value of luminance as specified by the following equations:

$$x = X / (X + Y + Z)$$

$$y = Y / (X + Y + Z)$$

$$z = Z / (X + Y + Z)$$

$$1 = x + y + z$$


Table 3

Format	RED	GREEN	BLUE
SMPTE 170M	0.630	0.340	0.310
SMPTE 170E	0.630	0.340	0.310
SMPTE 240M	0.630	0.340	0.310
SMPTE 240E	0.630	0.340	0.310
NTSC	0.630	0.340	0.310
EBU Rec 709	0.630	0.340	0.310
ITU-R BT.709	0.630	0.340	0.310
ITU-R BT.2020	0.630	0.340	0.310


Limits are defined for various video formats that show all possible colors for each format. Color-coded triangles (yellow for the SMPTE format, blue for EBU/PAL/SECAM, red for NTSC 1953) in Figure 1 are specified by x, y coordinates in Table 1.

White: The white point of the system within each format is defined by the addition of red, green, and blue in equal quantities. The CIE defined several standard sources in 1931 as shown in Table 3.

- Source A: A tungsten filament lamp with a color temperature of 2854K
  - Source B: A model of noon sunlight with a color temperature of 4800K
  - Source C: A model of average daylight with a color temperature of 6504K
- Illuminant C (Source C) was used in the original definition of NTSC. The CIE later defined a series of daylight illuminants, called the D series. Illuminant D65 with a color temperature of 6504K, and slightly different x, y coordinates, is predominantly used today.

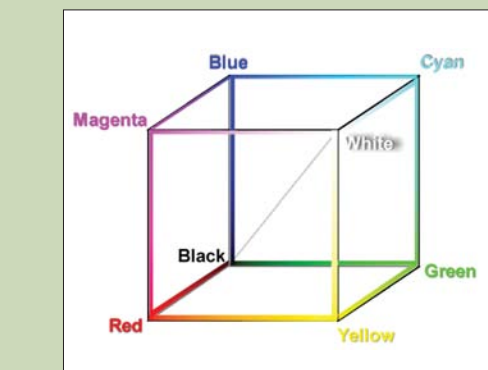


The primary colors, red, green and blue, can be mapped onto a three-dimensional color cube. All colors can be represented within the bounds of the R'G'B' color cube.

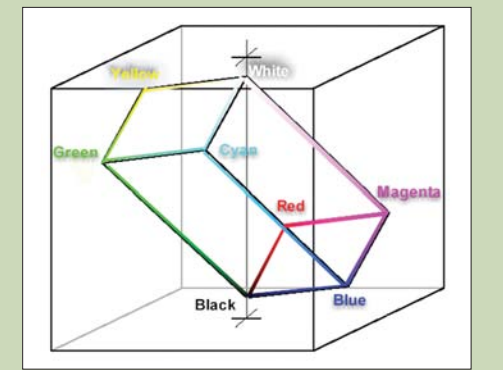


Using the equations in Table 2 to convert the color values from R'G'B' space to Y'PbPr space limits the range of colors. Only about 25% of all possible signal values in the Y'PbPr domain are used to present the complete gamut of colors in the R'G'B' domain. Care must be taken when translating between formats to ensure that the dynamic gamut of the signal is not exceeded.

## Definitions


- gamut** – The range of colors allowed for a video signal. Valid color gamut is defined as all colors represented by all possible combinations of legal values of an R'G'B' signal. Signals in other formats may represent colors outside valid gamut, but still remain within their legal limits. These signals, when transcoded to the R'G'B' domain, will fall outside legal R'G'B' limits. This may lead to clipping, crosstalk, or other distortions.
  - The allowed range for R'G'B' is 0 to 700 mV, while allowed ranges for Y'PbPr are luma (Y'), 0 to 700 mV, and color difference (PbPr), ±350 mV.
- legal/illegal** – A signal is legal if it stays within the gamut appropriate for the format in use. A legal signal does not exceed the voltage limits specified for the format in any signal channel. An illegal signal is one that is, at some time, outside the limits in one or more channels. A signal can be legal but still not be valid.
- valid signal** – A video signal where all colors represented lie within the valid color gamut. A valid signal will remain legal when translated to R'G'B' or other formats. A valid signal is always legal, but a legal signal is not necessarily valid. Signals that are not valid will be processed without problems in their current format, but may encounter problems when translated to another format.

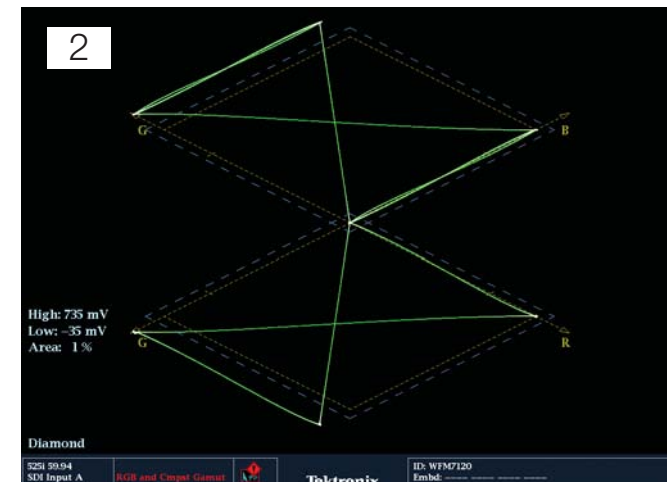


The color bars signal exceeds both the upper and lower diamonds along the G' axis. Therefore there is an amplitude error within the green channel and the signal gain should be corrected so that the waveform falls within the graticule. Note that the B' and R' components fall within the graticule and are therefore within correct limits.

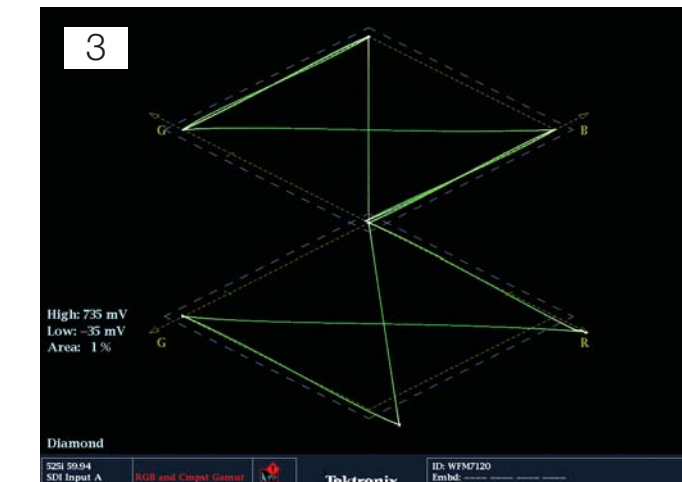

Here, the Tektronix Diamond display shows an error only in the lower diamond along the R' axis. This indicates an amplitude error within the red channel. The gain of the red channel should be adjusted to fall within the graticule. Similarly, if only the upper waveform falls outside the limits along the B' axis, this would indicate a blue amplitude error.

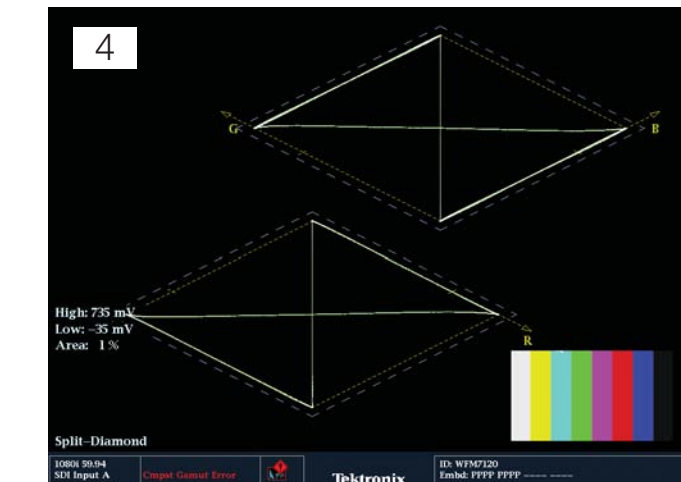

The Tektronix Split Diamond display is a special version of the Diamond display that separates the upper and lower components facilitating observation of gamut errors within the black region.

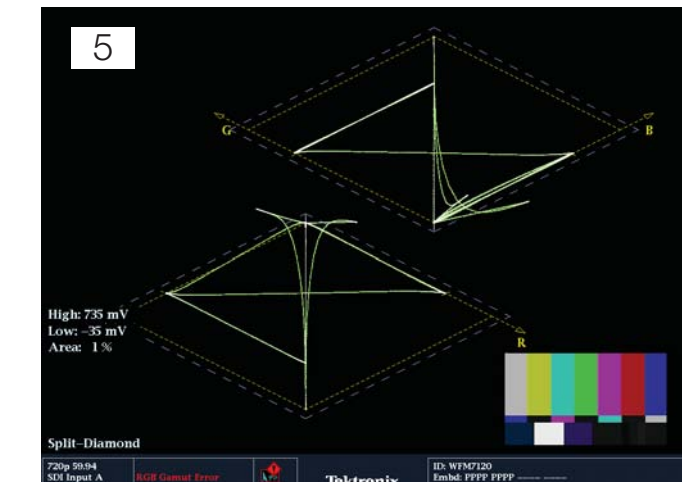



The Diamond display can be used for monitoring both standard definition and high definition formats. In this example using a high definition format, the NTSC SMPTE color bars signal is not legal when converted to R'G'B' color space. The waveform exceeds the graticules in the black region. This is due to the lower blue bars exceeding the R'G'B' limits and going below 0 mV.

## Lightning display\*

Tektronix developed the Lightning display to provide both amplitude and interchannel timing information for the three channels of a component signal – within a single display. This unique display requires only a single test signal, standard color bars, to make definitive measurements. Plotting luma versus Pb in the upper half of the screen and inverted luma versus Pr in the lower half – like two vector displays sharing the same screen – generates the Lightning display. The bright dot at the center of the screen is blanking (zero signal level). Increasing luma is plotted upward in the upper half of the screen and downward in the lower half.


\*Available only on WFM-WVR 6200 and 7020 Series

### Correct Lightning display

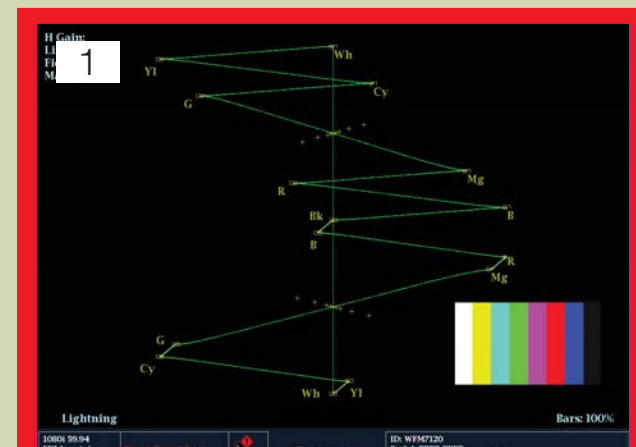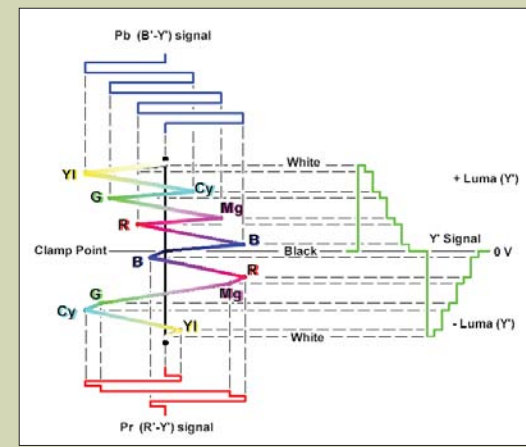


The Diamond and Split Diamond displays can be used for both live signals and test signals and provide unsurpassed ability to simplify R'G'B' gamut monitoring. In this signal, there is a minor violation along the upper G' axis. The operator can decide if this condition is acceptable for their requirements. With the WFM and WVR Series, the user can select gamut threshold limits appropriate for their production standards.


The Lightning display is an ideal tool for performing tape alignments quickly and easily. With a standard color bars signal at either 75% or 100%, select the appropriate scale on the waveform monitor and ensure that all of the color components fall within the boxes.

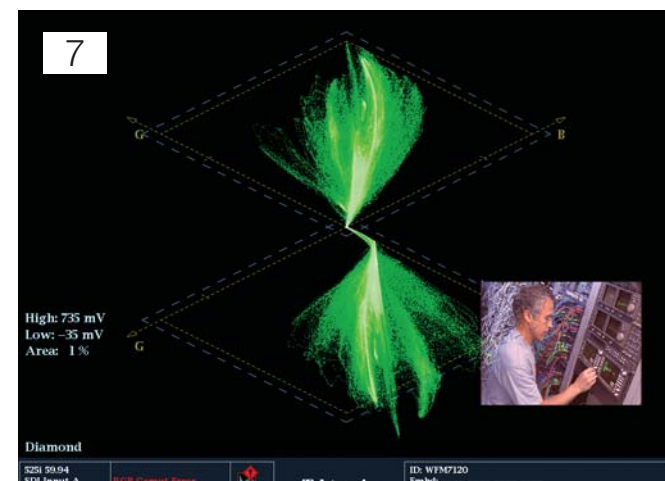


This signal has a significant red imbalance and falls outside the lower diamond graticule. Note also that the trace is offset to the right in the lower diamond. The red imbalance is caused by an offset in the black level of the red channel and should be color corrected.

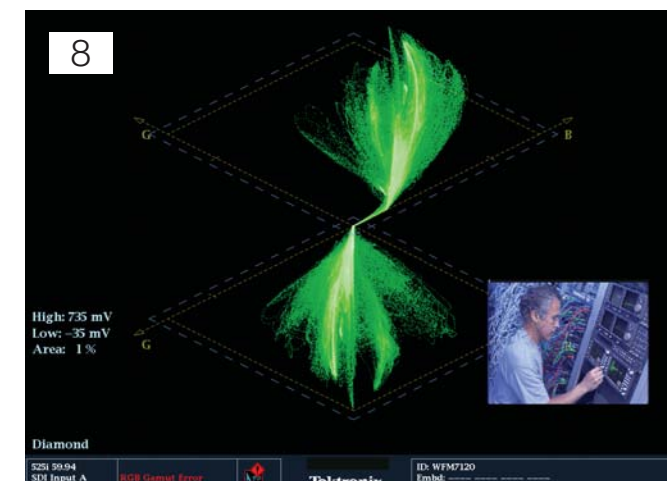


This signal shows an error indicating a green color imbalance. The signal is offset to the left in both upper and lower diamonds indicating a green setup error within the black region. Color correction of the signal is necessary to correct the imbalance.

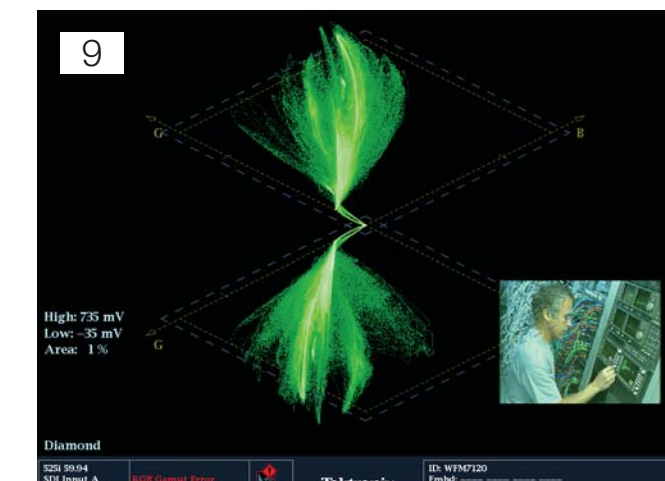


This signal shows an error indicating a blue color imbalance. The signal is offset to the left in both upper and lower diamonds indicating a blue setup error within the black region. Color correction of the signal is necessary to correct the imbalance.

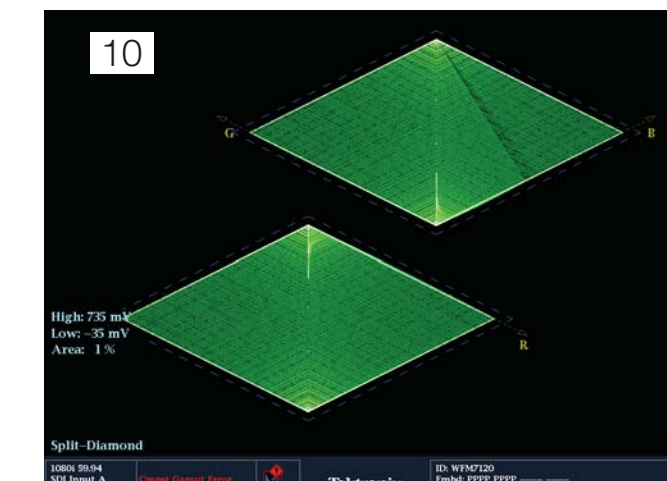

The Rainbow pattern generated on the TG700 test signal generator contains the complete range of high definition colors. This color range completely fills the graticule of the Split Diamond display.

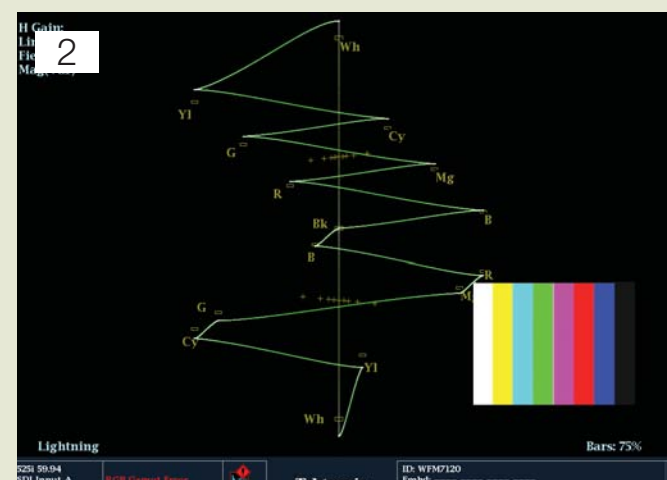


This example shows a luma amplitude error for a High Definition signal: both the upper and lower traces fall outside the individual graticule boxes and are stretched vertically. Decrease the amplitude of the luma signal until each component fits within the boxes. If the trace was distorted horizontally this would indicate a Chroma error within the signal.

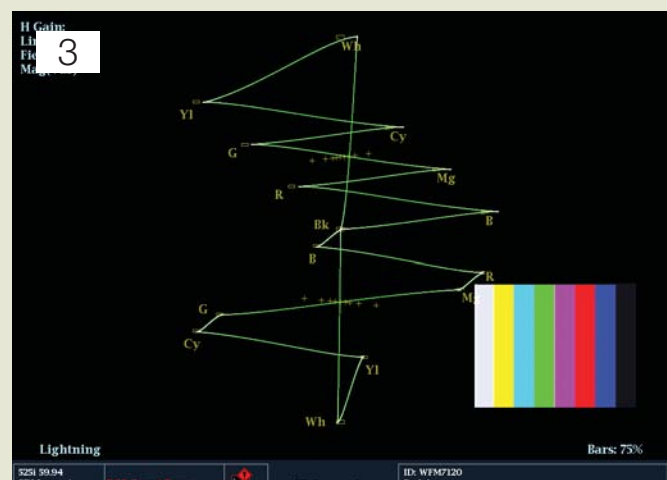

The lower half of this Lightning display shows an error for a standard definition signal: the traces are not within the graticule boxes. Specifically, this indicates a Pr amplitude error requiring adjustment of the Pr channel gain until each trace fits within the appropriate box.

Similarly, if only the upper half of the display was in error, then this would point to a gain error within the Pb channel. Using a color bars signal, and assuming correct gain and amplitude in the green-magenta transitions, the Lightning display can be used for interchannel timing measurement. On the screen there are nine cross-hair graticules positioned spanning each green-magenta transition that can be used for timing measurements.

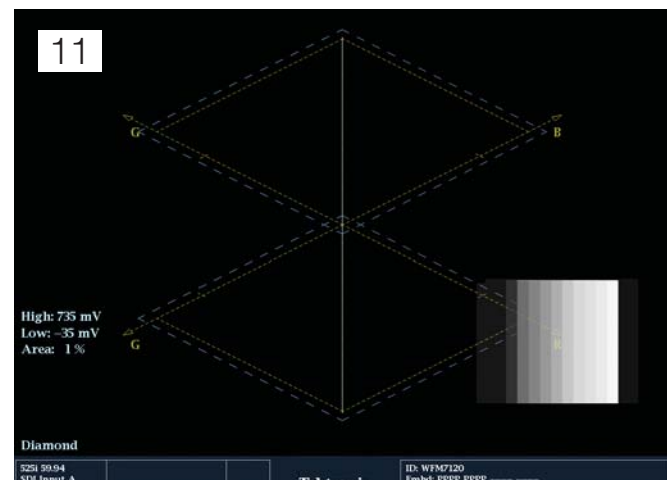

The Diamond display can be an essential tool for simplifying camera balancing. When the value of R'+G'+B' produces a gray value, a resulting gray scale will therefore produce a vertical line in both upper and lower diamonds, provided the signal is aligned correctly. Any deviation can easily be observed within the Diamond display.



In this case, the camera has a red imbalance that is shown by the deviation of the lower diamond from the vertical axis toward the red axis. The camera should be adjusted to correct for this imbalance.



With the lens of the camera capped, the signal should be black and the Diamond display should show a dot at the center of the graticule. In this case, the capping produces a trace along the red axis in the lower diamond, indicating that the red channel has a setup error and should be adjusted until a dot is displayed at the center of the display.


Category	Item	Value	Unit	Scale	Resolution
Statistics	RGB Center Error	183	7400	100000%	100000%
	Green Center Error	183	7400	100000%	100000%
	Blue Center Error	183	7400	100000%	100000%
	Y Chroma Error	0	0	0%	0%
	Pb Chroma Error	0	0	0%	0%
	Pr Chroma Error	0	0	0%	0%
	Y Luma Error	0	0	0%	0%
	Pb Luma Error	0	0	0%	0%
	Pr Luma Error	0	0	0%	0%
	Y Chroma Error	0	0	0%	0%

The WFM and WVR Series provide simple indication of Gamut errors within the status bar display at the bottom of the instrument screen. The type of errors can be identified by viewing the video session display. Lower case and uppercase letters indicate which gamut limits have been exceeded. For instance the image above shows the status bar with Luma, RGB and Composite gamut errors highlighted in red. Viewing the video sessions display shows R-BB. The uppercase letters "R-B" show the upper limit of gamut have been exceeded for red and blue and the lowercase letter "b" shows that the lower gamut limit has been exceeded for the red and blue channel. In the case of composite and luma gamut errors upper case "L" and "C" indicate the Luma or Chroma limit have been exceeded and lower case letters "r" and "c" indicate the lower limit have been exceeded. The user can use this information to make adjustment of the appropriate component in error.

Graticule	WFM7100-HD Signal	WFM7100-SD Signal	WFM601
Center	Aligned	Aligned	Aligned
1st Mark	2 ns	20 ns	40 ns
2nd Mark	5 ns	40 ns	80 ns
3rd Mark	13.5 ns (7 luma sample)	74 ns (7 luma sample)	160 ns
4th Mark	27 ns (7 chroma sample)	148 ns (7 chroma sample)	N/A


Timing Cross-Hair Positions on Lightning Display.

## Arrowhead Display

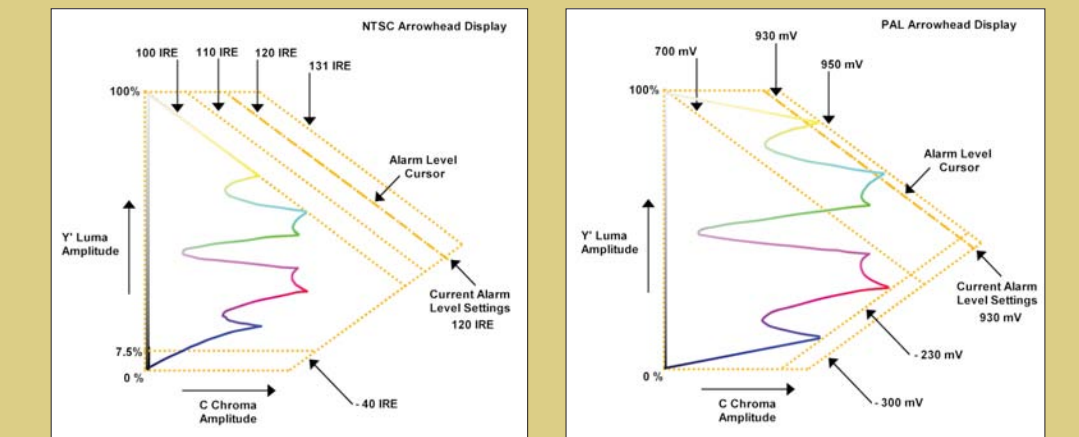


Tektronix developed the Arrowhead display to show out-of-gamut conditions in composite color spaces, without requiring a composite encoder. The Arrowhead display plots luma on the vertical axis, with blanking at the lower left corner of the arrow. The magnitude of the chroma subcarrier at each luma level is plotted on the horizontal axis, with zero subcarrier at the left edge of the arrow. The upper sloping line is a graticule indicating 100% color bars total luma + subcarrier amplitudes. The lower sloping graticule indicates luma + subcarrier extending toward sync tip (maximum transmitter power). An adjustable modulation depth alarm setting offers the capability to warn the operator that the composite signal may be approaching a limit.










### Correct Arrowhead Display

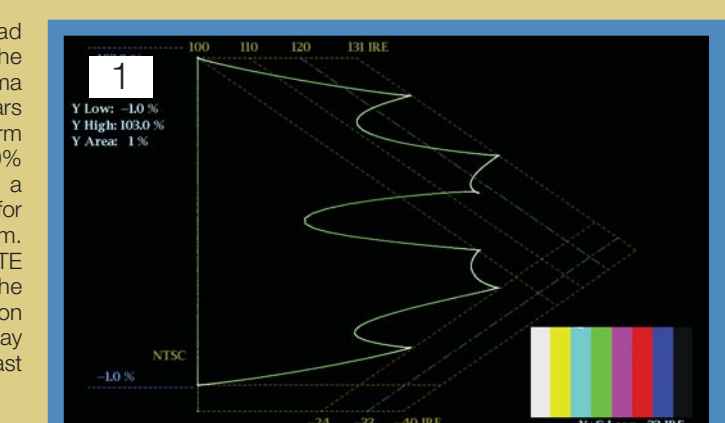


An NTSC SMPTE color bars signal has been applied to the Arrowhead display. In this case, the signal is within the limits of the graticule and will be passed easily through the transmission system. Note that the display indicates that SMPTE color bars are out of gamut within R'G'B' color space.

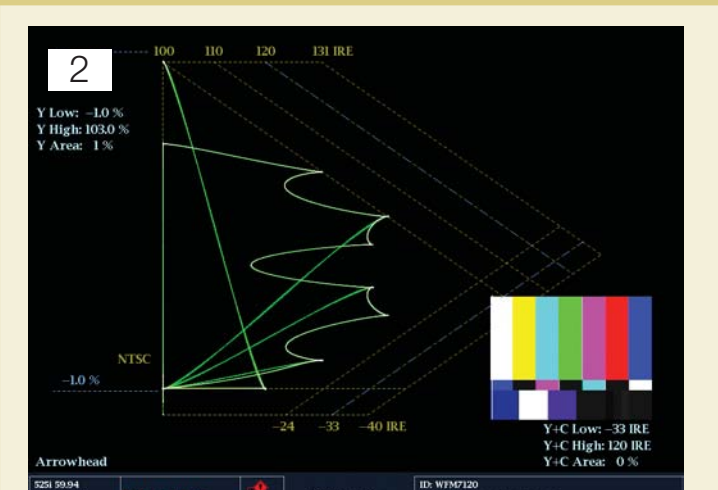

The WFM and WVR Series incorporate a pseudo-composite waveform mode that digitally recreates the composite signal waveform from the digital input. This feature allows the operator to visualize the familiar composite signal.

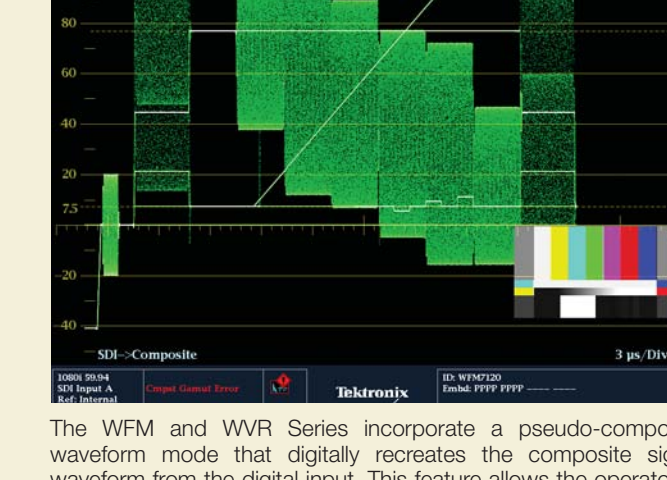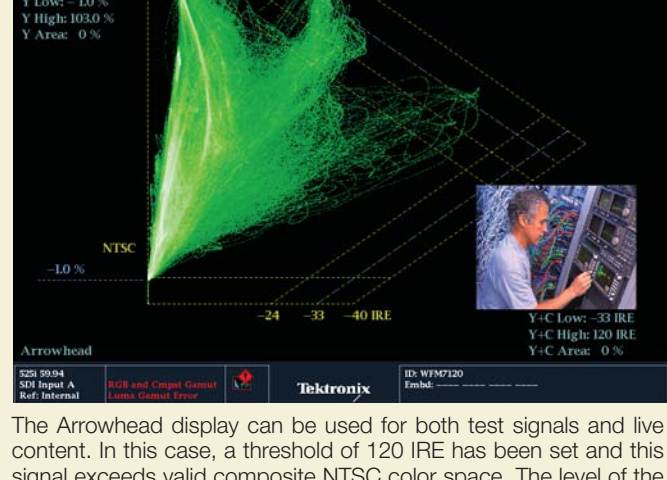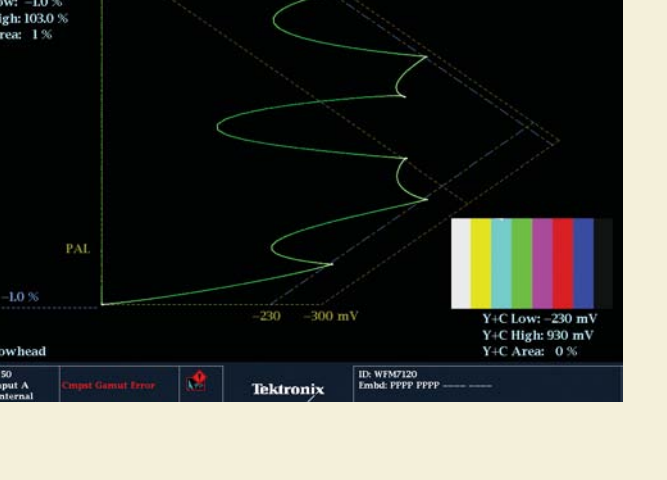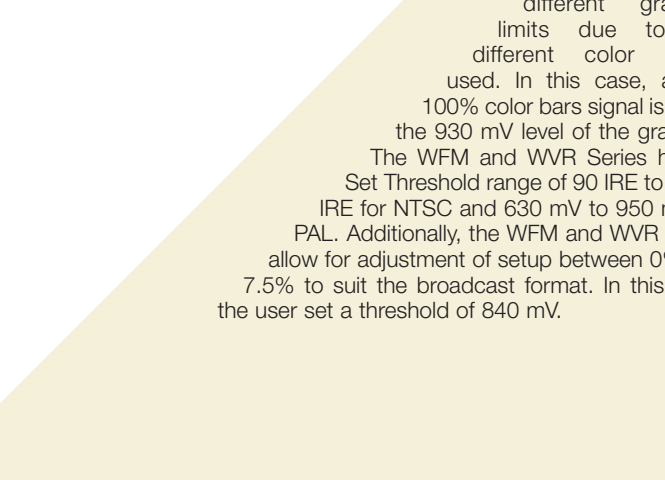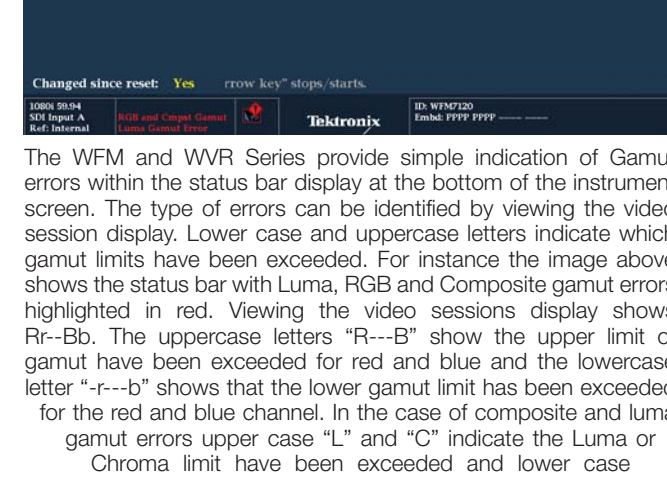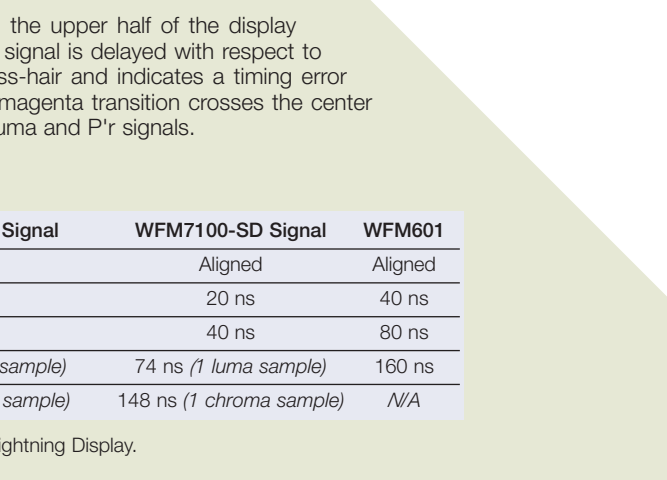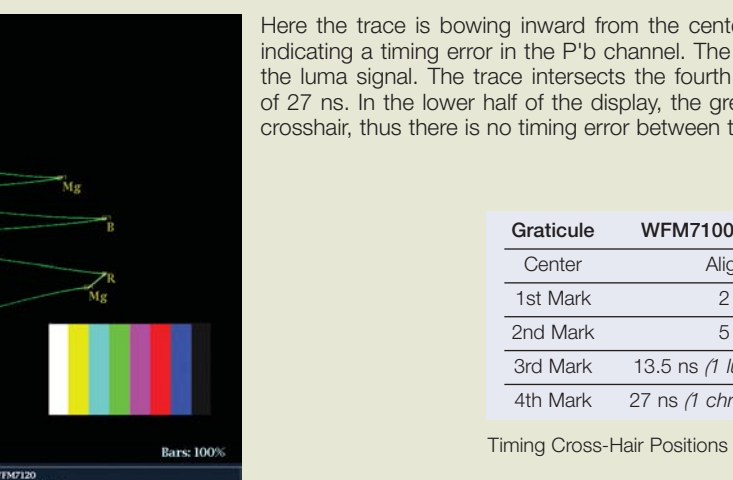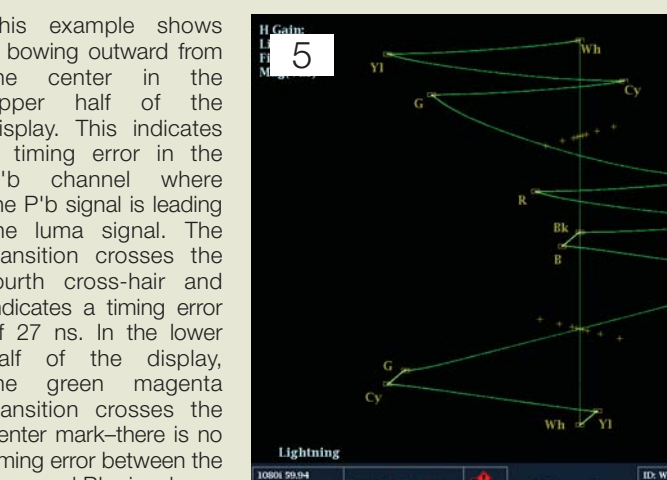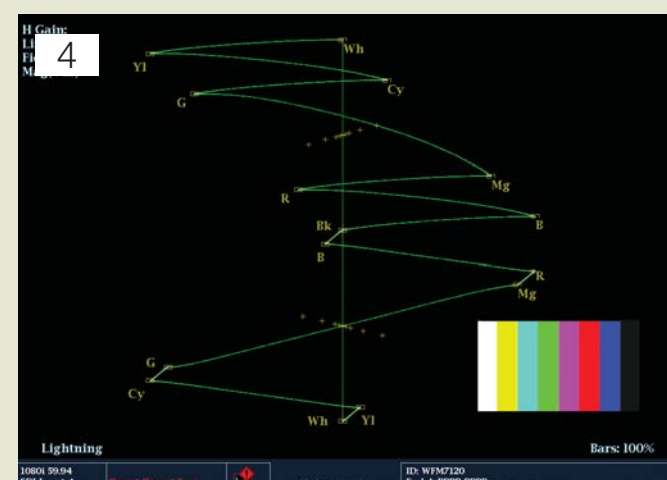


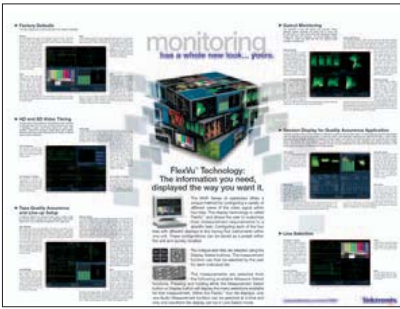

### Monitoring with FlexVu™ Technology Poster

This poster shows you how easy monitoring can be when you get the information you need displayed the way you want.

To order your free copy of this poster, please visit:  
[www.tek.com/video/FLEXVUposter/](http://www.tek.com/video/FLEXVUposter/)

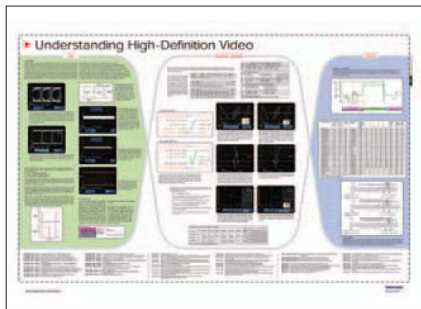

### Understanding High Definition Video Poster

This poster provides graphical reference to understanding high definition video.

To order your free copy of this poster, please visit: [www.tek.com/video/HDposter/](http://www.tek.com/video/HDposter/)



### Understanding Color and Gamut Poster

This poster provides a quick graphical reference to understand gamut and how to correct gamut problems within the video signal.

To order another copy of this poster, please visit: [www.tek.com/video/CGposter/](http://www.tek.com/video/CGposter/)

#### For Further Information

Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit [www.tektronix.com](http://www.tektronix.com)

Copyright © 2007, Tektronix. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks or registered trademarks of their respective companies.

11/07 EA/PT

25W-15618-3

#### Contact Tektronix:

ASEAN / Australasia (65) 6356 3900

Austria +41 52 675 3777

Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777

Belgium 07 81 60166

Brazil & South America (11) 40669400

Canada 1 (800) 661-5625

Central East Europe, Ukraine and the Baltics +41 52 675 3777

Central Europe & Greece +41 52 675 3777

Denmark +45 80 88 1401

Finland +41 52 675 3777

France +33 (0) 1 69 86 81 81

Germany +49 (221) 94 77 400

Hong Kong (852) 2585-6688

India (91) 80-22275577

Italy +39 (02) 25086 1

Japan 81 (3) 6714-3010

Luxembourg +44 (0) 1344 392400

Mexico, Central America & Caribbean 52 (55) 5424700

Middle East, Asia and North Africa +41 52 675 3777

The Netherlands 090 02 021797

Norway 800 16098

People's Republic of China 86 (10) 6235 1230

Poland +41 52 675 3777

Portugal 80 08 12370

Republic of Korea 82 (2) 6917-5000

Russia & CIS +7 (495) 7484900

South Africa +27 11 206 8360

Spain (+34) 901 988 054

Sweden 020 08 80371

Switzerland +41 52 675 3777

Taiwan 886 (2) 2722-9622

United Kingdom & Eire +44 (0) 1344 392400

USA 1 (800) 426-2200

For other areas contact Tektronix, Inc. at: 1 (503) 627-7111

Updated 12 November 2007

Our most up-to-date product information is available at: [www.tektronix.com](http://www.tektronix.com)



**Tektronix**  
Enabling Innovation