

PAM4 in 400G/200G/100G/50G Networking Technology

Optical Standards							Key Optical Measurements as of IEEE 802.3bs D2.2, D802.3cd D1.1				
(NOTE: Standards still in development)	Modulation Format	Distance	Data Rate	Multiplex	Signaling Rate	AOP Average launch Optical Power: key to safety and achieving transmission distance objectives.	OMAouter Optical Modulation Amplitude level 0 to level 3: basic TX amplitude (i.e. w/o ISI problems, noise, or offset).	RIN _{xx} ,OMA RIN<xx>,OMA of an optical signal is a ratio of optical Relative Intensity Noise to OMA when backreflection is <xx> dB.	ER Extinction Ratio: in PAM4, the ratio of certain high level to certain low level.	TDECQ Transmitter and Dispersion Eye Closure: characterizes the TX ISI, noise, and dispersive Quaternary eye closure.	
	200GBASE-SR4 (802.3cd) similar: 100GBASE-SR2, 50GBASE-SR	PAM4	70 m, 100 m	n lane x 50 Gbps	<n> parallel MMF	26.56 Gbd	-6 ... 4 dBm	-4 ... 3 dBm	[-]	≥ 3 dB	[≤ 4 dB]
	200GBASE-DR4 (802.3bs)	PAM4	500 m	4 lanes x 50 Gbps	4 parallel SMF	26.56 Gbd	-4.6 ... 3 dBm	-2.5 ... 2.8 dBm	≤ -142 dB/Hz, with -21.4 dB refl.	≥ 4.5 dB	≤ 2.5 dB
	400GBASE-DR4 (802.3bs) similar: 100GBASE-DR	PAM4	500 m	<n> lane x 100 Gbps	4 parallel SMF	53.125 Gbd	-2.4 ... 4 dBm	-0.3 ... 4.2 dBm	≤ -136 dB/Hz, with -21.4 dB refl.	≥ 5 dB	≤ 2.5 dB
	400GBASE-FR8 (802.3bs) similar: 200GBASE-FR4, 50GBASE-FR	PAM4	2 km	<n> lanes x 50 Gbps	1 SMF 8λ WDM	26.56 Gbd	-3 ... 5.3 dBm	0 ... 5.5 dBm	≤ -136 dB/Hz, with -16.5 dB refl.	≥ 4.5 dB	≤ 2.2 dB
	400GBASE-LR8 (802.3bs) similar: 200GBASE-LR4, 50GBASE-LR	PAM4	10 km	<n> lanes x 50 Gbps	1 SMF 8λ WDM	26.56 Gbd	-2.3...5.3 dBm	0.7 ... 5.7 dBm	≤ -136 dB/Hz, with -15.1 dB refl.	≥ 4.5 dB	≤ 2.4 dB
	Key Aspects of Measurement					Output power is within receiver and safety requirements.	Sufficient modulation swing.	Laser noise.	Limits signal offset.	Replaces TDP and mask testing to ensure signal quality.	

Note: Optical 400GBASE-SR16 at 25 Gbd PAM2 NRZ not shown

Electrical Standards						Key Electrical Measurements					
(NOTE: Standards still in development)	Modulation Format	Distance	Data Rate	Multiplex	Signaling Rate	SNDR Transmitter output Signal to Noise and Distortion Ratio: Describes the ratio (at the transmitter) of linear signal model amplitude to the sum of noise and non-linear components.	Linear Fit Pulse Peak The useful amplitude of the transmitter; found as the amplitude of a pulse that is a linear fit model of the transmitter.	UBHPJ/J5/J4 Uncorrelated Bounded High Probability Jitter: high probability/deterministic jitter components.	UUGJ/JRMS Uncorrelated Unbounded Gaussian Jitter (Random Jitter RMS),	E0J/Even-Odd Jitter F/2 Jitter asymmetry usually induced by imbalanced MUX.	
	CEI-56G-VSR-PAM4	PAM4	100 mm	n lane x 56 Gbps	1-n lanes	18-29 Gbd	31 dB	.75 Near-end-Linearity	0.05 Ulpp	0.01 Ulrms	0.019 Ulpp
	CEI-56G-MR-PAM4	PAM4	500 mm	n lane x 56 Gbps	1-n lanes	18-29 Gbd	31 dB	.80xT_Vf V	0.05 Ulpp	0.01 Ulrms	0.019 Ulpp
	CEI-56G-LR-PAM4	PAM4	1 m	n lane x 56 Gbps	1-n lanes	18-29 Gbd	31 dB	.85xT_Vf V	0.05 Ulpp	0.01 Ulrms	0.019 Ulpp
	50GAUI-1/100GAUI-2/ 200GAUI-4/400GAUI-8	PAM4	~250 mm	50 Gbps	1,2,4,8 lanes	26.56 Gbd	31 dB	.736xVf V	0.128 Ulpp	0.023 Ulrms	0.019 Ulpp
	50GBASE-KR/100GBASE- KR2/200GBASE-KR4	PAM4	<1 m	50 Gbps	1,2,4 lanes	26.56 Gbd	SNRTX >= 32.5 dB	.75xVf V (TBD)	J4: 0.128 Ulpp	0.023 Ulrms	0.019 Ulpp
	50GBASE-CR/100GBASE- CR2/200GBASE-CR4	PAM4	<3 m	50 Gbps	1,2,4 lanes	26.56 Gbd	SNRTX >= 32.5 dB	.49xVf V (TBD)	TBD	TBD	0.019 Ulpp
Key Aspects of Measurement						Measurement which compares the useful amplitude of the signal to the un-compensable distortions and noise.	Lower limits on pulse amplitude and compensable jitter.	Limits the un-correlated jitter for a transmitter.	Limits the random jitter for a transmitter.	Limits the asymmetry of the transmitter.	

SNDR (PAM4)

The Signal to Noise Distortion Ratio (SNDR) measurement is the principal electrical measure of transmitter performance in all 400G specifications today.

$$SNDR = 10 \log_{10} \left(\frac{p_{max}^2}{\sigma_e^2 + \sigma_n^2} \right) dB$$

The SNDR is a ratio of p_{max} (the maximum of the linear fit pulse response) to the sum of the linear fit error σ_e and the noise σ_n extracted from consecutive long run lengths of symbols.

These three parameters have error contributions directly related to the instrumentation bandwidth, jitter noise floor and vertical noise floor. The combination of 70 GHz of instrument BW allows tracking a fourth order Bessel-Thomson electrical response to the -10dB point (at 69 GHz), which offers flat phase response and minimal instrument contributed jitter. The σ_e term is heavily influenced by instrument contributed jitter noise floor, and that contribution on an AT1 architecture can be as low as 40fs on some signals. The σ_n term is heavily influence by the instrumentation effective number of bits and overall vertical noise contribution. The key to the most accurate SNDR measurement performance is to maximize the p_{max} term (requires approximately 50 GHz bandwidth) and minimize the instrument contributed jitter and vertical noise components.

Eye Height at BER (Noise Decomposition), T_{mid} , V_{mid}

The method of placement of these detection thresholds is governed by IEEE 802.3 and OIF-CEI.

TDECQ Transmitter and Dispersion Eye Closure - Quaternary

123.8.5.4 TDECQ after Reference Equalizer

TDECQ Example (Optical PAM4): 26GBaud

- Reference equalized PAM4 eye is sliced with two vertical histograms:

 - .45UI and .55UI at .04UI width
 - Find bathtub opening in terms of RX noise, compare to ideal, express as a penalty (the smaller the better)


Optical - 50G, 200G, 400GBASE-LR(1,4,8), FR(1,4,8) WDM (Wavelength Division Multiplexing)

Optical - 100G, 400GBASE-DR(1,4) parallel single-mode fiber

Optical - 200GBASE-DR4 parallel multi-mode fiber

Optical - 50/100/200GBASE-SR(1,2,4) parallel single-mode fiber


Electrical - 50, 100 or 200GBASE-CR/KR(1,2,4)

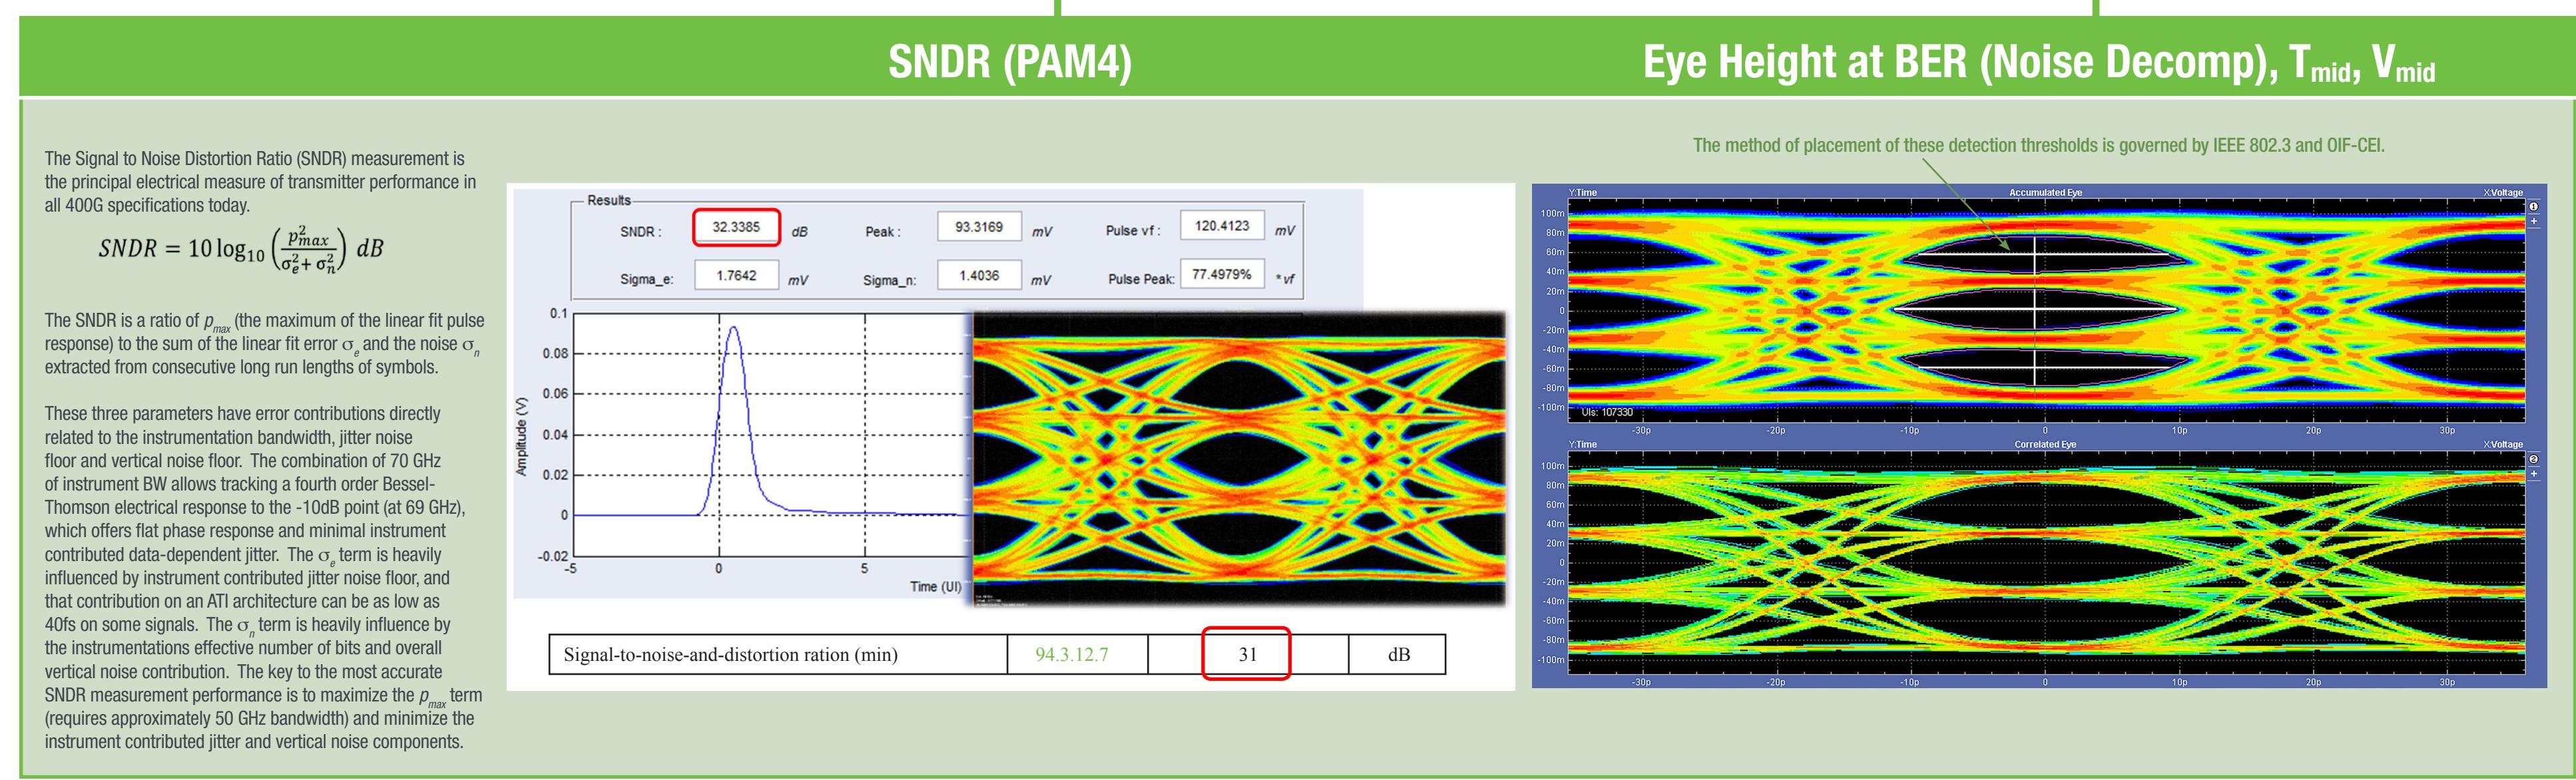

Visit tek.com/400G for additional resources and solutions in testing 400G designs.

All diagrams: for clarity, only one direction of transmission is shown.
SMF: single-mode fiber. MMF: multi-mode fiber. WDM: wavelength div. multiplexing.
Note: Optical 400GBASE-SR16 at 25 Gbd PAM2 NRZ not shown

Tektronix®

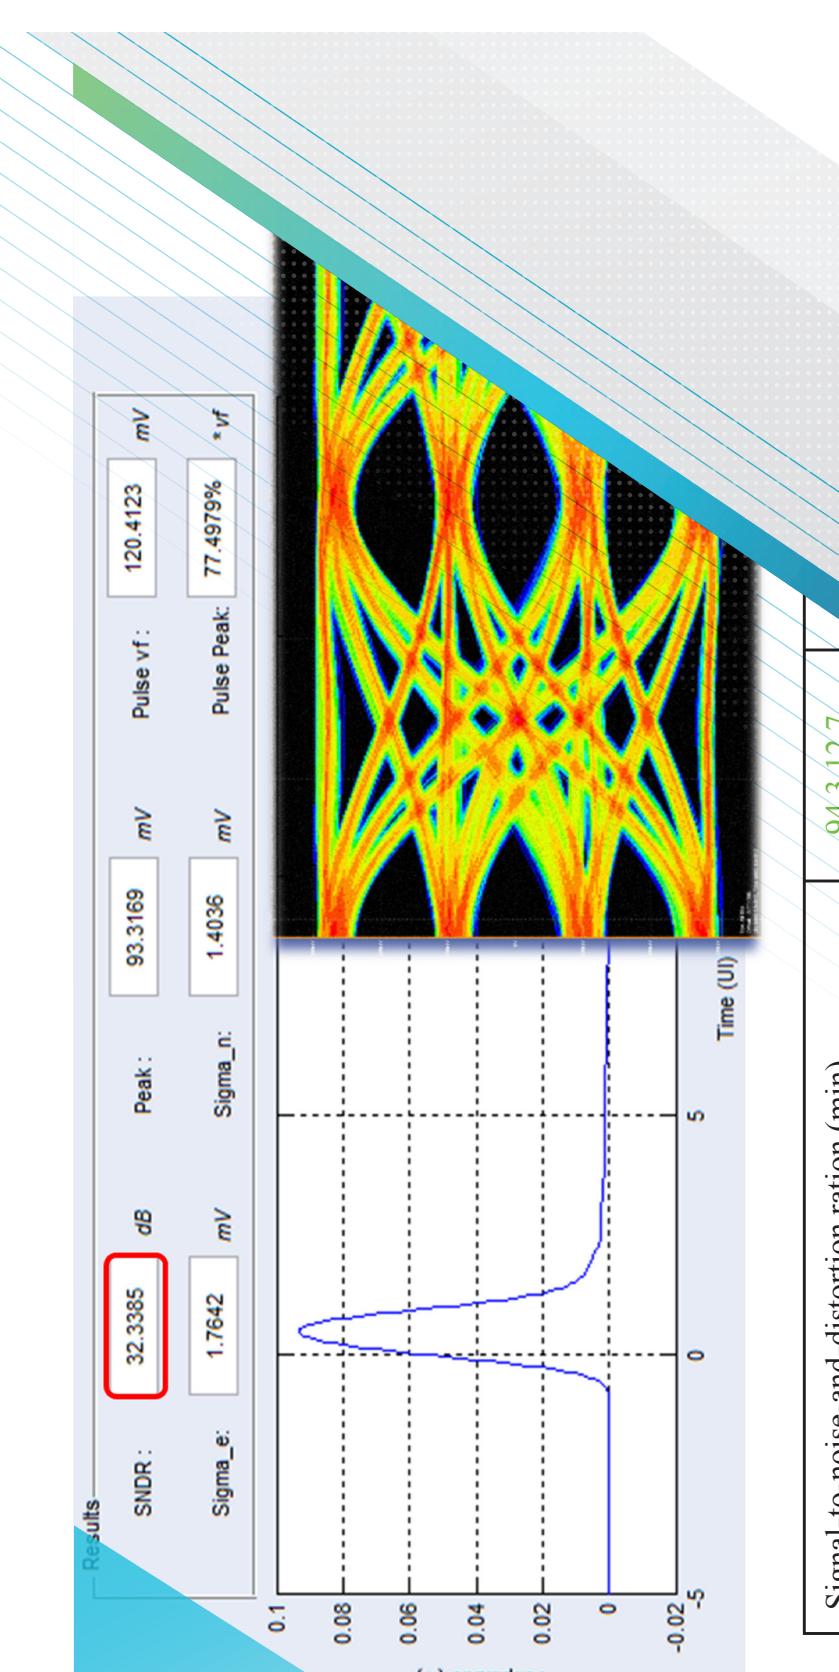

POSTER

PAM4 in 400G/200G/100G/50G
Networking Technology

Contact Information:

Balkans, Israel, South Africa and other SEE Countries	+41 52 075 3777
Austria	1 800 709 465
Austria	00800 2255 4835
Belgium*	+41 52 075 3777
Belgium*	00800 2255 4835
Brazil	55 (11) 359 7627
Central East Europe / Balkans	+41 52 075 3777
Central Europe / Greece	+41 52 075 3777
Denmark	+45 80 88 1401
Finland	+41 52 075 3777
France	00800 2255 4835
Germany	00800 2255 4835
Hong Kong	100 820 5835
India	000 160 000
Indonesia	007 803 801 5249
Italy	00800 2255 4835
Japan	81 (3) 6714 3010
Luxembourg	+41 52 075 3777
Mexico, Central/South America and Caribbean	+41 52 075 3777
Middle East, Asia, and North Africa	+41 52 075 3777
Malaysia	1 800 22 5835
Malta	356 56 04 50 90
The Netherlands	00800 2255 4835
New Zealand	0800 801 238
People's Republic of China	400 820 5835
Philippines	1 800 160 0077
Portugal	30 08 2370
Republic of Korea	+82 60 17 1500
Russia / CIS	+7 (495) 682 7684
Singapore	850 001 173
South Africa	+41 52 075 3777
Spain	00800 2255 4835
Sweden	00800 2255 4835
Switzerland	00800 2255 4835
Taiwan	886 (2) 2055 6588
United Kingdom / Ireland	1 800 011 931
USA	1 800 833 9200
Vietnam	1 800 001 028

* European toll-free number. If not accessible, call: +41 52 075 3777

PAM4 in 400G/200G/100G/50G

Networking Technology

POSTER

Contact Information:

Balkans, Israel, South Africa and other SEE Countries	+41 52 075 3777
Austria	1 800 709 465
Austria	00800 2255 4835
Belgium*	+41 52 075 3777
Belgium*	00800 2255 4835
Brazil	55 (11) 359 7627
Central East Europe / Balkans	+41 52 075 3777
Central Europe / Greece	+41 52 075 3777
Denmark	+45 80 88 1401
Finland	+41 52 075 3777
France	00800 2255 4835
Germany	00800 2255 4835
Hong Kong	100 820 5835
India	000 160 000
Indonesia	007 803 801 5249
Italy	00800 2255 4835
Japan	81 (3) 6714 3010
Luxembourg	+41 52 075 3777
Mexico, Central/South America and Caribbean	+41 52 075 3777
Middle East, Asia, and North Africa	+41 52 075 3777
Malaysia	1 800 22 5835
Malta	356 56 04 50 90
The Netherlands	00800 2255 4835
New Zealand	0800 801 238
People's Republic of China	400 820 5835
Philippines	1 800 160 0077
Portugal	30 08 2370
Republic of Korea	+82 60 17 1500
Russia / CIS	+7 (495) 682 7684
Singapore	850 001 173
South Africa	+41 52 075 3777
Spain	00800 2255 4835
Sweden	00800 2255 4835
Switzerland	00800 2255 4835
Taiwan	886 (2) 2055 6588
United Kingdom / Ireland	1 800 011 931
USA	1 800 833 9200
Vietnam	1 800 001 028

PAM4 in 400G/200G/100G/50G

Networking Technology

POSTER

Contact Information:

Balkans, Israel, South Africa and other SEE Countries	+41 52 075 3777
Austria	1 800 709 465
Austria	00800 2255 4835
Belgium*	+41 52 075 3777
Belgium*	00800 2255 4835
Brazil	55 (11) 359 7627
Central East Europe / Balkans	+41 52 075 3777
Central Europe / Greece	+41 52 075 3777
Denmark	+45 80 88 1401
Finland	+41 52 075 3777
France	00800 2255 4835
Germany	00800 2255 4835
Hong Kong	100 820 5835
India	000 160 000
Indonesia	007 803 801 5249
Italy	00800 2255 4835
Japan	81 (3) 6714 3010
Luxembourg	+41 52 075 3777
Mexico, Central/South America and Caribbean	+41 52 075 3777
Middle East, Asia, and North Africa	+41 52 075 3777
Malaysia	1 800 22 5835
Malta	356 56 04 50 90
The Netherlands	00800 2255 4835
New Zealand	0800 801 238
People's Republic of China	400 820 5835
Philippines	1 800 160 0077
Portugal	30 08 2370
Republic of Korea	+82 60 17 1500
Russia / CIS	+7 (495) 682 7684
Singapore	850 001 173
South Africa	+41 52 075 3777
Spain	00800 2255 4835
Sweden	00800 2255 4835
Switzerland	00800 2255 4835
Taiwan	886 (2) 2055 6588
United Kingdom / Ireland	1 800 011 931
USA	1 800 833 9200
Vietnam	1 800 001 028

PAM4 in 400G/200G/100G/50G

Networking Technology

POSTER