

# UNDERSTANDING COLORS AND GAMUT

---

POSTER






# Understanding Colors and Gamut

## Science Behind the Technology

The television color specification is based on standards defined by the CIE (Commission Internationale de L'Eclairage) in 1931. The CIE specified an idealized set of primary XYZ tristimulus values. This set is a group of all-positive values converted from R'G'B' where Y is proportional to the luminance of the additive mix. This specification is used as the basis for color within today's video standards.

Figure 1. CIE xy diagram with color coordinates used by ITU-R BT 709 and 2020 color spaces.

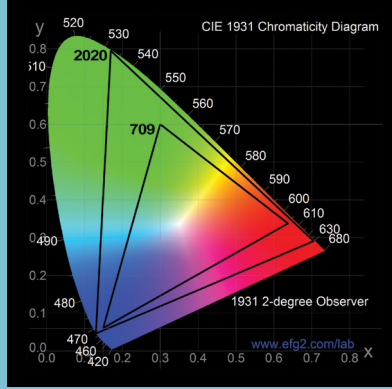

The CIE standardized a procedure for normalizing XYZ tristimulus values to obtain a two-dimensional plot of values (x and y) of all colors for a relative value of luminance (Y) as specified by the following equations:

$$x = X / (X + Y + Z)$$
$$y = Y / (X + Y + Z)$$
$$z = Z / (X + Y + Z)$$
$$x + y + z = 1$$

A color gamut is the complete range of colors allowed for a specific color space. This range is bounded by the xy coordinates of the primary red, green, and blue colors within the color space. The xy coordinates for these primary colors is given for several different gamuts in Table 1, and the range of each gamut is shown by the bounding triangle in Figure 1.

Gamut	Illuminant	Red	Green	Blue
ITU-R BT. 709	D <sub>65</sub>	x = 0.708 y = 0.292	x = 0.170 y = 0.797	x = 0.131 y = 0.046
ITU-R BT. 709	D <sub>65</sub>	x = 0.640 y = 0.330	x = 0.300 y = 0.600	x = 0.150 y = 0.060
SMPTe 431-2 (DCH-PS) XYZ	D <sub>65</sub>	x = 0.680 y = 0.320	x = 0.265 y = 0.690	x = 0.150 y = 0.060
SMPTe	D <sub>65</sub>	x = 0.630 y = 0.340	x = 0.310 y = 0.585	x = 0.155 y = 0.070
PAL/SECAM	D <sub>65</sub>	x = 0.640 y = 0.330	x = 0.290 y = 0.600	x = 0.150 y = 0.060
NTSC (1953)	C	x = 0.670 y = 0.330	x = 0.210 y = 0.710	x = 0.140 y = 0.080

Table 1. CIE xy Coordinate Values for Various Color Gamuts

The white point of the system within each format is defined by the addition of red, green, and blue in equal quantities. The CIE defined several standard sources in 1931 as shown in Table 2.

- Source A: A tungsten filament lamp with a color temperature of 2854K
- Source B: A model of noon sunlight with a color temperature of 4800K
- Source C: A model of average daylight with a color temperature of 6504K



Illuminant C (Source C) was used in the original definition of NTSC. The CIE later defined a series of daylight illuminants, called the Daylight D series. Illuminant D<sub>65</sub> with a color temperature of 6504K, and slightly different x, y coordinates, is predominately used today.

Illuminant A	x = 0.4476 y = 0.4075
Illuminant B	x = 0.3484 y = 0.3516
Illuminant C	x = 0.3101 y = 0.3162
Illuminant D <sub>65</sub>	x = 0.3127 y = 0.3290




Table 2. White Points for Various Illuminants.

## Lightning Display




Tektronix developed the Lightning display to provide both amplitude and interchannel timing information for the three channels of a component signal – within a single display. This unique display requires only a single test signal, standard color bars, to make definitive measurements. Plotting luma versus P'b in the upper half – like two vector displays sharing the same screen – inverted the Lightning display. The bright dot at the center of the screen is blanking (zero signal level). Increasing luma is plotted upward in the upper half of the screen and downward in the lower half.

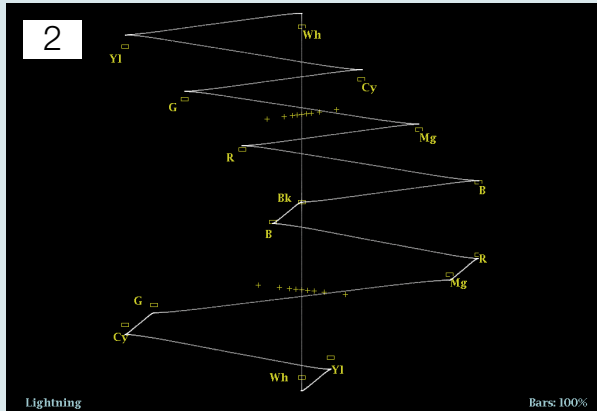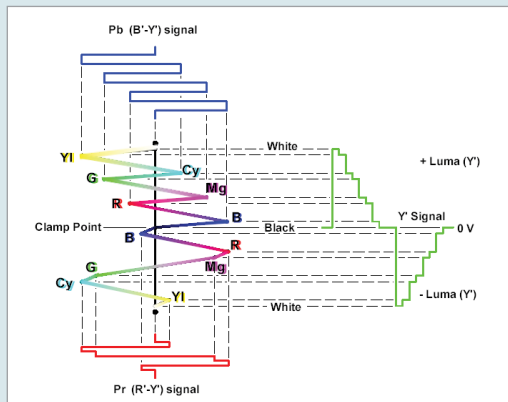




This example shows a luma amplitude error: both the upper and lower traces fall outside the individual graticule boxes and are stretched vertically. Decrease the amplitude of the luma signal until each component fits within the boxes. If the trace was distorted horizontally this would indicate a Chroma error within the signal.

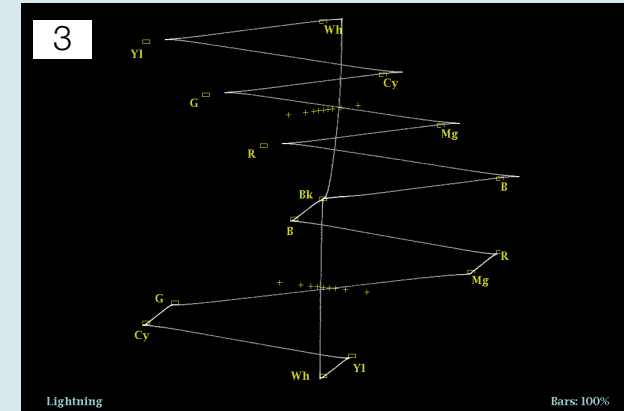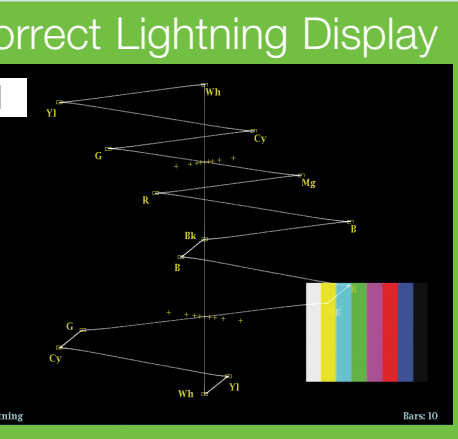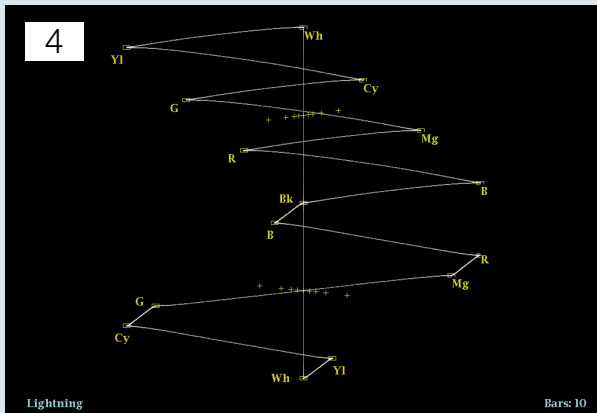




This example shows a bowing outward from the center in the upper half of the display. This indicates a timing error in the P'b channel where the P'b signal is leading the luma signal. The transition crosses the third cross-hair and indicates a timing error of 74 ns, or one luma sample. In the lower half of the display, the green-magenta transition crosses the center mark–there is no timing error between the luma and P'r signals.

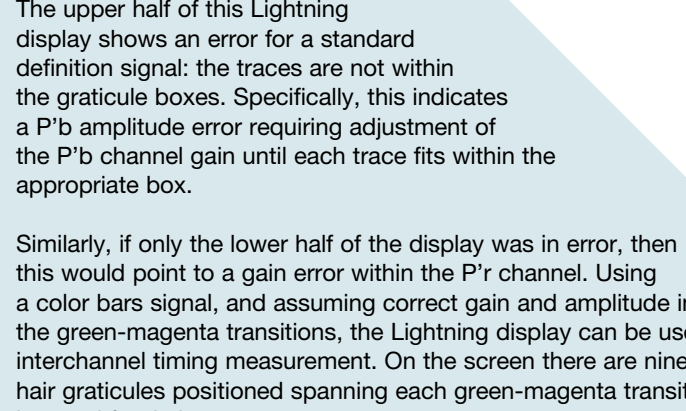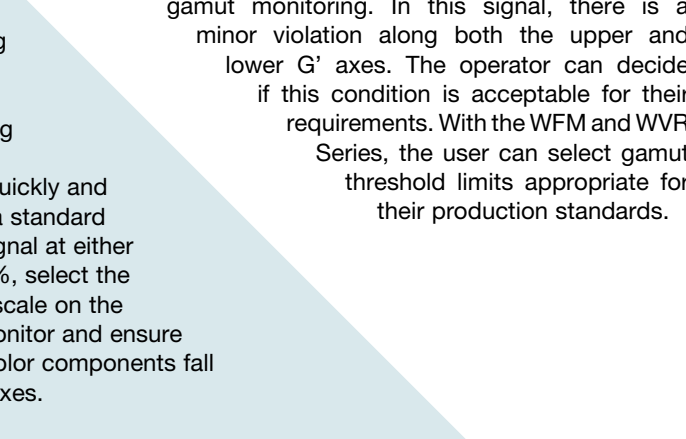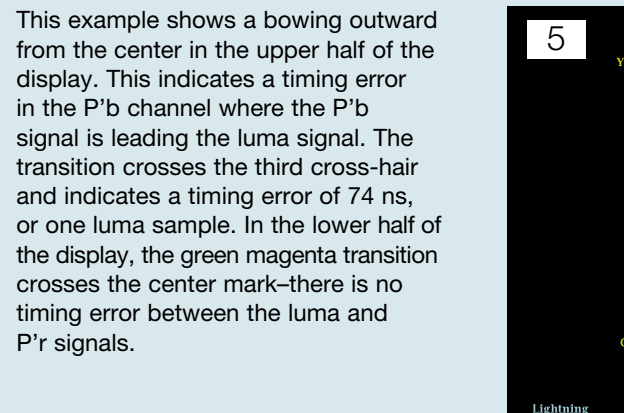




This example shows a bowing outward from the center in the upper half of the display. This indicates a timing error in the P'b channel where the P'b signal is leading the luma signal. The transition crosses the third cross-hair and indicates a timing error of 74 ns, or one luma sample. In the lower half of the display, the green-magenta transition crosses the center mark–there is no timing error between the luma and P'r signals.

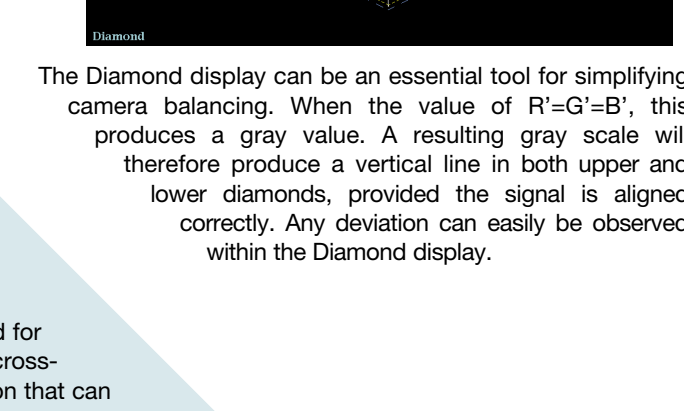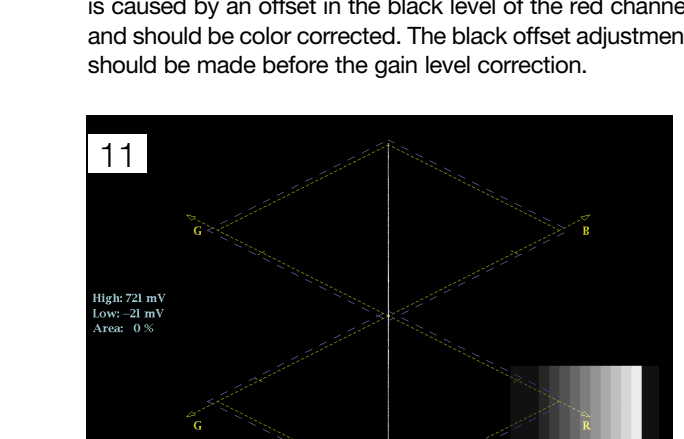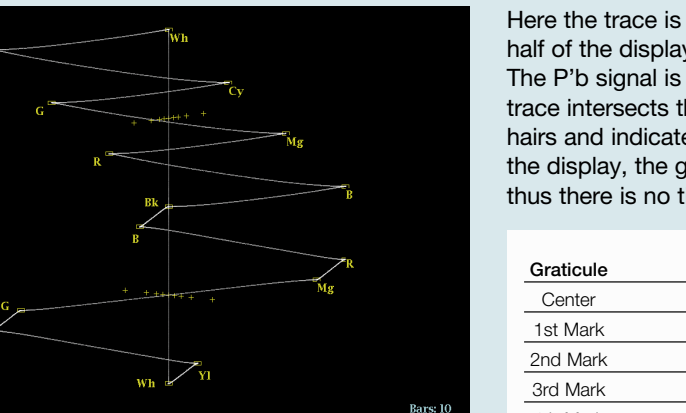




This example shows a bowing outward from the center in the upper half of the display. This indicates a timing error in the P'b channel where the P'b signal is leading the luma signal. The transition crosses the third cross-hair and indicates a timing error of 74 ns, or one luma sample. In the lower half of the display, the green-magenta transition crosses the center mark–there is no timing error between the luma and P'r signals.

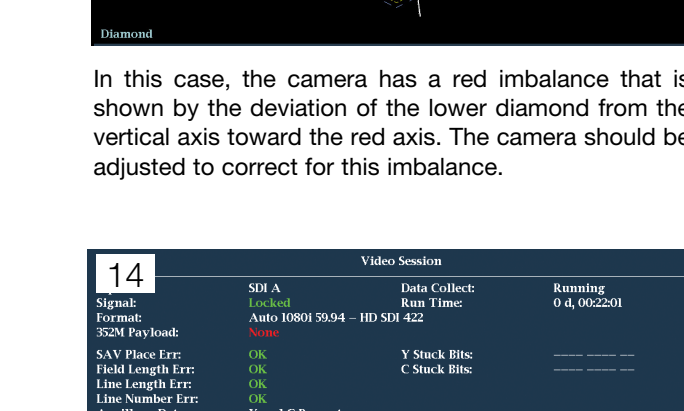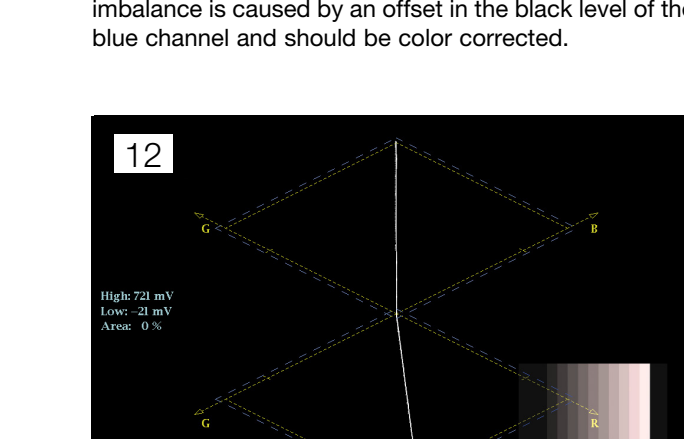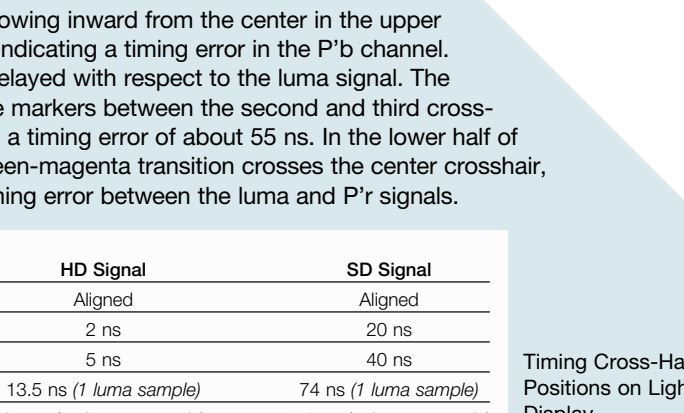




This example shows a bowing outward from the center in the upper half of the display. This indicates a timing error in the P'b channel where the P'b signal is leading the luma signal. The transition crosses the third cross-hair and indicates a timing error of 74 ns, or one luma sample. In the lower half of the display, the green-magenta transition crosses the center mark–there is no timing error between the luma and P'r signals.

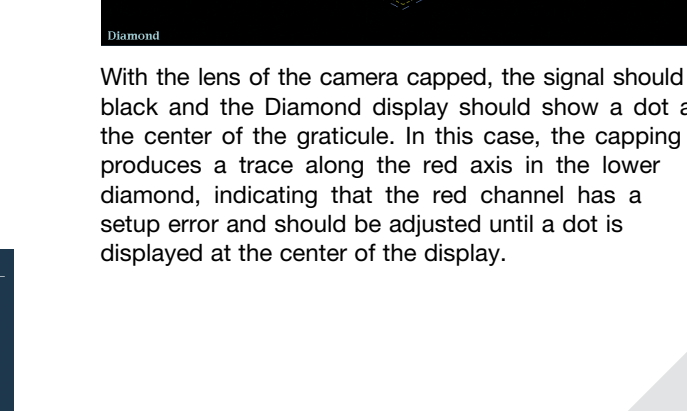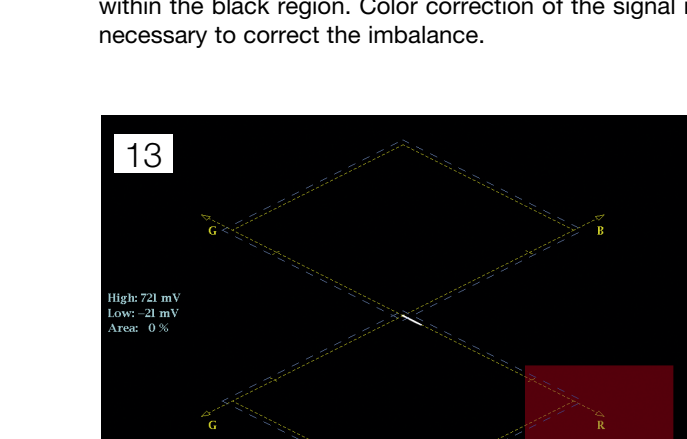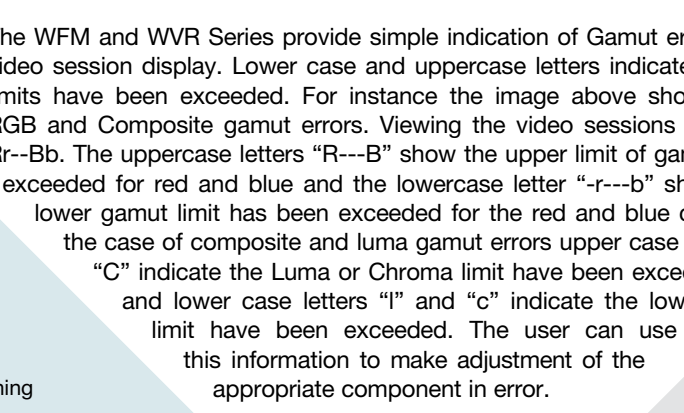




This example shows a bowing outward from the center in the upper half of the display. This indicates a timing error in the P'b channel where the P'b signal is leading the luma signal. The transition crosses the third cross-hair and indicates a timing error of 74 ns, or one luma sample. In the lower half of the display, the green-magenta transition crosses the center mark–there is no timing error between the luma and P'r signals.

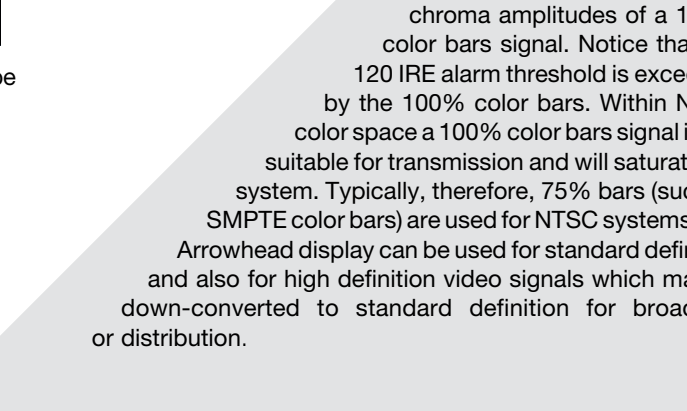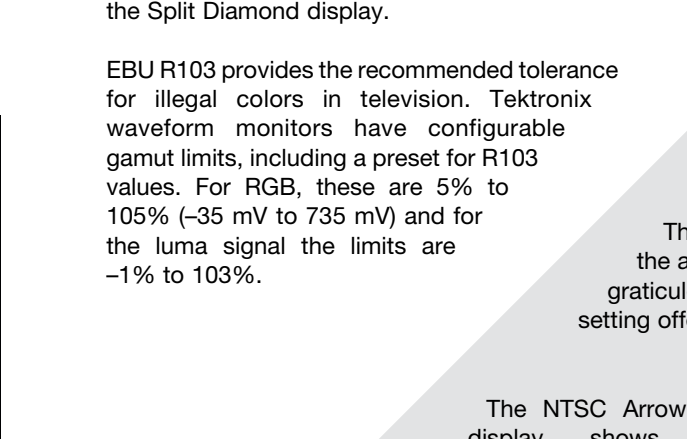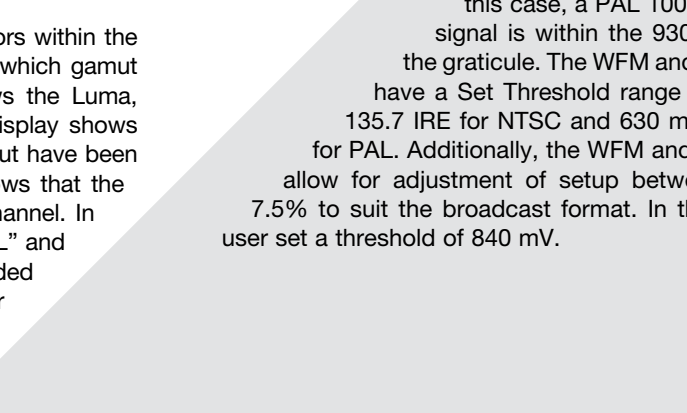


This example shows a bowing outward from the center in the upper half of the display. This indicates a timing error in the P'b channel where the P'b signal is leading the luma signal. The transition crosses the third cross-hair and indicates a timing error of 74 ns, or one luma sample. In the lower half of the display, the green-magenta transition crosses the center mark–there is no timing error between the luma and P'r signals.

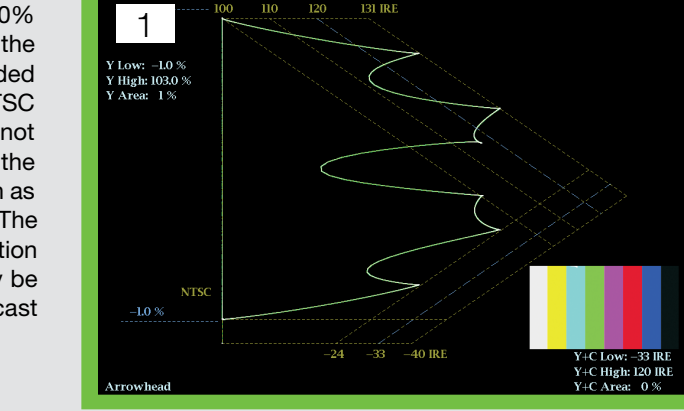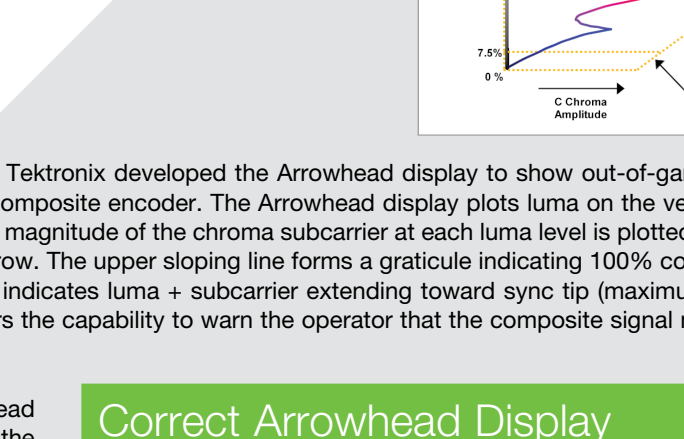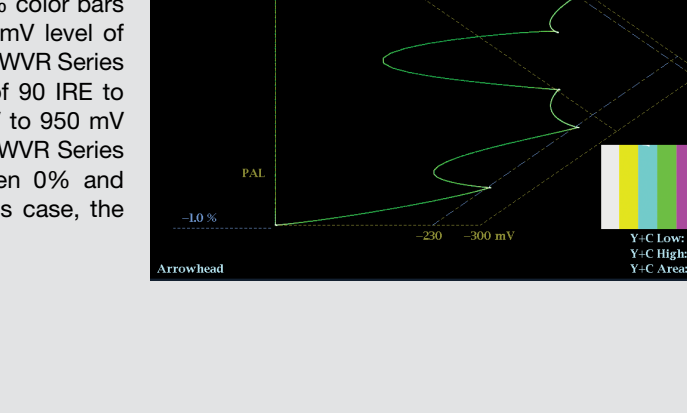


This example shows a bowing outward from the center in the upper half of the display. This indicates a timing error in the P'b channel where the P'b signal is leading the luma signal. The transition crosses the third cross-hair and indicates a timing error of 74 ns, or one luma sample. In the lower half of the display, the green-magenta transition crosses the center mark–there is no timing error between the luma and P'r signals.

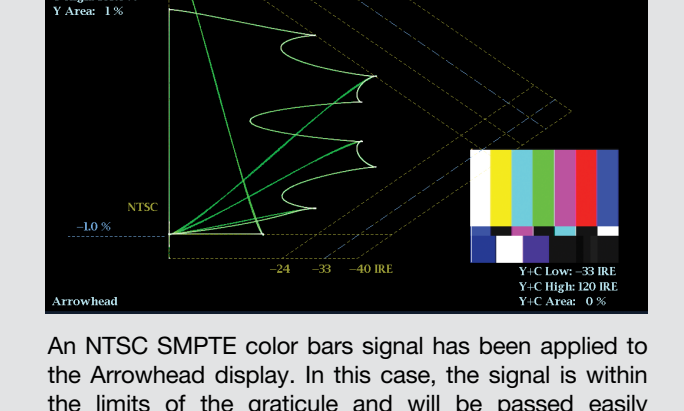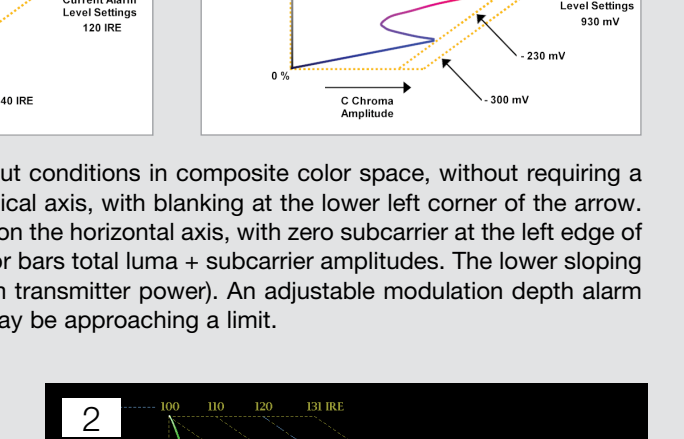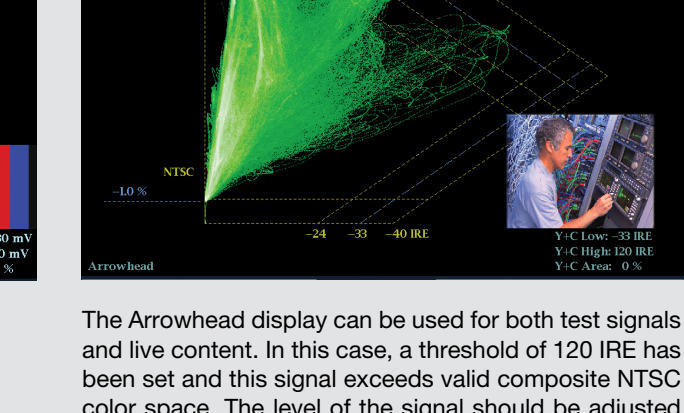


This example shows a bowing outward from the center in the upper half of the display. This indicates a timing error in the P'b channel where the P'b signal is leading the luma signal. The transition crosses the third cross-hair and indicates a timing error of 74 ns, or one luma sample. In the lower half of the display, the green-magenta transition crosses the center mark–there is no timing error between the luma and P'r signals.

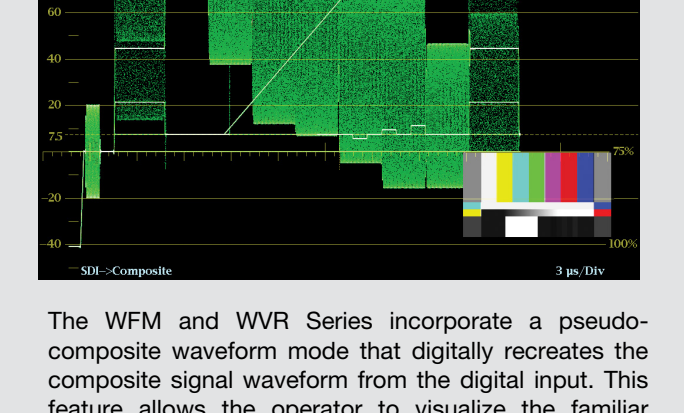


## Diamond Display

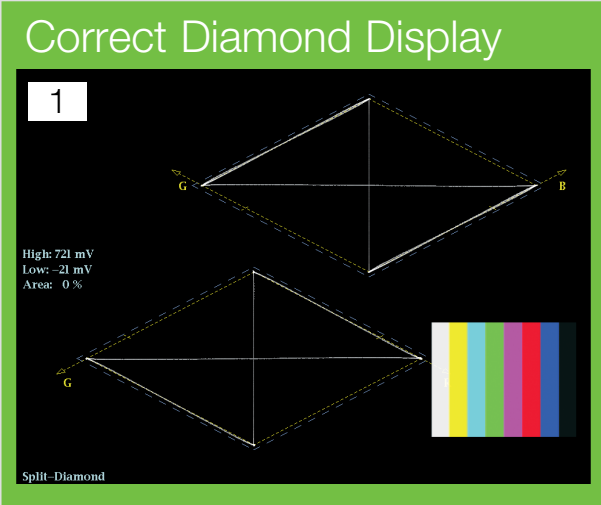


The Tektronix Diamond display provided on the WFM/WVR Series. The 0 to 700 mV signal range of a 100% color bars signal falls exactly within the graticule. The 100% color bars signal is said to be within the gamut of R'G'B' color space.

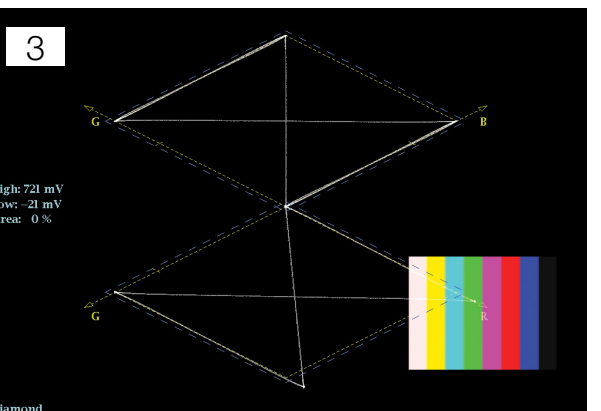

The color bars signal exceeds both the upper and lower diamonds along the G' axis. Therefore there is an amplitude error within the green channel and the signal gain should be corrected so that the waveform falls within the graticule. Note that the B' and R' components fall within the graticule and are therefore within correct limits.

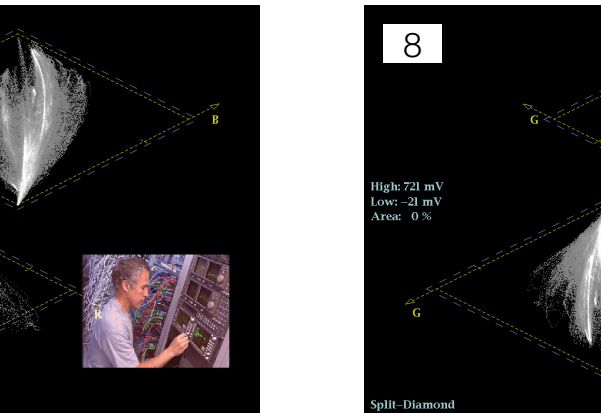

This signal has a significant blue imbalance and falls outside the lower diamond graticule. Note that the trace is offset to the right in the upper diamond. The blue imbalance is caused by an offset in the black level of the blue channel and should be color corrected.

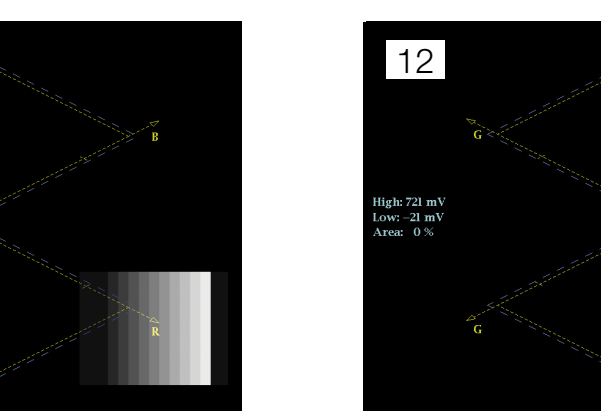

In this case, the camera has a red imbalance that is shown by the deviation of the lower diamond from the vertical axis toward the red axis. The camera should be adjusted to correct for this imbalance.



The WFM and WVR Series provide simple indication of Gamut errors within the video session display. Lower case and uppercase letters indicate which gamut limits have been exceeded. For instance the image above shows the Luma, RGB and Composite gamut errors. Viewing the video sessions display shows Rr–Bb. The uppercase letters "Rr–Bb" show the upper limit of gamut have been exceeded for red and blue and the lowercase letter "r–b" shows that the lower gamut limit has been exceeded for the red and blue channel. In the case of composite and luma gamut errors upper case "L" and "C" indicate the Luma or Chroma limit have been exceeded and lower case letters "l" and "c" indicate the lower limit have been exceeded. The user can use this information to make adjustment of the appropriate component in error.



Graticule	HD Signal	SD Signal
Center	Aligned	Aligned
1st Mark	2 ns	20 ns
2nd Mark	5 ns	40 ns
3rd Mark	13.5 ns (1 luma sample)	74 ns (1 luma sample)
4th Mark	27 ns (1 chroma sample)	148 ns (1 chroma sample)

Timing Cross-Hair Positions on Lightning Display.


## Spearhead Display

The newest gamut display from Tektronix is the Spearhead display, which shows the artistic metrics of color saturation and color value or lightness combined with RGB gamut limits. This allows a colorist to adjust live video signals in the HSV (Hue, Saturation, Value) space within the valid signal gamut range.


The Spearhead display is constructed by plotting the maximum of the R', G', and B' color values for each sample versus the minimum of the three values. The resulting area is a triangle that represents the full RGB color gamut. This triangle is rotated and scaled such that the vertical axis (max + min / 2) represents Lightness and the horizontal axis (max – min) represents non-normalized Saturation.

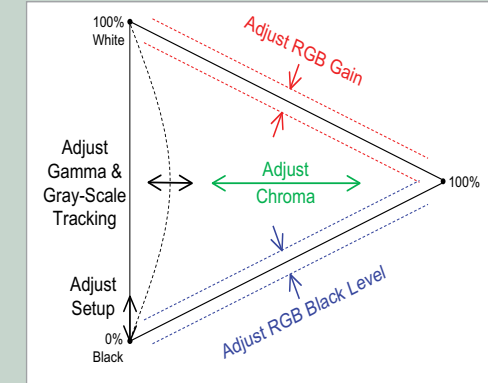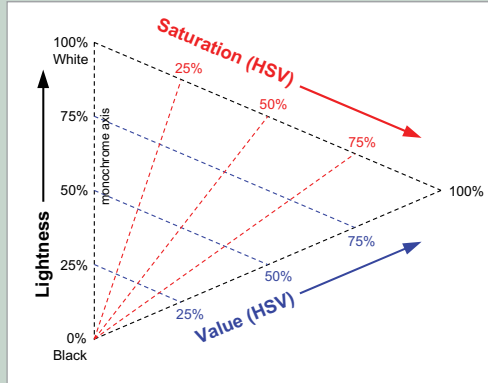


The Spearhead display can be used to quickly make color adjustments. The setup or black level is easily set by adjusting the image dot locations for alignment to the lower corner of the Spearhead triangle. The RGB White or Gain affects the image dot locations near the upper side of the triangle, increasing or decreasing the color Value or intensity. The RGB black-level controls affect the image dot locations near the lower side of the Spearhead triangle increasing or decreasing color Saturation. A chroma level change stretches or compresses the image dot locations along the horizontal axis, changing both Saturation and Value. Lastly, the gray-scale balance of the RGB gamma controls affects the alignment of the monochrome components of the image to the left side of the Spearhead.

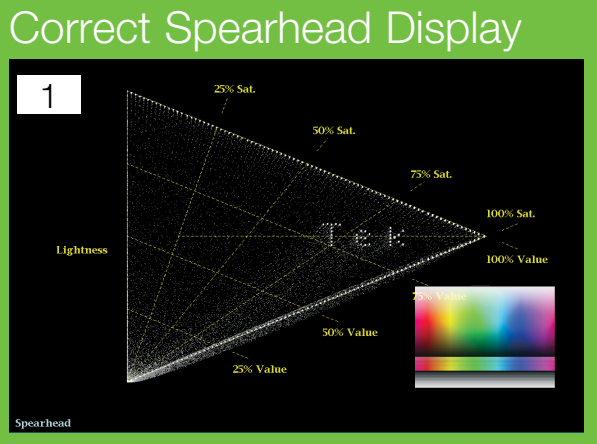


This rainbow pattern generated on the SPG8000A test signal generator contains a set of colors that completely fill the valid RGB gamut. Each line in the pattern spans the full range of color hues for a fixed Value and Saturation, with ramps from red to yellow to green to cyan to blue to magenta to red. The lines in the top portion of the pattern all have 100% Value, and range from 0% Saturation (white) to 100% Saturation (primary colors). The middle set of lines all have 100% Saturation, and range from 100% Value (primary colors) to 0% Value (black). The bottom portion of the image contains a text identification pattern and a monochrome step pattern.

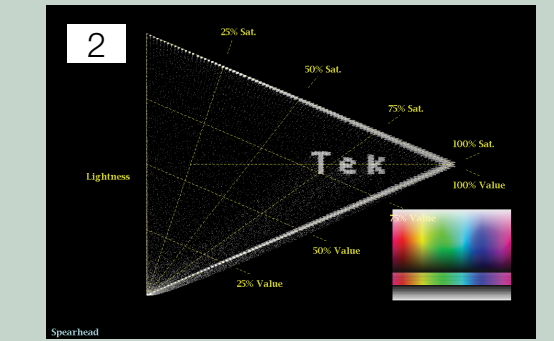


A Hue error added to the rainbow pattern will cause the text marker to blur. This type of color correction adjustment will also show as a rotation on the vector display.

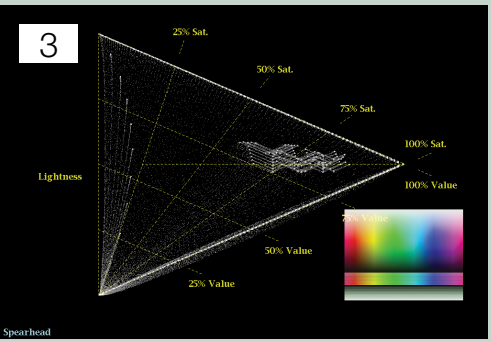

A green gamma error has been added to the test pattern, resulting in distortions in the text identifier. Additionally, the points on the Lightness axis (from the monochrome stepped portion of the test pattern) are bowed inward, since these points now have some color. Proper gamma adjustment will remove the tint from monochrome parts of the image.

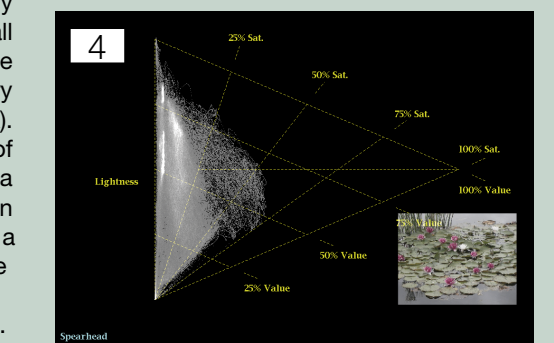

This image shows how the Spearhead display can be used effectively by a colorist. Before correction, this image has too much near-white brightness and relatively unsaturated colors. The thumbnail display of the picture shows that the flowers and lily pads appear "washed out".

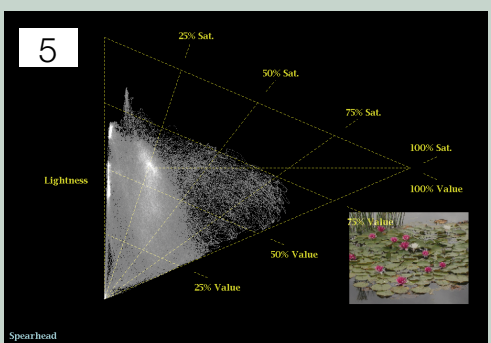


After correction, the colors appear vibrant but not excessively bright. The trace in the Spearhead display shows a wider range of color saturation, with lightness and color values kept within the 75% targets desired by the colorist.

## Arrowhead Display



The Rainbow pattern generated on the SPG8000A test signal generator contains the complete range of high definition colors. This color range completely fills the graticules of the Split Diamond display.

EBU R103 provides the recommended tolerance for illegal colors in television. Tektronix waveform monitors have configurable gamut limits, including a preset for R103 values. For RGB, these are 5% to 105% (–35 mV to 735 mV) and for the luma signal the limits are –1% to 103%.


The NTSC Arrowhead display shows the constructed luma and chroma amplitudes of a 100% color bars signal. Notice that the 120 IRE alarm threshold is exceeded by the 100% color bars. Within NTSC color space a 100% color bars signal is not suitable for transmission and will saturate the system. Typically, therefore, 75% bars (such as SMPTE color bars) are used for NTSC systems. The Arrowhead display can be used for standard definition and also for high definition video signals which may be down-converted to standard definition for broadcast or distribution.

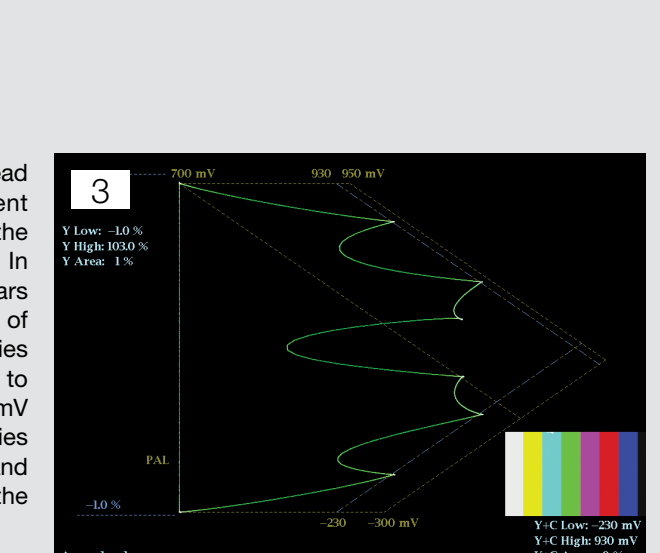


The PAL Arrowhead display has different graticule limits due to the different color space used. In this case, a PAL 100% color bars signal is within the 930 mV level of the graticule. The WFM and WVR Series have a Set Threshold range of 30 IRE to 135.7 IRE for NTSC and 630 mV to 950 mV for PAL. Additionally, the WFM and WVR Series allow for adjustment of setup between 0% and 7.5% to suit the broadcast format. In this case, the user set a threshold of 840 mV.

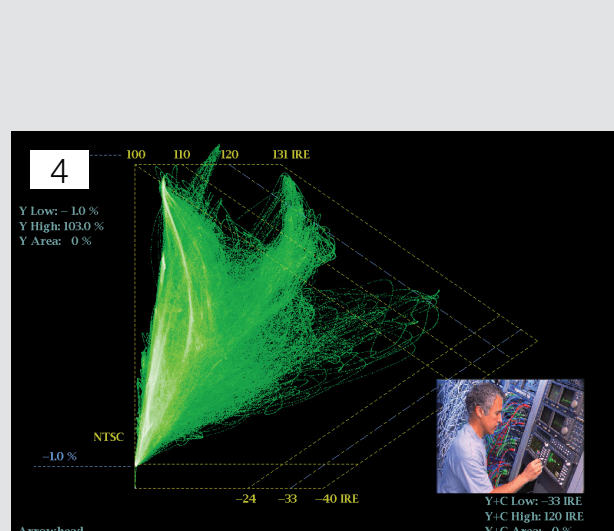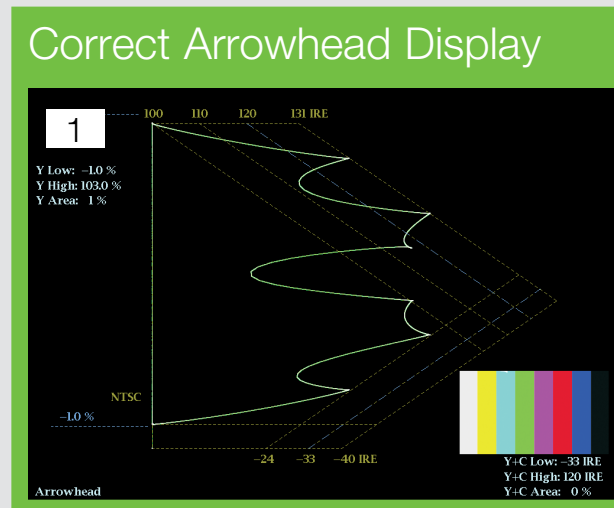

The Arrowhead display can be used for both test signals and live content. In this case, a threshold of 120 IRE has been set and this signal exceeds valid composite NTSC color space. The level of the signal should be adjusted to prevent clipping within NTSC transmission systems.

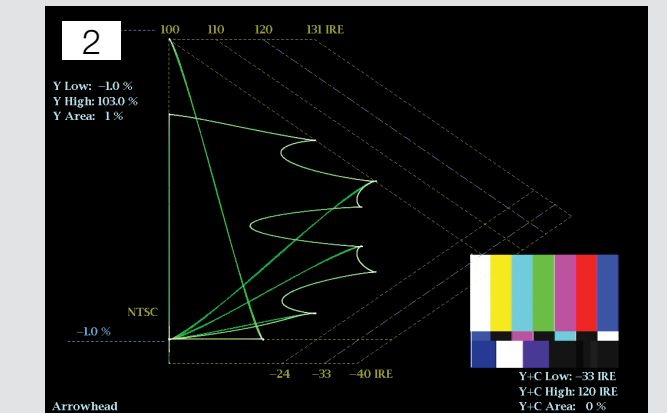


An NTSC SMPTE color bars signal has been applied to the Arrowhead display. In this case, the signal is within the limits of the graticule and will be passed easily through the transmission system. Note that the display indicates that SMPTE color bars are out of gamut within R'G'B' color space.

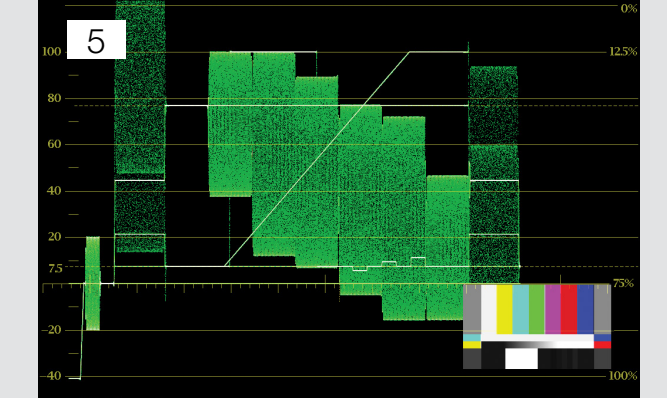

The WFM and WVR Series incorporate a pseudo-composite waveform mode that digitally recreates the composite signal waveform from the digital input. This feature allows the operator to visualize the familiar composite signal.



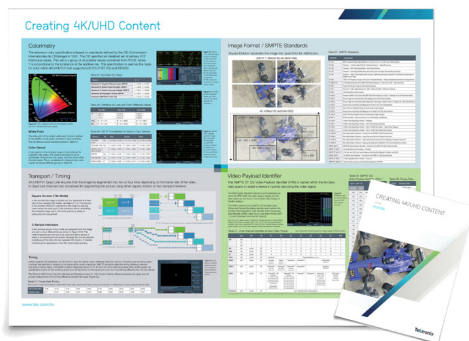

## 4K/UHD Content Creation

Our newest poster on 4K/UHD Content Creation is a highly visual wall chart developed by our experts. It will empower you with all of the specifications, approaches and information you need to make the best decisions about creating quality 4K content.

## A Guide to 4K/UHD Monitoring and Measurement

Learn how to navigate the challenges of creating 4K/UHD content with High Dynamic Range (HDR) and extended color gamut when transitioning from HD to 4K/UHD workflows. Includes: Inter-Channel Timing for Quad Link 4K/UHD Signal, Video Payload Identifier (VPID), Colorimetry (ITU-R BT.709 & BT.2020) and Aspect Ratio Validation of Incoming 4K/UHD Content.



To order your free copy of this featured content, please visit:  
[TEK.COM/4K](http://TEK.COM/4K)

## Contact Information:

**Australia\*** 1 800 709 465  
**Austria** 00800 2255 4835  
**Balkans, Israel, South Africa and other ISE Countries** +41 52 675 3777  
**Belgium\*** 00800 2255 4835  
**Brazil** +55 (11) 3759 7627  
**Canada** 1 800 833 9200  
**Central East Europe / Baltics** +41 52 675 3777  
**Central Europe / Greece** +41 52 675 3777  
**Denmark** +45 80 88 1401  
**Finland** +41 52 675 3777  
**France\*** 00800 2255 4835  
**Germany\*** 00800 2255 4835  
**Hong Kong** 400 820 5835  
**India** 000 800 650 1835  
**Indonesia** 007 803 601 5249  
**Italy** 00800 2255 4835  
**Japan** 81 (3) 6714 3010  
**Luxembourg** +41 52 675 3777  
**Malaysia** 1 800 22 55835  
**Mexico, Central/South America and Caribbean** 52 (55) 56 04 50 90  
**Middle East, Asia, North Africa** +41 52 675 3777  
**The Netherlands\*** 00800 2255 4835  
**New Zealand** 0800 800 238  
**Norway** 800 16098  
**People's Republic of China** 400 820 5835  
**Philippines** 1 800 1601 0077  
**Poland** +41 52 675 3777  
**Portugal** 80 08 12370  
**Republic of Korea** +82 2 6917 5000  
**Russia / CIS** +7 (495) 6647564  
**Singapore** 800 6011 473  
**South Africa** +41 52 675 3777  
**Spain\*** 00800 2255 4835  
**Sweden\*** 00800 2255 4835  
**Switzerland\*** 00800 2255 4835  
**Taiwan** 886 (2) 2656 6688  
**Thailand** 1 800 011 931  
**United Kingdom / Ireland\*** 00800 2255 4835  
**USA** 1 800 833 9200  
**Vietnam** 12060128

\* European toll-free number. If not accessible, call: +41 52 675 3777

Find more valuable resources at [TEK.COM](http://TEK.COM)

Copyright © Tektronix. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks or registered trademarks of their respective companies.

092016.AH 25W-15618-6

