


ITSRACK Rack mount instructions

Use the following instructions with the illustration and table to assemble the ITSRACK kit.



Item number	Quantity	Description
1	2	Bracket, rack slide, rear mount
2	2	Bracket, rack, front
3	2	Bracket assembly, rack, rear mount
4	4	Screw, machine 10-32 x 3/8 inch
5	4	#8 Lock washer
6	8	#8 Flat washer
7	4	Screw, machine, 8-32 x 1/2 inch
8	4	Hex nut, 8-32
9	4	Screw, machine, 8-32 x 3/8 inch, flat head
10	8	Screw, machine, 10-32 x 1/2 inch, pan head, Phillips, with spring lock, 18-8 SS
11	4	#10 Washer, 18-8 stainless steel
12	8	Clip nut, 10-32 for round holes

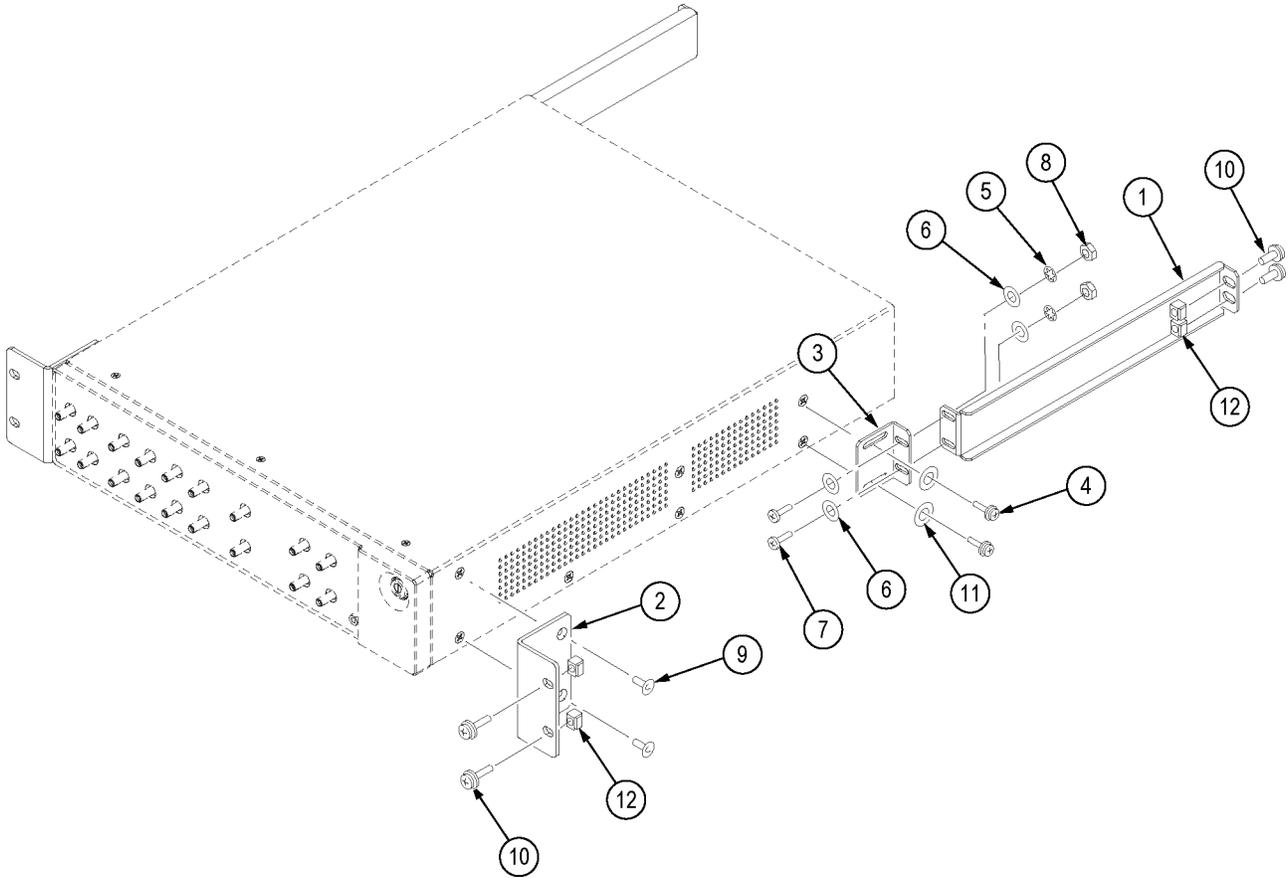

1. Remove the screws from the side of the instrument where you intend to install the front and rear brackets.
2. Install the front brackets (item 2) on each side using the 8 x 32 flat head machine screws (item 9).
3. Attach the one of the rear brackets (item 3) to the bracket slide (item 1) using the provided hardware (items 5, 6,7, 8). Tighten the screws finger-tight.
4. Install the bracket assembly to the side of the instrument using the 10-32 screws (item 4) and #10 stainless steel washers (item 11). Tighten the screws finger-tight.
5. Repeat steps 3 and 4 to assemble and attach the bracket assembly on the other side of the instrument.
6. Install the instrument in the rack, adjusting the rear bracket as required.
 - a. Note the positions of the bracket and remove the instrument from the rack.
 - b. Tighten the hardware and place the instrument in the rack.
7. Secure the instrument in the rack using the machine screws (item 10) and clip nuts (item 12) on the front and rear of the rack.