

# Read This First: Z-Active Differential Probes – Specifications Change & New Optional Accessory Tip

**Keep this document with the probe documentation so that end users can read this information.**

The following specifications and optional accessories have changed since the probe documentation was produced. These changes affect the following Tektronix Z-Active Differential Probes:

P7340A (4 GHz), P7360A (6 GHz), P7380A (8 GHz), P7313 (13 GHz)


## Specification Change (Applies to all tips)

Specification	Updated limits
Operating temperature	-35 °C up to 85 °C (-31 °F to +185 °F)

## New Optional Accessory Tip

A kit of ten (10) Medium Flex, Square Pin Tip-Clip Assemblies are an optional accessory for the probes. The tips adapt your P73xx probe to 0.025 in. (0.63 mm) square pins that are spaced 0.10 in. (2.54 mm) apart. Order Tektronix part number 020-3116-xx, package of 10.

Refer to your probe manual for the installation procedure; it is similar to the tips that are included in the standard accessory kits.

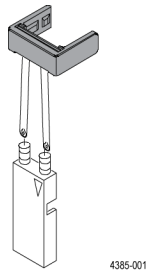


## Medium Flex, Square Pin Tip-Clip Assembly

## Square Pin Tip Specifications

Probe	Bandwidth	Rise time (10–90%)
P7340A	>4 GHz	<100 ps
P7360A	>5 GHz	<80 ps
P7380A	>5 GHz	<80 ps
P7313	>5 GHz	<80 ps



### Performance Graphs

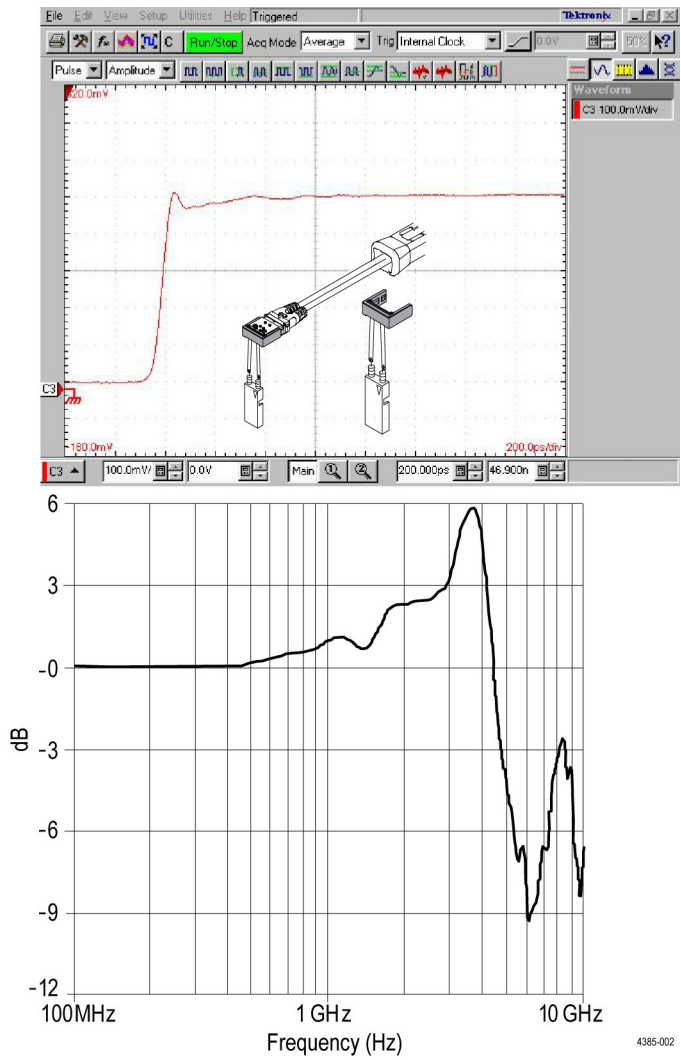

Typical rise time and frequency plots