



DPO70E1
33 GHz Optical Probe
Specifications and Performance Verification





DPO70E1
33 GHz Optical Probe
Specifications and Performance Verification

Warning

The servicing instructions are for use by qualified personnel only. To avoid personal injury, do not perform any servicing unless you are qualified to do so. Refer to all safety summaries prior to performing service.

Supports DPO70E1 Product Firmware V1.0 and above

Copyright © Tektronix. All rights reserved. Licensed software products are owned by Tektronix or its subsidiaries or suppliers, and are protected by national copyright laws and international treaty provisions. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specifications and price change privileges reserved.

TEKTRONIX and TEK are registered trademarks of Tektronix, Inc.

Contacting Tektronix

Tektronix, Inc.
14150 SW Karl Braun Drive
P.O. Box 500
Beaverton, OR 97077
USA

For product information, sales, service, and technical support:

- In North America, call 1-800-833-9200.
- Worldwide, visit www.tek.com to find contacts in your area.

Table of Contents

Important safety information	iii
General safety summary	iii
Terms in the manual	v
Terms on the product	v
Symbols on the product	v
Preface	vii

Specifications

Acquisition system specifications	1
Proximity sensor specifications	7
Environmental specifications	7
Mechanical specifications	7

Performance verification

Performance verification	9
Functional tests	9
First turn on functional checks	10
Test record	12
Performance tests	15
Prerequisites	15
Check output zero (dark level)	15
Check system vertical equivalent optical noise	16

Important safety information

This manual contains information and warnings that must be followed by the user for safe operation and to keep the product in a safe condition.

General safety summary

Use the product only as specified. Review the following safety precautions to avoid injury and prevent damage to this product or any products connected to it. Carefully read all instructions. Retain these instructions for future reference.

This product shall be used in accordance with local and national codes.

For correct and safe operation of the product, it is essential that you follow generally accepted safety procedures in addition to the safety precautions specified in this manual.

The product is designed to be used by trained personnel only.

Only qualified personnel who are aware of the hazards involved should remove the cover for repair, maintenance, or adjustment.

Before use, always check the product with a known source to be sure it is operating correctly.

This product is not intended for detection of hazardous voltages.

While using this product, you may need to access other parts of a larger system. Read the safety sections of the other component manuals for warnings and cautions related to operating the system.

When incorporating this equipment into a system, the safety of that system is the responsibility of the assembler of the system.

To avoid fire or personal injury

Ground the product. This product is indirectly grounded through the grounding conductor of the mainframe power cord. To avoid electric shock, the grounding conductor must be connected to earth ground. Before making connections to the input or output terminals of the product, ensure that the product is properly grounded. Do not disable the power cord grounding connection.

Power disconnect. The power cord disconnects the product from the power source. See instructions for the location. Do not position the equipment so that it is difficult to operate the power cord; it must remain accessible to the user at all times to allow for quick disconnection if needed.

Connect and disconnect properly. Do not connect or disconnect probes or test leads while they are connected to a voltage source. Use only insulated voltage probes, test leads, and adapters supplied with the product, or indicated by Tektronix to be suitable for the product.

Observe all terminal ratings. To avoid fire or shock hazard, observe all rating and markings on the product. Consult the product manual for further ratings information before making connections to the product.

Do not apply a potential to any terminal, including the common terminal, that exceeds the maximum rating of that terminal.

Do not operate without covers. Do not operate this product with covers or panels removed, or with the case open. Hazardous voltage exposure is possible.

Do not operate with suspected failures. If you suspect that there is damage to this product, have it inspected by qualified service personnel.

Disable the product if it is damaged. Do not use the product if it is damaged or operates incorrectly. If in doubt about safety of the product, turn it off and disconnect the power cord. Clearly mark the product to prevent its further operation.

Examine the exterior of the product before you use it. Look for cracks or missing pieces.

Use only specified replacement parts.

Wear eye protection. Wear eye protection if exposure to high-intensity rays or laser radiation exists.

Do not operate in wet/damp conditions. Be aware that condensation may occur if a unit is moved from a cold to a warm environment.

Do not operate in an explosive atmosphere.

Keep product surfaces clean and dry. Remove the input signals before you clean the product.

Terms in the manual

These terms may appear in this manual:



WARNING. *Warning statements identify conditions or practices that could result in injury or loss of life.*



CAUTION. *Caution statements identify conditions or practices that could result in damage to this product or other property.*

Terms on the product

These terms may appear on the product:

- DANGER indicates an injury hazard immediately accessible as you read the marking.
- WARNING indicates an injury hazard not immediately accessible as you read the marking.
- CAUTION indicates a hazard to property including the product.

Symbols on the product



When this symbol is marked on the product, be sure to consult the manual to find out the nature of the potential hazards and any actions which have to be taken to avoid them. (This symbol may also be used to refer the user to ratings in the manual.)

The following symbols may appear on the product:



CAUTION
Refer to Manual

Preface

This manual describes the specifications and performance verification of the DPO7OE1 33 GHz Optical Probe.

Specifications

This chapter contains specifications for the instrument. All specifications are guaranteed unless noted as "typical." Typical specifications are provided for your convenience but are not guaranteed. Specifications that are marked with the ✓ symbol are checked in Performance Verification.

To meet specifications, the following conditions must first be met:

- The instrument must have been calibrated/adjusted at an ambient temperature between +20 °C and +30 °C.
- The instrument must be in an environment with temperature, altitude, humidity, and vibration within the operating limits described in this document.
- The instrument must have had a warm-up period of at least 20 minutes.

Any conditions unique to a particular characteristic are expressly stated as part of that characteristic.

Acquisition system specifications

Probe output termination	50 Ω Characteristic Impedance
Mainframe interface	Meets the requirements of the TekConnect interface.
Input fiber type	Option FC/PC: 50/125 μm multi-mode type. Option FC/APC: 9/125 μm single-mode type. Graded-index, 50/125 μm multi-mode OM3 fiber is designed into the O/E. The probe can accept any input fiber with a smaller core diameter, including the standard single mode fiber 9/125 (such as SMF 128).
Front panel optical fiber connectors	JAE changeable optical connector. The JAE changeable optical connector supports numerous interchangeable industry standard connector styles; These include FC, ST, and SC. All connections are either PC style (Physical Contact) or APC style (Angled Physical Contact) to minimize reflections from the interface. See the Optional Accessory list for a complete listing of available JAE adapters.
Optical return loss	19 dB at 850 nm, 1310 nm, and 1550 nm Optical return loss is not specified at intermediate wavelengths.
Maximum nondestructive optical input	8 mW average power. Note that optical input powers below non-destruct levels may exceed saturation and compression limits.
Effective wavelength range, typical	Option FC/PC: 750 nm - 1650 nm. Option FC/APC: 1260 nm - 1650nm.

FC/APC connectorized pigtail used as an input interface is limited in bandwidth to the range of 1260 nm - 1650 nm, making it applicable for single-mode use only.

Calibrated wavelengths

Option FC/PC: calibrated at 850 nm, 1310 nm, 1550 nm.

Option FC/APC: calibrated at 1310 nm, 1550 nm.

Vertical specifications apply only at the following wavelengths: 850 nm (FC/PC only), 1310 nm and 1550 nm (all within ± 20 nm)

Polarization dependence

0.3 dB typical

This is the typical difference between maximum and minimum conversion gain achieved for any possible polarization launch into the module. In general, these polarizations are orthogonal to each other

✓ Output zero (dark level)

$\pm 10 \text{ uW} \pm 4\% \times [\text{Vertical Offset}]$

This Output Zero specification requires that Dark Level compensation has been performed and the following conditions are met after this compensation:

- < 1 degree Celsius change in ambient temperature.
- The vertical offset is the same.
- The filter or bandwidth setting is the same as that selected during the compensation.

Linear dynamic range, typical

4 mW

The input range over which the DPO7OE1 behaves as a linear system. Input signals above this range should not be expected to result in a DPO7OE1 output signal free of harmonic distortion or gain compression.

Mainframe vertical scale factors

Maximum: 600 mV/[Conversion Gain¹(V/W)] per division

Minimum: 6.25 mV/[Conversion Gain¹(V/W)] per division

Vertical offset range

TekConnect

Full Scale Voltage Range	Offset Range
$\leq 1.2 \text{ V}/[\text{Conversion Gain}^1(\text{V/W})]$	$\pm 3.4 \text{ V}/[\text{Conversion Gain}^1(\text{V/W})]$
$> 1.2 \text{ V}/[\text{Conversion Gain}^1(\text{V/W})]$	$\pm 6 \text{ V}/[\text{Conversion Gain}^1(\text{V/W})]$

ATI

Full Scale Voltage Range	Offset Range
$\leq 300 \text{ mV}/[\text{Conversion Gain}^1(\text{V/W})]$	$[\pm 300 \text{ mV} - (10 \text{ div} \times \text{V/div})]/[\text{Conversion Gain}^1(\text{V/W})]$

The base offset ranges of the oscilloscope are multiplied directly by the DPO7OE1 conversion gain¹ associated with the selected wavelength.

DC vertical accuracy, typical

$\pm 25 \text{ uW} \pm 4\%$ of [(vertical reading)-(vertical offset)]

¹ Conversion gain for a channel can be queried with the :CH<x>:PRObe:GAIN? PI command. The value returned is dependent on the wavelength currently selected in Probe Setup.

DC vertical accuracy refers to the DC accuracy of a sampled waveform referenced to an external optical power meter. Limited to temperature range within ± 5 °C of previous signal path compensation and ambient temperature within 20 °C to 35 °C.

Vertical accuracy of DC waveform measurements made on a mainframe vertical channel will be subject to the accuracy of the channel.

Valid for the calibrated wavelengths (850 nm, 1310 nm, 1550 nm) ± 20 nm. Optical input must be either unpolarized light or have been properly polarization scrambled.

Unfiltered frequency response, typical

The unfiltered frequency response approximates a 4th order Bessel-Thomson curve with a -3 dB frequency of 21 GHz. The response on a TekConnect channel is altered slightly relative to the response on an ATI channel. This is due to microwave characteristics of the coaxial cable connecting the O/E to the TekConnect interface.

Flat to 33 GHz frequency response, typical

TekConnect

DC to 16.5 GHz	± 1.0 dB
>16.5 GHz to 26 GHz	± 2.0 dB

ATI

DC to 20 GHz	± 0.5 dB
>20 GHz to 30 GHz	± 0.75 dB
>30 GHz to 32 GHz	± 1.25 dB
>32 GHz to 33 GHz	+1.25/-4.0 dB

Flat to maximum bandwidth, typical

TekConnect

DC to 16.5 GHz	± 1.0 dB
>16.5 GHz to 26 GHz	± 2.0 dB

ATI

DC to 20 GHz	± 0.5 dB
>20 GHz to 30 GHz	± 0.75 dB
>30 GHz to 42 GHz	± 1.25 dB

200GBASE-LR filter setting frequency response for 26.56 Gbps NRZ, typical

The 200GBASE-LR filter is a defined optical reference receiver (ORR) filter for 26.56 Gbps mask testing.

The response follows the bandwidth limits in the table below. This table along with the time domain aberration specifications ensure that 26.56 Gbps NRZ signals may be viewed with limited distortion. Values are normalized to 3% of the bit rate, represented as the 0 frequency in the table.

NOTE. the table below is a discrete list of some specific values that are commonly listed in ITU standards; this curve and tolerances are continuous functions.

Freq (GHz)	Lower (dB)	Nominal (dB)	Upper (dB)
0	-0.85	0.0	0.85
3	-0.91	-0.06	0.79
6	-1.10	-0.25	0.60
9	-1.42	-9.57	0.28

Freq (GHz)	Lower (dB)	Nominal (dB)	Upper (dB)
12	-1.88	-1.03	-0.18
15	-2.49	-1.64	-0.79
17	-2.99	-2.14	-1.29
19.92	-3.86	-3.01	-2.16
24	-6.04	-4.55	-3.05
27	-7.86	-5.92	-3.95
30	-9.93	-7.49	-5.04
33	-12.12	-9.20	-6.28
36	-14.41	-11.01	-7.62
39	-16.75	-12.88	-9.01
39.84	-17.41	-13.41	-9.41

**100GBASE-SR filter setting
frequency response for 25.78 Gbps
NRZ, typical**

The 100GBASE-SR filter is a defined optical reference receiver (ORR) filter for 25.78 Gbps mask testing.

The response follows the bandwidth limits in the table below. This table along with the time-domain aberration specifications ensure that 25.78 Gbps NRZ signals may be viewed with limited distortion.

NOTE. The table below is a discrete list of some specific values that are commonly listed in ITU standards; this curve and tolerances are continuous functions.

Freq (GHz)	Lower (dB)	Nominal (dB)	Upper (dB)
0	-0.85	0.0	0.85
3	-0.92	-0.07	0.78
6	-1.12	-0.27	0.58
9	-1.46	-0.61	0.24
12	-1.95	-1.10	-0.25
15	-2.60	-1.75	-0.90
19.34	-3.86	-3.01	-2.16
21	-4.46	-3.61	-2.76
24	-6.47	-4.86	-3.25
27	-8.43	-6.33	-4.23
30	-10.58	-7.99	-5.40
33	-12.87	-9.80	-6.72
36	-15.25	-11.69	-8.12
38.67	-17.41	-13.41	-9.41

**User filter setting frequency
response, typical**

This filter option allows the you to specify the bit rate for which a 4th order Bessel-Thomson filter will be generated. The -3 dB electrical bandwidth is calculated as 0.75 times the bit rate entered.

28.05 GBd			
Freq (GHz)	Lower (dB)	Nominal (dB)	Upper (dB)
0	-0.85	0.0	0.85
3	-0.91	-0.06	0.79
6	-1.08	-0.23	0.62
9	-1.36	-0.51	0.34
12	-1.77	-0.92	-0.07
15	-2.31	-1.46	-0.61
18	-3.00	-2.15	-1.30
21.0375	-3.86	-3.01	-2.16
24	-5.32	-4.03	-2.73
27	-6.98	-5.24	-3.50
30	-8.83	-6.64	-4.44
33	-10.83	-8.18	-5.54
36	-15.13	-9.87	-6.76
39	-17.41	-11.59	-8.05
42.075	-17.41	-13.41	-9.41

16.8 GBd			
Freq (GHz)	Lower (dB)	Nominal (dB)	Upper (dB)
0	-0.85	0.0	0.85
3	-1.01	-0.16	0.69
6	-1.49	-0.64	0.21
9	-2.32	-1.47	0.62
12.6	-3.86	-3.01	-2.16
15	-5.88	-4.43	-2.98
18	-8.86	-6.66	-4.46
21	-12.27	-9.32	-6.37
24	-15.92	-12.22	-8.52
25.2	-17.41	-13.41	-9.41

Rise times, typical

	TekConnect	ATI
	Typical (ps)	Typical (ps)
None	17.1	15.8
Flat to 33 GHz	13.4	13.2
Flat to Maximum	13.4	10.2
100GBASE-SR	19.4	18.1
200GBASE-LR	19.1	17.6
User 16.8 GBd	27.6	28.0
User 28.05 GBd	18.2	16.7

The 10% to 90% transition rise time is indirectly determined from the impulse response measurement. The impulse response is integrated, with baseline offset removed to keep the average power of each period the same. 10% to 90% transition rise time is then calculated from the step response.

Time domain vertical response aberrations, typical

± 3% pk-pk for ORR filters only.
For peak optical signal input < 4mW peak-peak.

✓ **System vertical equivalent optical noise**

Noise values shown are for the maximum real-time sample rate in each configuration: 100 GS/s for TekConnect, 200 GS/s for ATI.

850 nm

	TekConnect		ATI	
	Typical (µW)	Maximum (µW)	Typical (µW)	Maximum (µW)
None	12.57	16.36	14.06	17.84
Flat to 33 GHz	18.65	25.83	17.30	24.48
Flat to Max	18.65	25.83	26.48	33.66
100GBASE-SR	11.30	15.51	11.57	15.78
200GBASE-LR	11.47	15.77	11.96	16.26
User 16.8 GBd	11.25	14.52	10.80	15.09
User 28.05 GBd	12.04	17.08	12.70	17.75

1310 nm

	TekConnect		ATI	
	Typical (µW)	Maximum (µW)	Typical (µW)	Maximum (µW)
None	7.42	8.83	8.29	9.10
Flat to 33 GHz	10.60	12.54	9.84	12.31
Flat to Max	10.60	12.54	15.06	22.29
100GBASE-SR	6.63	8.53	6.78	8.64
200GBASE-LR	6.67	8.28	6.95	9.00
User 16.8 GBd	5.20	7.64	6.23	8.18
User 28.05 GBd	6.94	8.99	7.33	9.63

1550 nm

	TekConnect		ATI	
	Typical (µW)	Maximum (µW)	Typical (µW)	Maximum (µW)
None	7.58	9.27	8.54	10.10
Flat to 33 GHz	10.92	12.84	10.07	12.53
Flat to Max	10.92	12.84	15.48	23.63
100GBASE-SR	6.70	8.27	6.91	9.15
200GBASE-LR	6.73	8.34	7.20	9.41
User 16.8 GBd	5.50	7.30	6.46	8.56
User 28.05 GBd	7.05	8.56	7.58	10.05

Values are the root mean square (RMS) distribution of vertical noise with either no optical input or noiseless optical input. Noise is representative of a DPO70000SX system with the vertical scale set to the highest sensitivity.

Proximity sensor specifications

Photodiode current limiting, typical Probe dynamic range is limited when the shuttle is mounted to the ATI bracket. This protects the ATI channel from excessive probe output voltage.

Environmental specifications

Temperature range

Installed and Operating	10 °C to +40 °C
	Certain performance specifications of the DPO70E1 are limited to a more restricted ambient temperature range:
	<ul style="list-style-type: none"> Filters' frequency response tolerances: +20 °C to +30 °C
Installed and non-operating	-22 °C to +60 °C

Humidity

Installed and operating	20% to 80% relative humidity with a maximum wet bulb temperature of 29 °C at or below +40 °C, (Upper limit de-rates to 45% relative humidity at +40 °C.) Non-condensing.
	Certain performance specifications of the DPO70E1 are limited to a more restricted ambient temperature range:
	<ul style="list-style-type: none"> Filters' frequency response tolerances: +20 °C to +30 °C
Installed and non-operating	5% to 90% relative humidity with a maximum wet bulb temperature of 29 °C at or below +60 °C. (Upper limit de-rates to 20% relative humidity at +60 °C.) Non-condensing.

Mechanical specifications

Weight

Module alone with terminators and FC/PC or FC/APC JAE optical connector installed	0.318 kg (0.70 lbs.)
--	----------------------

Dimensions

Approximate external dimensions	10.5 inches x 3.3 inches x 1.5 inch (26.7 cm X 8.4 cm X 3.8 cm)
--	---

Performance verification

Performance verification

If you are not familiar with operating this instrument, read the instrument user manual or explore the online help.

These performance verification procedures add direct checking of the warranted specifications that are marked with the ✓ symbol. These procedures require specific test equipment.

Functional tests

The purpose of these procedures is to confirm that the instrument functions properly.

NOTE. *These procedures verify functions; that is, they verify that the instrument features operate. They do not verify that they operate within limits.*


Therefore, when the instructions in the functional tests that follow call for you to verify that a signal appears on-screen "that is about five divisions in amplitude" or "has a period of about six horizontal divisions," etc., do NOT interpret the quantities given as limits. Operation within limits is checked in Performance Tests. (See [Performance tests](#) on page 15.)

NOTE. *DO NOT make changes to the front-panel settings that are not called out in the procedures. Each verification procedure will require you to set the instrument to certain default settings before verifying functions. If you make changes to these settings, other than those called out in the procedure, you may obtain invalid results. In this case, just redo the procedure from step 1.*

When you are instructed to press a front-panel or screen button, the button may already be selected (its label will be highlighted). If this is the case, it is not necessary to press the button.

First turn on functional checks


1. When a DPO7OE1 is plugged into a 70k series oscilloscope for the first time, measured S-parameters for the probe are copied from the probe internal memory to build custom correction filters. The message pictured below appears on the screen while this process takes place. Total operation time may take over a minute.

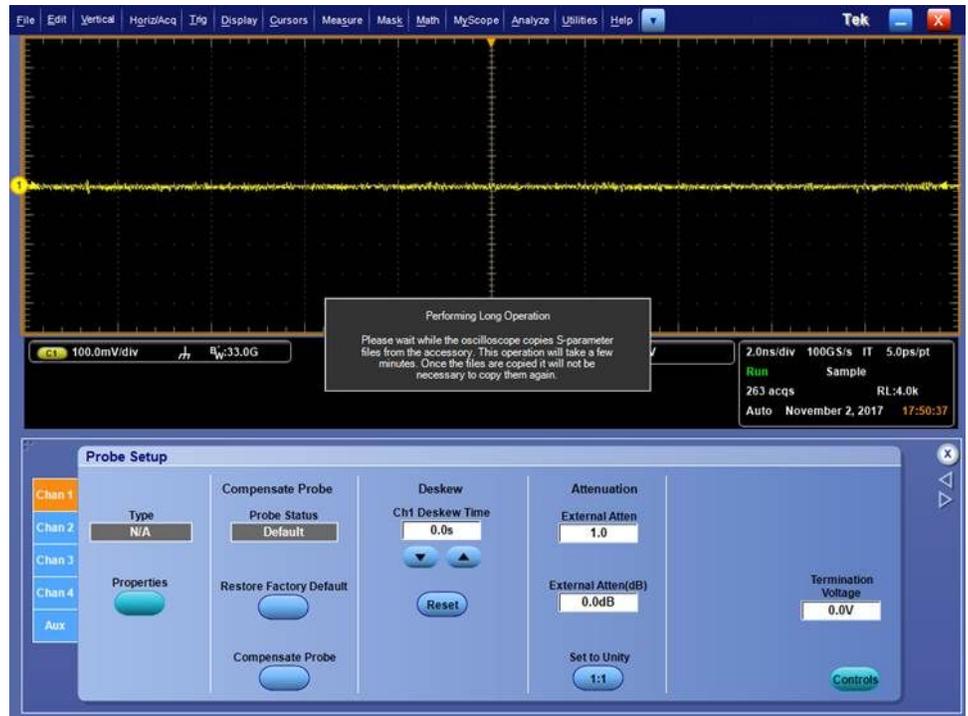

2. Once complete, the message will disappear.

Verify that the message appears the first time the probe is attached to the instrument.

- The probe model number and serial number can be verified in the Probe Properties screen, accessible from the Probe Setup menu.

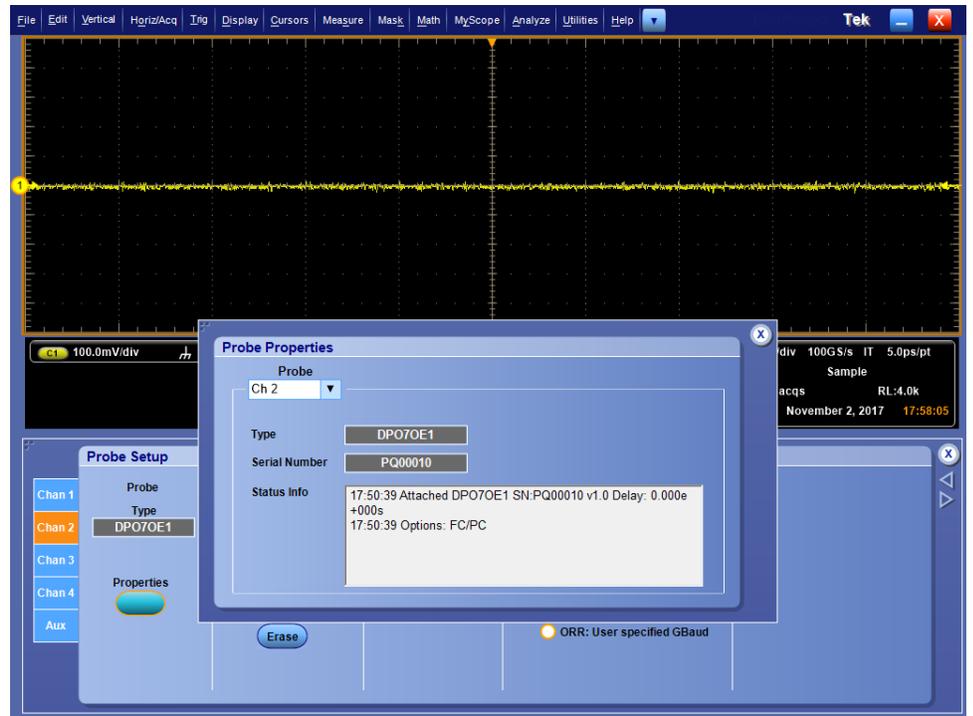

- Attach the probe to the instrument.
- Select **Vertical > Vertical Setup**. Select the tab for the channel that the probe is attached to.
- Press the **Properties** button.

The Probe Properties window is displayed.

- Verify the probe model number and serial number.

Test record

Photocopy the test record tables and use them to record the performance test results for your instrument.

Table 1: Test information

Item	Recorded value
Instrument Serial Number	
Technician	
Certificate Number	
Date of Calibration	
Temperature	
RH %	

Output zero (dark level) accuracy				
Instrument performance test	Minimum	Incoming	Outgoing	Maximum
850 nm TekConnect				
Unfiltered OE Response	-10.00 μ W	_____	_____	+10.00 μ W
Flat to 33 GHz	-10.00 μ W	_____	_____	+10.00 μ W
Flat to Max	-10.00 μ W	_____	_____	+10.00 μ W
100GBASE-SR	-10.00 μ W	_____	_____	+10.00 μ W
200GBASE-SR	-10.00 μ W	_____	_____	+10.00 μ W
User Specified 16.8 GBd	-10.00 μ W	_____	_____	+10.00 μ W
User Specified 28.05 GBd	-10.00 μ W	_____	_____	+10.00 μ W
850 nm ATI				
Unfiltered OE Response	-10.00 μ W	_____	_____	+10.00 μ W
Flat to 33 GHz	-10.00 μ W	_____	_____	+10.00 μ W
Flat to Max	-10.00 μ W	_____	_____	+10.00 μ W
100GBASE-SR	-10.00 μ W	_____	_____	+10.00 μ W
200GBASE-SR	-10.00 μ W	_____	_____	+10.00 μ W
User Specified 16.8 GBd	-10.00 μ W	_____	_____	+10.00 μ W
User Specified 28.05 GBd	-10.00 μ W	_____	_____	+10.00 μ W
1310 nm TekConnect				
Unfiltered OE Response	-10.00 μ W	_____	_____	+10.00 μ W
Flat to 33 GHz	-10.00 μ W	_____	_____	+10.00 μ W
Flat to Max	-10.00 μ W	_____	_____	+10.00 μ W
100GBASE-SR	-10.00 μ W	_____	_____	+10.00 μ W
200GBASE-SR	-10.00 μ W	_____	_____	+10.00 μ W
User Specified 16.8 GBd	-10.00 μ W	_____	_____	+10.00 μ W
User Specified 28.05 GBd	-10.00 μ W	_____	_____	+10.00 μ W
1310 nm ATI				

Output zero (dark level) accuracy				
Instrument performance test	Minimum	Incoming	Outgoing	Maximum
Unfiltered OE Response	-10.00 μ W	_____	_____	+10.00 μ W
Flat to 33 GHz	-10.00 μ W	_____	_____	+10.00 μ W
Flat to Max	-10.00 μ W	_____	_____	+10.00 μ W
100GBASE-SR	-10.00 μ W	_____	_____	+10.00 μ W
200GBASE-SR	-10.00 μ W	_____	_____	+10.00 μ W
User Specified 16.8 GBd	-10.00 μ W	_____	_____	+10.00 μ W
User Specified 28.05 GBd	-10.00 μ W	_____	_____	+10.00 μ W
1550 nm TekConnect				
Unfiltered OE Response	-10.00 μ W	_____	_____	+10.00 μ W
Flat to 33 GHz	-10.00 μ W	_____	_____	+10.00 μ W
Flat to Max	-10.00 μ W	_____	_____	+10.00 μ W
100GBASE-SR	-10.00 μ W	_____	_____	+10.00 μ W
200GBASE-SR	-10.00 μ W	_____	_____	+10.00 μ W
User Specified 16.8 GBd	-10.00 μ W	_____	_____	+10.00 μ W
User Specified 28.05 GBd	-10.00 μ W	_____	_____	+10.00 μ W
1550 nm ATI				
Unfiltered OE Response	-10.00 μ W	_____	_____	+10.00 μ W
Flat to 33 GHz	-10.00 μ W	_____	_____	+10.00 μ W
Flat to Max	-10.00 μ W	_____	_____	+10.00 μ W
100GBASE-SR	-10.00 μ W	_____	_____	+10.00 μ W
200GBASE-SR	-10.00 μ W	_____	_____	+10.00 μ W
User Specified 16.8 GBd	-10.00 μ W	_____	_____	+10.00 μ W
User Specified 28.05 GBd	-10.00 μ W	_____	_____	+10.00 μ W

System vertical equivalent optical noise accuracy				
Instrument performance test	Minimum (μW)	Incoming (μW)	Outgoing (μW)	Maximum (μW)
850 nm TekConnect				
None	N/A	_____	_____	16.36
Flat to 33 GHz	N/A	_____	_____	25.83
Flat to Max	N/A	_____	_____	25.83
100GBASE-SR	N/A	_____	_____	15.51
200GBASE-LR	N/A	_____	_____	15.77
USER 16.8 GBd	N/A	_____	_____	14.52
USER 28.05 GBd	N/A	_____	_____	17.08
850 nm ATI				
None	N/A	_____	_____	17.84
Flat to 33 GHz	N/A	_____	_____	24.48
Flat to Max	N/A	_____	_____	33.66

System vertical equivalent optical noise accuracy				
Instrument performance test	Minimum (μW)	Incoming (μW)	Outgoing (μW)	Maximum (μW)
100GBASE-SR	N/A	_____	_____	15.78
200GBASE-LR	N/A	_____	_____	16.26
USER 16.8 GBd	N/A	_____	_____	15.09
USER 28.05 GBd	N/A	_____	_____	17.75
1310 nm TekConnect				
None	N/A	_____	_____	8.83
Flat to 33 GHz	N/A	_____	_____	12.54
Flat to Max	N/A	_____	_____	12.54
100GBASE-SR	N/A	_____	_____	8.53
200GBASE-LR	N/A	_____	_____	8.28
USER 16.8 GBd	N/A	_____	_____	7.64
USER 28.05 GBd	N/A	_____	_____	8.99
1310 nm ATI				
None	N/A	_____	_____	9.10
Flat to 33 GHz	N/A	_____	_____	12.31
Flat to Max	N/A	_____	_____	22.29
100GBASE-SR	N/A	_____	_____	8.64
200GBASE-LR	N/A	_____	_____	9.00
USER 16.8 GBd	N/A	_____	_____	8.18
USER 28.05 GBd	N/A	_____	_____	9.63
1550 nm TekConnect				
None	N/A	_____	_____	9.27
Flat to 33 GHz	N/A	_____	_____	12.84
Flat to Max	N/A	_____	_____	12.84
100GBASE-SR	N/A	_____	_____	8.27
200GBASE-LR	N/A	_____	_____	8.34
USER 16.8 GBd	N/A	_____	_____	7.30
USER 28.05 GBd	N/A	_____	_____	8.56
1550 nm ATI				
None	N/A	_____	_____	10.10
Flat to 33 GHz	N/A	_____	_____	12.53
Flat to Max	N/A	_____	_____	23.63
100GBASE-SR	N/A	_____	_____	9.15
200GBASE-LR	N/A	_____	_____	9.41
USER 16.8 GBd	N/A	_____	_____	8.56
USER 28.05 GBd	N/A	_____	_____	10.05

Performance tests

This section contains a collection of manual procedures for checking that the instrument performs as warranted. They check all the characteristics that are designated as checked in Specifications. (The characteristics that are checked appear with a ✓ in Specifications).

Prerequisites

The tests in this section comprise an extensive, valid confirmation of performance and functionality when the following requirements are met:

- The instrument must have been calibrated/adjusted at an ambient temperature between +20 °C and +30 °C.
- The instrument must be in an environment with temperature, altitude, humidity, and vibration within the operating limits described in this document.
- The instrument must have had a warm-up period of at least 20 minutes.

Check output zero (dark level)

Perform these steps to verify the output zero (dark level).

Equipment needed: None.

1. Attach the DPO7OE1 to the Ch1 TekConnect input.
2. Allow the oscilloscope and DPO7OE1 to warm-up for at least 60 minutes.
3. Run SPC on the oscilloscope.
4. Set Trigger Source to **Line**.
5. Set the sample rate to **100 GS/s**.
6. Set the Horizontal Scale to **1 ns/div**.
7. Set Ch1 to the lowest W/Div setting in the Vertical Setup.
8. Select the Mean measurement.
9. Set the Wavelength to **850 nm**.
10. Make sure the protective cap is covering the DPO7OE1 optical input.
11. Press the **Dark Cal** button for the DPO7OE1.
12. After Dark Cal has completed, note the Mean measurement. Note this value as Output Zero and check against limits.
13. Repeat steps 10 through 12 with the Flat to 33 GHz filter selected.
14. Repeat steps 10 through 12 with the Flat to Max filter selected.
15. Repeat steps 10 through 12 with the 100GBASE-SR filter selected.

16. Repeat steps 10 through 12 with the 200GBASE-LR filter selected.
17. Repeat steps 10 through 12 with the User Specified 16.8 GBd filter selected.
18. Repeat steps 10 through 12 with the User Specified 28.05 GBd filter selected.
19. Repeat steps 10 through 12 for Wavelengths 1310 nm and 1550 nm.
20. Move the DPO7OE1 shuttle to the ATI channel.
21. Set Ch2 to the lowest W/Div setting in the Vertical Setup.
22. Repeat steps 8 through 19 using the ATI channel.

This completes the procedure.

Check system vertical equivalent optical noise

Perform these steps to verify the system vertical equivalent optical noise.

Equipment needed: None.

Procedure:

1. Attach the DPO7OE1 to the Ch1 TekConnect input.
2. Allow the oscilloscope and DPO7OE1 to warm-up for at least 60 minutes.
3. Run SPC on the oscilloscope.
4. Set Trigger Source to **Line**.
5. Set the sample rate to **100 GS/s**,
6. Set the Horizontal Scale to **1 ns/Div**.
7. Set the Ch1 Vertical Scale to the lowest W/Div setting in the Vertical Setup.
8. Select the Mean measurement.
9. Set the Wavelength to 850 nm.
10. Set Filter to Unfiltered Response.
11. Make sure the protective cap is covering the DPO7OE1 optical input.
12. Press the Dark Cal button for the DPO7OE1.
13. Create a Vertical Histogram with boundaries that span 10 vertical and 10 Horizontal divisions of the graticule.
14. Select the Histogram Standard Deviation measurement.
15. Note the Value of the Standard Deviation as the Vertical Optical Noise for the selected Bandwidth and Wavelength combination.
16. Repeat steps 11- 15 for all Filter Settings.
17. Repeat steps 10- 15 for all Wavelengths.
18. Move the DPO7OE1 shuttle to the ATI channel.

- 19.** Set Ch2 to the lowest W/Div setting in the Vertical Setup.
- 20.** Repeat steps 8 through 17 using the ATI channel.

This completes the procedure.

