




## PCIe5.0 (CEM) Receiver Test Application Help



077-1706-02

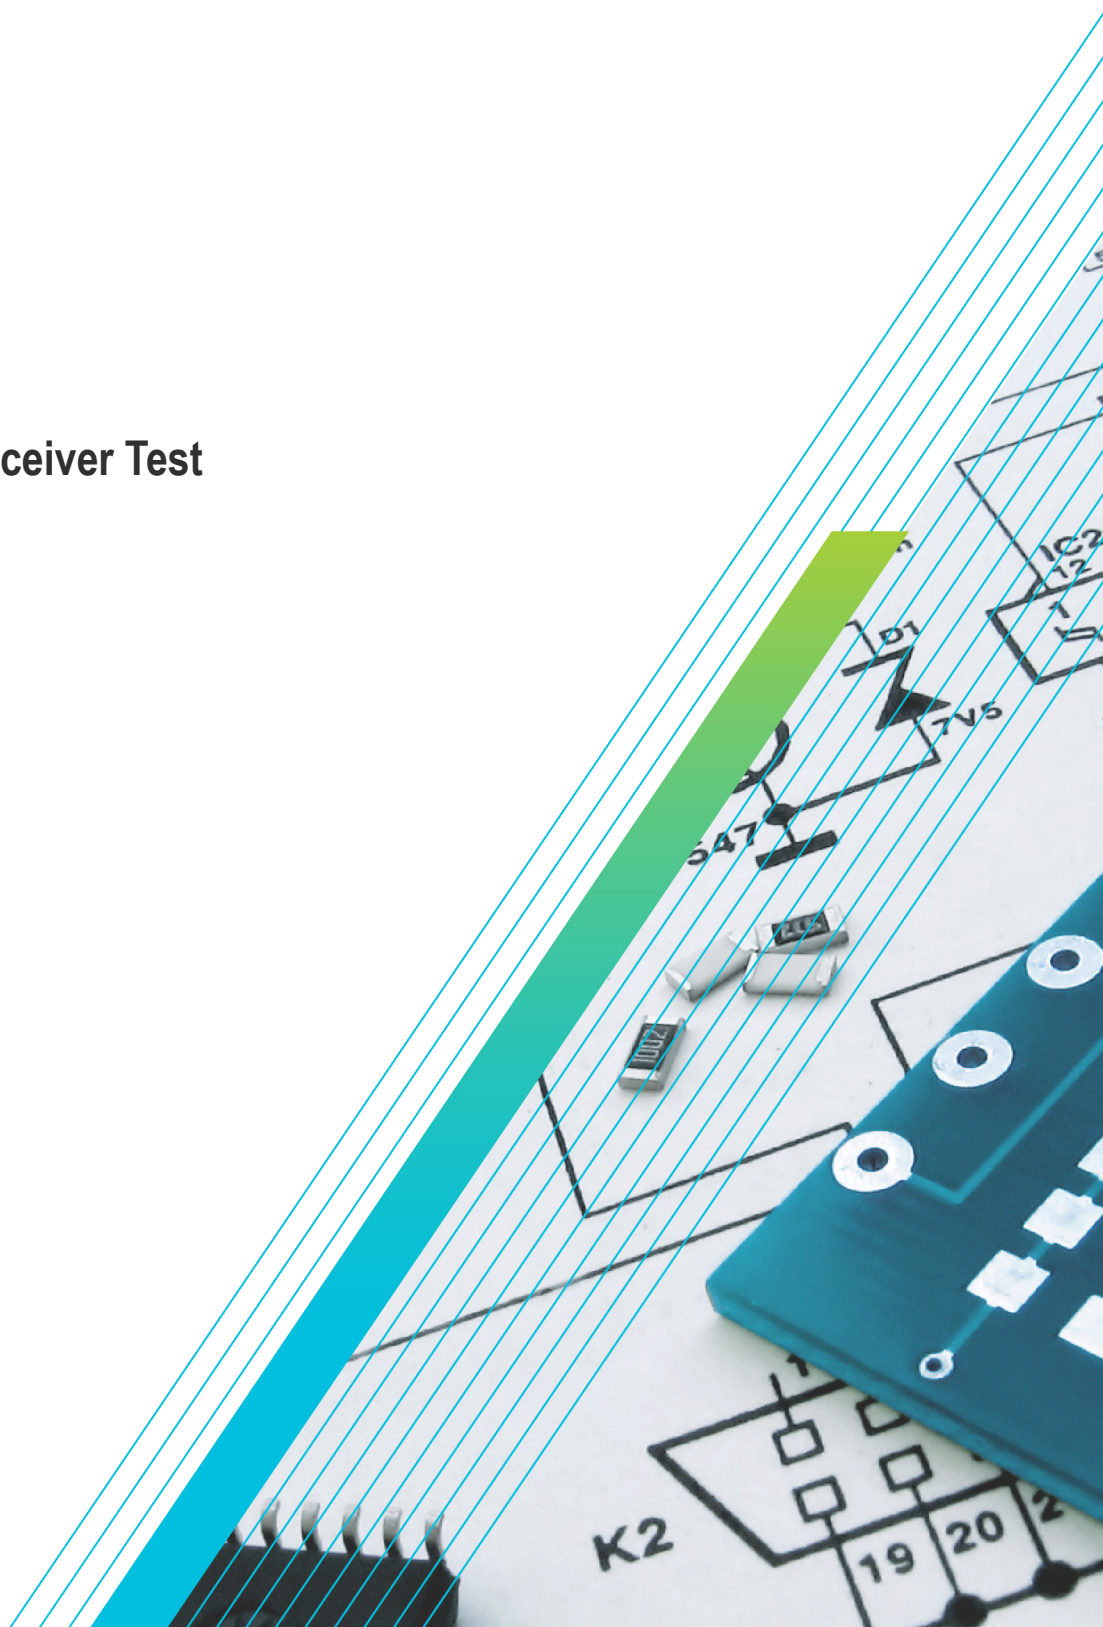





## **PCIe5.0 (CEM) Receiver Test Application Help**

**Register now!**  
**Click the following link to protect your product.**  
**[www.tek.com/register](http://www.tek.com/register)**



077-1706-02

Copyright © Tektronix. All rights reserved. Licensed software products are owned by Tektronix or its subsidiaries or suppliers, and are protected by national copyright laws and international treaty provisions. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specifications and price change privileges reserved.

TEKTRONIX and TEK are registered trademarks of Tektronix, Inc.

## **Contacting Tektronix**

Tektronix, Inc.

14150 SW Karl Braun Drive

P.O. Box 500

Beaverton, OR 97077

USA

For product information, sales, service, and technical support:

- In North America, call 1-800-833-9200.
- Worldwide, visit to [www.tek.com](http://www.tek.com) find contacts in your area.



# Table of Contents

List of Figures.....	12
List of Tables.....	15
Welcome.....	17
Getting help and support.....	18
Related documentation.....	18
Technical support.....	18
Conventions.....	18
Getting started.....	20
Required equipment and accessories.....	20
Installing the software.....	21
Operating basics.....	22
Launch the application.....	22
Close the application.....	22
Launch Real-Time Oscilloscope.....	22
Launch TekRxService.....	23
Application panels.....	24
Application panels overview.....	24
Connections panel.....	25
Settings panel.....	26
Help panel.....	36
Calibrations panel.....	36
Tests panel.....	61
Options panel.....	83
Programmatic interface commands .....	100
PREF:BERT:IP.....	100
PREF:RTS:IP.....	100
CONN:BERT .....	100
CONN:RTS.....	101
SETTINGS:TEKRXSERVICE:ANALYSISTIMEOUT.....	101
SETTINGS:SIGTEST:VERSION.....	101
SETTINGS:SOCKETSERVER:IP.....	101
SETTINGS:SOCKETSERVER:LISTENINGPORT.....	102
SETTINGS:SOCKETSERVER:TIMEOUT.....	102
SETTINGS:MULTITONESJCAL:ENABLE.....	102
SETTINGS:MULTITONESJCAL:FREQUENCYCOUNT.....	103
SETTINGS:MULTITONESJCAL:MAXFREQUENCY.....	103
SETTINGS:MULTITONESJCAL:MINFREQUENCY.....	103
SETTINGS:MULTITONESJCAL:POINTS.....	103
SETTINGS:EYE:ACQUISITIONS.....	104
SETTINGS:TP1:CH1DEEMBEDFILE.....	104
SETTINGS:TP1:CH2DEEMBEDFILE.....	104
SETTINGS:TP1:ENABLECH1DEEMBED.....	105
SETTINGS:TP1:ENABLECH2DEEMBED.....	105
SETTINGS:TP2:CH1DEEMBEDFILE.....	105

---

SETTINGS:TP2:CH2DEEMBEDFILE.....	106
SETTINGS:TP2:ENABLECH1DEEMBED.....	106
SETTINGS:TP2:ENABLECH2DEEMBED.....	106
SETTINGS:MULTITONESJCAL:DEFAULT.....	107
SETTINGS:MULTITONESJCAL:GENERATE.....	107
SETTINGS:TP1:CH1:EXTERNALATTEN.....	107
SETTINGS:TP1:CH2:EXTERNALATTEN.....	107
SETTINGS:TP2:CH1:EXTERNALATTEN.....	108
SETTINGS:TP2:CH2:EXTERNALATTEN.....	108
SETTINGS:EYE:ALGO.....	108
SETTINGS:CTLE:ANALYSISTOOL.....	109
SETTINGS:RESTORE.....	109
SETTINGS:RECALL.....	109
SETTINGS:SAVE.....	109
SETTINGS:RECALL:STATUS.....	110
SETTINGS:RESTORE:STATUS.....	110
SETTINGS:SAVE:STATUS.....	110
TP1CAL:OPEN.....	111
TP1CAL:WIZARD:OPEN.....	111
TP1CAL:WIZARD:CLOSE.....	111
TP1CAL:DELETE.....	111
TP1CAL:REPORT.....	112
TP1CAL:SAVE.....	112
TP1CAL:EQUIP:INIT.....	112
TP1CAL:AUTOCAL.....	112
TP1CAL:AMPLITUDE:RUN.....	113
TP1CAL:PRESET:RUN.....	113
TP1CAL:RJ:RUN.....	113
TP1CAL:SJ:RUN.....	114
TP1CAL:MULTITONESJCAL:RUN.....	114
TP1CAL:EQUIP:STATUS.....	114
TP1CAL:AMPLITUDE:STATUS.....	114
TP1CAL:PRESET:STATUS.....	115
TP1CAL:PWJCAL:DJ.....	115
TP1CAL:PWJCAL:MODE.....	115
TP1CAL:PWJCAL:RJ.....	116
TP1CAL:PWJCAL:START.....	116
TP1CAL:PWJCAL:STATUS.....	116
TP1CAL:RJ:STATUS.....	116
TP1CAL:SJ:STATUS.....	117
TP1CAL:MULTITONESJCAL:RUN.....	117
TP1CAL:AMPLITUDE:SETTING.....	117
TP1CAL:RJ:SETTING.....	118
TP1CAL:SJ:SETTING.....	118
TP1CAL:SAVE:ID.....	118
TP1CAL:SAVE:GENERATEDBY.....	118
TP1CAL:SAVE:COMMENTS.....	119
TP1CAL:ACDC:RUN.....	119
TP1CAL:ACDC:STATUS.....	119

TP1CAL:ACDC:SETTING.....	119
TP1CAL:SJ@210MHz:RUN.....	120
TP1CAL:SJ@210MHz:STATUS.....	120
TP1CAL:IL:MODE.....	120
TP1CAL:MANUAL:IL.....	121
TP1CAL:MEASURELOSS:START.....	121
TP1CAL:IL:SCOPEACQS.....	121
TP1CAL:IL:AVGS.....	122
TP1CAL:MEASURELOSS:STATUS.....	122
TP2CAL:OPEN.....	122
TP2CAL:WIZARD:OPEN.....	122
TP2CAL:WIZARD:CLOSE.....	123
TP2CAL:DUT:TYPE.....	123
TP2CAL:SELECT:TP1.....	123
TP2CAL:DELETE.....	123
TP2CAL:REPORT.....	124
TP2CAL:SAVE.....	124
TP2CAL:EQUIP:INIT.....	124
TP2CAL:CMi:RUN.....	125
TP2CAL:ILMEAS:RUN.....	125
TP2CAL:CTLEANDPRESET:RUN.....	125
TP2CAL:STRESSEDEYE:RUN.....	125
TP2CAL:EQUIP:STATUS.....	126
TP2CAL:CMi:STATUS.....	126
TP2CAL:ILMEAS:STATUS.....	126
TP2CAL:CTLEANDPRESET:STATUS.....	127
TP2CAL:STRESSEDEYE:STATUS.....	127
TP2CAL:DMI:SETTING.....	127
TP2CAL:CMi:SETTING.....	127
TP2CAL:SAVE:ID.....	128
TP2CAL:SAVE:GENERATEDBY.....	128
TP2CAL:SAVE:COMMENTS.....	128
TP2CAL:SAVE:ISIPAIR.....	128
TP2CAL:ILMEASFORDMI:RUN.....	129
TP2CAL:ILMEASFORDMI:STATUS.....	129
TP2CAL:STRESSEDEYE:ACQUISITIONS.....	129
TP2CAL:DMI:RUN.....	130
TP2CAL:DMI:STATUS.....	130
TP2CAL:CTLEANDPRESET:ACQUISITIONS.....	130
TP2CAL:CTLE:ESTIMATOR.....	130
TP2CAL:SEASIMCTLE:GEN5.....	131
TP2CAL:STRESSEDEYE:SJ.....	131
TP2CAL:STRESSEDEYE:DMI.....	131
TP2CAL:STRESSEDEYE:AMPLITUDE.....	132
TP2CAL:IL:MODE.....	132
TP2CAL:MANUAL:IL.....	132
TP2CAL:IL:SCOPEACQS.....	133
TP2CAL:IL:AVGS.....	133
TP2CAL:CTLEANDPRESET:CHKPRESET.....	133

TP2CAL:CTLEANDPRESET:CHKCTLE.....	133
TP2CAL:STRESSEDEYE:MANUALCALRUN.....	134
TP2CAL:STRESSEDEYE:EXHAUSTIVESWEEP.....	134
TP2CAL:STRESSEDEYE:LINEARSWEEP.....	135
TP2CAL:STRESSEDEYE:EXHAUSTIVE.....	135
TP2CAL:STRESSEDEYE:STEPSIZE.....	136
TEST:SELECT:TESTDURATION.....	136
TEST:SELECT:STRESSCONFIGTYPE.....	137
TEST:SELECT:AMP.....	137
TEST:SELECT:DMI.....	137
TEST:SELECT:CMI.....	138
TEST:SELECT:RJ.....	138
TEST:SELECT:SJ.....	138
TEST:SELECT:BER.....	139
TEST:SELECT:ERRORLIMIT.....	139
LOOPBACK:SELECT:CONFIGURATIONTYPE.....	139
LOOPBACK:SELECT:PRESETSNAME.....	140
LOOPBACK:SELECT:PRESETSPRESHOOT.....	140
LOOPBACK:SELECT:PRESETSDEEMPHASIS.....	140
LOOPBACK:SELECT:BERTCTLEMODE.....	140
LOOPBACK:SELECT:BERTCTLETYPE.....	141
LOOPBACK:SELECT:BERTCTLEVALUE.....	141
LOOPBACK:SELECT:AUTOSEARCHMODE.....	141
JTOLTEST:OPEN.....	142
JTOLTEST:WIZARD:OPEN.....	142
JTOLTEST:WIZARD:CLOSE.....	142
JTOLTEST:JITTERSTEP:HIGHFREQ.....	143
JTOLTEST:JITTERSTEP:LOWFREQ.....	143
JTOLTEST:JITTERSTEP:MIDDLEFREQ.....	143
JTOLTEST:JITTERSTEP:VERYLOWFREQ.....	143
JTOLTEST:SELECT:TP2FILE.....	144
JTOLTEST:SELECT:CUSTOM:MASK.....	144
JTOLTEST:MIN:FREQ.....	144
JTOLTEST:MAX:FREQ.....	145
JTOLTEST:FREQ:POINTS.....	145
JTOLTEST:FREQ:GENERATE.....	145
JTOLTEST:FREQ:DEFAULT.....	145
JTOLTEST:SELECT:RELAXATION.....	146
JTOLTEST:SEARCH:ALGO.....	146
JTOLTEST:RUN.....	146
JTOLTEST:SAVE:ID.....	147
JTOLTEST:SAVE:GENERATEDBY.....	147
JTOLTEST:SAVE:COMMENTS.....	147
JTOLTEST:SAVE.....	148
JTOLTEST:RUNSTATUS.....	148
JTOLTEST:FREQ.....	148
JTOLTEST:PLOT:POINTS.....	148
JTOLTEST:SELECT:SJAMPUNITS.....	149
JTOLTEST:SELECT:CLOCKTYPE.....	149

JTOLTEST:PLOT.....	149
JTOLTEST:TABLE.....	150
JTOLTEST:SELECT:DUTTYPE.....	150
JTOLTEST:BERMEASUREMENT:PATTERN.....	150
JTOLTEST:LINKTRAINING:LOOPBACKMODEGEN5.....	151
JTOLTEST:LINKTRAINING:BERTINITIALPRESET.....	151
JTOLTEST:LINKTRAINING:DUTINITIALPRESET.....	152
JTOLTEST:LINKTRAINING:DUTTARGETPRESET.....	152
JTOLTEST:LINKTRAINING:LANENUMBER.....	152
JTOLTEST:LINKTRAINING:LINKNUMBER.....	153
JTOLTEST:LINKTRAINING:STRESSTYPE.....	153
JTOLTEST:LINKTRAINING:CTLE.....	153
JTOLTEST:LINKTRAINING:DUTPOWERONTYPE.....	153
JTOLTEST:LINKTRAINING:SCRIPTLOCATION .....	154
JTOLTEST:LINKTRAINING:DUTPOWERDELAY .....	154
JTOLTEST:CLOCK:ARCHITECTURE .....	154
JTOLTEST:COMMONCLOCK:SKP:GEN12:INTERVAL.....	155
JTOLTEST:COMMONCLOCK:SKP:GEN345:INTERVAL .....	155
JTOLTEST:FILTER:SKP.....	155
JTOLTEST:INSERT:SKP.....	156
JTOLTEST:LINKTRAINING:CTLETYPE.....	156
JTOLTEST:LINKTRAINING:CBBAUTORESET.....	156
JTOLTEST:LINKTRAINING:CBBPOWERCYCLE.....	157
JTOLTEST:LINKTRAINING:CBBPOWERRESET.....	157
JTOLTEST:LINKTRAINING:CBBWAITINGTIME.....	157
JTOLTEST:LINKTRAINING:POWEROPTIONTYPE.....	158
JTOLTEST:LINKTRAINING:ENABLEDUTLOOPBACKAFTERTEST.....	158
JTOLTEST:LINKTRAINING:USERPATTERNLOCATION.....	158
JTOLTEST:SKP:GEN12:DOUBLESKP.....	159
JTOLTEST:SKP:GEN12:SYMBOLLENGTH.....	159
JTOLTEST:SKP:GEN345:DOUBLESKP .....	159
JTOLTEST:SKP:GEN345:SYMBOLLENGTH.....	160
LEQRXTEST:OPEN .....	160
LEQRXTEST:WIZARD:OPEN .....	160
LEQRXTEST:WIZARD:CLOSE .....	161
LEQRXTEST:DUTTYPE .....	161
LEQRXTEST:CLOCKTYPE .....	161
LEQRXTEST:SHOW:CONNECTIONDIAGRAM .....	162
LEQRXTEST:LINKTRAINING:BERTINITIALPRESET.....	162
LEQRXTEST:LINKTRAINING:DUTINITIALPRESET .....	162
LEQRXTEST:LINKTRAINING:DUTTARGETPRESET.....	162
LEQRXTEST:LINKTRAINING:LINKNUMBER.....	163
LEQRXTEST:LINKTRAINING:LANENUMBER.....	163
LEQRXTEST:LINKTRAINING:LOOPBACKMODEGEN5.....	163
LEQRXTEST:LINKTRAINING:CTLETYPE.....	164
LEQRXTEST:LINKTRAINING:POWEROPTIONTYPE.....	164
LEQRXTEST:LINKTRAINING:CBBAUTORESET.....	164
LEQRXTEST:SSC:STATE.....	165
LEQRXTEST:LINKTRAINING:AUTOSEARCHANDTUNECDR.....	165

LEQRXTEST:LINKTRAINING:CBBPOWERCYCLE.....	165
LEQRXTEST:LINKTRAINING:CBBPOWERRESET.....	166
LEQRXTEST:LINKTRAINING:CBBWAITINGTIME.....	166
LEQRXTEST:LINKTRAINING:ENABLEDUTLOOPBACKAFTERTEST.....	166
LEQRXTEST:CLOCK:ARCHITECTURE.....	167
LEQRXTEST:COMMONCLOCK:SKP:GEN12:INTERVAL.....	167
LEQRXTEST:COMMONCLOCK:SKP:GEN345:INTERVAL.....	167
LEQRXTEST:FILTER:SKP.....	168
LEQRXTEST:INSERT:SKP.....	168
LEQRXTEST:SKP:GEN12:DOUBLESKP.....	168
LEQRXTEST:SKP:GEN12:SYMBOLLENGTH.....	169
LEQRXTEST:SKP:GEN345:DOUBLESKP.....	169
LEQRXTEST:SKP:GEN345:SYMBOLLENGTH.....	169
LEQRXTEST:LINKTRAINING:USERPATTERNLOCATION.....	170
LEQRXTEST:SSC:STATE.....	170
LEQRXTEST:LINKTRAINING:AUTOSEARCHANDTUNECDR.....	170
LEQRXTEST:LINKTRAINING:DUTPOWERONTYPE.....	171
LEQRXTEST:LINKTRAINING:DUTPOWERDELAY.....	171
LEQRXTEST:LINKTRAINING:SCRIPTLOCATION.....	171
LEQRXTEST:BERMEASUREMENT:PATTERN.....	172
LEQRXTEST:LINKTRAINING:STRESSTYPE.....	172
LEQRXTEST:LINKTRAINING:CTLE.....	173
LEQRXTEST:LINKTRAINING:ENABLEDUTLOOPBACKAFTERTEST.....	173
LEQRXTEST:RUN.....	173
LEQRXTEST:STATUS.....	174
LEQRXTEST:LINKTRAINING:STATUS.....	174
LEQRXTEST:LINKTRAINING:STOP.....	174
LEQRXTEST:TEST:ADDERROR.....	174
LEQRXTEST:TEST:CURRENTBER.....	175
LEQRXTEST:TEST:CURRENTERRORCOUNT.....	175
LEQRXTEST:TEST:CURRENTTOTALBITS.....	175
LEQRXTEST:TEST:RESULT.....	175
LEQRXTEST:SAVE:ID.....	176
LEQRXTEST:SAVE:GENERATEDBY.....	176
LEQRXTEST:SAVE:COMMENTS.....	176
LEQRXTEST:SAVE.....	177
LEQTXTEST:OPEN.....	177
LEQTXTEST:WIZARD:OPEN.....	177
LEQTXTEST:WIZARD:CLOSE.....	177
LEQTXTEST:SELECT:TP1FILE.....	178
LEQTXTEST:DUTTYPE.....	178
LEQTXTEST:CLOCKTYPE.....	178
LEQTXTEST:SELECT:TEST.....	179
LEQTXTEST:LINKTRAINING:BERTINITIALPRESET.....	179
LEQTXTEST:LINKTRAINING:LINKNUMBER.....	179
LEQTXTEST:LINKTRAINING:LANENUMBER.....	180
LEQTXTEST:LINKTRAINING:DUTPOWERONTYPE.....	180
LEQTXTEST:LINKTRAINING:DUTPOWERDELAY.....	180
LEQTXTEST:LINKTRAINING:SCRIPTLOCATION.....	181

---

LEQTXTEST:LINKTRAINING:CTLE.....	181
LEQTXTEST:STRESSTYPE.....	181
LEQTXTEST:AMPLITUDE.....	181
LEQTXTEST:APPLYSOFTSQ.....	182
LEQTXTEST:FILTERFILE.....	182
LEQTXTEST:DUTWFMSCALE.....	182
LEQTXTEST:LOOPBACKRUN.....	183
LEQTXTEST:DUTID.....	183
LEQTXTEST:CLEARALL.....	183
LEQTXTEST:RUN .....	184
LEQTXTEST:STATUS.....	184
LEQTXTEST:LINKTRAINING:STATUS.....	184
LEQTXTEST:LINKTRAINING:STOP.....	184
LEQTXTEST:SAVE:ID.....	185
LEQTXTEST:SAVE:COMMENTS .....	185
LEQTXTEST:SAVE:GENERATEDBY.....	185
LEQTXTEST:INITIALPRESET.....	186
LEQTXTEST:SELECTPRESET .....	186
LEQTXTEST:LINKTRAINING:CBBAUTORESET.....	186
LEQTXTEST:LINKTRAINING:CBBPOWERCYCLE.....	187
LEQTXTEST:LINKTRAINING:CBBPOWERRESET.....	187
LEQTXTEST:LINKTRAINING:CBBWAITINGTIME.....	187
LEQTXTEST:LINKTRAINING:POWEROPTIONTYPE.....	188
LEQTXTEST:SOFTWAREQTYPE <0/1>.....	188

## List of Figures

Figure 1: TekRxTest - PCIe5.0 CEM application.....	17
Figure 2: TekRxTest application window.....	22
Figure 3: Launch Real-Time Oscilloscope.....	23
Figure 4: TekRxService application window.....	24
Figure 5: Connections panel.....	25
Figure 6: Settings panel.....	26
Figure 7: Components: RT Scope.....	27
Figure 8: Components: TekRxService.....	28
Figure 9: TP3 Calibration: Attenuator Settings.....	29
Figure 10: TP3 Calibration: Calibrations.....	30
Figure 11: TP2 Calibration: Attenuator Settings.....	31
Figure 12: TP2 Calibration: DMI and CMI .....	32
Figure 13: TP2 Calibration: CTLE and Preset Selection.....	33
Figure 14: TP2 Calibration: Stressed Eye Parameters.....	34
Figure 15: Remote access: Configuration.....	35
Figure 16: TP3 Calibration.....	37
Figure 17: TP3 Calibration: Connection Diagram.....	38
Figure 18: TP3 Calibration: Initialization.....	39
Figure 19: TP3 Calibration: PWJ Calibration.....	40
Figure 20: TP3 Calibration: AC-DC Balance.....	41
Figure 21: TP3 Calibration: Amplitude Calibration.....	42
Figure 22: TP3 Calibration: Preset Calibration.....	43
Figure 23: TP3 Calibration: IL Measurement.....	44
Figure 24: TP3 Calibration: RJ Calibration.....	45
Figure 25: TP3 Calibration: SJ Calibration.....	46
Figure 26: TP3 Calibration: SJ@210 MHz Calibration.....	47
Figure 27: TP3 Calibration: Multi-tone SJ.....	48
Figure 28: TP3 Calibration: Save Results.....	49
Figure 29: TP2 Calibration.....	50
Figure 30: TP2 Calibration: Description.....	51
Figure 31: TP2 Calibration: Connection Diagram-AIC .....	52
Figure 32: TP2 Calibration: Connection Diagram-System .....	52



Figure 33: TP2 Calibration: Calibration Selection.....	53
Figure 34: TP2 Calibration: IL for DMI/CMI.....	54
Figure 35: TP2 Calibration: DMI Calibration.....	55
Figure 36: TP2 Calibration: CMI Calibration.....	56
Figure 37: TP2 Calibration: IL Measurement.....	57
Figure 38: TP2 Calibration: CTLE and Preset .....	58
Figure 39: TP2 Calibration: Stressed Eye Cal.....	59
Figure 40: TP2 Calibration: Stressed Eye Configuration.....	59
Figure 41: TP2 Calibration: Save Results.....	61
Figure 42: Rx LEQ Test: Calibration Selection.....	62
Figure 43: Rx LEQ Test: Connection Diagram(AIC).....	63
Figure 44: Rx LEQ Test: Connection Diagram(System).....	63
Figure 45: Rx LEQ Test: Link Training Configuration (Link Training-External).....	64
Figure 46: Rx LEQ Test: Link Training Configuration (Link Training-CBB Controller).....	64
Figure 47: Rx LEQ Test: Link Training Configuration (Forced Loopback).....	65
Figure 48: Rx LEQ Test: Rx LEQ Test Configuration (Basic).....	67
Figure 49: Rx LEQ Test: Rx LEQ Test Configuration (SKP Ordered Set).....	67
Figure 50: Rx LEQ Test: Run Test (Basic).....	69
Figure 51: Rx LEQ Test: Run Test (Advanced Debug)).....	70
Figure 52: Rx LEQ Test: Link Training.....	73
Figure 53: Rx LEQ Test: Save Results.....	74
Figure 54: Tx LEQ Test: Calibration Selection.....	75
Figure 55: Tx LEQ Test: Connection Diagram(AIC).....	76
Figure 56: Tx LEQ Test: Connection Diagram(System).....	76
Figure 57: Tx LEQ Test: Link Training Configuration (External).....	77
Figure 58: Tx LEQ Test: Link Training Configuration (CBB Controller).....	77
Figure 59: Tx LEQ Test: Tx LEQ Test Configuration.....	79
Figure 60: Tx LEQ Test: Run Test(System Response Time Test).....	80
Figure 61: Tx LEQ Test: Run Test(AIC Initial Tx EQ Test).....	81
Figure 62: Tx LEQ Test: Run Test(AIC Response Time Test).....	81
Figure 63: Tx LEQ Test: Link Training.....	82
Figure 64: Tx LEQ Test: Save Results.....	83
Figure 65: JTOL Test.....	84
Figure 66: JTOL Test: Calibration Selection.....	85
Figure 67: JTOL Test: Connection Diagram(AIC).....	86

Figure 68: JTOL Test: Connection Diagram(System).....	86
Figure 69: JTOL Test: Link Training Configuration (Link Training-External).....	87
Figure 70: JTOL Test: Link Training Configuration (Link Training-CBB Controller).....	88
Figure 71: JTOL Test: Link Training Configuration (Forced Loopback).....	89
Figure 72: JTOL Test: Configure Test (Basic).....	91
Figure 73: JTOL Test: Configure Test (SKP Ordered Set).....	91
Figure 74: JTOL Test: Configure JTOL Test.....	93
Figure 75: JTOL Test: Configure Advanced JTOL Test.....	94
Figure 76: JTOL Test: JTOL Chart.....	96
Figure 77: JTOL Test (Result Table).....	97
Figure 78: JTOL Test: Link Training.....	98
Figure 79: JTOL Test: Save Results.....	99

# List of Tables

Table 1: Product documentation.....	18
Table 2: Icon descriptions.....	19
Table 3: Application panels overview.....	24
Table 4: Connections panel.....	25
Table 5: Settings panel configurations.....	26
Table 6: Components: RT Scope.....	27
Table 7: Components: TekRxService.....	28
Table 8: TP3 Calibration: Attenuator Settings.....	29
Table 9: TP3 Calibration: Calibrations.....	30
Table 10: PCIe Gen 5 TP2 Calibration: Attenuator Settings.....	31
Table 11: TP2 Calibration: DMI and CMI .....	32
Table 12: TP2 Calibration: CTLE and Preset Selection.....	33
Table 13: TP2 Calibration: Stressed Eye Parameters.....	34
Table 14: Remote access: Configuration.....	35
Table 15: TP3 Calibration: PWJ Calibration.....	40
Table 16: TP3 Calibration: AC-DC Balance.....	41
Table 17: TP3 Calibration: Amplitude Calibration.....	42
Table 18: TP3 Calibration: Preset Calibration.....	43
Table 19: TP3 Calibration: IL Measurement.....	44
Table 20: TP3 Calibration: RJ Calibration.....	45
Table 21: TP3 Calibration: SJ Calibration.....	46
Table 22: TP3 Calibration: SJ@210 MHz Calibration.....	47
Table 23: TP3 Calibration: Multi-tone SJ.....	48
Table 24: TP3 Calibration: Save Results.....	49
Table 25: TP2 Calibration: Description.....	51
Table 26: TP2 Calibration: Calibration Selection.....	53
Table 27: TP2 Calibration: IL for DMI/CMI.....	54
Table 28: TP2 Calibration: DMI Calibration.....	55
Table 29: TP2 Calibration: CMI Calibration.....	56
Table 30: TP2 Calibration: IL Measurement.....	57
Table 31: TP2 Calibration: CTLE and Preset .....	58
Table 32: TP2 Calibration: Stressed Eye Cal.....	60

---

Table 33: TP2 Calibration: Save Results.....	61
Table 34: Rx LEQ Test: Calibration Selection.....	62
Table 35: Rx LEQ Test: Link Training Configuration for Link Training.....	65
Table 36: Rx LEQ Test: Link Training Configuration for Forced Loopback.....	66
Table 37: Rx LEQ Test: Rx LEQ Test Configuration (Basic).....	68
Table 38: Rx LEQ Test: Rx LEQ Test Configuration (SKP Ordered Set).....	68
Table 39: Rx LEQ Test: Run Test (Basic).....	70
Table 40: Rx LEQ Test: Run Test (Advanced Debug).....	71
Table 41: Rx LEQ Test: Link Training.....	73
Table 42: Rx LEQ Test: Save Results.....	74
Table 43: Tx LEQ Test: Calibration Selection.....	75
Table 44: Tx LEQ Test: Link Training Configuration.....	78
Table 45: Tx LEQ Test: Tx LEQ Test Configuration.....	79
Table 46: Tx LEQ Test: Run Test.....	82
Table 47: Tx LEQ Test: Save Results.....	83
Table 48: JTOL Test: Calibration Selection.....	85
Table 49: JTOL Test: Link Training Configuration for Link Training .....	89
Table 50: JTOL Test: Link Training Configuration for Forced Loopback.....	90
Table 51: JTOL Test: Configure Test (Basic).....	92
Table 52: JTOL Test: Configure Test (SKP Order Set).....	92
Table 53: JTOL Test: Configure JTOL Test.....	93
Table 54: JTOL Test: Configure Advanced JTOL Test.....	94
Table 55: JTOL Test: JTOL Chart.....	96
Table 56: JTOL Test (Results Table).....	97
Table 57: JTOL Test: Link Training.....	98
Table 58: JTOL Test: Save Results.....	99

# Welcome

Welcome to the PCIe5.0 (CEM) TekRxTest application. This application performs the test as per the Gen 5 PHY Test Specification Revision 5.0 Version 1.0 and Base Specification Revision 6.0.1 Version 1.0.

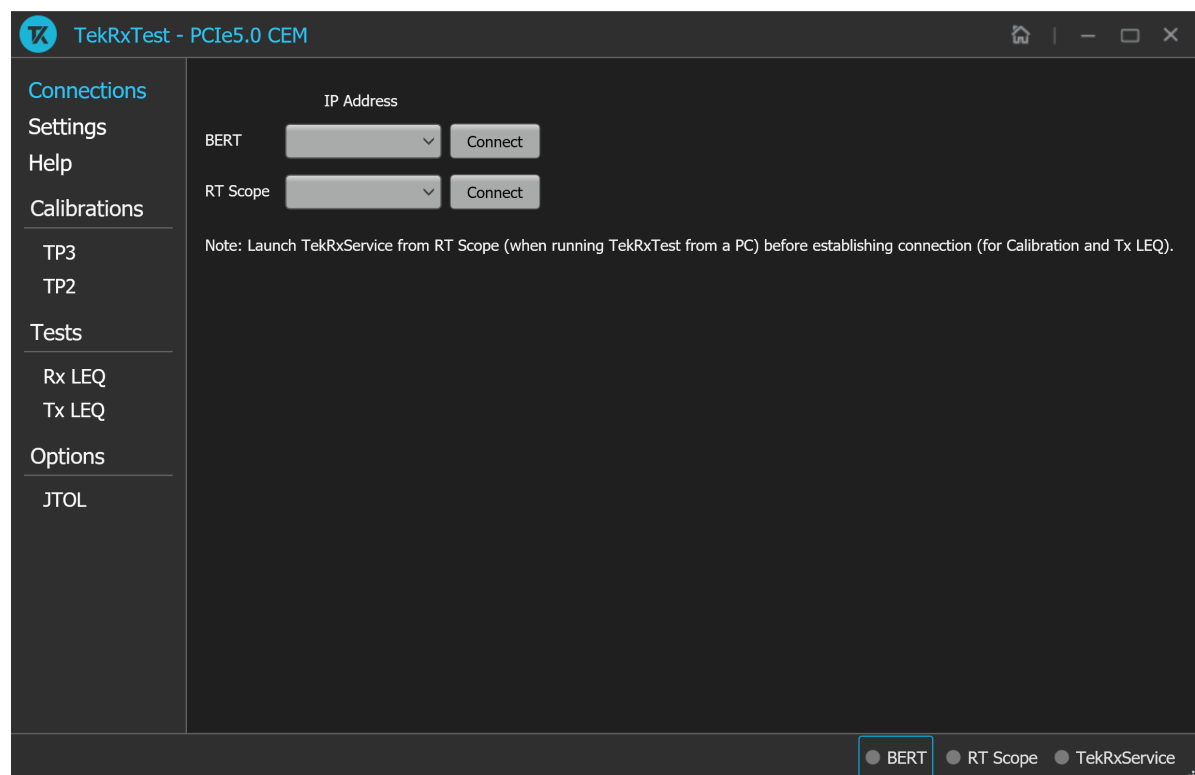


Figure 1: TekRxTest - PCIe5.0 CEM application

Receiver testing is accomplished by connecting the output of BERT PPG (which can produce specific PCIe test patterns) to the input of the DUT through a specialized set of fixtures and cables. The BERT can be programmed to add different amounts of random jitter, sinusoidal jitter, differential, Common mode interference along with variable signal amplitude, preshoot, and de-emphasis. Output of the DUT is connected to the BERT error detector to identify bit errors on the DUT Tx traffic, either during loopback or during sweep of one of the stress parameters. Any error detected can be assumed to be generated from the DUT Tx path as a result of either the DUT experiencing a bad bit-decision at its receiver or uncompensated back channel loss at the error detector of the BERT. Additionally, DUT Tx traffic can be analyzed to verify the DUT responses to various requests put forward by the BERT during link training process.

## Key features and benefits

- Automated Calibration, Link Training, and Compliance Testing.
- Receiver JTOL test for AIC / System DUT.
- Jointly with Anritsu BERT MP1900A series, the receiver solution provides the tools and flexibility required to visualize and control the impairments, observe real-time eye performance for PCIe Gen5 devices.
- Reliable and accurate results reduce the test execution time and minimize the skill-set required to perform calibration and testing.

# Getting help and support

## Related documentation

The following documentation is available as part of the **PCIe5.0 (CEM)** test application.

**Table 1: Product documentation**

Item	Purpose	Location
Application Help	Application operation and User Interface details	Help panel of the application

### See also

[Technical support](#) on page 18

## Technical support

Tektronix values your feedback on our products. To help us serve you better, please send us your suggestions, ideas, or comments on your application or Real Time Oscilloscope. Contact Tektronix through mail, telephone, or the Web site. See [Contacting Tektronix](#) on page 0 at the front of this document for contact information.

When you contact Tektronix Technical Support, please include the following information (be as specific as possible):

### General information

- All instrument model numbers
- Hardware options, if any
- Modules used
- Your name, company, mailing address, phone number, and FAX number
- Please indicate if you would like to be contacted by Tektronix about your suggestion or comments.

### Application specific information




- Software version number
- Description of the problem such that technical support can duplicate the problem
- If possible, save the setup files for all the instruments used and the application

## Conventions

Help uses the following conventions:

- The term "Application", "Software", and "PCIe5.0 CEM" refers to the TekRxTest - PCIe5.0 CEM Application.
- The term "DUT" is an abbreviation for Device Under Test.
- The term "select" is a generic term that applies to the two methods of choosing a screen item (button, control, list item): using a mouse or using the touch screen.

**Table 2: Icon descriptions**

Icon	Meaning
	This icon identifies important information.
	This icon identifies conditions or practices that could result in loss of data.
	This icon identifies additional information that will help you use the application more efficiently.

# Getting started

## Required equipment and accessories

Item	Vendor	Type	R/O	Qty	Description	Notes
DPS75004SX	Tektronix	Equipment	Required	1	Dual-Stack 50 GHz Sx oscilloscope	50 G or better
DPO7RFK2	Tektronix	Tek accessory	Required	2	Attenuator kit	Attenuator kit + DC blocks
103047400	Tektronix	Tek accessory	Required	2	Connector savers (1.85 mm)	1.85 mm oscilloscope channel input connection
Anritsu MP1900A <sup>1</sup>	Anritsu	3 <sup>rd</sup> party equipment	Required	1	Bit Error Rate Tester (BERT)	Configuration provided by 3 <sup>rd</sup> party
DJA	Tektronix	Equipment SW option	Required	1	DPOJET advanced option	DPOJET advanced Jitter, Eye and Timing Analysis SW option
SDLA64	Tektronix	Equipment SW option	Required	1	Serial Data Link Analysis (SDLA) software	Embedding/De-embedding/s-parameter filter generation/Receiver Virtualization and Analysis Software
PMCABLE1M	Tektronix	Tek accessory	Required	2	Cable pair; 2.92-to-2.92 mm, straight, 1.5 ps phase-matched, 40 GHz	Equipment connection to fixtures and DUT
174-6663-01	Tektronix	Tek accessory	Required	1	Cable pair; 2.92-to-2.92 mm, straight, 1.5 ps phase-matched, 500 mm, 40 GHz	Signal connection between oscilloscope and BERT for Tx LEQ
174-6666-01	Tektronix	Tek accessory	Required	2	Cable pair; SMA-to-SMA, Right Angle-Right Angle, 500 mm	Signal connection between oscilloscope and BERT for Tx LEQ and Trigger
174-6659-01	Tektronix	Tek accessory	Required	1	Cable pair; SMA - SMP cable pair	Refclk connection between DUT and BERT
MPR40M	Fairview Microwave	3 <sup>rd</sup> party	Required	2	Power divider	Split signal from DUT Tx to the oscilloscope and Error Detector
C7035	CentricRF	3 <sup>rd</sup> party	Optional	4	Right Angle Male-Female 2.92 mm adapter	Cable management
C7049	CentricRF	3 <sup>rd</sup> party	Required	3	2.92 mm Male to 2.92 mm Male adaptor	Power divider output to oscilloscope input
Redriver	3 <sup>rd</sup> party	3 <sup>rd</sup> party equipment	Optional	1	Active Gen5 Redriver (back channel equalization) <sup>2</sup>	High loss back channels (DUT Tx to Error Detector) may need EQ
PowerUSB - Basic	PowerUSB	3 <sup>rd</sup> party	Optional	1	Power USB Power Strip	Automate DUT power cycle
TF-PCIE5-CEM-X16	Tektronix or PCI-SIG	Test fixtures	Required	1	Gen 5 CEM Test fixtures <sup>3</sup>	Tektronix fixtures are not officially approved by PCI-SIG

Table continued...

<sup>1</sup> Configuration for BERT provided by 3<sup>rd</sup> party vendor

<sup>2</sup> Another matched pair of cables (e.g. 174-6663-xx) will be required if the Active redriver is used for Rx or Tx LEQ

<sup>3</sup> Gen5 CEM Test Fixtures are not backwards compatible for Gen3 & Gen4 CEM Rx



Item	Vendor	Type	R/O	Qty	Description	Notes
RXSW-NLP-PCIE5	Tektronix	SW option	Required	1	PCIe Gen5 Receiver software	Gen5 BASE and CEM Rx test software - Node-Locked, Perpetual
RXSW-NL1-PCIE5						Gen5 BASE and CEM Rx test software - Node Locked, Time Based, 1 year
RXSW-FLP-PCIE5						Gen5 BASE and CEM Rx test software - Floating, Perpetual
RXSW-FL1-PCIE5						Gen5 BASE and CEM Rx test software - Floating, Time Based, 1 year

## Installing the software

Complete the following steps to download and install the latest PCIe5.0 (CEM) TekRx test application.

1. Go to [www.tek.com](http://www.tek.com).
2. Click **Downloads**. In the Download menu, select DOWNLOAD TYPE as Software and enter **PCIe5.0 (CEM)** in the MODEL OR KEYWORD field and click **SEARCH**.

3. Select the latest version of the software and follow the instructions to download.
4. Copy the executable file into the instrument you wish to install the software (Real-time oscilloscope or PC).
5. Follow the installation instruction that is available in the website. The software is installed at C:\Program Files\Tektronix\BERTScope\RxTest60
6. Double click the shortcut icon on the desktop to launch the application.

### Note:



- The PCIe5.0 (CEM) TekRx test application can be installed on a Tektronix real-time oscilloscope or a PC (optional).
- You must install the TekRxService and SigTest application in the real-time oscilloscope to successfully connect the application with the real-time oscilloscope.

# Operating basics

## Launch the application

To launch the PCIe5.0 (CEM) test application, double click the shortcut icon **TekRxTest** on the desktop and select **PCIe5.0 (CEM)** in the application window.



Figure 2: TekRxTest application window

## Close the application

To exit the application, click  on the application title bar. Follow on-screen instructions to save the unsaved session or test setup.



**Note:** Using other methods to exit the application may result in abnormal termination of the application.

## Launch Real-Time Oscilloscope

The TekVISA Socket Server application on the oscilloscope provides the necessary connectivity between the TekRxTest application and scope. Although it is launched in the background when the scope boots up and the socket is initialized for communication, it is recommended to verify the status by clicking on the Desktop Tray → TekVISA LAN Server Control as shown in the image below. If it is ready to exchange data, then a wizard would appear as in the below image.

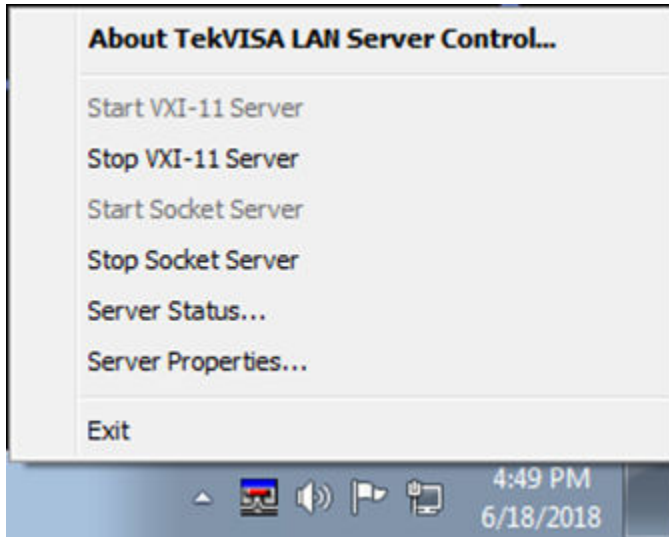


Figure 3: Launch Real-Time Oscilloscope



**Note:** In the unlikely event when the socket is not initialized, the process can be started by clicking on “Start Socket Server” which gets enabled during such a scenario.

## Launch TekRxService

The PCIe5.0 (CEM) TekRxTest application interfaces with the oscilloscope for data acquisition, analysis and data retrieval utilizing TekRxService application. This software module should be launched at the time of initiating the TekRxTest application.

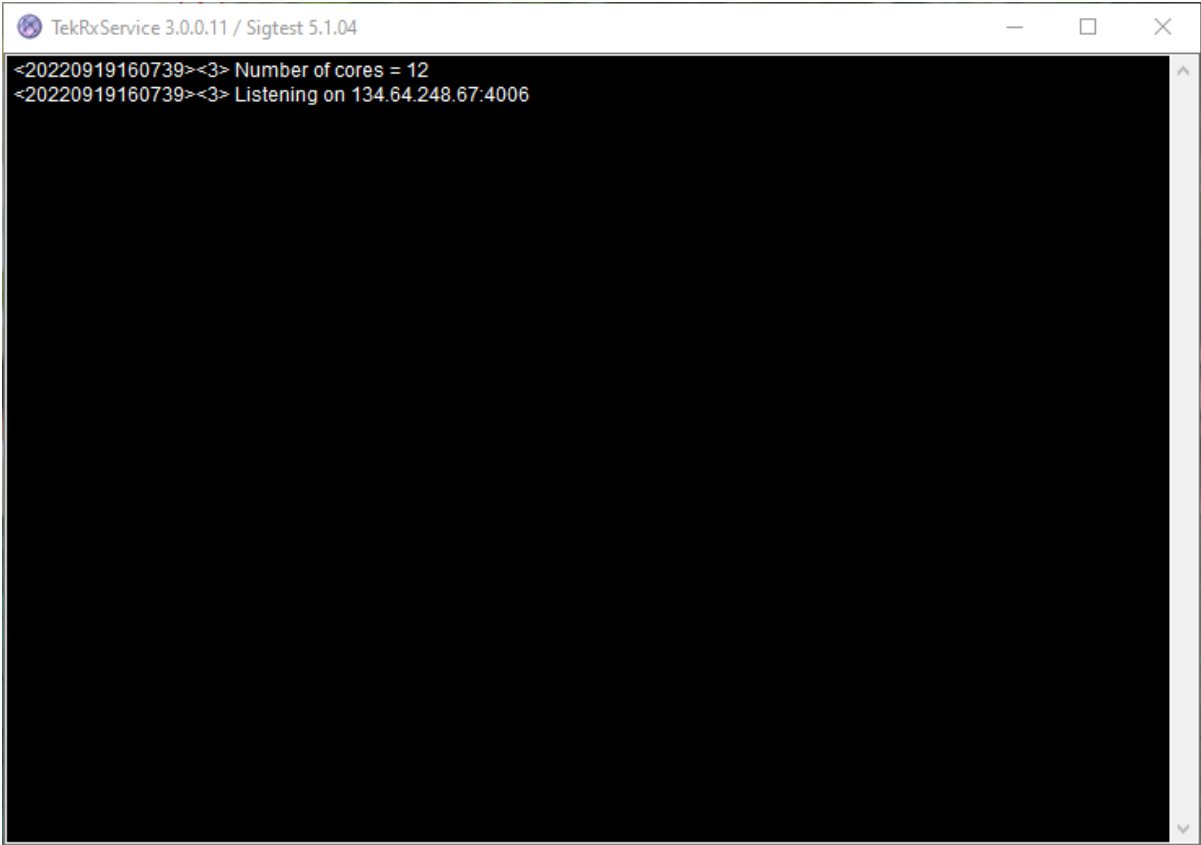



Figure 4: TekRxService application window

 **Note:** TekRxService has to be launched if the application is being run on an external PC. To launch the application, double click the TekRxService batch file shortcut icon in the desktop of the real-time oscilloscope.

## Application panels

### Application panels overview

The PCIe5.0 (CEM) TekRxTest application uses panels to group the configurations and settings. Click on any panel to configure the associated settings. A panel may have one or more tabs that lists the selections available in that panel. Controls in a tab may change depending on the settings made in the same tab or another tab.

Table 3: Application panels overview

Parameter	Description
Connections	This panel displays the real-time oscilloscope and BERT connection settings. You can connect to a real-time oscilloscope and BERT by entering the IP address of the instruments.
Settings	This panel allows configuring various settings for the Components, TP3 and TP2 Calibration.
Help	This panel displays the application help.

Table continued...

Parameter	Description
Calibrations	This panel allows you to configure the calibration parameters for TP3/TP2 and save the results.
Tests	This panel allows you to configure the Rx/Tx LEQ test settings and view the results.
Options	This panel allows you to configure the JTOL test settings and view the results.

## Connections panel

The connections panel allows you to connect to a real-time oscilloscope and BERT with the PCIe5.0 (CEM) TekRxTest application. Enter the IP address of the instruments and click **Connect** to establish the connection.

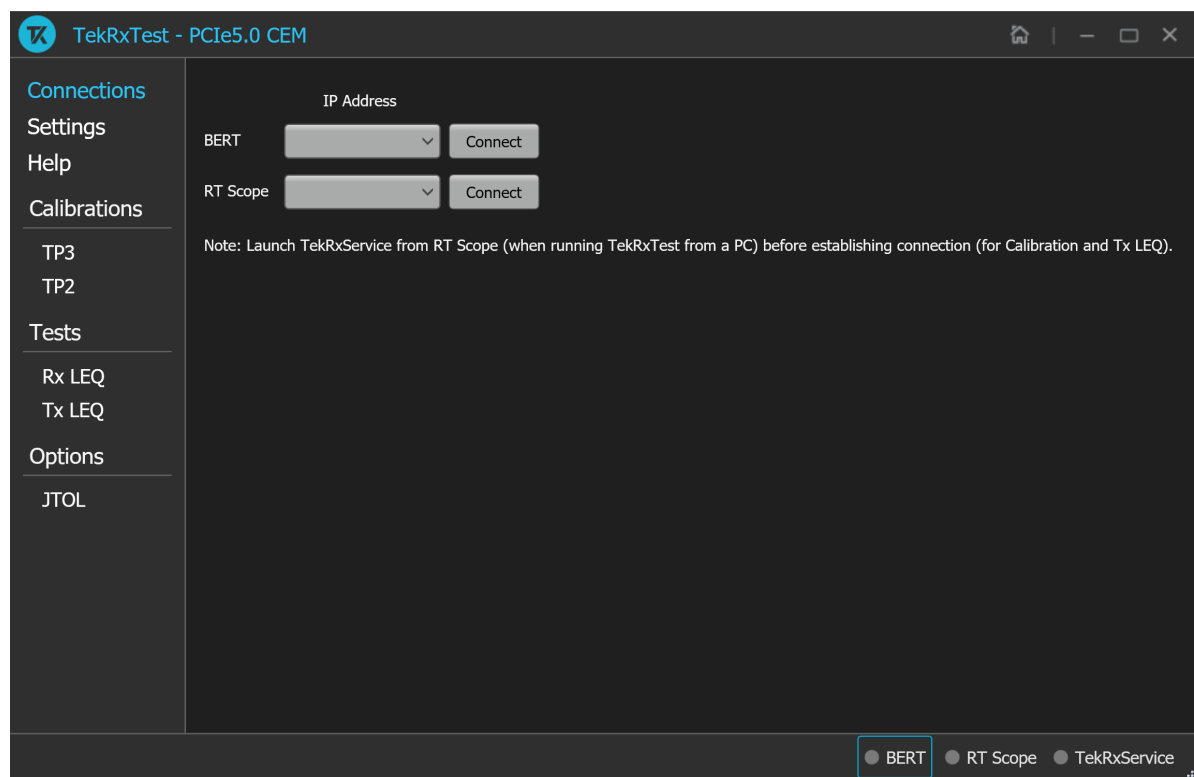



Figure 5: Connections panel

Table 4: Connections panel

Connections	Description
BERT	Enter the BERT IP address in the address field and click <b>Connect</b> . When the BERT is connected successfully, the circle next to <b>BERT</b> in the right end corner turns green.
RT Scope	<p>Enter the RT Scope IP address in the address field and click <b>Connect</b>. When the RT Scope is connected successfully, the circle next to <b>RT Scope</b> and TekRxService in the right end corner turns green.</p> <p> <b>Note:</b> Before you click Connect, if the TekRxTest application is running on an external PC, make sure to launch the TekRxService in the real-time oscilloscope.</p>

## Settings panel

This panel allows you to configure the settings for instruments, calibrations, and remote access. Click any tab to configure the associated settings.

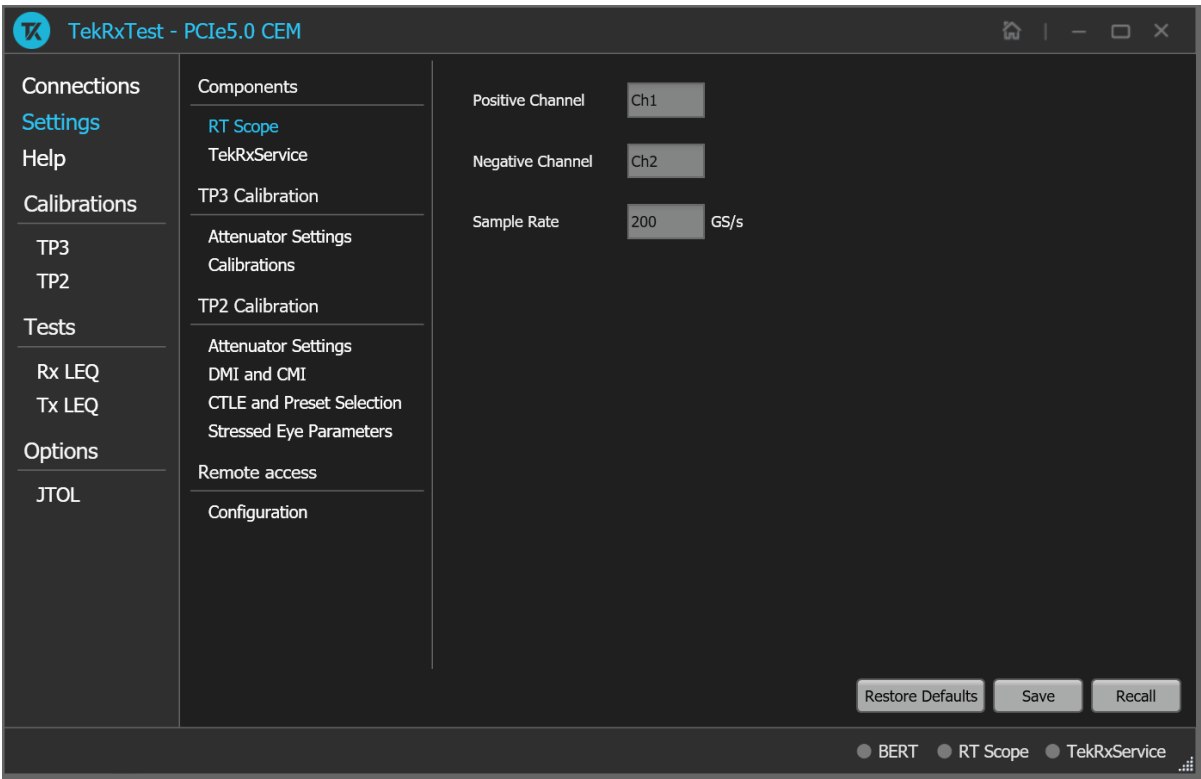


Figure 6: Settings panel

Table 5: Settings panel configurations

Item	Description
Restore Defaults	Restores the application with default settings.
Save	Saves the current test setup.
Recall	Recalls the saved test setup.

## Components settings

The components settings display the parameters for RT Scope and TekRxService.

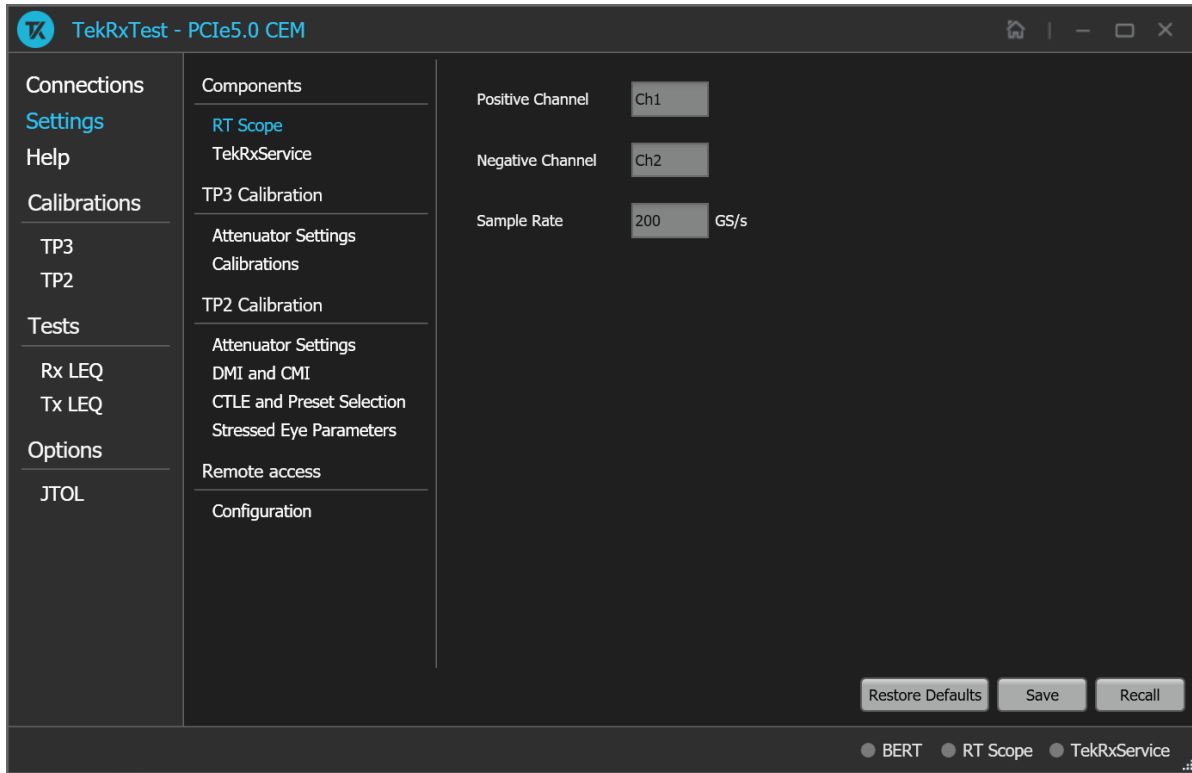


Figure 7: Components: RT Scope

Table 6: Components: RT Scope

Parameter	Description
Positive Channel	Select the generator data positive channel from BERT.
Negative Channel	Select the generator data negative channel from BERT.
Sample Rate	Displays the RT Scope sample rate in GS/s.

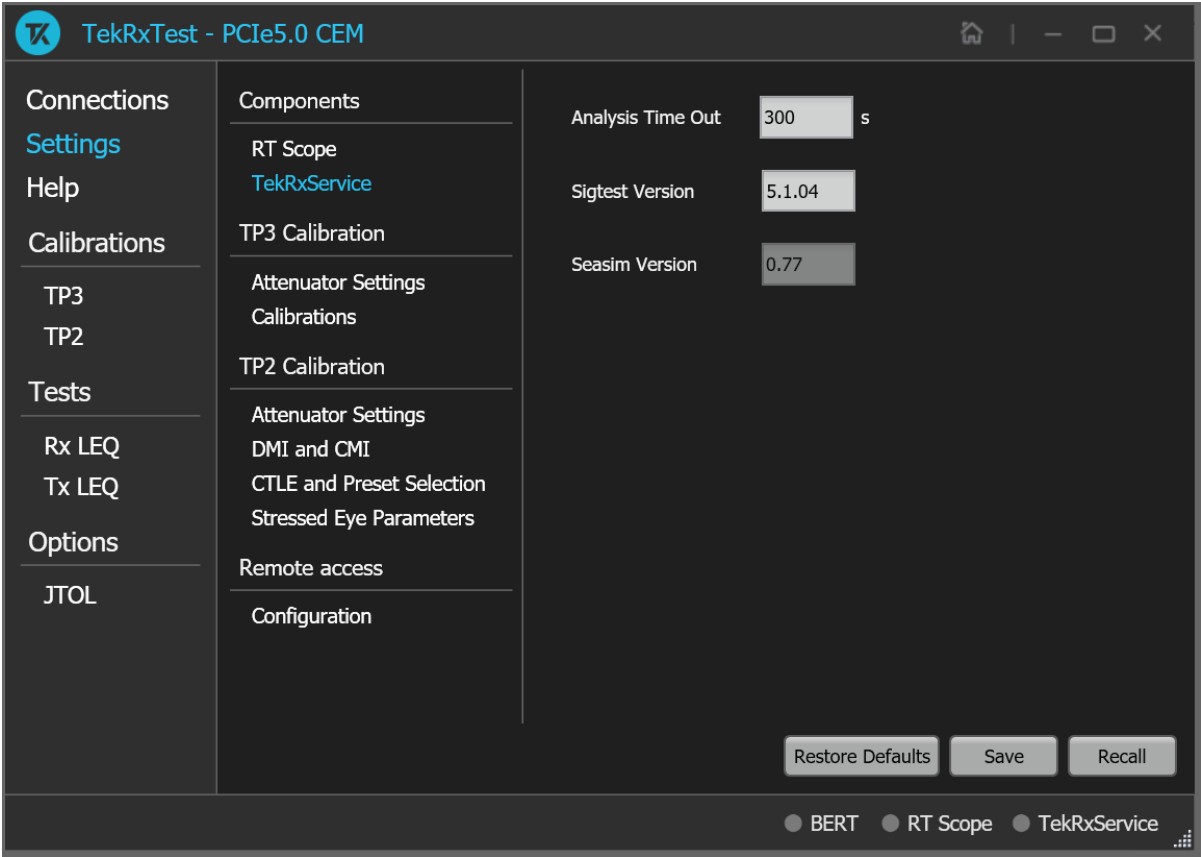


Figure 8: Components: TekRxService

Table 7: Components: TekRxService

Parameter	Description
Analysis Time Out	Enter the timeout value for Sigtest analysis.
Sigtest Version	Enter the Sigtest version.
Seasim Version	Displays the Seasim version.

TP3 Calibration

The TP3 calibration tab allows you to configure the channel settings including the attenuators and component de-embedding, multi-tone calibration, and insertion loss calculation.



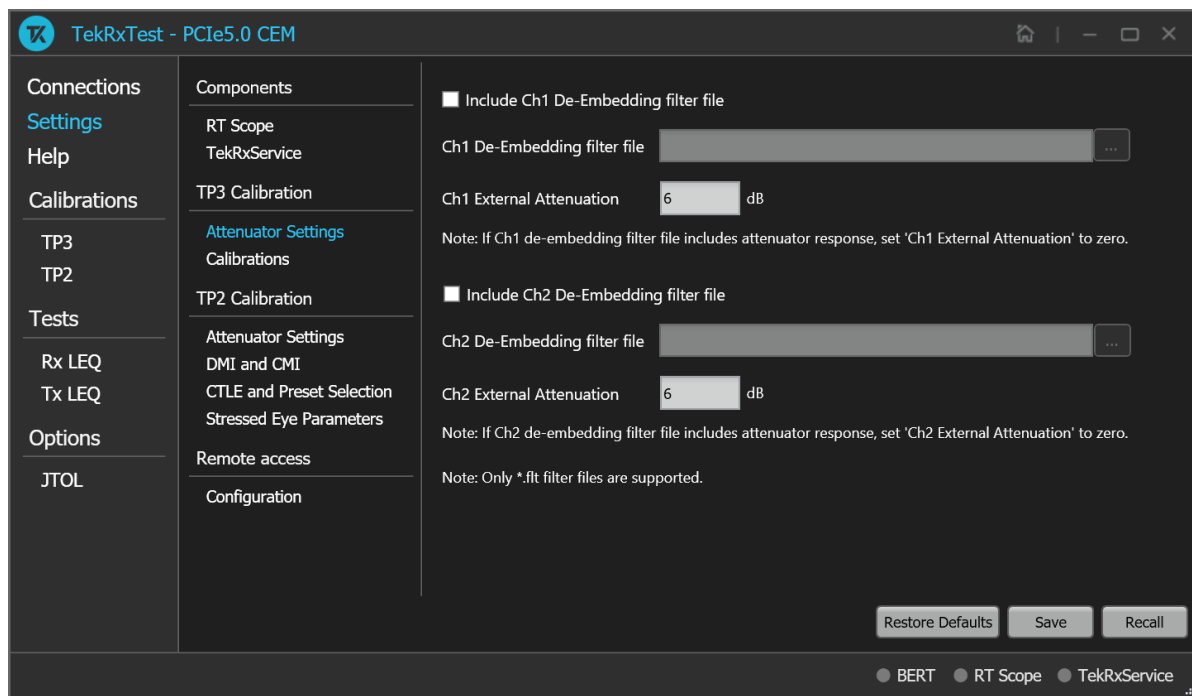


Figure 9: TP3 Calibration: Attenuator Settings

Table 8: TP3 Calibration: Attenuator Settings

Parameter	Description
Include Ch1 De-Embedding filter file	Enable to apply Ch1 de-embedding filter file.
Ch1 De-Embedding filter file	Click to browse and navigate to the path and select the required Ch1 de-embedding filter file.
Ch1 External Attenuation	Enter the Ch1 external attenuation value in dB.
Include Ch2 De-Embedding filter file	Enable to apply Ch2 de-embedding filter file.
Ch2 De-Embedding filter file	Click to browse and navigate to the path and select the required Ch2 de-embedding filter file.
Ch2 External Attenuation	Enter the Ch2 external attenuation vaue in dB.

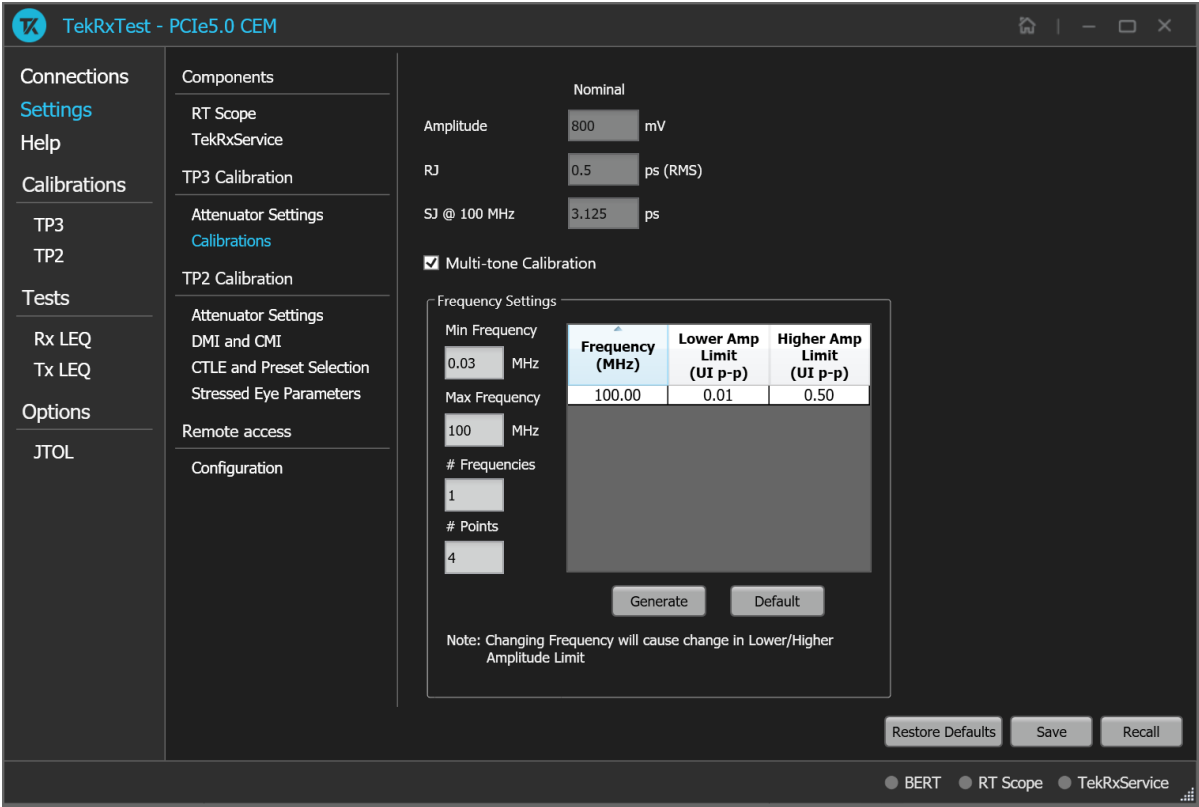


Figure 10: TP3 Calibration: Calibrations

Table 9: TP3 Calibration: Calibrations

Parameter	Description
Amplitude	Displays the calibration target for generator amplitude source.
RJ	Displays the calibration target for random jitter source.
SJ @ 100 MHz	Displays the calibration target for sinusoidal jitter source @ 100 MHz.
Multi-tone Calibration	Select to enable the multi-tone calibration. It displays the calibration settings for multiple tones.
Frequency Settings: Frequencies at which the SJ calibration needs to be performed for JTOL Test.	
Frequency (MHz)	Displays the table of frequencies in MHz for which Multi-tone calibration is to be performed.
Lower Amplitude Limit (UI p-p)	Displays the table of lower amplitude limit values at which SJ calibration starts for that frequency.
Higher Amplitude Limit (UI p-p)	Displays the table of higher amplitude limit values at which SJ calibration ends for that frequency.
Min Frequency	Enter the minimum frequency value.
Max Frequency	Enter the maximum frequency value.
# Frequencies	Enter the desired number of frequencies within the specified range.
# Points	Enter the desired number of points used for calibration.
Generate	Click to view the table populated with the frequencies.
Table continued...	

Parameter	Description
Default	Click to view the table populated with default list of frequencies.

## TP2 Calibration

The TP2 calibration tab allows you to configure the Attenuator settings, DMI and CMI calibration , Insertion Loss, CTLE and Preset Selection, and Stressed Eye Parameters.

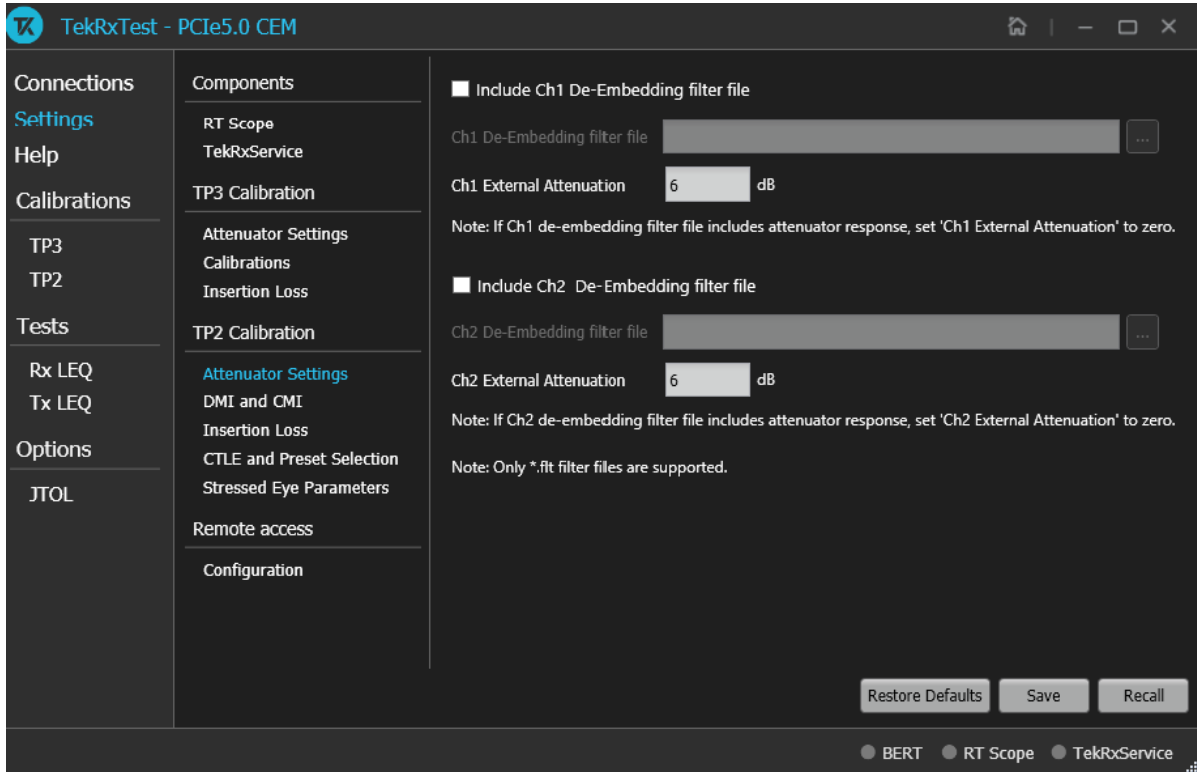


Figure 11: TP2 Calibration: Attenuator Settings

Table 10: PCIe Gen 5 TP2 Calibration: Attenuator Settings

Parameter	Description
Include Ch1 De-Embedding filter file	Enable to apply Ch1 de-embedding filter file.
Ch1 De-Embedding filter file	Click to browse and navigate to the path and select the required Ch1 de-embedding filter file.
Ch1 External Attenuation	Enter the Ch1 external attenuation value in dB.
Include Ch2 De-Embedding filter file	Enable to apply Ch2 de-embedding filter file.
Ch2 De-Embedding filter file	Click to browse and navigate to the path and select the required Ch2 de-embedding filter file.
Ch2 External Attenuation	Enter the Ch2 external attenuation value in dB.

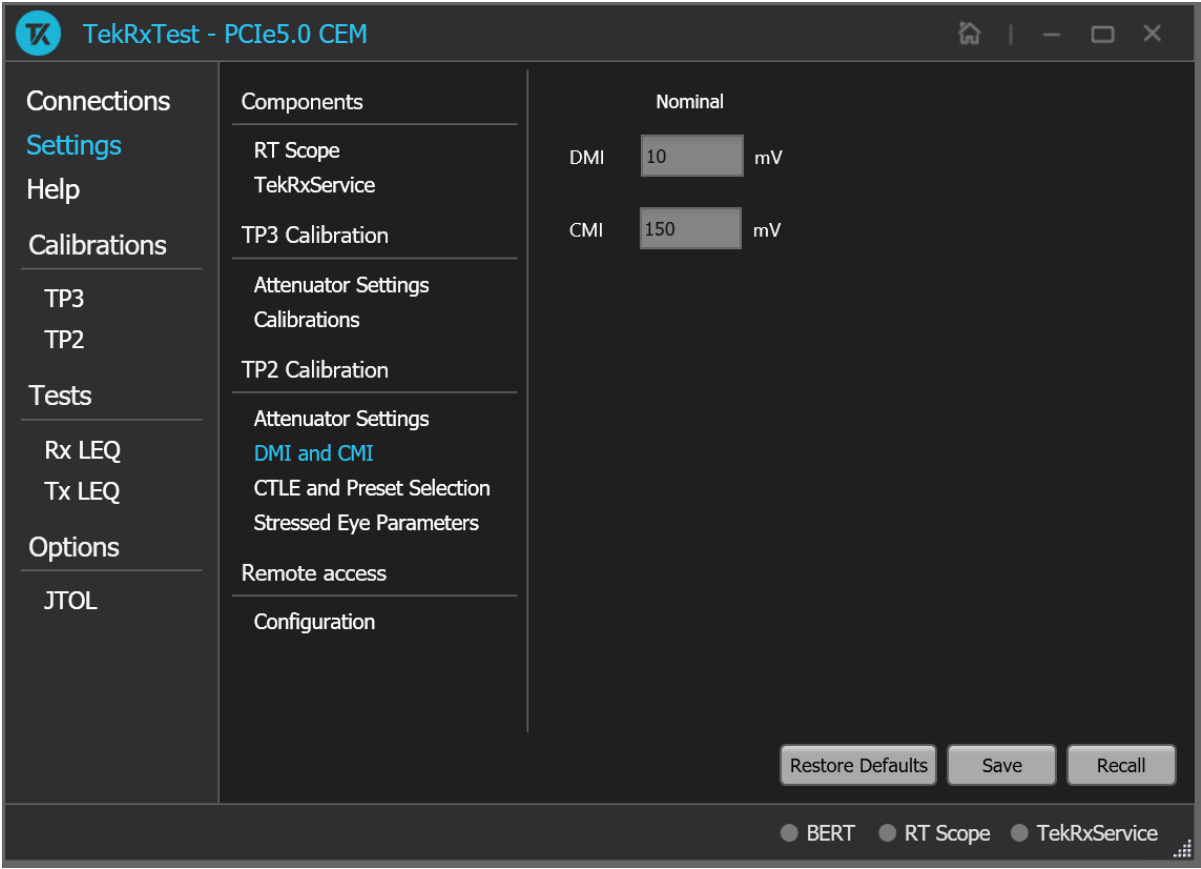


Figure 12: TP2 Calibration: DMI and CMI

Table 11: TP2 Calibration: DMI and CMI

Parameter	Description
DMI	Displays the nominal DMI value in mV.
CMI	Displays the nominal CMI value in mV.

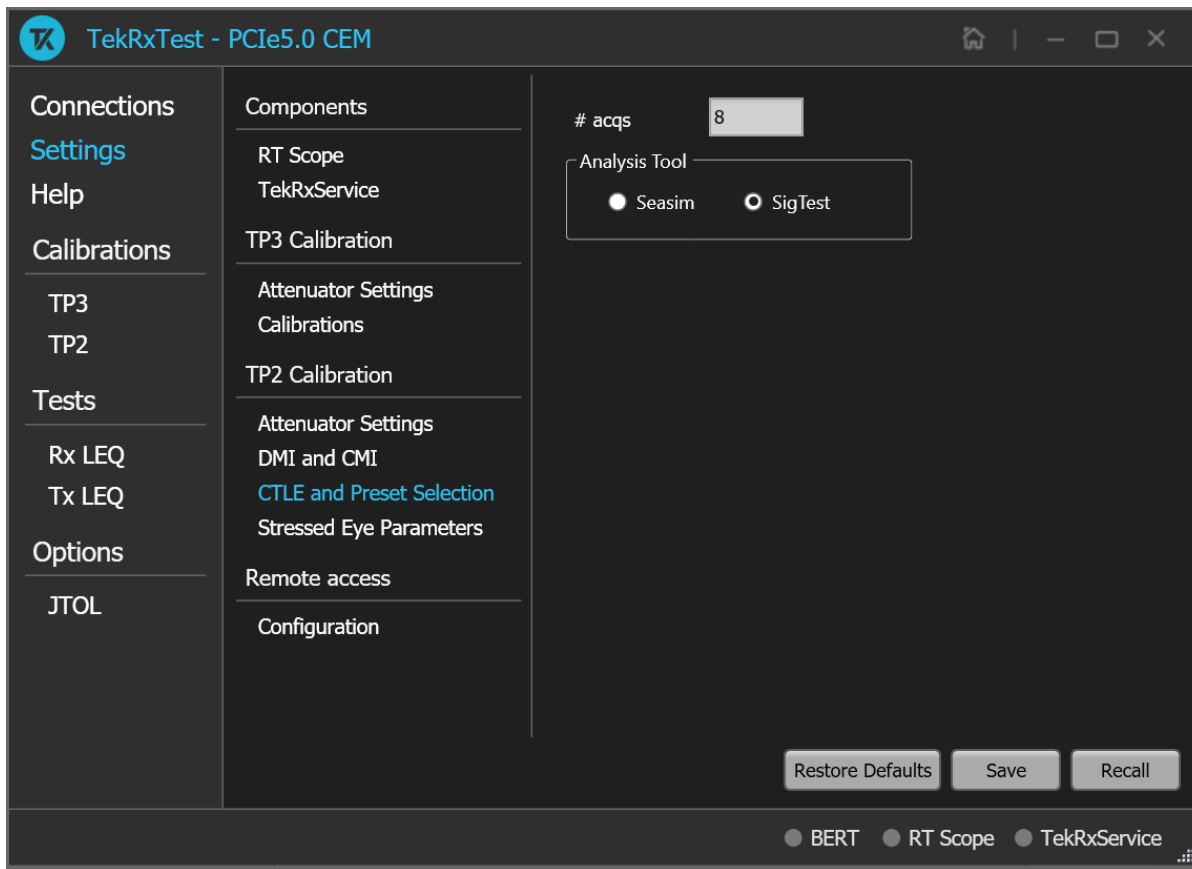


Figure 13: TP2 Calibration: CTLE and Preset Selection

Table 12: TP2 Calibration: CTLE and Preset Selection

Parameter	Description
# acqs	Enter the number of waveform acquisitions to be carried out for averaging during this measurement.
Analysis Tool	Select the required analysis tool. <ul style="list-style-type: none"> <li>Seasim</li> <li>Sigtest</li> </ul>

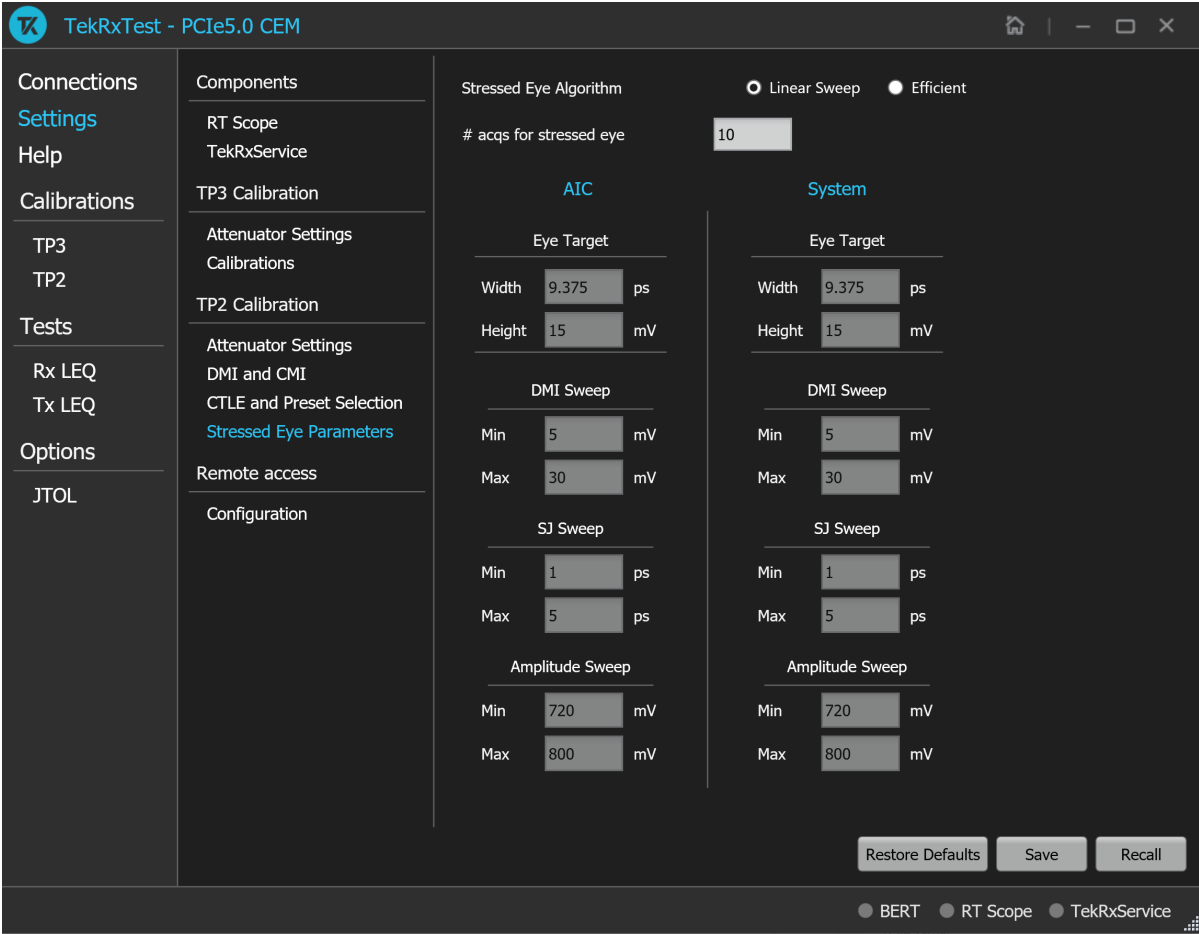


Figure 14: TP2 Calibration: Stressed Eye Parameters

Table 13: TP2 Calibration: Stressed Eye Parameters

Parameter	Description
Stressed Eye Algorithm	Select the required algorithm. <ul style="list-style-type: none"><li>Linear Sweep</li><li>Efficient</li></ul>
No. of acqs for stressed eye	Displays the number of acquisitions value for stressed eye.
<b>Eye Target</b>	
Width	Displays the target eye width value as per PCIe specification.
Height	Displays the target eye height value as per PCIe specification.
<b>DMI Sweep</b>	
Min	Displays the minimum value of DMI sweep during stressed eye calibration.
Max	Displays the maximum value of DMI sweep during stressed eye calibration.
<b>SJ Sweep</b>	
Table continued...	

Parameter	Description
Min	Displays the minimum value of SJ sweep during stressed eye calibration.
Max	Displays the maximum value of SJ sweep during stressed eye calibration.
<b>Amplitude Sweep</b>	
Min	Displays the minimum value of amplitude sweep during stressed eye calibration.
Max	Displays the maximum value of amplitude sweep during stressed eye calibration.

## Remote access: Configuration

The remote access tab allows you to configure the remote setting parameters to access the equipment remotely.

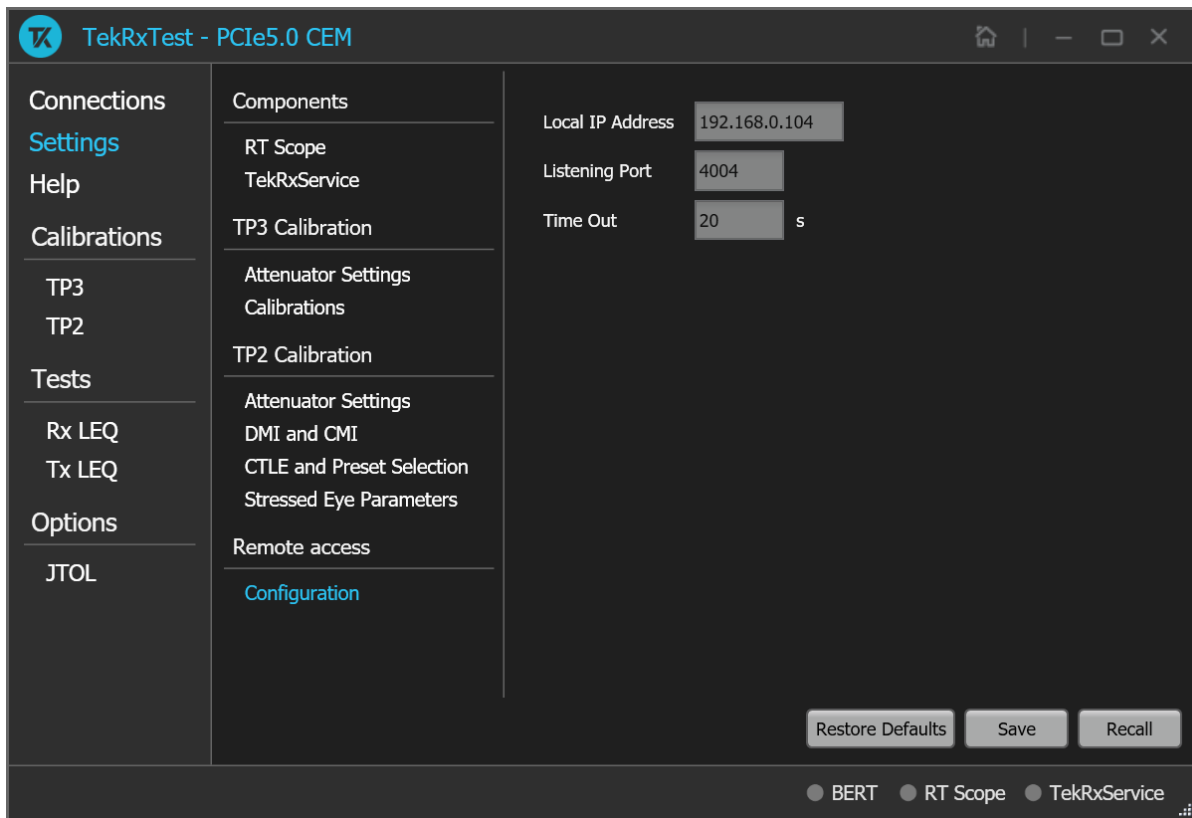


Figure 15: Remote access: Configuration

Table 14: Remote access: Configuration

Parameter	Description
Local IP Address	Displays the IP address for connecting to the application over socket server.
Listening Port	Displays the TCP/IP port number of the port that the socket server is listening. <b>Default Value: 4004</b>

Table continued...

Parameter	Description
Time Out	Displays the timeout value used when communicating with the socket server. <b>Default Value: 20 Seconds</b>

## Help panel

The help panel launches the PCIe5.0 (CEM) TekRxTest application help document.

## Calibrations panel

Complete TP3 and TP2 calibrations before you start the DUT testing using the PCIe5.0 (CEM) test application. Follow the instructions in the calibration wizards to automate the calibration for the test points. After calibrating the test points, you can save the results.

### TP3 Calibration

The TP3 calibration panel allows you to perform calibration for TP3 and save the results. You can perform calibration for Signal Amplitude, Preset, Random Jitter (RJ), Sinusoidal Jitter (SJ), SJ@210 MHz, and Multi-tone. Additionally, there is a provision to perform AC-DC Balancing, and Insertion Loss measurement for the TP3 channel.

The PCIe5.0 (CEM) TekRxTest application calibrates the following at TP3:

1. Amplitude - The differential voltage swing is required to be within 720 - 800 mV. This is done only after the transition and non-transition bit levels are made equal using de-emphasis.
2. Tx Equalization Presets - The various levels of de-emphasis and preshoot are required to be calibrated within the tolerance as specified.
3. RJ - It is calibrated to be 0.5 ps (RMS value).
4. SJ - The SJ is calibrated over the desired range of 1-5 ps (pk-pk) including the nominal SJ specification of 0.1 UI ( or 3.125 at 100 MHz frequency).
5. SJ @ 210 MHz - If the stressed eye calibration requires sinusoidal jitter levels greater than 0.1 UI, then SJ@210 MHz is used during JTOL test.
6. Multi-tone - It is calibrated over a specific range for multiple user-defined frequencies.



## TP3 Calibration procedure



Figure 16: TP3 Calibration

Click **TP3** under the calibration tab to view the calibration results. Click  at the right end corner of the application to launch the TP3 calibration wizard. This wizard will guide you through the sequential procedure to perform the calibration.

1. **Connection Diagram:** This tab displays the connection diagram for TP3 calibration. The connection diagram is same for AIC / System.

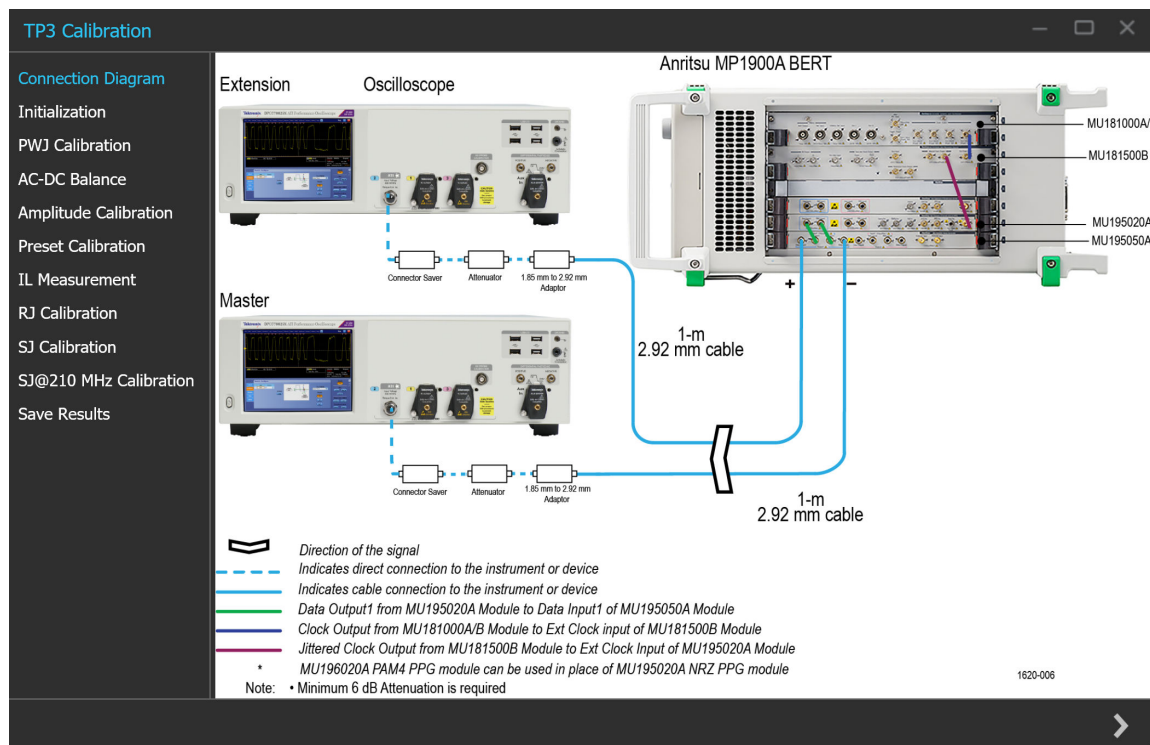


Figure 17: TP3 Calibration: Connection Diagram

Click  to move to the next screen.

- Initialization:** This tab displays the description and allows you to initialize the equipment. Click **Initialize Equipment** and complete the initialization process.

You can click **Automatic Calibration** to perform the automatic calibration with the default settings for amplitude, Tx Equalization Presets, RJ, and SJ parameters without user intervention.

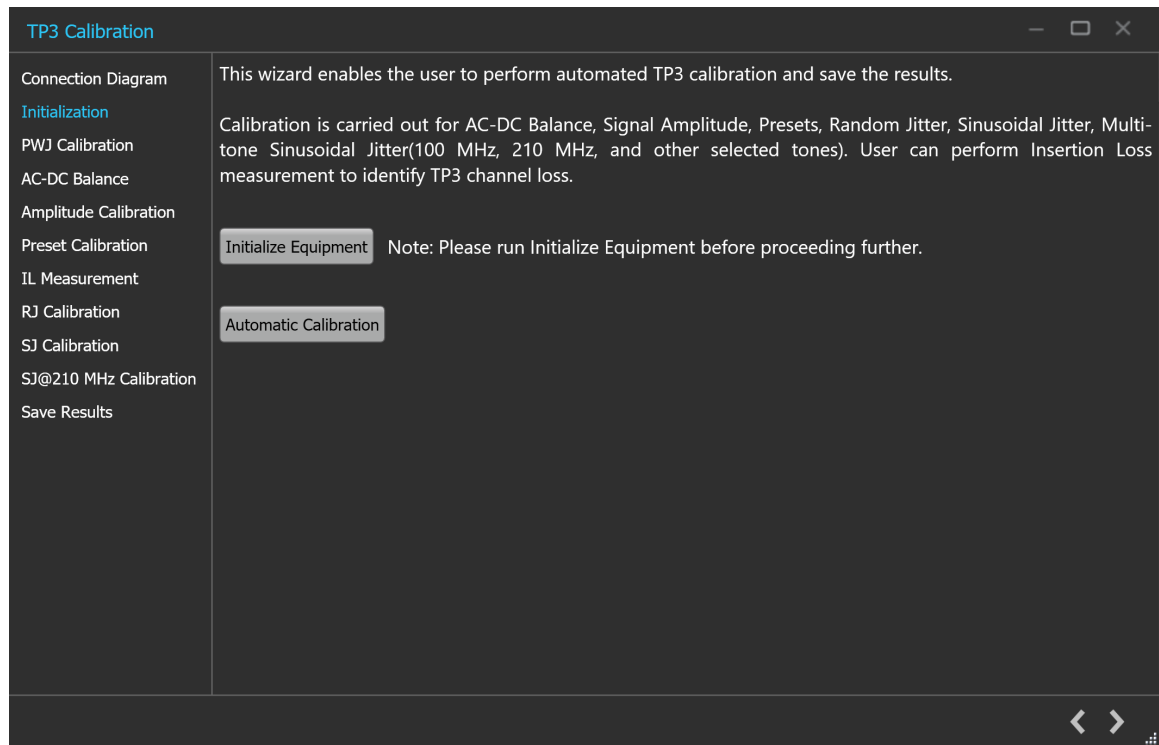



Figure 18: TP3 Calibration: Initialization

Click  to move to the next screen.

3. **PWJ Calibration:** This tab displays the description and allows you to perform PWJ Calibration.

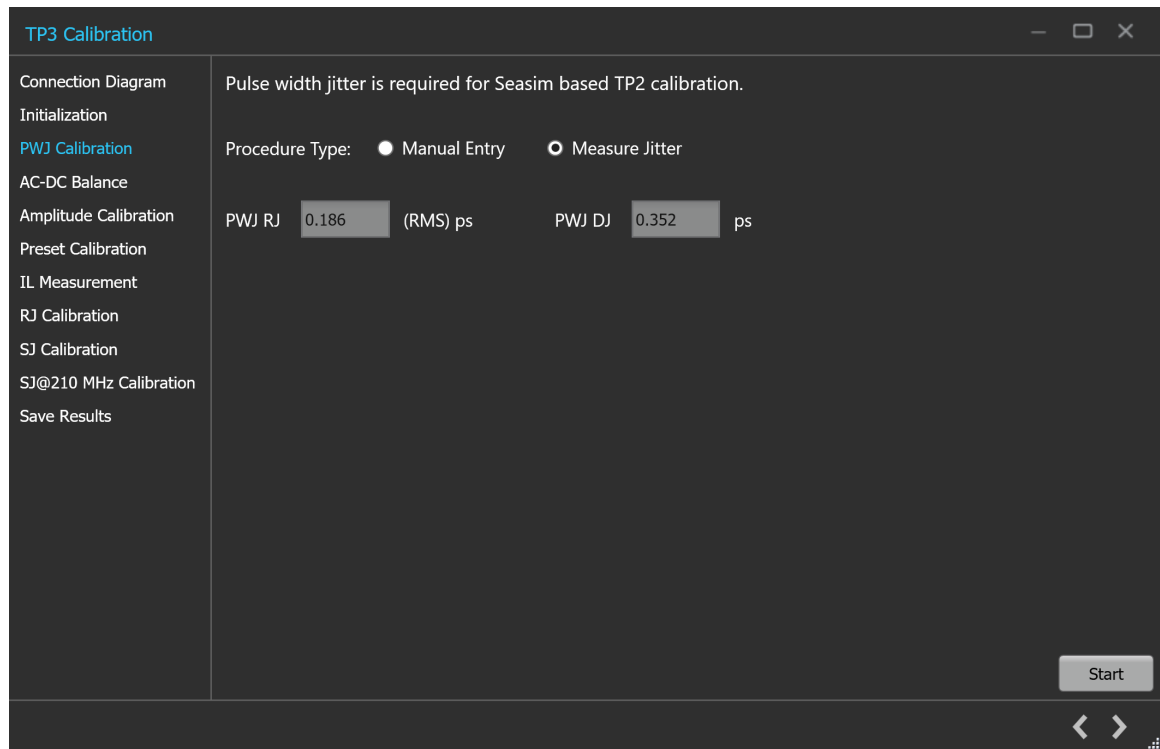



Figure 19: TP3 Calibration: PWJ Calibration

Table 15: TP3 Calibration: PWJ Calibration

Parameter	Discription
Procedure Type	Select the required procedure type. <ul style="list-style-type: none"><li>• Measure Jitter</li><li>• Manual entry</li></ul>
Manual Entry	Select the manual entry option and enter the calibration values in PWJ RJ value in (RMS) ps and PWJ DJ value in ps. Click on <b>Start</b> to start measurement.
Measure Jitter	Select the option and click on <b>Start</b> to initiate the measurement.
PWJ RJ / PWJ DJ	Displays the PWJ/RJ and PWJ/DJ values.
Start	Click on <b>Start</b> to start the measurement.

Click  to move to the next screen.

4. **AC-DC Balance:** This tab displays the graph plots of AC-DC balance.

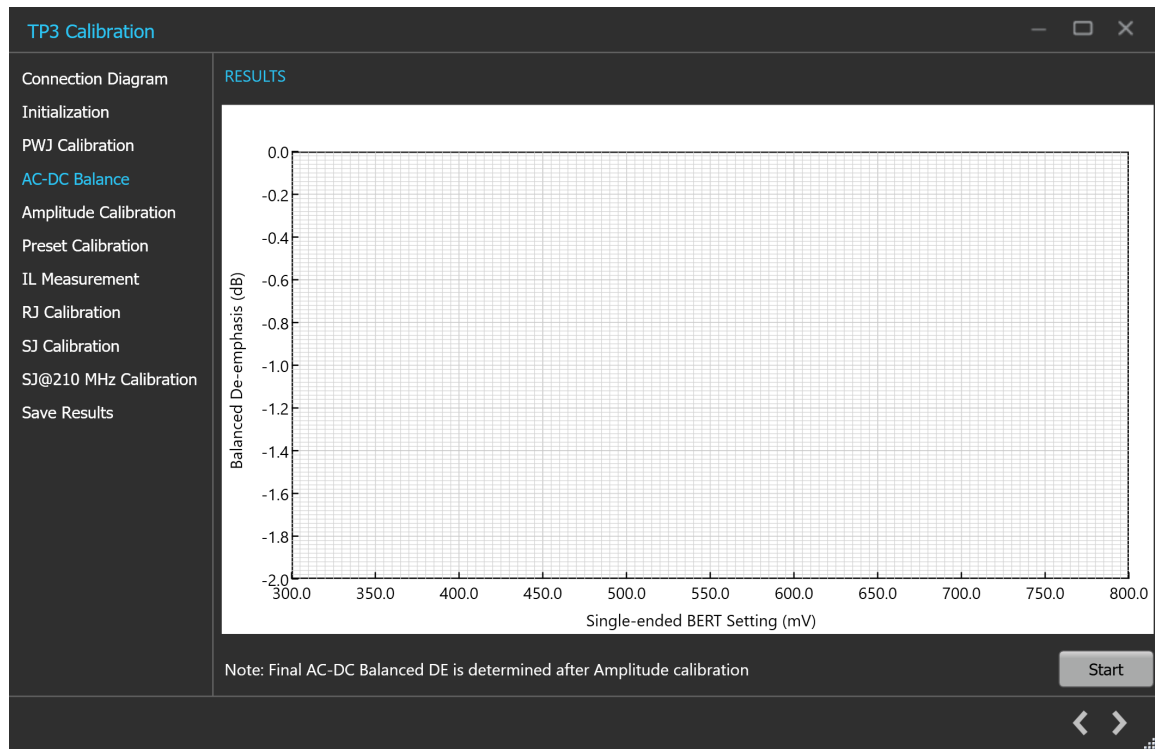



Figure 20: TP3 Calibration: AC-DC Balance

Table 16: TP3 Calibration: AC-DC Balance

Parameter	Description
Start	Click <b>Start</b> to run the measurements.

Click  to move to the next screen.

5. **Amplitude Calibration:** This tab displays the graph plots of amplitude calibration.

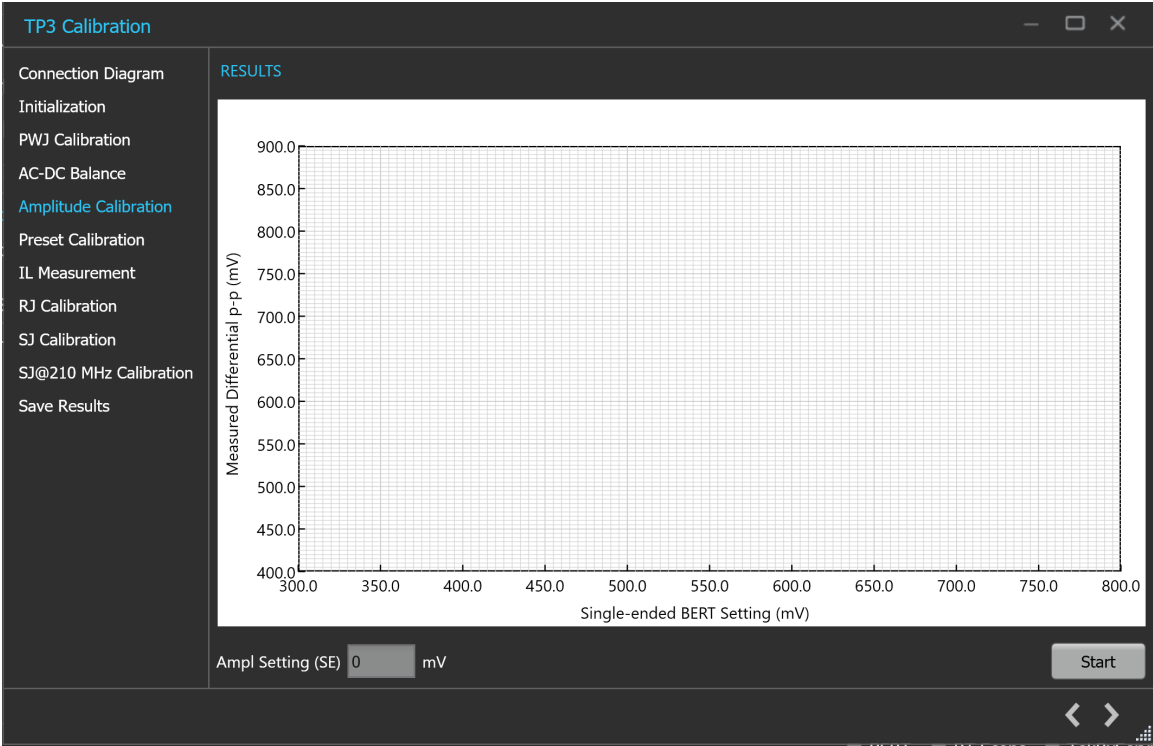



Figure 21: TP3 Calibration: Amplitude Calibration

Table 17: TP3 Calibration: Amplitude Calibration

Parameter	Description
Ampl Setting (SE)	Displays the single-ended calibrated amplitude value corresponding to 800 mV differential.
Start	Click <b>Start</b> to run the measurements.

Click  to move to the next screen.

6. **Preset Calibration:** This tab displays the graph plots of preset calibration.

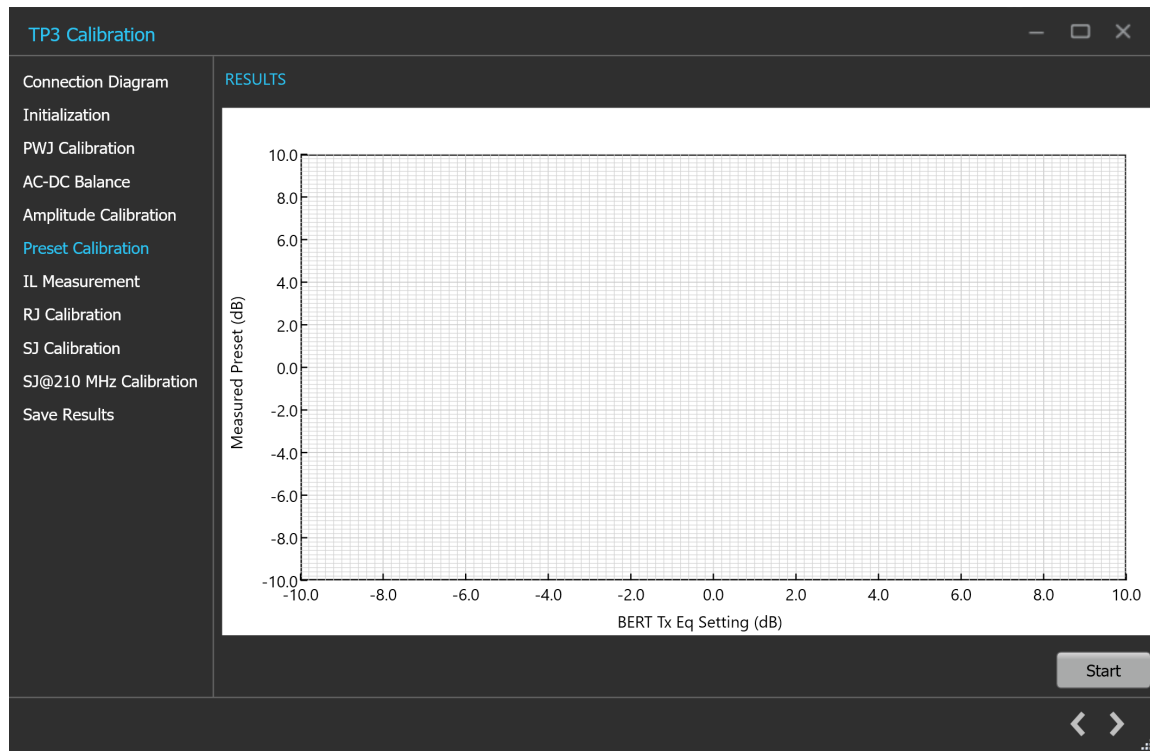



Figure 22: TP3 Calibration: Preset Calibration

Table 18: TP3 Calibration: Preset Calibration

Parameter	Description
Start	Click <b>Start</b> to run the measurements.

Click  to move to the next screen.

7. **IL Measurement:** This tab displays the description and allows you to perform IL Measurement.

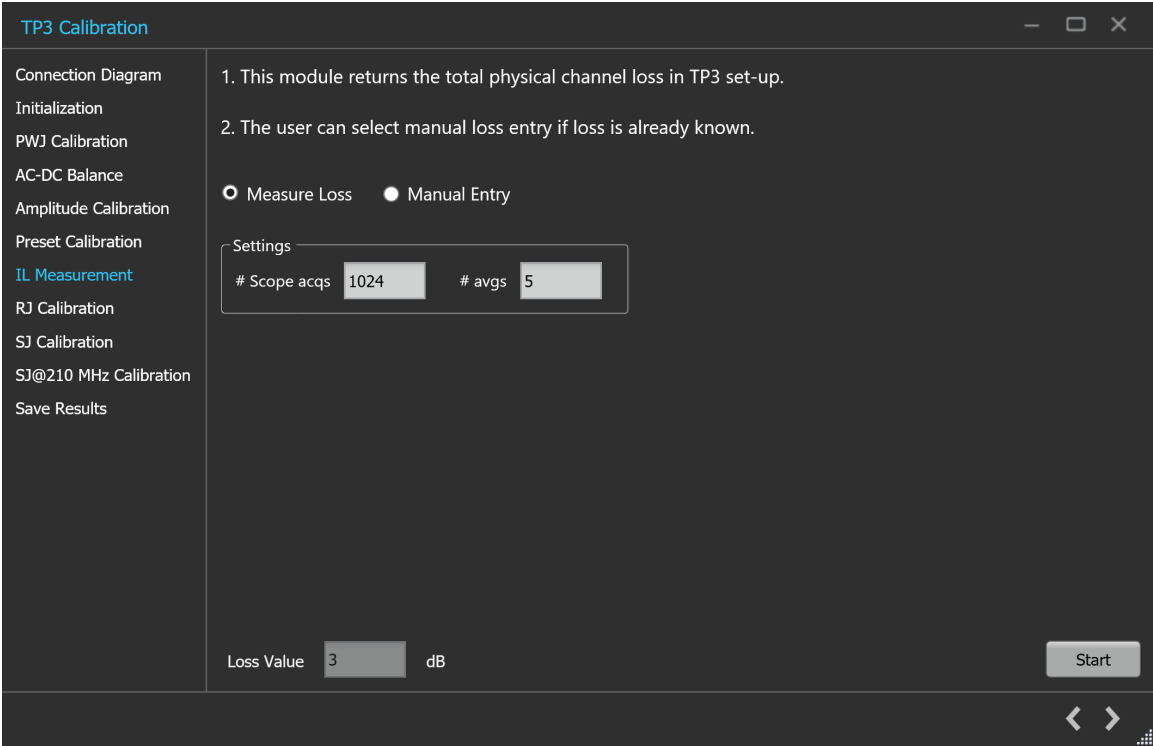



Figure 23: TP3 Calibration: IL Measurement

Table 19: TP3 Calibration: IL Measurement

Parameter	Description
Manual Entry	Select the manual entry option and enter the loss value in dB.
Measure Loss	Select the measure loss option for the TekRxTest application to initiate measure loss.
Settings	
#Scope acqs	The number of scope acquisitions that allows the algorithm to make multiple insertion loss measurements and report the mean insertion loss. This way, any error in a particular acquisition will get averaged out. The mean of scope noise is usually zero. If we have a large number of samples and we average out those samples, then the noise component in the averaged sample will be zero.
# avgs	The number of averages that will run the insertion loss measurement multiple times and calculate the average value. This way, any error in a particular acquisition will get averaged out.
Loss Value	Displays the Final Loss value after computing.
Start	Click <b>Start</b> to run the measurements.

Click  to move to the next screen.

8. **RJ Calibration:** This tab displays the graph plots of RJ calibration.



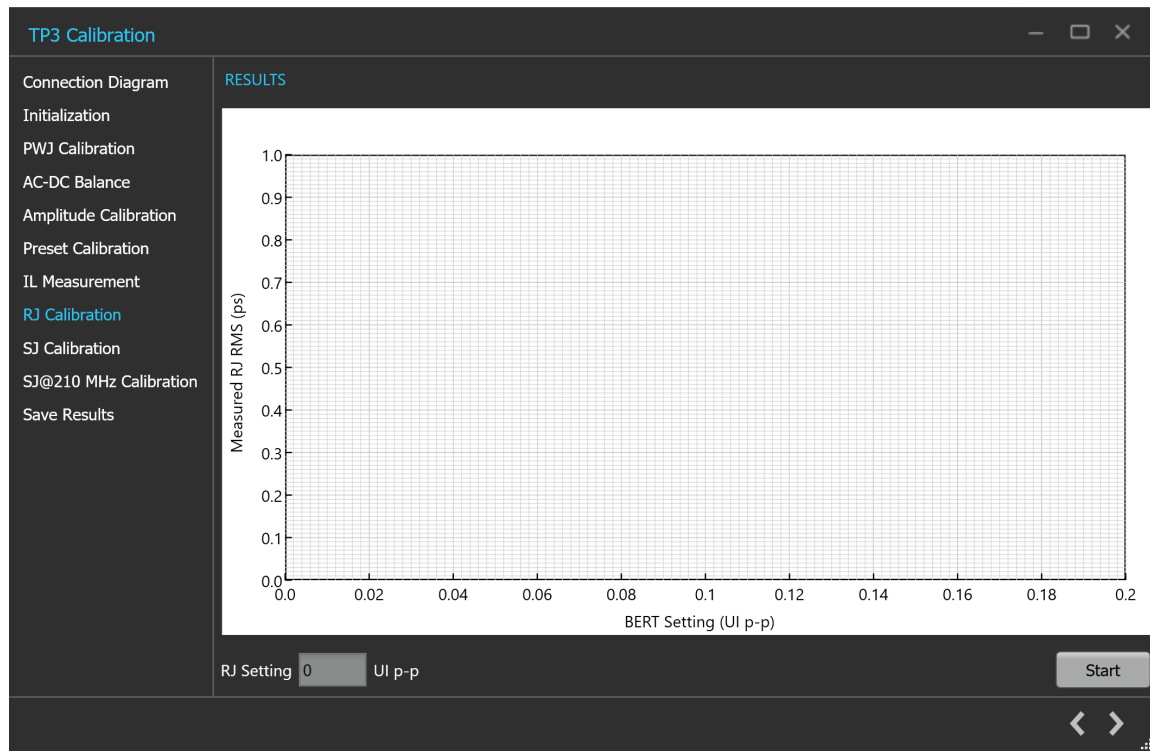



Figure 24: TP3 Calibration: RJ Calibration

Table 20: TP3 Calibration: RJ Calibration

Parameter	Description
RJ Setting	Displays the calibrated RJ setting corresponding to the nominal value.
Start	Click <b>Start</b> to run the measurements.

Click  to move to the next screen.

- SJ Calibration:** This tab displays the graph plots of SJ calibration.

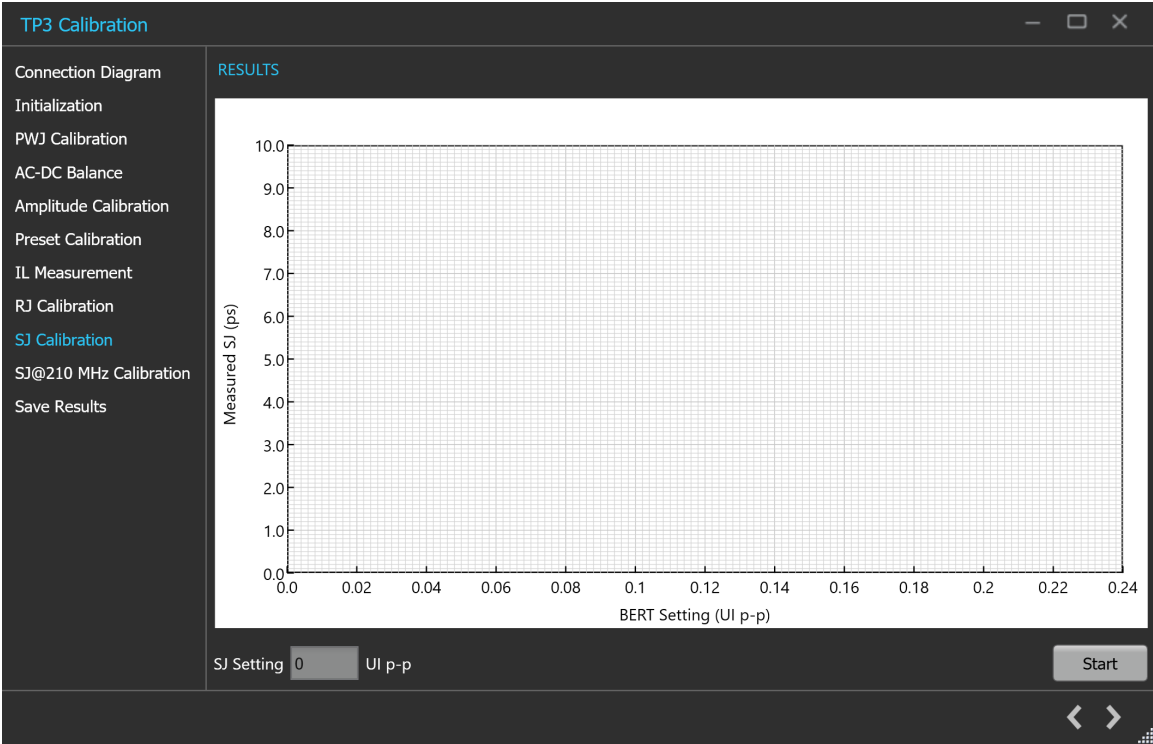



Figure 25: TP3 Calibration: SJ Calibration

Table 21: TP3 Calibration: SJ Calibration

Parameter	Description
SJ Setting	Displays the calibrated SJ setting corresponding to the nominal target value.
Start	Click <b>Start</b> to run the measurements.

Click  to move to the next screen.

10. **SJ@210 MHz Calibration:** This tab displays the graph plots of SJ@210 MHz calibration.

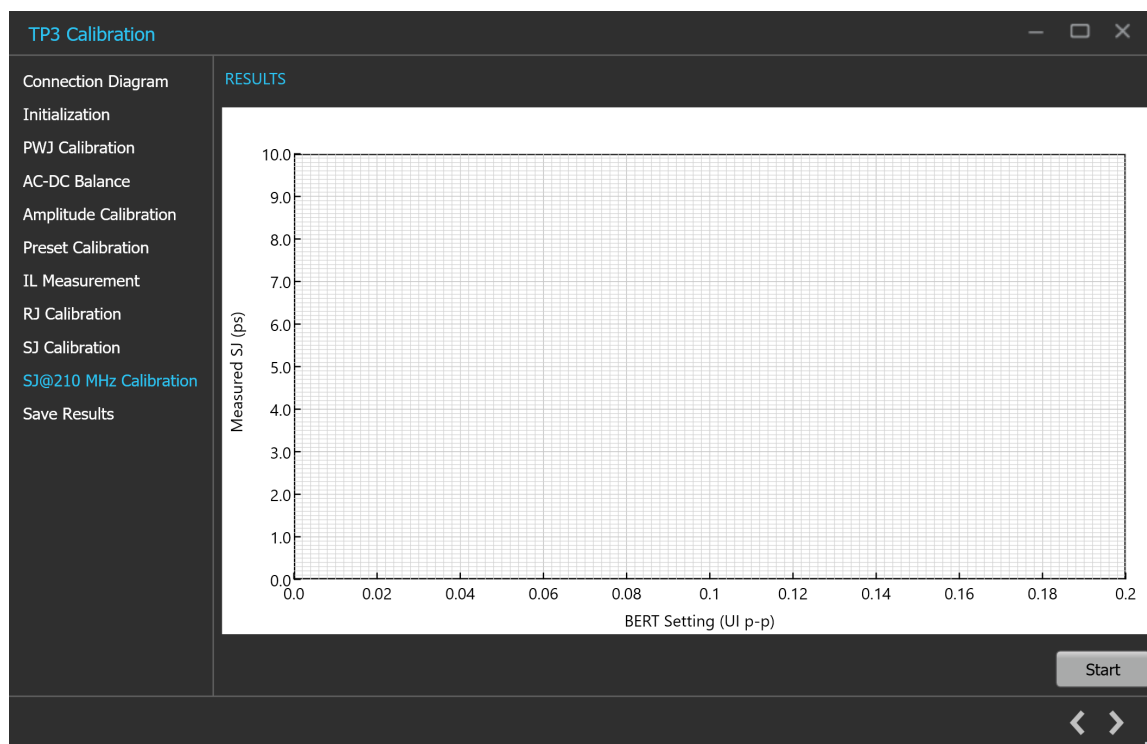


Figure 26: TP3 Calibration: SJ@210 MHz Calibration

Table 22: TP3 Calibration: SJ@210 MHz Calibration

Parameter	Description
Start	Click <b>Start</b> to run the measurements.

11. **Multi-tone SJ:** This tab displays the graph plots of multi-tone SJ calibration.



**Note:** Enable the multi-tone option in the settings panel to display the Multi-tone SJ calibration panel in the TP3 calibration wizard window.

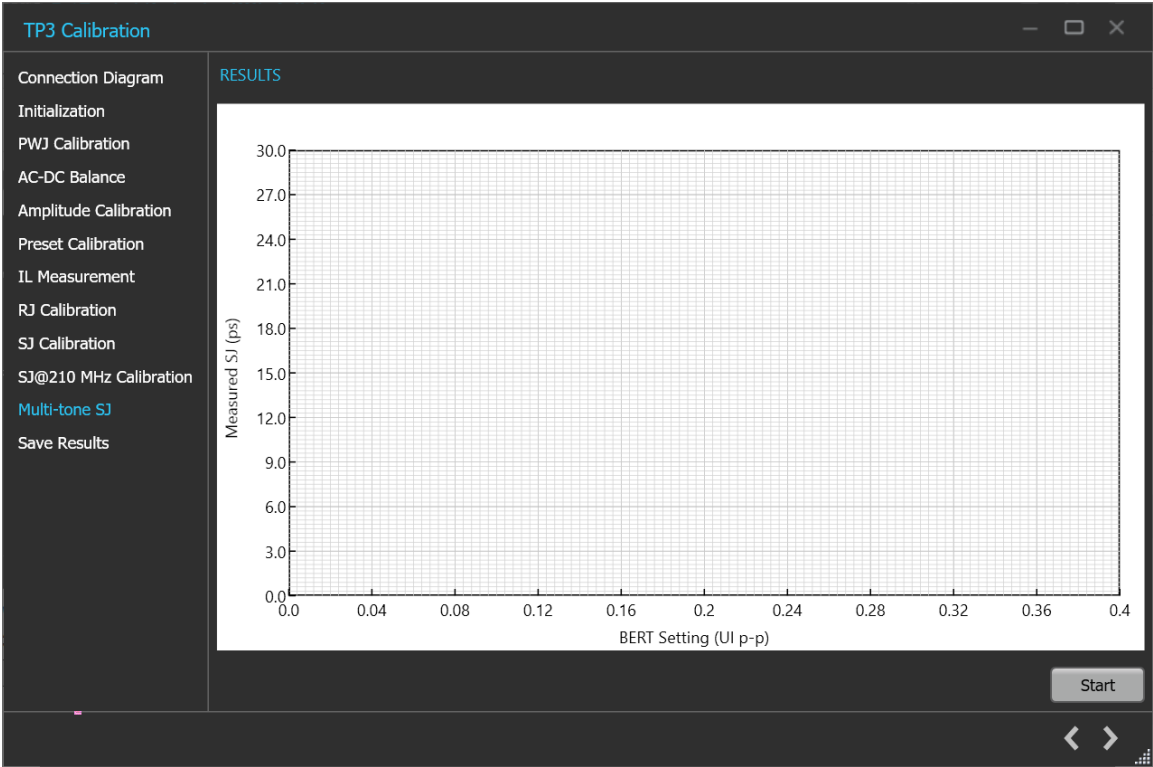


Figure 27: TP3 Calibration: Multi-tone SJ

Table 23: TP3 Calibration: Multi-tone SJ


Parameter	Description
Start	Click <b>Start</b> to run the measurements.

12. **Save Results:** This tab allows you to save all the TP3 calibration results.

Figure 28: TP3 Calibration: Save Results

Table 24: TP3 Calibration: Save Results

Parameter	Description
Unique ID	Enter the Unique ID of the calibrated equipment in the text box.
Generated By	Enter the user name in the text box.
Comments (Optional)	Enter the required comments in the comment box.
Save	Click to save the results.

Click  to complete the TP3 calibration and close the wizard.



**Note:** Completion of the TP3 calibration process or in the event of cancellation of the process, the BERT data generator is turned off automatically by the PCIe5.0 (CEM) TekRxTest application.

## TP2 Calibration

The TP2 calibration panel allows you to manually perform calibration for the equipment and save the results. TP2 Calibration is carried out for DMI, CMI, Physical channel loss, CTLE/Preset selection, and Stressed Eye. This procedure sets SJ, DMI, and Amplitude levels to achieve target eye-opening.

You must perform TP3 calibration before you start performing the calibration for TP2.

The PCIe5.0 (CEM) TekRx test application calibrates the following at TP2:


1. DMI - The differential mode sinusoidal interference is required to be calibrated within 5 - 30 mV (pk-pk) by capturing the 2.1 GHz sinusoidal output for a duration of at least 125 us.
2. CMI - The common-mode sinusoidal interference is required to be calibrated for a nominal voltage of 150 mV (pk-pk) by capturing the 120 MHz sinusoidal output for a duration of at least 125 us.

- 3. CTLE and Preset- Tx equalization presets P5, P6, P8, and P9 are used to find the optimal eye area with the optimal CTLE.
- 4. Stressed Eye calibration - As per the specification, various signal parameters and stress levels are computed to generate a signal that meets the stressed eye targets.

TP2 Calibration procedure



Figure 29: TP2 Calibration

Click TP2 under the calibration tab to view the calibration results. Click  at the right end corner of the application, to launch the TP2 calibration wizard. This wizard will guide you through the sequential procedure to perform the calibration.

You must perform TP3 calibration before you start performing the calibration for TP2.

- 1. **Description:** This tab displays the description and allows you to select the DUT Type as Non-Root Complex or Root Complex.

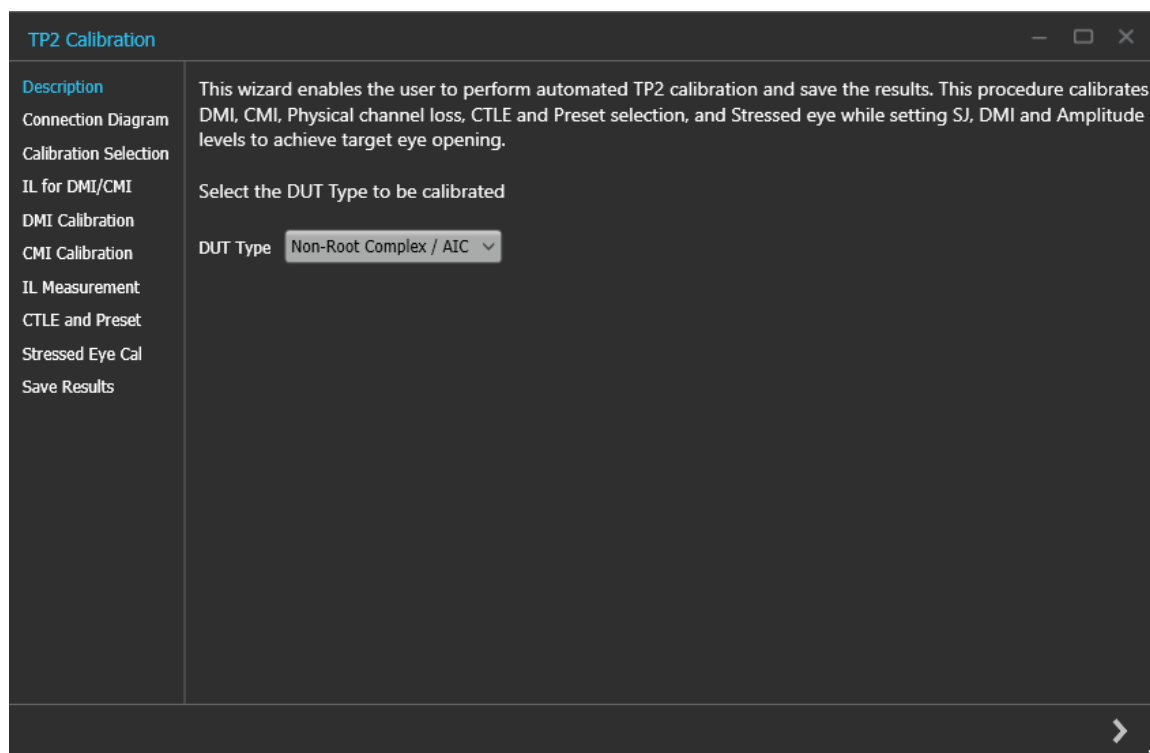



Figure 30: TP2 Calibration: Description

**Table 25: TP2 Calibration: Description**

Parameter	Description
DUT Type	<ul style="list-style-type: none"> <li>Non-Root Complex / AIC Card</li> <li>Root Complex / System</li> </ul>

Click  to move to the next screen.

- Connection Diagram:** This tab displays the connection diagram for the DUT Type selected in description screen.

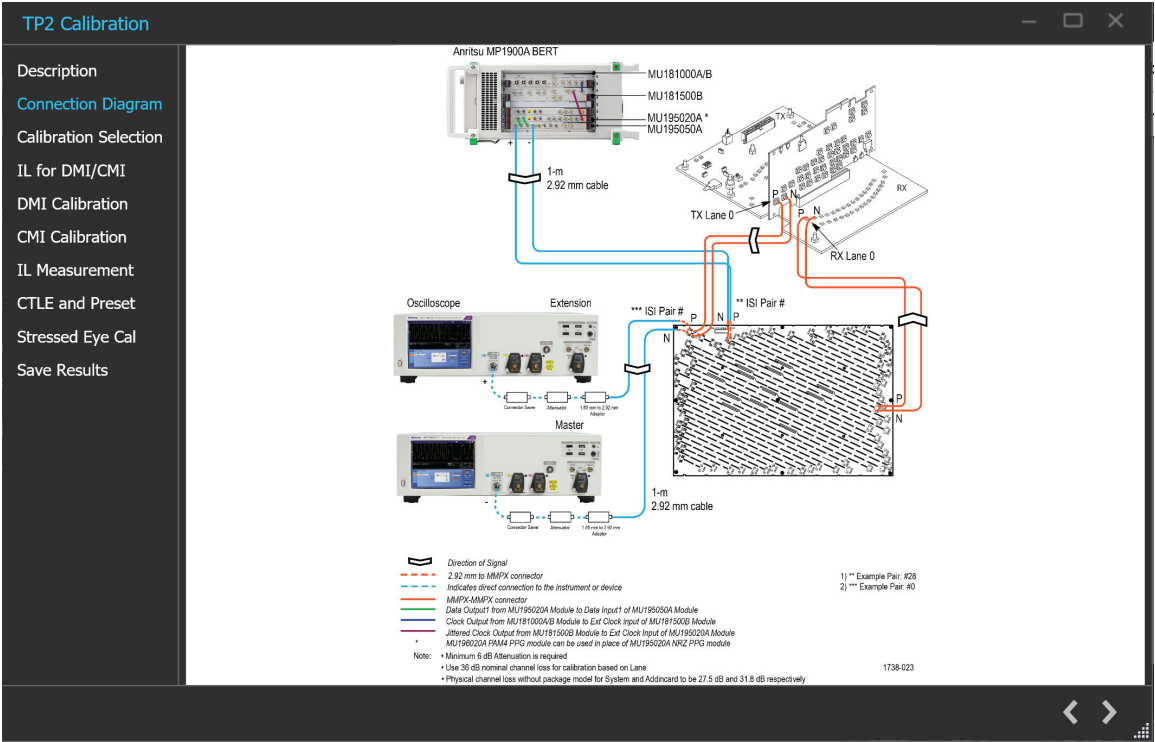


Figure 31: TP2 Calibration: Connection Diagram-AIC

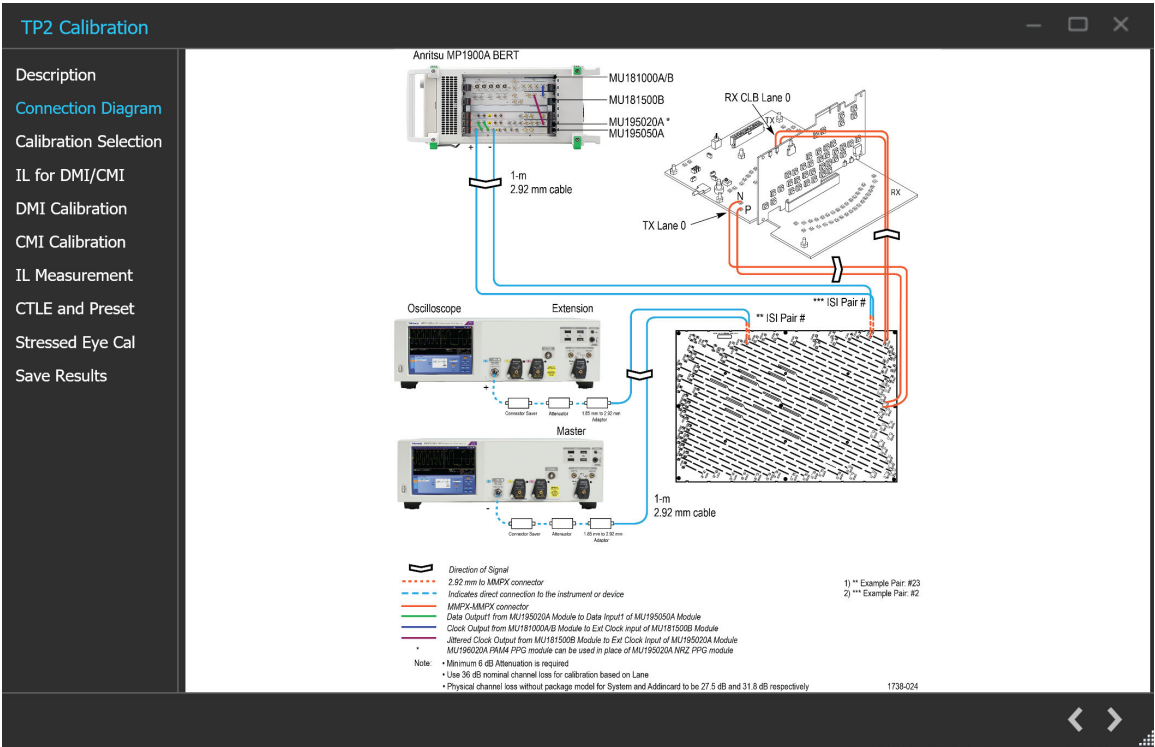



Figure 32: TP2 Calibration: Connection Diagram-System

Click  to move to the next screen.



3. **Calibration Selection:** This tab allows you to select the TP3 Calibration file from the drop-down list and click **Initialize Equipment**.

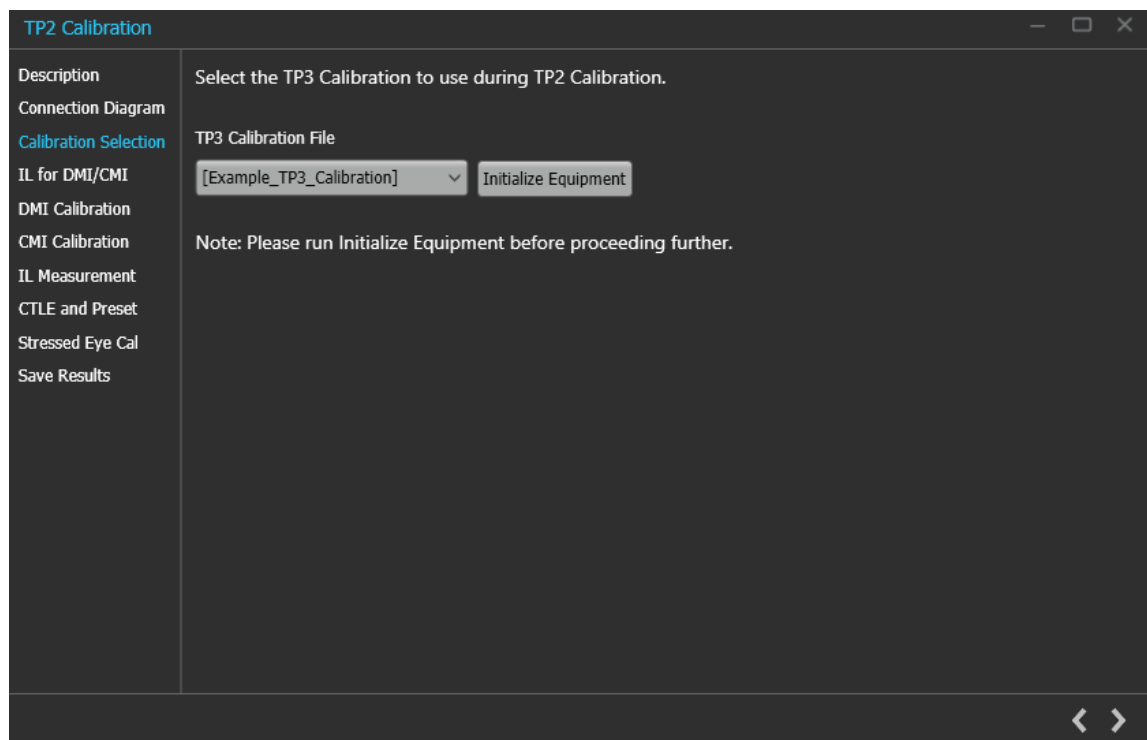



Figure 33: TP2 Calibration: Calibration Selection

Table 26: TP2 Calibration: Calibration Selection

Parameter	Description
TP3 Calibration File	Select the desired TP3 calibration file and initialize the equipment.

Click  to move to the next screen.

4. **IL for DMI/CMI:** This module returns physical channel loss without package embedding for DMI and CMI calibration.

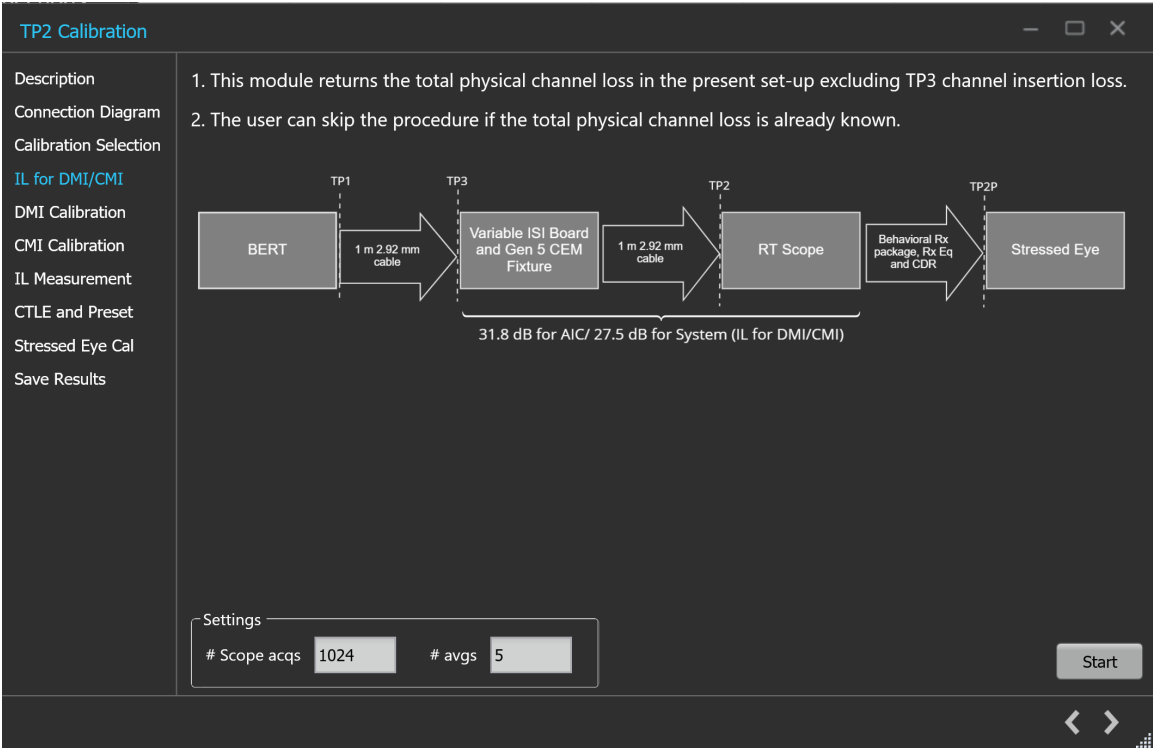



Figure 34: TP2 Calibration: IL for DMI/CMI

Table 27: TP2 Calibration: IL for DMI/CMI

Parameter	Description
#Scope acqs	The number of scope acquisitions that allows the algorithm to make multiple insertion loss measurements and report the mean insertion loss. This way, any error in a particular acquisition will get averaged out. The mean of scope noise is usually zero. If we have a large number of samples and we average out those samples, then the noise component in the averaged sample will be zero.
# avgs	The number of averages that will run the insertion loss measurement multiple times and calculate the average value. This way, any error in a particular acquisition will get averaged out.
Start	Click <b>Start</b> to run the measurements.

Click  to move to the next screen.

5. **DMI Calibration:** This tab displays the graph plots of DMI calibration.

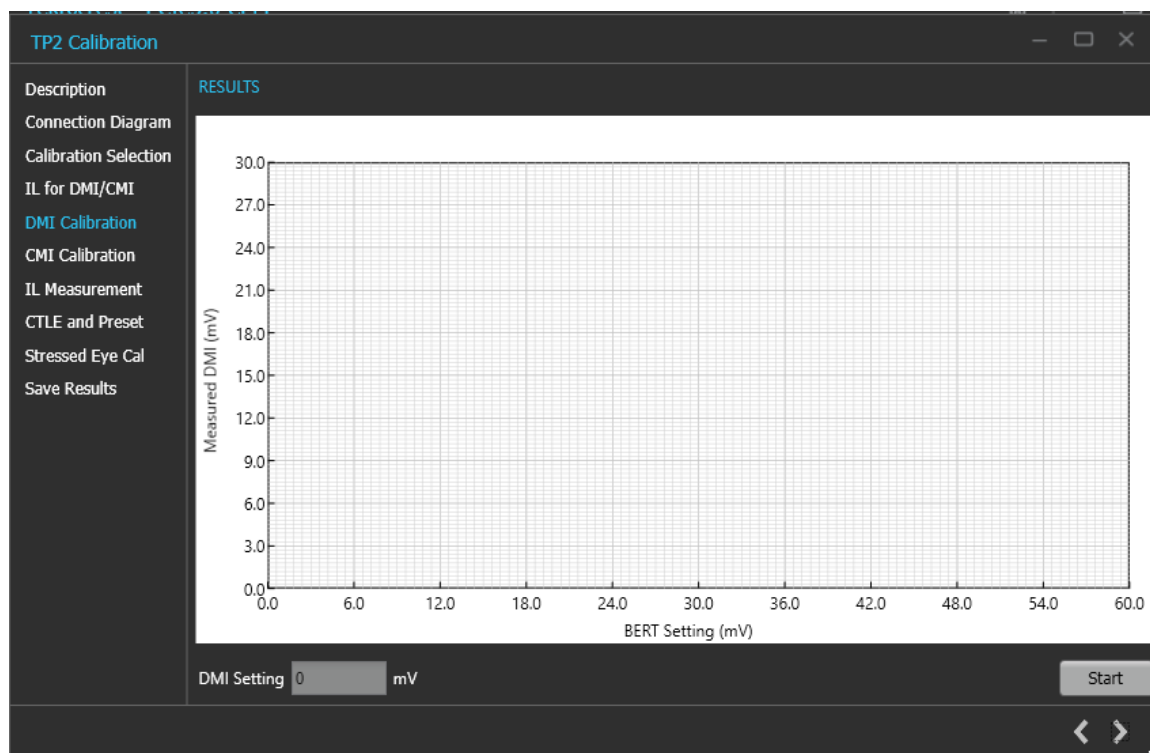



Figure 35: TP2 Calibration: DMI Calibration

Table 28: TP2 Calibration: DMI Calibration

Parameter	Description
DMI Setting	Displays the calibrated DMI setting corresponding to nominal value.
Start	Click <b>Start</b> to run the measurement.

Click  to move to the next screen.

- CMI Calibration:** This tab displays the graph plots of CMI calibration.

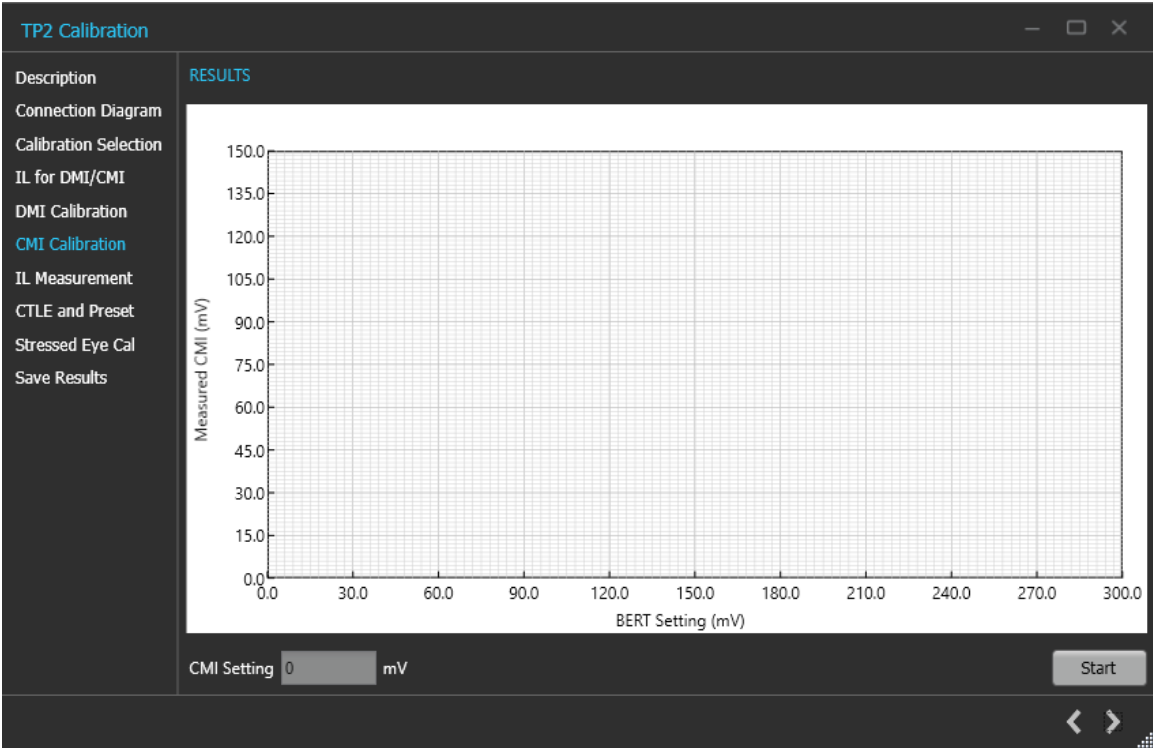



Figure 36: TP2 Calibration: CMI Calibration

Table 29: TP2 Calibration: CMI Calibration

Parameter	Description
CMI Setting	Displays the calibrated CMI setting corresponding to nominal value.
Start	Click <b>Start</b> to run the measurement.

Click  to move to the next screen.

7. IL Measurement:

The Stressed Eye calibration including CTLE selection and optimal preset identification needs to be performed with a full physical channel loss between 34 dB to 37 dB . This includes the package embedding loss.

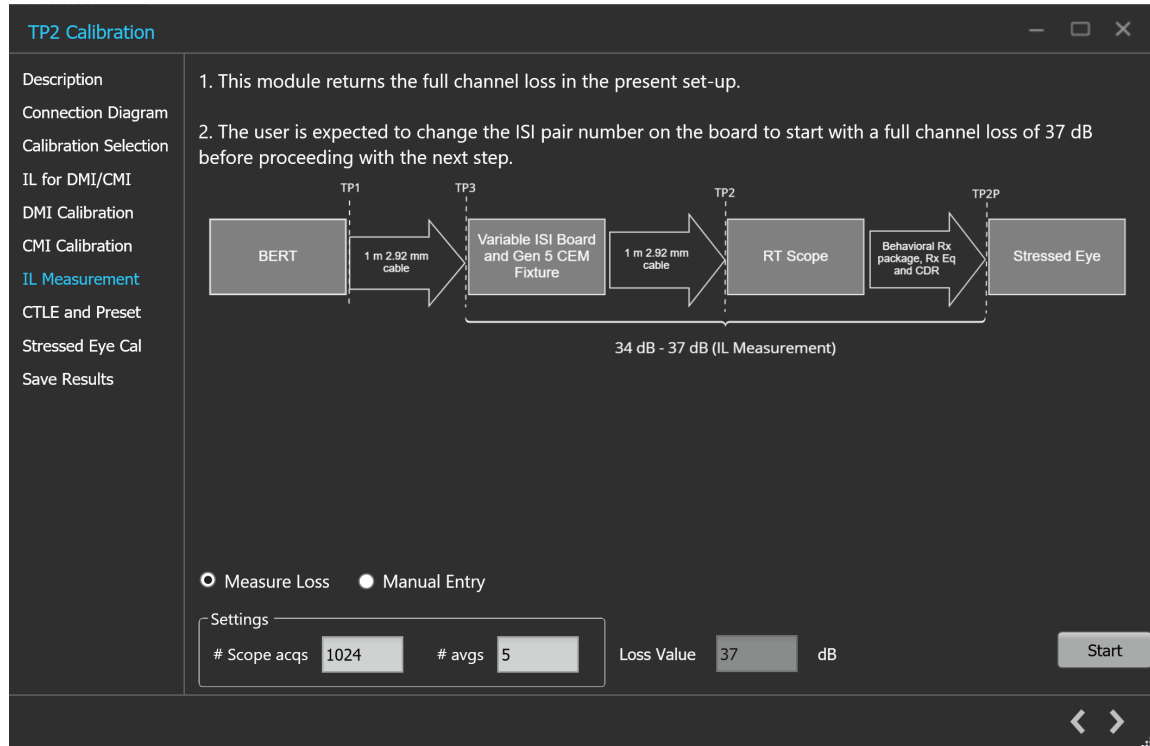



Figure 37: TP2 Calibration: IL Measurement

Table 30: TP2 Calibration: IL Measurement

Parameter	Description
Manual Entry	Select the manual entry option and enter the loss value in dB.
Measure Loss	Select the measure loss option for the TekRxTest application to initiate measure loss
Settings	
#Scope acqs	The number of scope acquisitions that allows the algorithm to make multiple insertion loss measurements and report the mean insertion loss. This way, any error in a particular acquisition will get averaged out. The mean of scope noise is usually zero. If we have a large number of samples and we average out those samples, then the noise component in the averaged sample will be zero.
# avgs	The number of averages that will run the insertion loss measurement multiple times and calculate the average value. This way, any error in a particular acquisition will get averaged out.
Loss Value	Displays the final loss value after computing.
Start	Click <b>Start</b> to run the measurements.

Click  to move to the next screen.

## 8. CTLE and Preset

The PCIe Gen5 TekRxTest application provides the facility to automatically compute and present the total physical channel loss in the TP2 set-up. Selection of optimum physical channel loss (obtained by means of changing the ISI pair), optimum CTLE, and Preset is a prerequisite for to obtain the stressed eye as per the specification. While arriving at the optimum combination of the parameters,

the TekRxTest application guides you through the various steps in this process by means of pop-up messages in taking suitable actions.

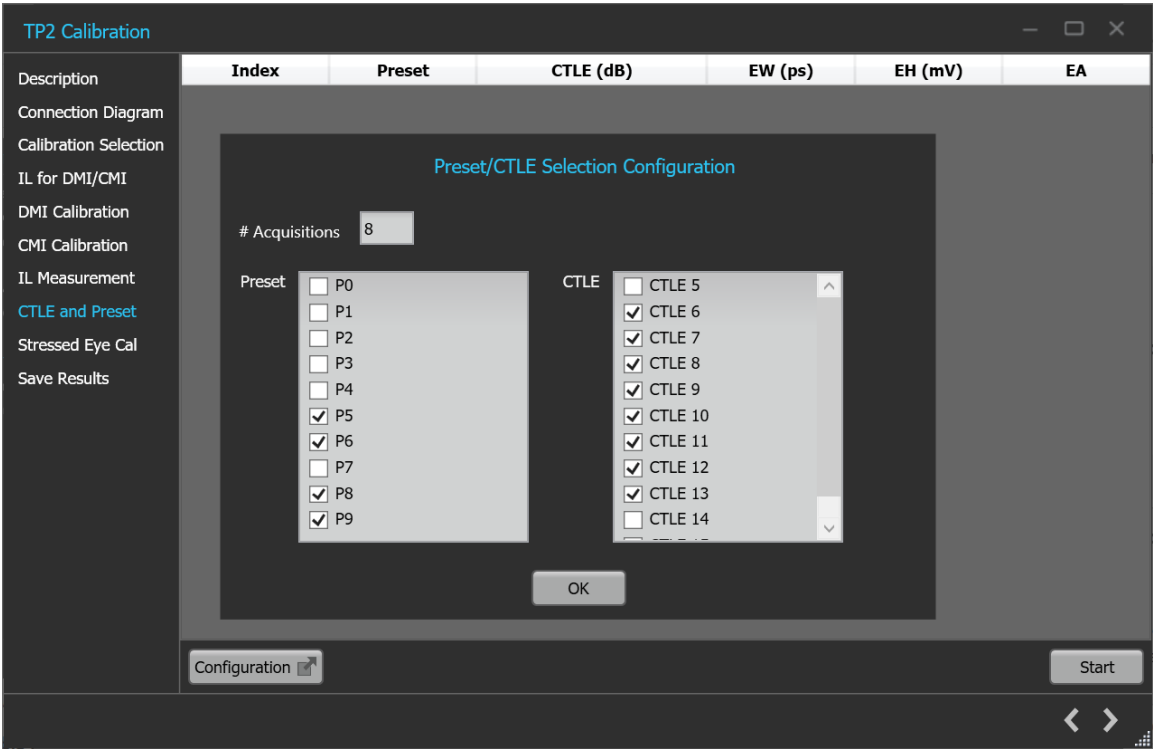



Figure 38: TP2 Calibration: CTLE and Preset

Table 31: TP2 Calibration: CTLE and Preset

Parameter	Description
# Acquisitions	Enter the number of waveforms to be acquired for CTLE and Preset.
Preset	Select the presets from which the optimum will be chosen for TP2 calibration.
CTLE	Select the CTLEs from which the optimum will be chosen for TP2 calibration.
Configuration	Select to Configure the Preset and CTLE configuration.
OK	Select to apply the configuration for Preset and CTLE.
Start	Click <b>Start</b> to run the measurements.

Click  to move to the next screen.

9. Stressed Eye Cal:

TP2 calibration for stressed eye requires information from the TP3 calibration that is performed for the set-up under consideration or from one of the saved TP3 results. The relevant TP3 calibration file can be chosen from the calibration selection page shown from a drop-down button listing all the TP3 calibration files stored in the PCIe Gen5 TekRxTest application repository.



Figure 39: TP2 Calibration: Stressed Eye Cal

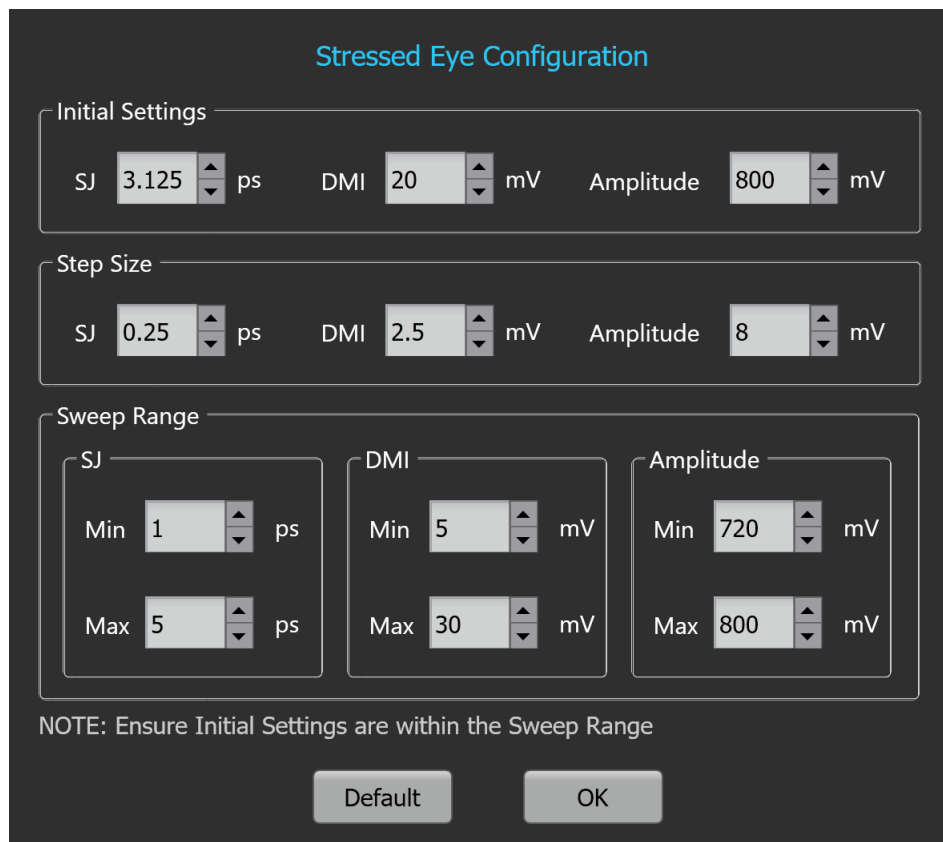



Figure 40: TP2 Calibration: Stressed Eye Configuration

**Table 32: TP2 Calibration: Stressed Eye Cal**

Parameter	Description
Manual Calibration Run	Select to manually enter the SJ, DMI and Amplitude values for Stressed Eye calibration.
SJ	Displays the SJ value at which Eye Width (EW) and Eye height (EH) needs to be computed.
DMI	Displays the DMI value at which Eye Width (EW) and Eye height (EH) needs to be computed.
Amplitude	Displays the amplitude level at which Eye Width (EW) and Eye height (EH) needs to be computed.
Exhaustive Sweep	Select to run the stressed eye calibration for all combinations of Amplitude, SJ, and DMI within the sweep range with defined step sizes.
# acqs	Enter the number of waveforms used to obtain the average EW and EH.
Configuration	Select to configure initial settings, step size, sweep range. <ul style="list-style-type: none"> <li>Initial Settings - Configure the Initial SJ / DMI / Amplitude value from which your Linear Sweep should start (Not applicable for Exhaustive Sweep).</li> <li>Step Size - Configure the SJ / DMI / Amplitude step size value by which the increment or decrement of your SJ / DMI / Amplitude values should happen for Stressed Eye Calibration.</li> <li>Sweep Range - Configure the SJ / DMI / Amplitude min and max sweep range for which the Stressed Eye Calibration is executed.</li> <li>Default - Select to apply the initial settings, step size and sweep range to the default values.</li> <li>OK - Select to apply the configured values of initial settings, step size, sweep range.</li> </ul>
Start	Click <b>Start</b> to run the measurements.

Click  to move to the next screen.


**10. Save Results:** This tab allows you to save all the TP2 calibration results.



Figure 41: TP2 Calibration: Save Results

Table 33: TP2 Calibration: Save Results

Parameter	Description
Unique ID	Enter the Unique ID of the calibrated equipment in the text box.
Generated By	Enter the user name in the text box.
ISI Pair	Enter the ISI pair used during calibration.
Comments (Optional)	Enter the required comments in the comment box.
Save	Click to save the results.

Click  to complete the TP2 calibration and close the wizard.




**Note:** Completion of the TP2 calibration process or in the event of cancellation of the process, the BERT data generator is turned off automatically by the PCIe5.0 (CEM) Test Application.

## Tests panel

### Rx LEQ Test

#### Rx LEQ Test procedure

Click **Rx LEQ Test** under the Tests panel to view the measurement results. Click  at the right end corner of the application, to launch the Rx LEQ test wizard. This wizard will guide you through the sequential procedure to perform the test.

1. **Calibration Selection:** This tab allows you to select the required DUT type, Clock Architecture, BERT Clock type and TP2 Calibration file from the drop-down list. The drop-down lists all the TP2 calibration files available as per the choice made under DUT Type selection.

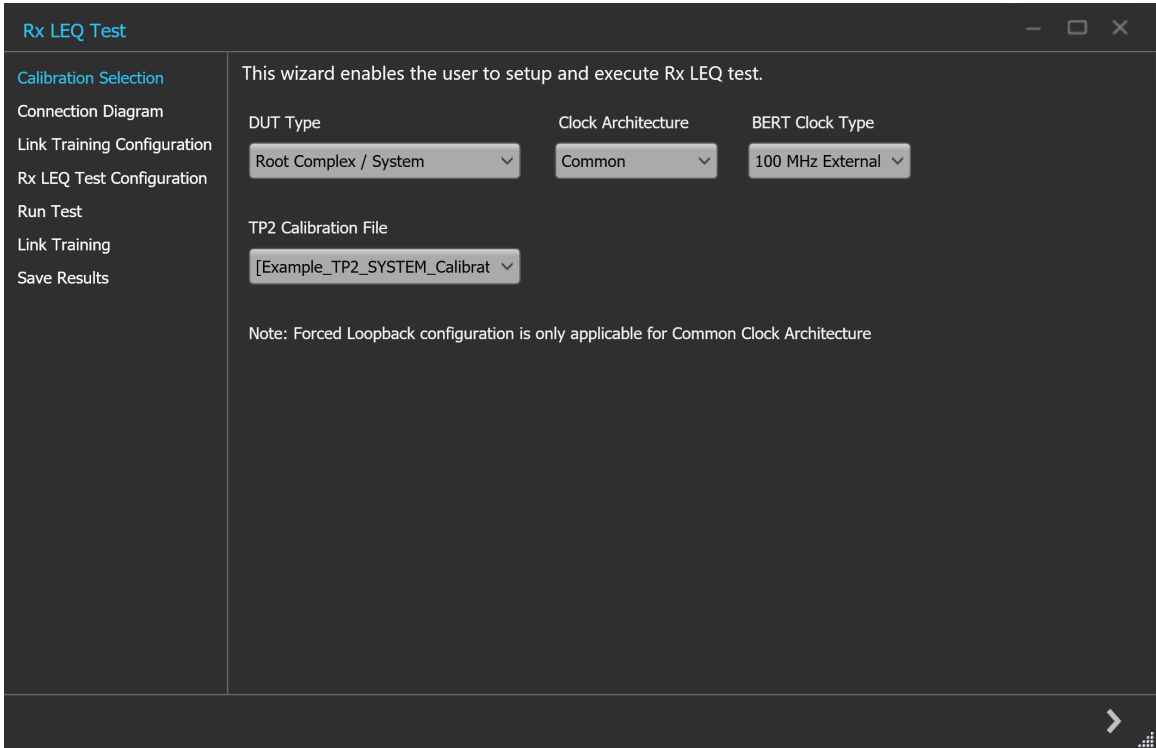



Figure 42: Rx LEQ Test: Calibration Selection

Table 34: Rx LEQ Test: Calibration Selection

Parameter	Description
DUT Type	Select the required DUT type. <ul style="list-style-type: none"><li>• Non-Root Complex / AIC</li><li>• Root Complex / System</li></ul>
Clock Architecture	Select the desired clock architecture.
BERT Clock Type	Select the required BERT clock type.
TP2 Calibration File	Select the required TP2 calibration file.

Click  to move to the next screen.

2. **Connection Diagram:** This tab displays the connection diagram for the Rx LEQ test. The connection diagram is the different for AIC and System in case of Rx LEQ test.

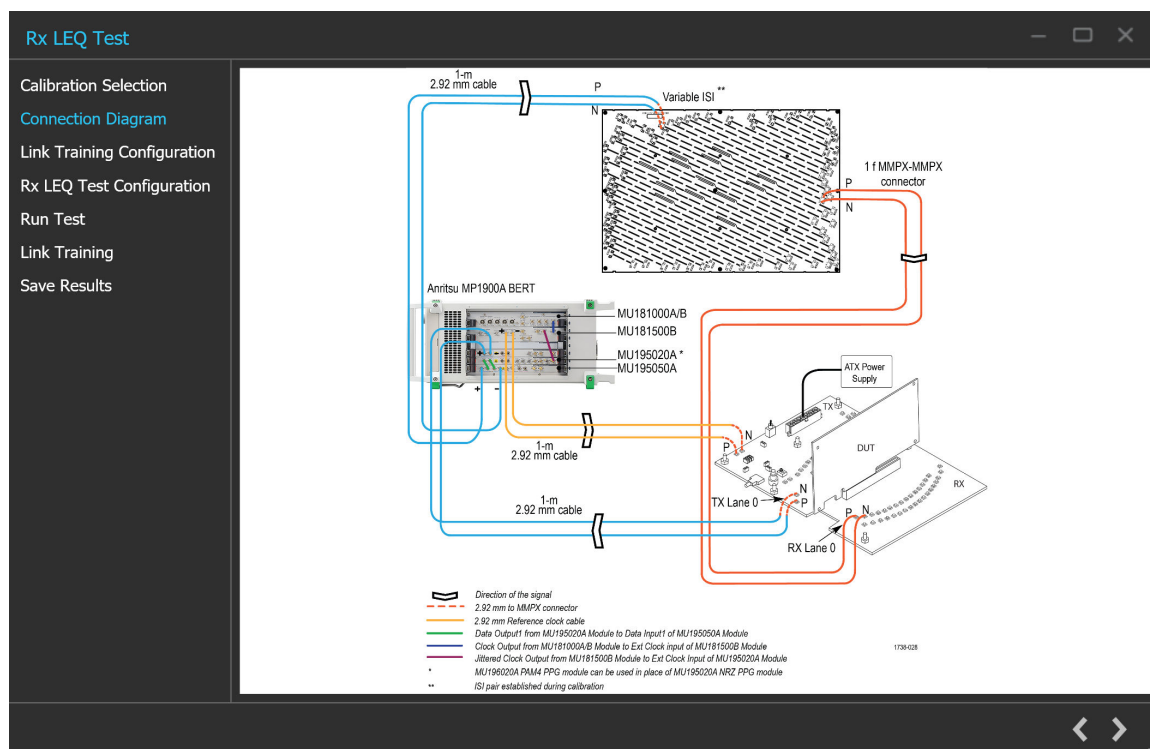


Figure 43: Rx LEQ Test: Connection Diagram(AIC)

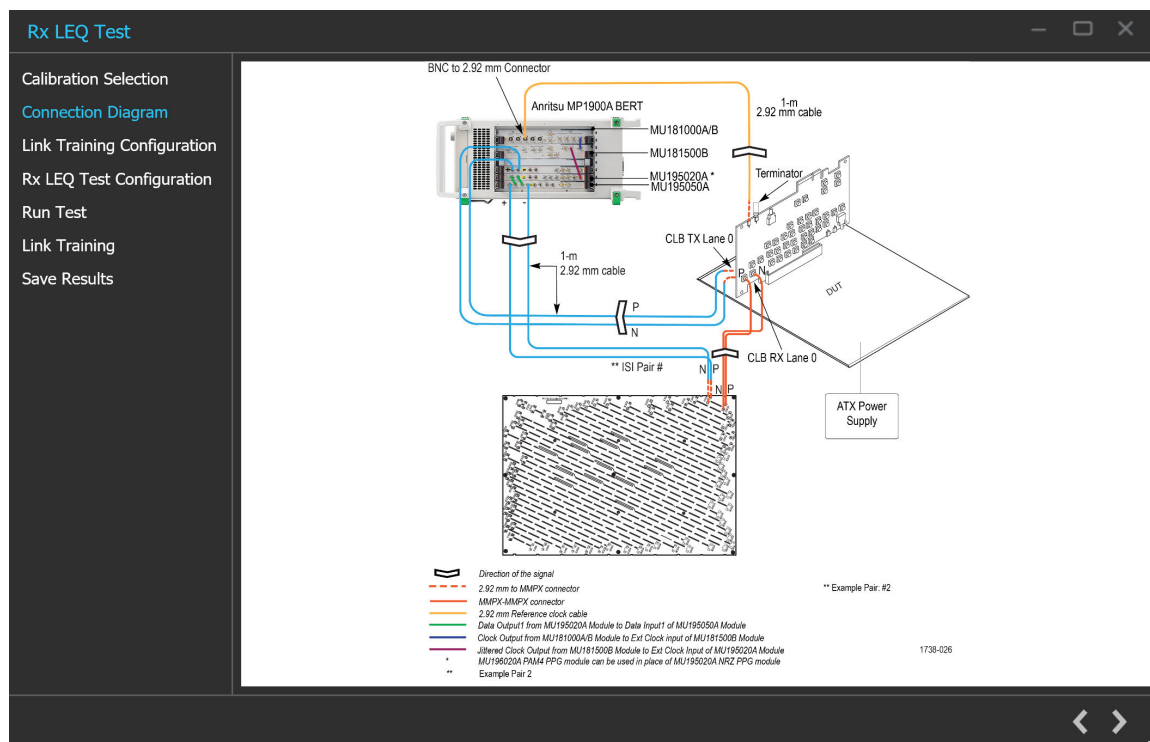



Figure 44: Rx LEQ Test: Connection Diagram(System)

Click  to move to the next screen.

3. **Link Training Configuration:**This tab allows you to configure the parameters for link training.

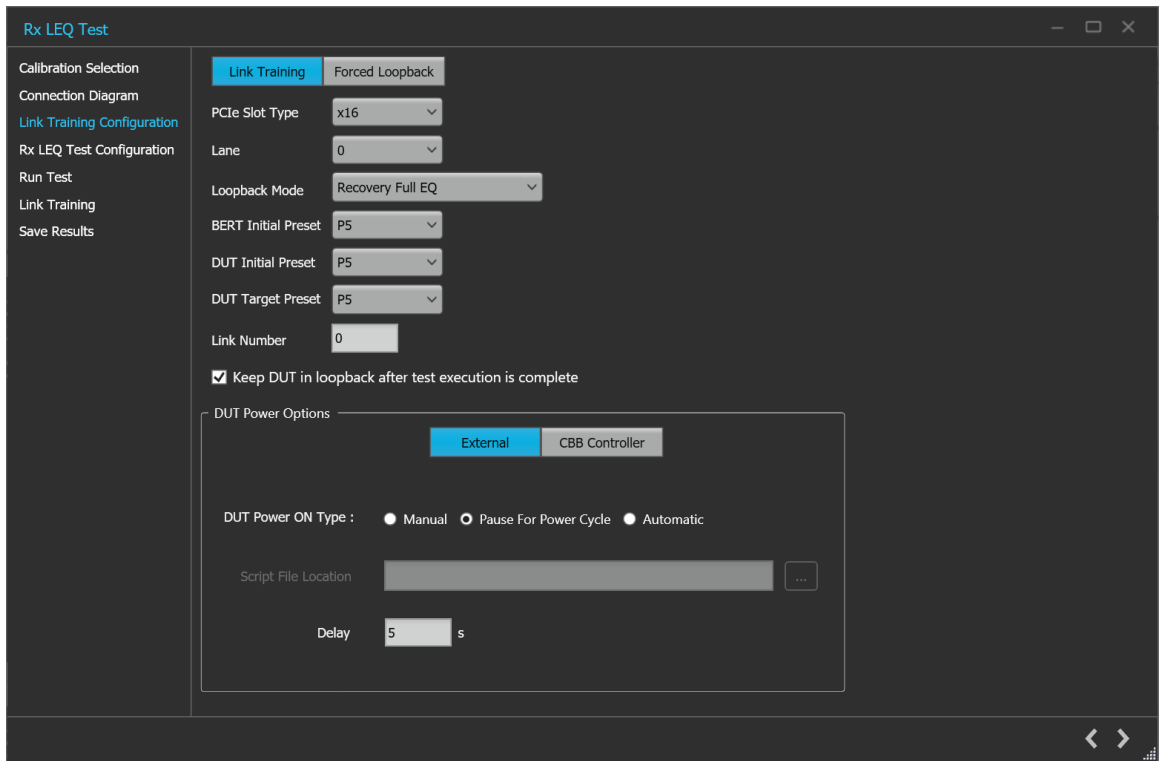


Figure 45: Rx LEQ Test: Link Training Configuration (Link Training-External)



Figure 46: Rx LEQ Test: Link Training Configuration (Link Training-CBB Controller)

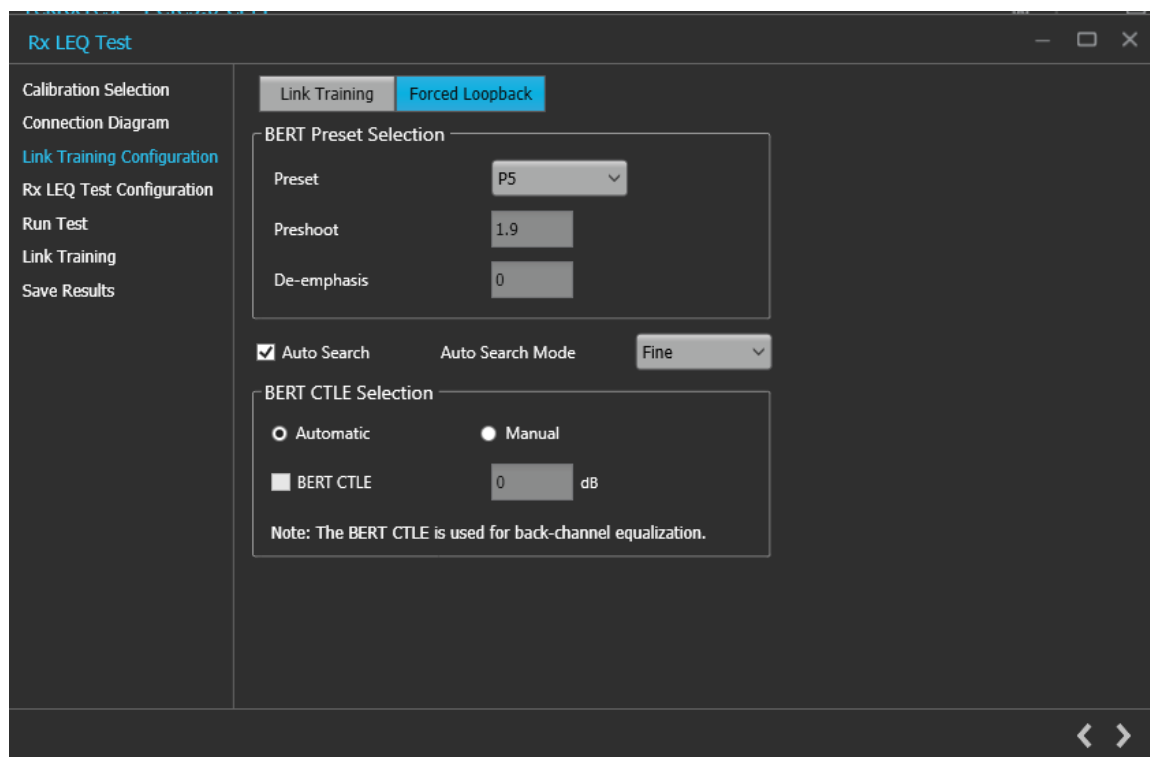




Figure 47: Rx LEQ Test: Link Training Configuration (Forced Loopback)

Table 35: Rx LEQ Test: Link Training Configuration for Link Training


Parameter	Description
PCIe Slot Type	Select the required PCIe slot from the drop-down list.
Lane	Select the lane to be tested from the drop-down list.
Loopback Mode	Select the required loopback mode from the drop-down list.
BERT Initial Preset	Select the Preset to be set on the BERT PPG during loopback from the drop-down list.
DUT Initial Preset	Select the Preset to be set on the DUT Tx during loopback from the drop-down list.
DUT Target Preset	Select the Preset to be set on the DUT Tx as the final preset during link training.
Link Number	Enter the link number value.
Keep DUT in loopback after test execution is complete	Select to keep the DUT in the loopback after test execution is complete.
DUT Power options	Select the required DUT power options. <ul style="list-style-type: none"> <li>External</li> <li>CBB Controller</li> </ul>
DUT Power ON Type	Select the required DUT power ON type. <ul style="list-style-type: none"> <li>Manual</li> <li>Pause For Power Cycle</li> <li>Automatic</li> </ul>

Table continued...

Parameter	Description
Script File Location	Browse and navigate to the path and select the required script file.   <b>Note:</b> Enabled only when Automatic is selected as DUT Power ON Type.
Delay	Enter the delay time in seconds.
Auto Reset	Select the required Auto Reset and enter the values in seconds. <ul style="list-style-type: none"> <li>Power Cycle</li> <li>Power Reset</li> <li>Waiting Time</li> </ul>  <b>Note:</b> PCIe CBB Controller should be connected to the BERT for the control to be functional.

**Table 36: Rx LEQ Test: Link Training Configuration for Forced Loopback**

Parameter	Description
BERT Preset Selection	
Preset	Select the BERT Tx Preset setting from the drop-down list.
Preshoot	Displays the preshoot value corresponding to the choice of preset. Editable for Custom Preset selection.
De-emphasis	Displays the de-emphasis value corresponding to the choice of preset. Editable for P10 and Custom Preset selection.
BERT CTLE Selection	
Automatic	Enables automatic CTLE selection for back-channel equalization in the BERT Error Detector.
Manual	Select to manually choose the BERT CTLE selection.
BERT CTLE	Select to enable and enter the BERT Error Detector CTLE value in dB.
Auto Search	Select to enable the Auto-search mode.
Auto Search Mode	Select the auto search mode from the drop-down. <ul style="list-style-type: none"> <li>Fine</li> <li>Coarse</li> </ul>

Click  to move to the next screen.

**4. Rx LEQ Test Configuration:** This tab allows you to configure the Rx LEQ test settings.

**Rx LEQ Test**

Calibration Selection  
Connection Diagram  
Link Training Configuration  
**Rx LEQ Test Configuration**  
Run Test  
Link Training  
Save Results

**Basic** SKP Ordered Set

☒ Apply SSC to Data and Clock output

BER Settings

BER 1 E-12 Error Limit 1

Test Length

Duration 125 s Confidence 90.842 % at 4E+12 Bits

Stress Configuration

Calibrated Customized Un-Calibrated

CMI 150 mV RJ 0.5 ps (RMS)

DMI 17.5 mV SJ 3.125 ps

Amplitude 800 mV (Diff)

BER Measurement Pattern Modified Compliance

Figure 48: Rx LEQ Test: Rx LEQ Test Configuration (Basic)

**Rx LEQ Test**

Calibration Selection  
Connection Diagram  
Link Training Configuration  
**Rx LEQ Test Configuration**  
Run Test  
Link Training  
Save Results

Basic **SKP Ordered Set**

SKP Ordered Set Settings

☒ Insert SKP OS while sending Training Sequences

Generation	Gen 1-2	Gen 3-5
Symbol Length	COM+3	16 Symbols
Insert double SKP in Loopback.Active state	OFF	OFF
SKP Ordered Set interval	1538	375

☒ Filter / Remove the received SKP Ordered Set

Figure 49: Rx LEQ Test: Rx LEQ Test Configuration (SKP Ordered Set)

**Table 37: Rx LEQ Test: Rx LEQ Test Configuration (Basic)**


Parameter	Description
Apply SSC to data and clock output	Select to apply SSC to data and clock output.
BER	Number of bits in error that can be tolerated.
Error Limit	Enter the required error limit value. The default value is 1.
Test Length	Enter the test length value in second. <ul style="list-style-type: none"> <li>Duration - Enter the test length duration value.</li> <li>Confidence - Displays the test length confidence value.</li> </ul>
Stress Configuration	Select the stress configuration among calibrated, customized, un-calibrated.
CMI	Displays the CMI value in mV. The stress on the waveform is defined by the parameters of CMI.
DMI	Displays the DMI value in mV. The stress on the waveform is defined by the parameters of DMI.
Amplitude	Displays the amplitude value in mV. The stress on the waveform is defined by the parameters of Amplitude.
RJ	Displays the RJ value in ps. The stress on the waveform is defined by the parameters of RJ.
SJ	Displays the SJ value in ps. The stress on the waveform is defined by the parameters of SJ.
BER Measurement Pattern	Select the required BER measurement pattern from the drop-down list. <ul style="list-style-type: none"> <li>Modified Compliance</li> <li>Clock</li> <li>Compliance</li> <li>PRBS7</li> <li>PRBS9</li> <li>PRBS10</li> <li>PRBS11</li> <li>PRBS15</li> <li>PRBS20</li> <li>PRBS23</li> <li>PRBS31</li> </ul>

**Table 38: Rx LEQ Test: Rx LEQ Test Configuration (SKP Ordered Set)**

Parameter	Description
SKP Ordered Set Settings	
Insert SKP OS while sending Training Sequence	Click to insert SKP OS while sending training sequence.
Symbol Length	Select the required symbol length from the drop-down list for the corresponding generation.
Table continued...	



Parameter	Description
Insert double SKP in Loopback.Active state	Select the required option (ON/OFF) from the drop-down list for the corresponding generation.
SKP Orderd Set interval	Select the required interval value from the drop-down list for the corresponding generation.
Filter/Remove the received SKP Order Set	Select to enable the filter or remove the received SKP ordered set.

Click  to move to the next screen.

5. **Run Test:** This tab allows you to configure the settings to run the test.

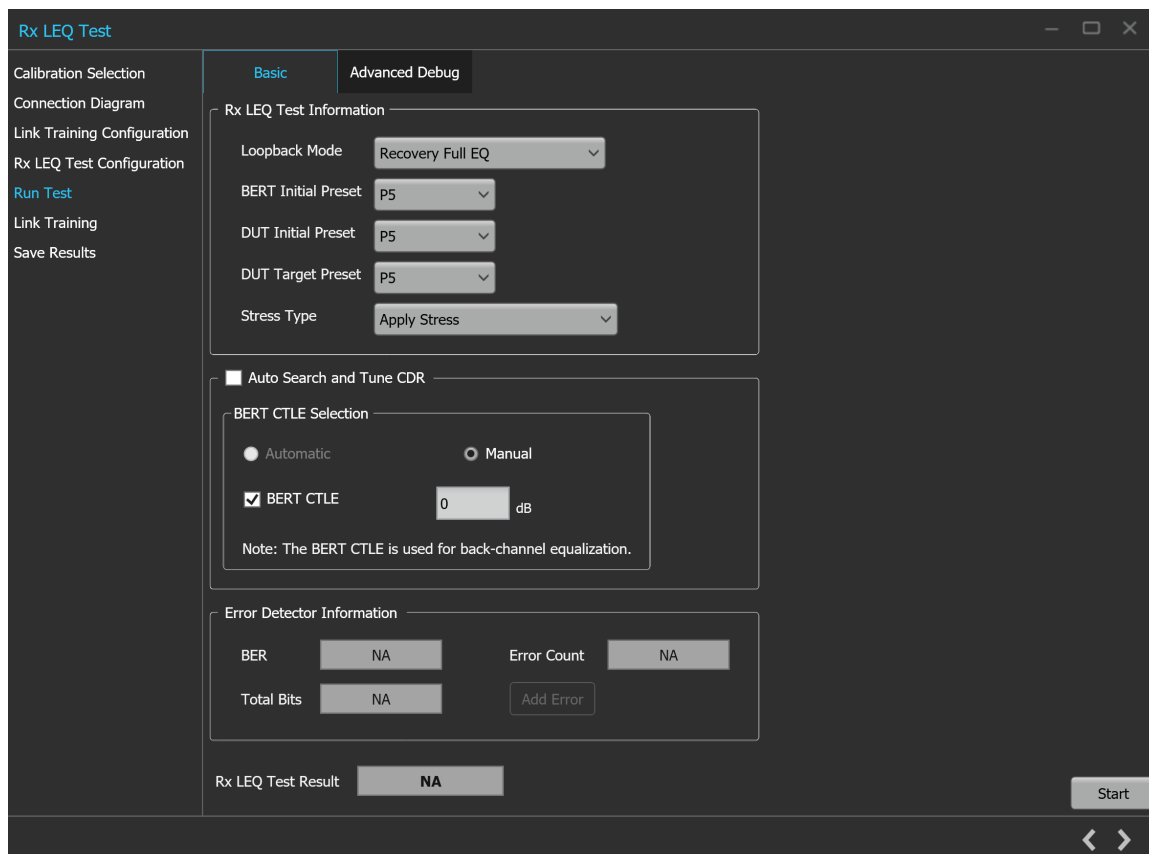


Figure 50: Rx LEQ Test: Run Test (Basic)

Rx LEQ Test

Calibration Selection

Connection Diagram

Link Training Configuration

Rx LEQ Test Configuration

Run Test

Link Training

Save Results

BasicAdvanced Debug

Stress Configuration

CustomizedUn-Calibrated

☒ CMI

150

mV

☒ RJ

0.5

ps (RMS)

☒ DMI

17.5

mV

☒ SJ

3.125

ps

Amplitude

800

mV

BERT Tx EQ

CustomizedUn-Calibrated

Tx EQ Type

Preset

Preset

P5

Pattern

Test Pattern

COMP

Comp

MCP

Note: Use COMP / USER test pattern in case of SRNS and SRIS clock architecture

Auto Search and Tune CDR

Auto Search Mode

Fine

BERT CTLE Selection

☐ Automatic☒ Manual

☒ BERT CTLE

0

dB

Note: The BERT CTLE is used for back-channel equalization.

Auto Search

Tune CDR

Error Detector Information

Error Count

NA

BER

NA

Total Bits

NA

Status

NA

☐ Redo Link Training

Export

Reset

Start

Figure 51: Rx LEQ Test: Run Test (Advanced Debug)

Table 39: Rx LEQ Test: Run Test (Basic)


Parameter	Description
Rx LEQ Test Information	
Table continued...	

Parameter	Description
Loopback Mode	Select the required loopback mode from the drop-down list.
BERT Initial Preset	Select the Preset to be set on the BERT PPG during loopback from the drop-down list.
DUT Initial Preset	Select the Preset to be set on the DUT Tx during loopback from the drop-down list.
DUT Target Preset	Select the Preset to be set on the DUT Tx as the final preset during link training.
Stress Type	Select the required Stress type from the drop-down list. <ul style="list-style-type: none"> <li>• Apply stress</li> <li>• Inhibit stress during loopback</li> <li>• Disable stress</li> </ul>
Auto Search and Tune CDR	Enable to perform Auto Search and Tune CDR after Link Training: <ul style="list-style-type: none"> <li>• Automatic - Search and set the appropriate CTLE on the Error Detector.</li> <li>• Manual – Sets the configured CTLE value on the Error Detector.</li> <li>• BERT CTLE - Enable and enter the BERT CTLE value in dB</li> </ul>
Error Detector Information	
BER	Displays the BER information.
Error Count	Displays the error count information.
Total Bits	Displays the total number of bits.
Rx LEQ Test Result	Displays the Rx LEQ test result.
Start	Click to <b>start</b> the test execution.

**Table 40: Rx LEQ Test: Run Test (Advanced Debug)**

Parameter	Description
Stress Configuration	Select the stress configuration among Customized and Un-calibrated.
CMI	Click to display the CMI value in mV. The stress on the waveform is defined by the parameters of CMI.
DMI	Click to display the DMI value in mV. The stress on the waveform is defined by the parameters of DMI.
Amplitude	Click to display the amplitude value in mV. The stress on the waveform is defined by the parameters of Amplitude.
RJ	Click to display the RJ value in ps. The stress on the waveform is defined by the parameters of RJ.
SJ	Click to display the SJ value in ps. The stress on the waveform is defined by the parameters of SJ.
BERT Tx EQ	Select BERT Tx EQ among Customized and Un-calibrated
Tx EQ Type	Select the Tx EQ type from the drop-down list.
Preset	Select the Preset from the drop-down list.
Test Pattern	Select the required test pattern type from the drop-down list.
Comp	Select the required Compliance pattern type from the drop-down list.
Table continued...	

Parameter	Description
Auto Search and Tune CDR	<ul style="list-style-type: none"> <li>Auto Search mode - Select to enable the auto search mode from the drop-down list. <ul style="list-style-type: none"> <li>Fine</li> <li>Coarse</li> </ul> </li> <li>BERT CTLE Selection: <ul style="list-style-type: none"> <li>Automatic - Search and set the appropriate CTLE on the Error Detector.</li> <li>Manual - Sets the configured CTLE value on the Error Detector.</li> <li>BERT CTLE - Enter the BERT CTLE value in dB.</li> </ul> </li> <li>Auto Search - Click to enable Auto Search when the DUT is in loopback</li> <li>Tune CDR - Click to enable CDR Tune when the DUT is in loopback</li> </ul>
Error Count	Displays the error count information.
Total Bits	Displays the total number of bits.
BER	Displays the BER information.
Status	Displays the status information.
Export	Click to export the Advance debug settings.
Reset	Click to reset the Advance debug settings.
Redo Link Training	Select to enable the redo link training in-case of sync or clock error. <ul style="list-style-type: none"> <li>Export</li> <li>Reset</li> </ul>
Start	Click to <b>start</b> the text execution.

Click  to move to the next screen.

**6. Link Training:** This tab displays the loopback steps with its status in a tabular form

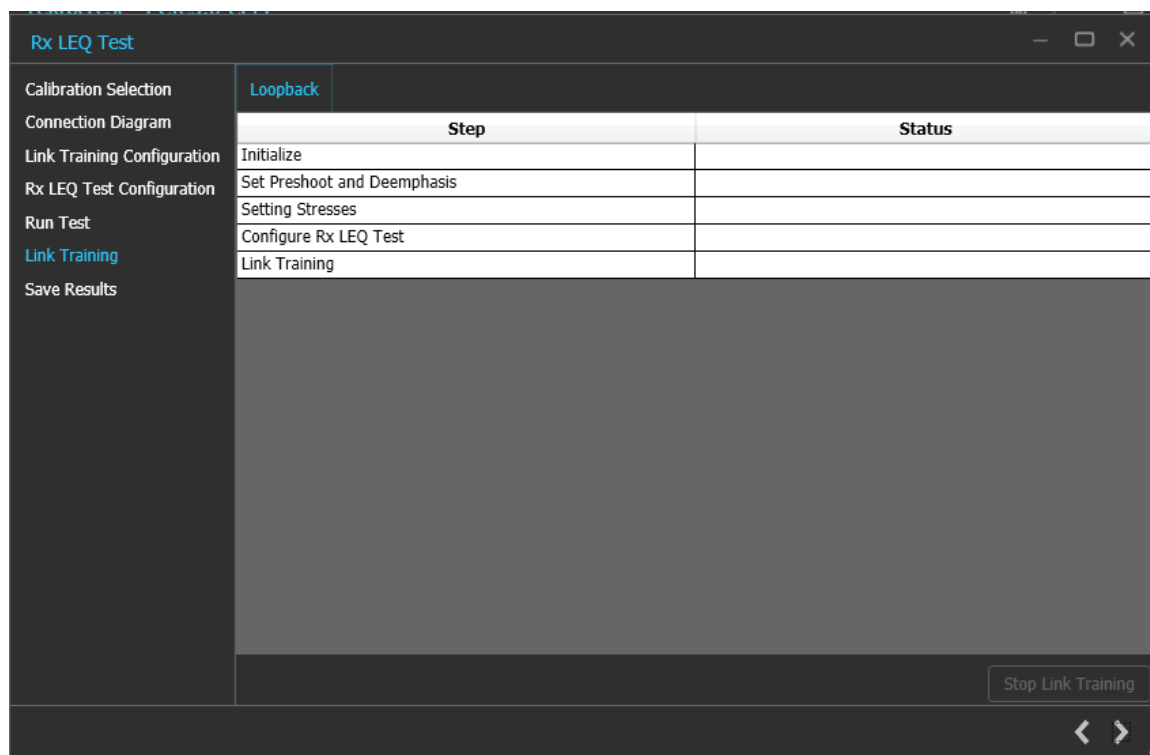



Figure 52: Rx LEQ Test: Link Training

Table 41: Rx LEQ Test: Link Training

Parameter	Description
Step	Lists the different steps that are prerequisite for initiating link training
Status	Indicates the completion status of each activity
Initialize	Initialize the BERT for performing link training
Set Preshoot and Deemphasis	Sets the preset as per BERT Initial Preset in Link Training Configuration wizard It sets all the calibrated Presets on the BERT from P0-P9
Setting Stresses	Sets stresses as per the user selection in Configure Test wizard
Configure JTOL Test	Sets the BERT, DUT initial and Target Presets, Loopback mode (Recovery, Config), Link and Lane number
Link Training	Initiates the link training process in MX 183000A

Click  to move to the next screen.

- 7. Save Results:** This tab allows you to save the Rx LEQ test results.

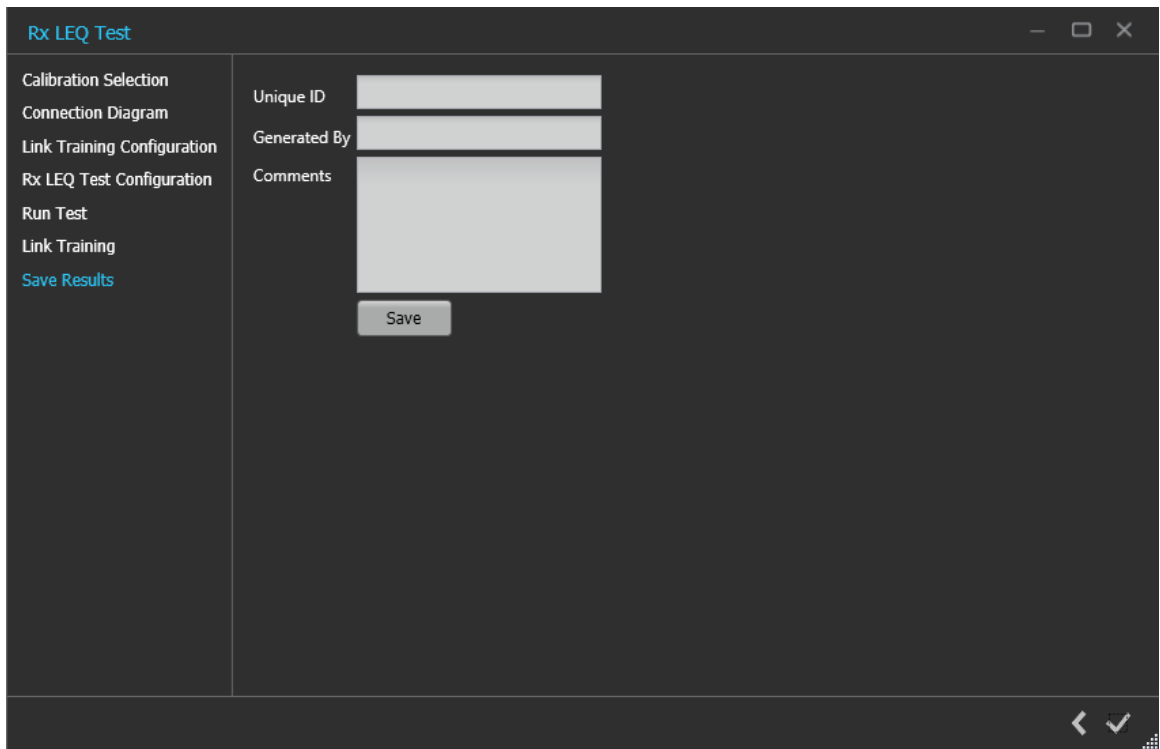



Figure 53: Rx LEQ Test: Save Results


Table 42: Rx LEQ Test: Save Results

Parameter	Description
Unique ID	Enter the Unique ID of the calibrated equipment in the text box.
Generated By	Enter the user name in the text box.
Comments (Optional)	Enter the required comments in the comment box.
Save	Click to save the results.

Click  to complete the Rx LEQ Test and close the wizard.

**Tx LEQ Test**

**Tx LEQ Test procedure**

Click **Tx LEQ Test** under the Tests panel to view the measurement results. Click  at the right end corner of the application, to launch the Tx LEQ test wizard. This wizard will guide you through the sequential procedure to perform the test.

- 1. **Calibration Selection:** This tab allows you to select required DUT type, BERT Clock type and TP3 Calibration file from the drop-down list.

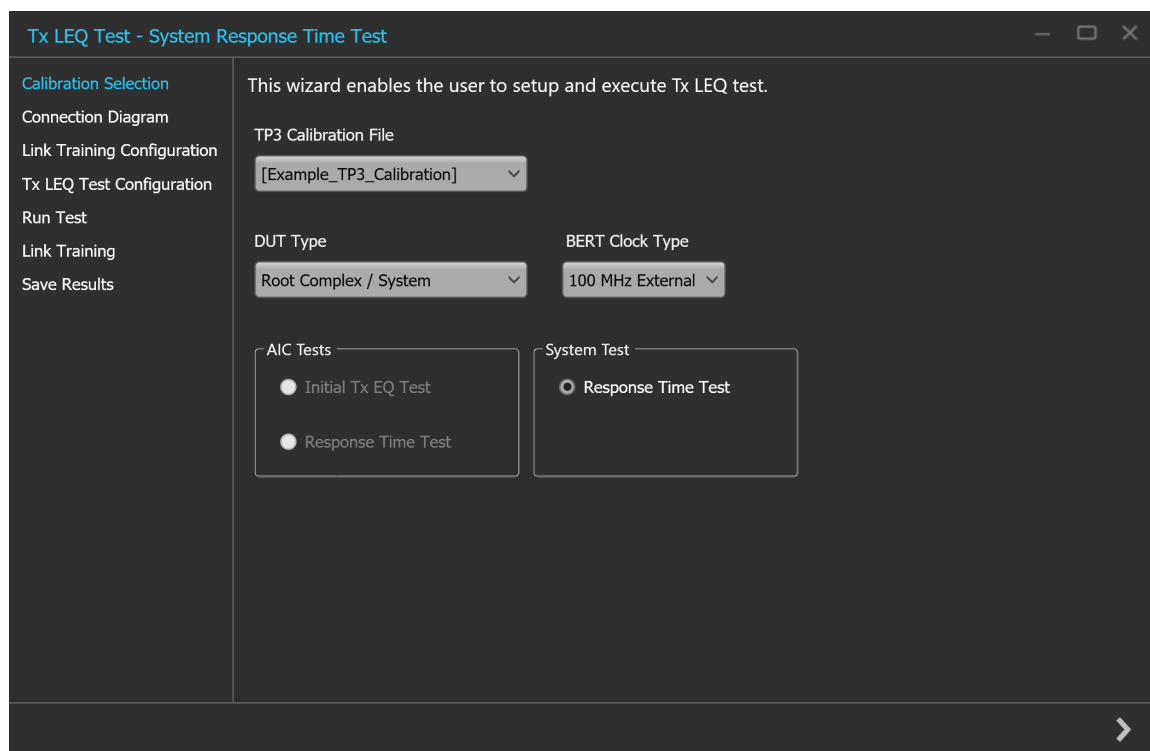



Figure 54: Tx LEQ Test: Calibration Selection

Table 43: Tx LEQ Test: Calibration Selection

Parameter	Description
TP3 Calibration File	Select the required TP3 calibration file.
DUT Type	Select the required DUT type. <ul style="list-style-type: none"> <li>Non-Root Complex / AIC</li> <li>Root Complex / System</li> </ul>
BERT Clock Type	Select the required BERT clock type from the drop-down list.
AIC Tests	Select the required AIC test.
System Test	Select the required System test.

Click  to move to the next screen.

- 2. Connection Diagram:** This tab displays the connection diagram for the Tx LEQ test. The connection diagram is the different for AIC and System in case of Tx LEQ test.

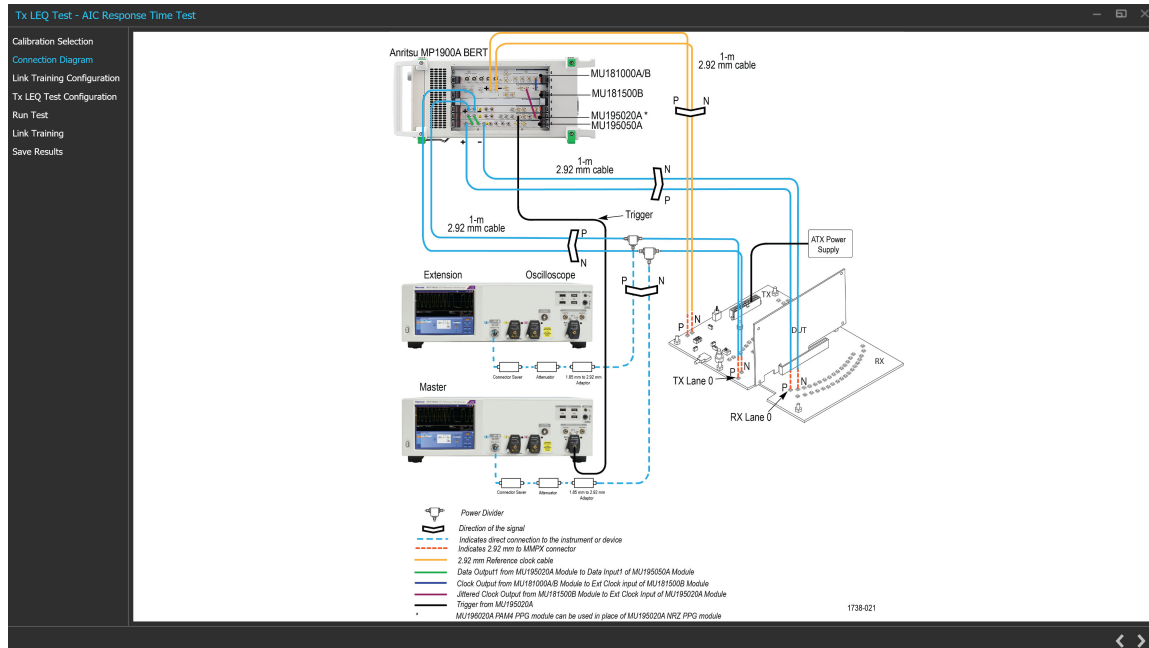


Figure 55: Tx LEQ Test: Connection Diagram(AIC)

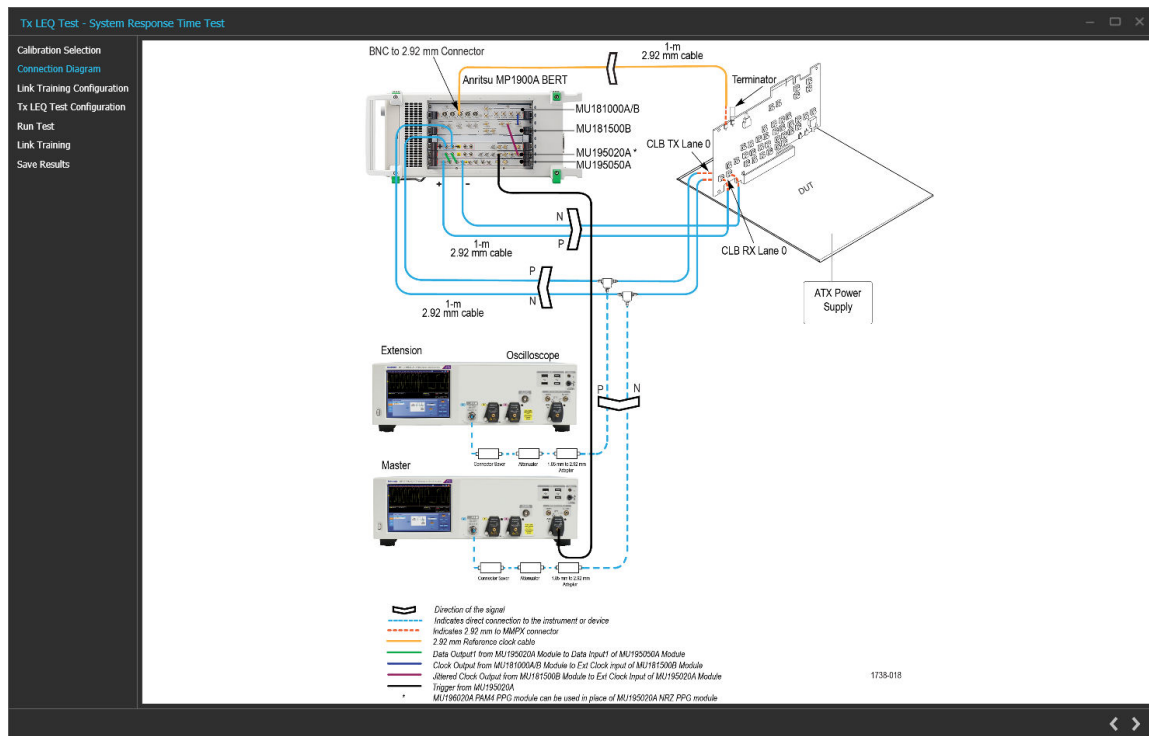



Figure 56: Tx LEQ Test: Connection Diagram(System)

Click  to move to the next screen.

**3. Link Training Configuration:** This tab allows you to configure the parameters for link training.



**Tx LEQ Test - AIC Response Time Test**

Calibration Selection  
 Connection Diagram  
 Link Training Configuration  
 Tx LEQ Test Configuration  
 Run Test  
 Link Training  
 Save Results

Loopback Mode: Recovery Full EQ

BERT Initial Preset: P5

Lane Number: 0

Link Number: 0

☒ BERT CTLE: 0 dB

DUT Power Options

External CBB Controller

DUT Power ON Type : ☒ Manual ☐ Pause For Power Cycle ☐ Automatic

Script File Location:

Delay: 5 s

Figure 57: Tx LEQ Test: Link Training Configuration (External)

**Tx LEQ Test - AIC Response Time Test**

Calibration Selection  
 Connection Diagram  
 Link Training Configuration  
 Tx LEQ Test Configuration  
 Run Test  
 Link Training  
 Save Results

Loopback Mode: Recovery Full EQ

BERT Initial Preset: P5

Lane Number: 0

Link Number: 0

☒ BERT CTLE: 0 dB

DUT Power Options

External CBB Controller

Auto Reset : ☒ Power Reset 2 s ☐ Power Cycle 3 s

Waiting Time: 3 s

Link Start Start of Power Cycle / Reset End of Power Cycle / Reset Link Training Start Link Training


Power Cycle / Reset Time (s) Waiting Time (s)

Note : PCIe CBB Controller should be connected to the BERT for the control to be functional

Figure 58: Tx LEQ Test: Link Training Configuration (CBB Controller)

**Table 44: Tx LEQ Test: Link Training Configuration**

Parameter	Description
Loopback Mode	Select the required loopback mode from the drop-down list.
BERT Initial Preset	Select the Preset to be set on the BERT PPG during loopback from the drop-down list.
BERT CTLE	Enter the BERT Error Detector CTLE value in dB.
Lane Number	Enter the lane number value.
Link Number	Enter the link number value.
DUT Power Options	Select the required DUT power options. <ul style="list-style-type: none"> <li>• External</li> <li>• CBB Controller</li> </ul>
DUT Power ON Type	Select the required DUT power ON type. <ul style="list-style-type: none"> <li>• Manual</li> <li>• Pause For Power Cycle</li> <li>• Automatic</li> </ul>
Script File Location	Browse and navigate to the path and select the required script file. Available only when Automatic is selected as DUT Power ON Type.
Delay	Enter the delay time in seconds.
Auto Reset	Select the required Auto Reset and enter the values in seconds. <ul style="list-style-type: none"> <li>• Power Cycle</li> <li>• Power Reset</li> <li>• Waiting Time</li> </ul>

Click  to move to the next screen.

**4. Tx LEQ Test Configuration:** This tab allows you to configure the Tx LEQ test settings.

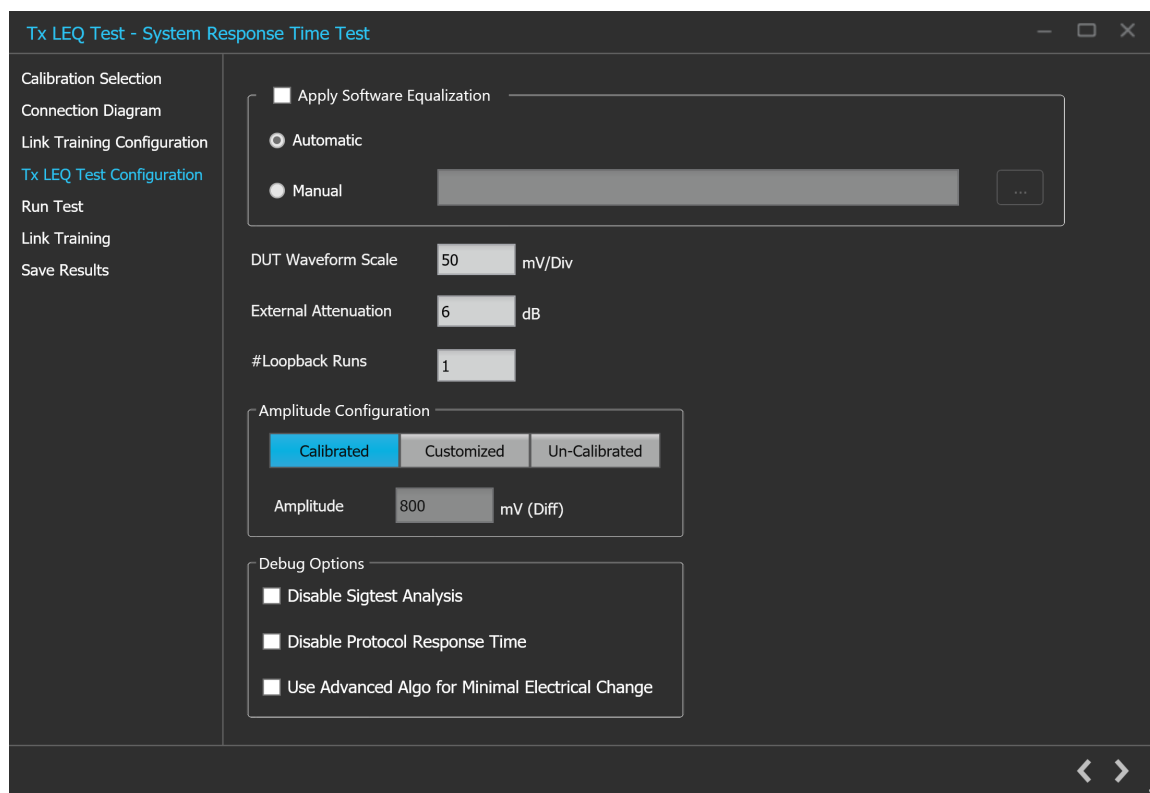



Figure 59: Tx LEQ Test: Tx LEQ Test Configuration

Table 45: Tx LEQ Test: Tx LEQ Test Configuration

Parameter	Description
Apply Software Equalization	Select to apply equalization on the waveform using CTLE Filter files during runtime. <ul style="list-style-type: none"> <li>Automatic - This will find the optimum CTLE for the channel and apply that during waveform acquisition.</li> <li>Manual - User can browse and apply CTLE filter file which will be applied during waveform acquisition.</li> </ul>
DUT Waveform Scale	Enter the DUT waveform scale value in mV/Div.
External Attenuation	Displays the value set on RT Scope
#Loopback Runs	Enter the number of loopback runs.
Amplitude Configuration	Select the required amplitude configuration type. <ul style="list-style-type: none"> <li>Calibrated</li> <li>Customized</li> <li>Un-Calibrated</li> </ul>
Amplitude	Enter the amplitude value in mV.
Debug Options	Select the required Debug option <ul style="list-style-type: none"> <li>Disable Sigtest analysis</li> <li>Disable protocol response time</li> <li>Use advanced Algo for Minimal Electrical change</li> </ul>

Click  to move to the next screen.

5. **Run Test:** This tab allows you to display all the presets with its details in the tabular format.

**Tx LEQ Test - System Response Time Test**

	Target Preset / Coeff	Preshoot (dB)	De-emphasis (dB)	Vb (mV)	Electrical Response Time (ns)	Protocol Response Time (ns)	Coeff	Result
Calibration Selection								
Connection Diagram								
Link Training Configuration	<input checked="" type="checkbox"/> P0	-	-	-	-	-	-	-
Tx LEQ Test Configuration	<input checked="" type="checkbox"/> P0 (Coeff)	-	-	-	-	-	-	-
	<input checked="" type="checkbox"/> P1	-	-	-	-	-	-	-
Run Test	<input checked="" type="checkbox"/> P1 (Coeff)	-	-	-	-	-	-	-
	<input checked="" type="checkbox"/> P2	-	-	-	-	-	-	-
Link Training	<input checked="" type="checkbox"/> P2 (Coeff)	-	-	-	-	-	-	-
Save Results	<input checked="" type="checkbox"/> P3	-	-	-	-	-	-	-
	<input checked="" type="checkbox"/> P3 (Coeff)	-	-	-	-	-	-	-
	<input checked="" type="checkbox"/> P4	-	-	-	-	-	-	-
	<input checked="" type="checkbox"/> P4 (Coeff)	-	-	-	-	-	-	-
	<input checked="" type="checkbox"/> P5	-	-	-	-	-	-	-
	<input checked="" type="checkbox"/> P5 (Coeff)	-	-	-	-	-	-	-
	<input checked="" type="checkbox"/> P6	-	-	-	-	-	-	-
	<input checked="" type="checkbox"/> P6 (Coeff)	-	-	-	-	-	-	-
	<input checked="" type="checkbox"/> P7	-	-	-	-	-	-	-
	<input checked="" type="checkbox"/> P7 (Coeff)	-	-	-	-	-	-	-
	<input checked="" type="checkbox"/> P8	-	-	-	-	-	-	-
	<input checked="" type="checkbox"/> P8 (Coeff)	-	-	-	-	-	-	-
	<input checked="" type="checkbox"/> P9	-	-	-	-	-	-	-
	<input checked="" type="checkbox"/> P9 (Coeff)	-	-	-	-	-	-	-

DUT ID

Clear All Check All Start

Figure 60: Tx LEQ Test: Run Test(System Response Time Test)

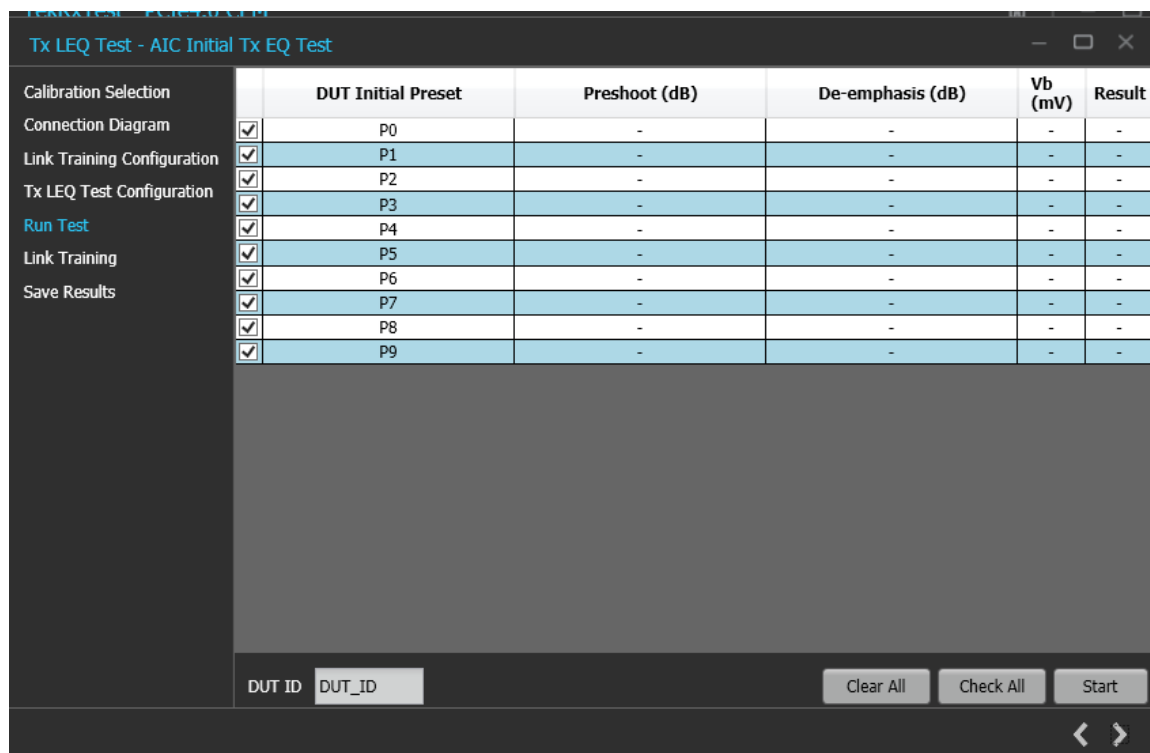


Figure 61: Tx LEQ Test: Run Test(AIC Initial Tx EQ Test)

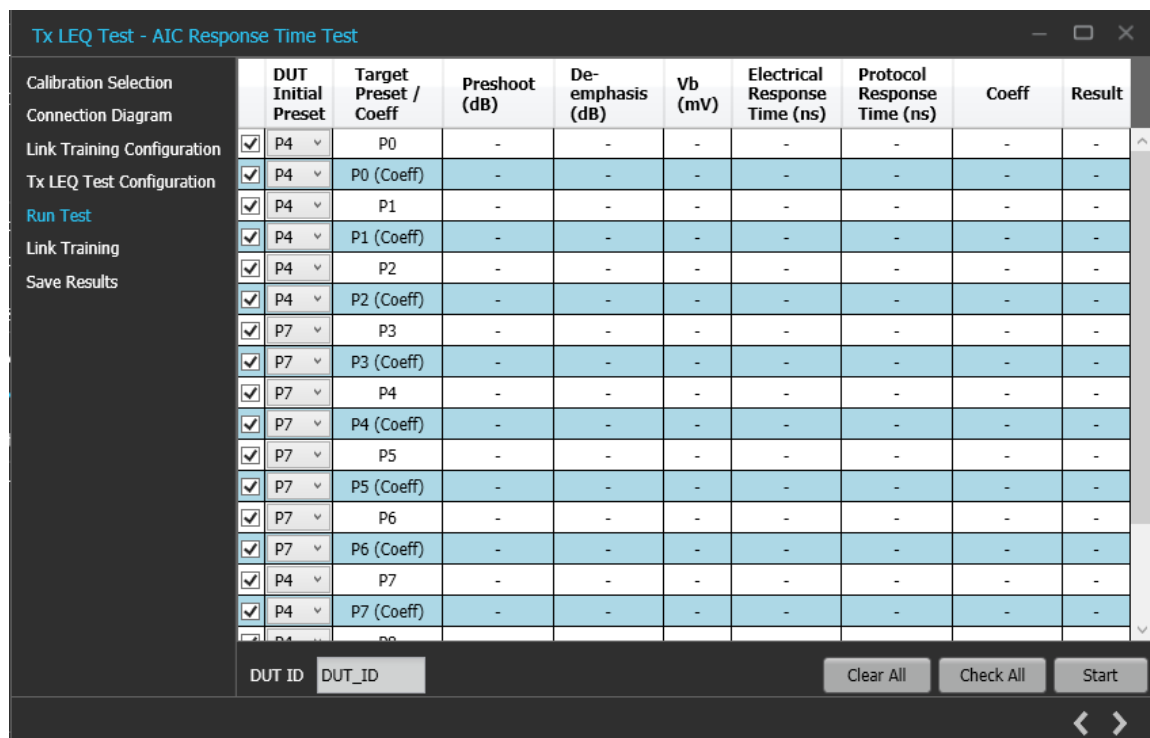



Figure 62: Tx LEQ Test: Run Test(AIC Response Time Test)

Table 46: Tx LEQ Test: Run Test

Parameter	Description
DUT ID	Enter the DUT ID.
Clear All	Unchecks all the presets in the table.
Check All	Checks all the presets in the table.
Start	Click to start the test execution.

Click  to move to the next screen.

6. **Link Training:** This tab displays the loopback steps with its status in a tabular form.

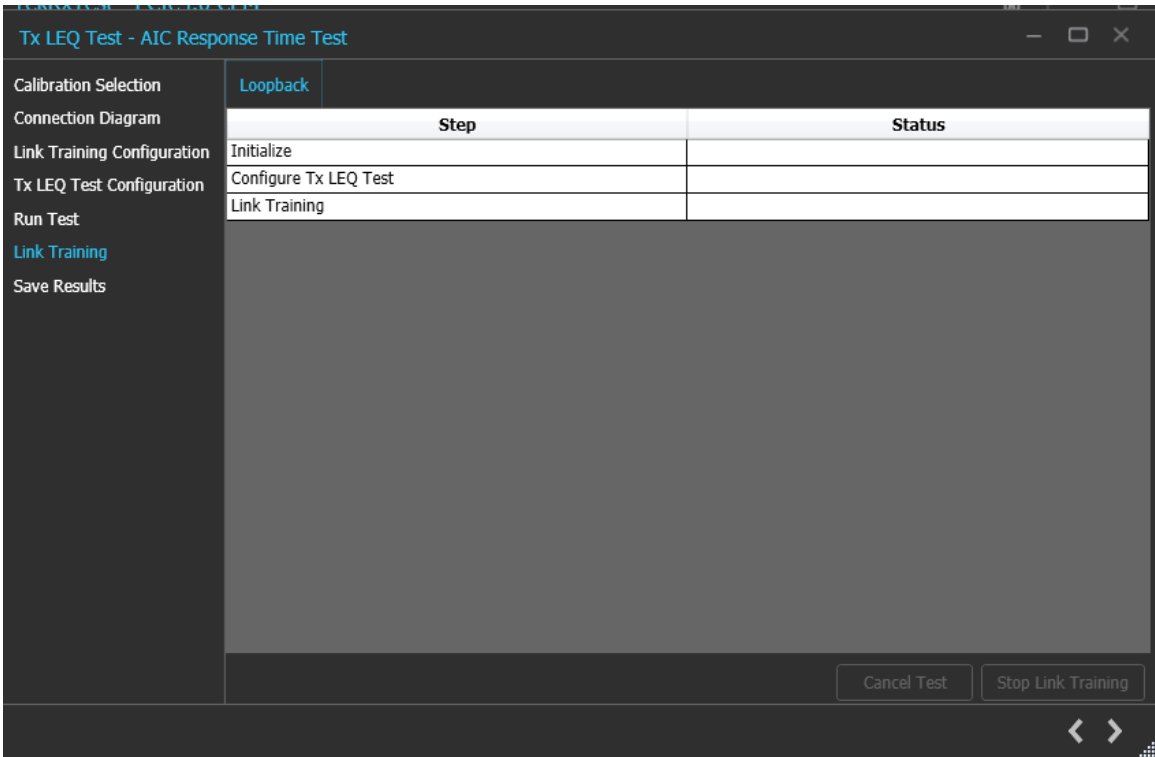



Figure 63: Tx LEQ Test: Link Training

Click  to move to the next screen.

7. **Save Results:** This tab allows you to save the Tx LEQ test results.

Figure 64: Tx LEQ Test: Save Results

Table 47: Tx LEQ Test: Save Results

Parameter	Description
Unique ID	Enter the Unique ID of the calibrated equipment in the text box.
Generated By	Enter the user name in the text box.
Comments (Optional)	Enter the required comments in the comment box.
Save	Click to save the results.

Click  to complete the Tx LEQ Test and close the wizard.

## Options panel

### JTOL Test

To test SJ at multiple frequencies for the JTOL test, you need to perform Multi-tone SJ calibration during TP3 Calibration. You can generate 30 KHz to 100 MHz with a maximum of 14 different frequencies.

The frequency settings table lists the frequencies calibrated during Multi-tone SJ calibration while performing TP3 calibration. If the newly generated frequency doesn't match with the calibrated frequency, then nearby calibrated frequency data will be used for running the JTOL test.

## JTOL Test procedure

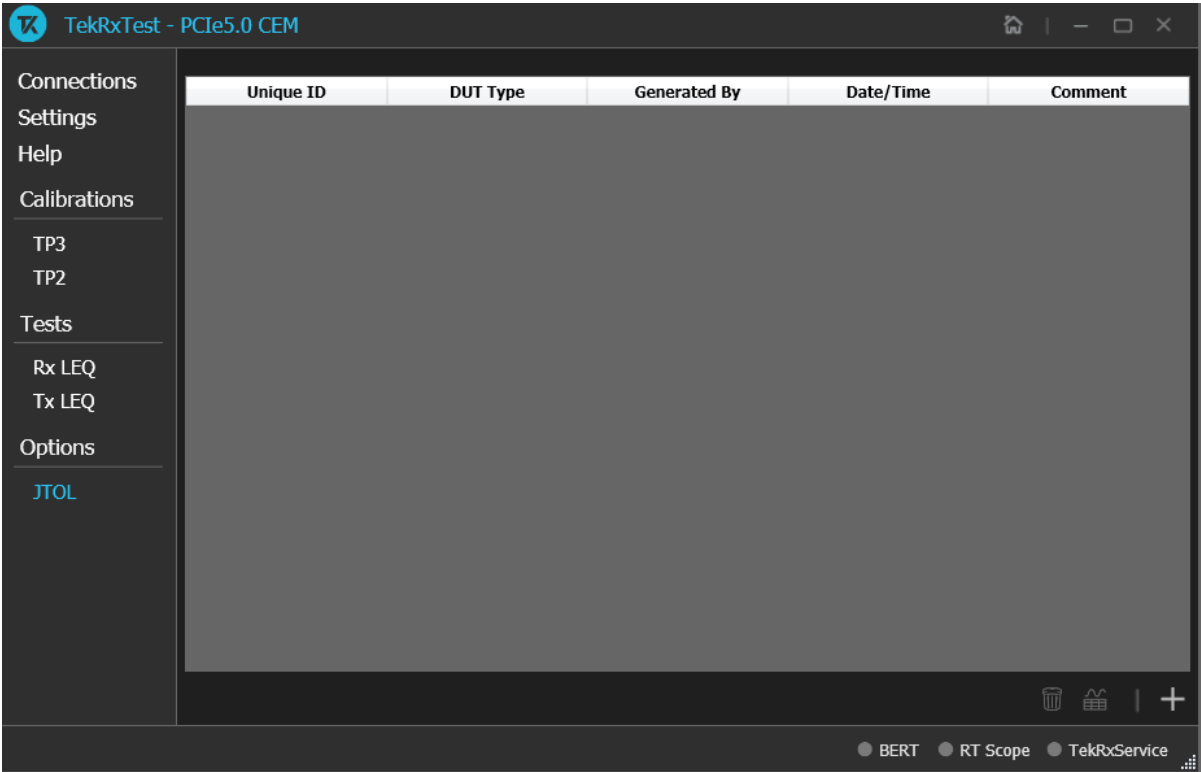



Figure 65: JTOL Test

Click **JTOL Test** under the Tests panel to view the measurement results. Click  at the right end corner of the application, to launch the JTOL test wizard. This wizard will guide you through the sequential procedure to perform the test.

1. **Calibration Selection:** This tab allows you to select the calibration file from the drop-down list. The drop-down lists all the TP2 calibration files available as per the choice made under DUT Type selection.



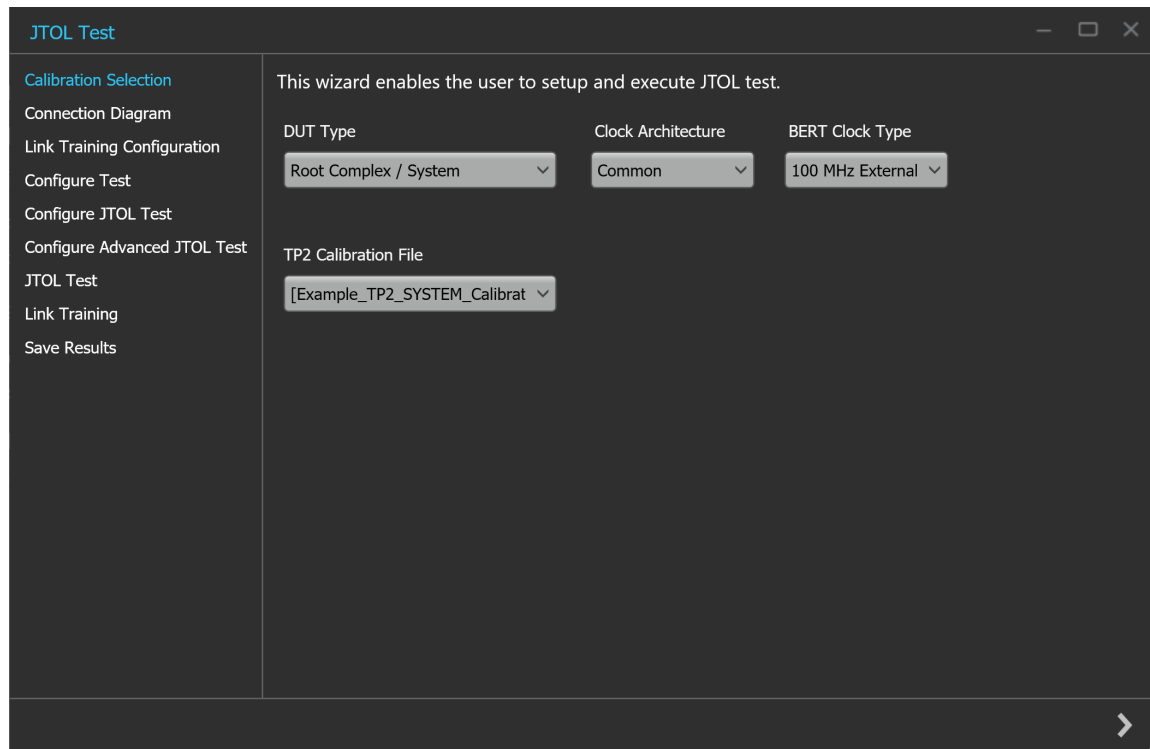



Figure 66: JTOL Test: Calibration Selection

Table 48: JTOL Test: Calibration Selection

Parameter	Description
DUT Type	Select the required DUT type. <ul style="list-style-type: none"> <li>Non-Root Complex / AIC</li> <li>Root Complex / System</li> </ul>
Clock Architecture	Selects the clock architecture between Common, SRIS and SRNS.
BERT Clock Type	Select the required BERT clock type. <ul style="list-style-type: none"> <li>100 MHz External</li> <li>Internal</li> </ul>
TP2 Calibration File	Select the required TP2 calibration file.

Click  to move to the next screen.

- 2. Connection Diagram:** This tab displays the connection diagram for the JTOL test. The connection diagram is the different for AIC and System in case of JTOL test.

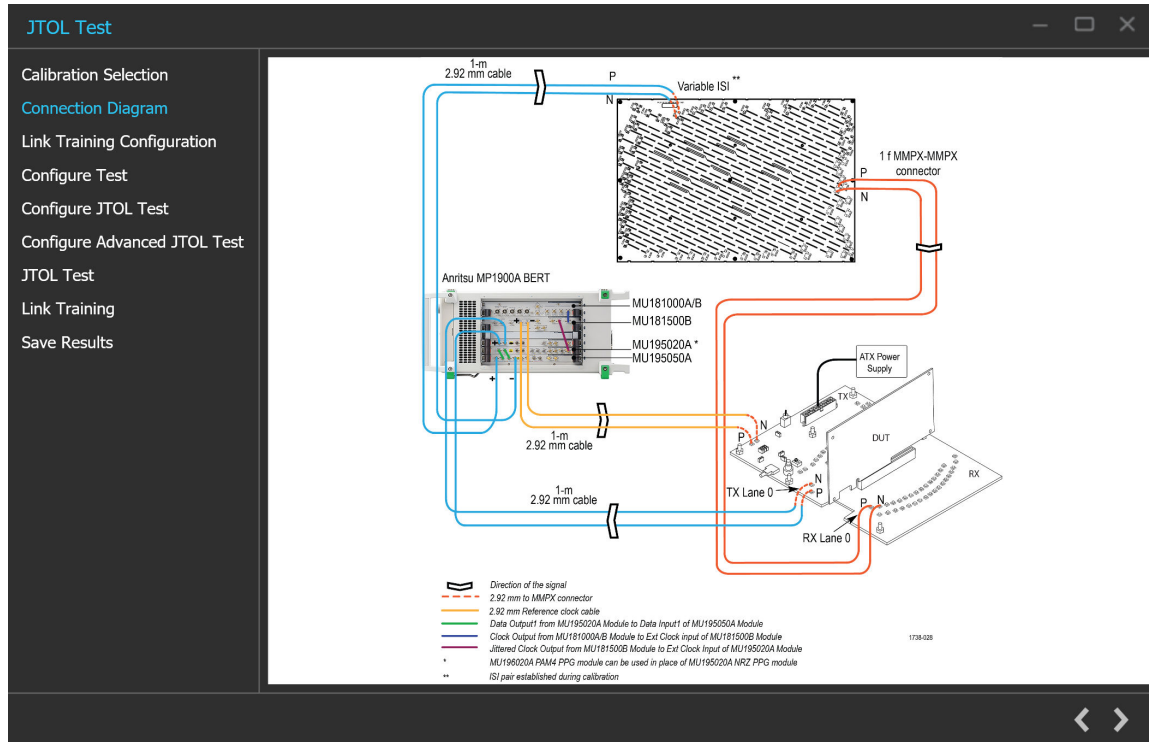


Figure 67: JTOL Test: Connection Diagram(AIC)

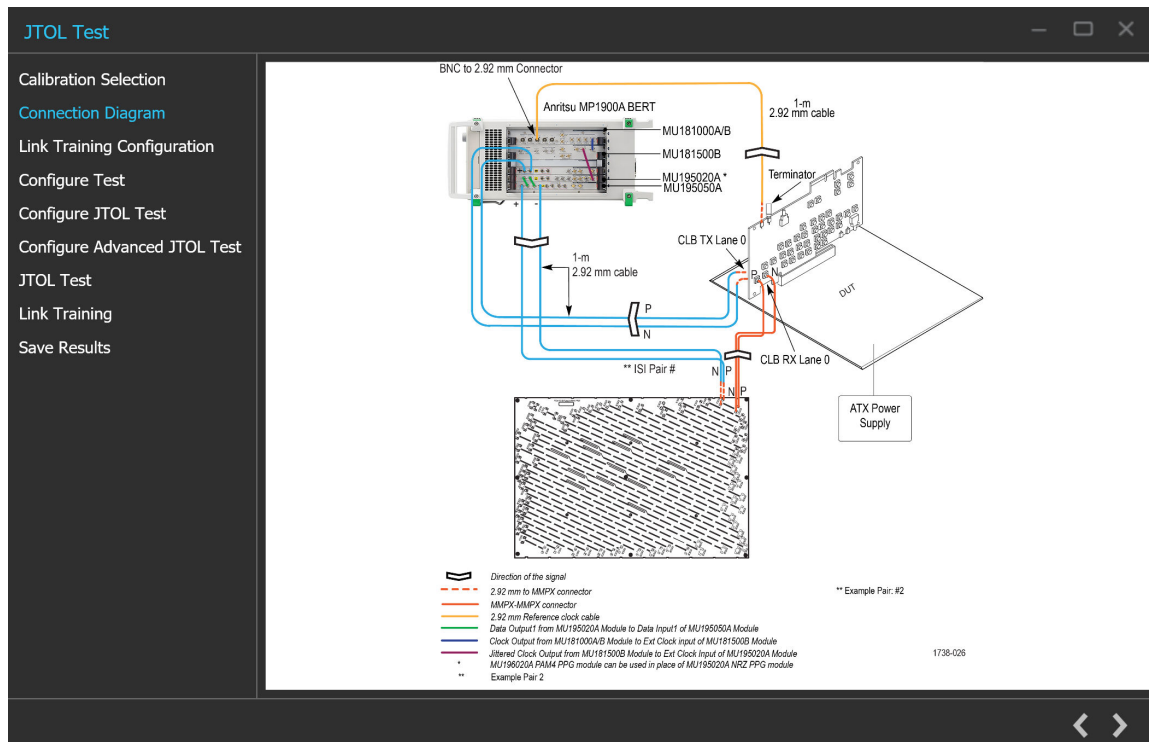



Figure 68: JTOL Test: Connection Diagram(System)

Click  to move to the next screen.

3. **Link Training Configuration:** This tab allows you to configure the link training and forced loopback settings.

**JTOL Test**

Calibration Selection  
 Connection Diagram  
 Link Training Configuration  
 Configure Test  
 Configure JTOL Test  
 Configure Advanced JTOL Test  
 JTOL Test  
 Link Training  
 Save Results

**Link Training** Forced Loopback

PCIe Slot Type: x16  
 Lane: 0  
 Loopback Mode: Recovery Full EQ  
 BERT Initial Preset: P5  
 DUT Initial Preset: P5  
 DUT Target Preset: P5  
 Stress Type: Apply Stress  
 Link Number: 0  
☒ BERT CTLE: 0 dB  
☒ Keep DUT in loopback after test execution is complete

**DUT Power Options**

External CBB Controller

DUT Power ON Type : ☐ Manual ☒ Pause For Power Cycle ☐ Automatic

Script File Location:  ...

Delay: 5 s

Figure 69: JTOL Test: Link Training Configuration (Link Training-External)



Figure 70: JTOL Test: Link Training Configuration (Link Training-CBB Controller)

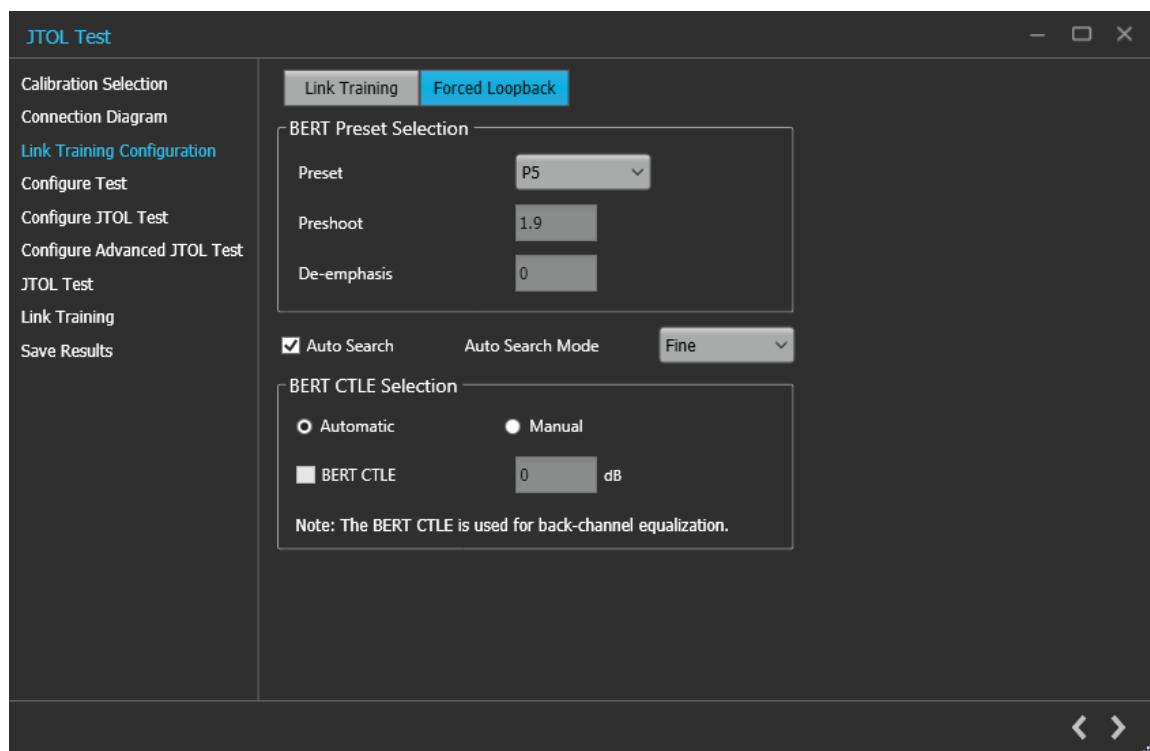


Figure 71: JTOL Test: Link Training Configuration (Forced Loopback)

Table 49: JTOL Test: Link Training Configuration for Link Training


Parameter	Description
PCIe Slot Type	Select the required PCIe slot from the drop-down list.
Lane	Select the lane to be tested from the drop-down list.
Loopback Mode	Select the required loopback mode from the drop-down list.
BERT Initial Preset	Select the Preset to be set on the BERT PPG during loopback from the drop-down list.
DUT Initial Preset	Select the Preset to be set on the DUT Tx during loopback from the drop-down list.
DUT Target Preset	Select the Preset to be set on the DUT Tx during loopback from the drop-down list.
Stress Type	Select the required stress type from the drop-down list.
Link Number	Enter the link number value.
BERT CTLE	Enable and enter the BERT Error Detector CTLE value in dB.
Keep DUT in loopback after test execution is complete	Select to enable the DUT in the loopback after test execution is complete.
DUT Power Options	Select the required DUT power options. <ul style="list-style-type: none"> <li>External</li> <li>CBB Controller</li> </ul>

Table continued...

Parameter	Description
DUT Power ON Type	Select the required DUT power ON type for External option. <ul style="list-style-type: none"> <li>Manual</li> <li>Pause For Power Cycle</li> <li>Automatic</li> </ul>
Script File Location	Browse and navigate to the path and select the required script file. Enabled only when Automatic is selected as DUT Power ON Type.
Delay	Enter the delay time in seconds.
Auto Reset	Select the required CBB Controller and enter the values in seconds. <ul style="list-style-type: none"> <li>Power Cycle</li> <li>Power Reset</li> <li>Waiting Time</li> </ul>

**Table 50: JTOL Test: Link Training Configuration for Forced Loopback**

Parameter	Discription
BERT Preset Selection	
Preset	Select the BERT Tx Preset setting from the drop-down list.
Preshoot	Displays the preshoot value corresponding to the choice of preset. Editable for P10 and Custom Preset selection.
De-emphasis	Displays the de-emphasis value corresponding to the choice of preset. Editable for Custom Preset selection.
BERT CTLE Selection	
Auto Search Mode	Select to Enable auto search and choose the mode from the drop-down list. <ul style="list-style-type: none"> <li>Fine</li> <li>Coarse</li> </ul>
Automatic	Enables automatic CTLE selection for back-channel equalization in the BERT Error Detector.
Manual	Select to manually choose the BERT CTLE selection.
BERT CTLE	Select to enable and enter the BERT Error Detector CTLE value in dB.

Click  to move to the next screen.

**4. Configure Test:** This tab allows you to configure the test settings.

**JTOL Test**

Calibration Selection  
Connection Diagram  
Link Training Configuration  
**Configure Test**  
Configure JTOL Test  
Configure Advanced JTOL Test  
JTOL Test  
Link Training  
Save Results

**Basic** SKP Ordered Set

☒ Apply SSC to Data and Clock output

**BER Settings**

BER 1 E- 12 Error Limit 1

**Test Length**

Duration 125 s Confidence 90.842 % at 4E+12 Bits

**Stress Configuration**

Calibrated Customized Un-Calibrated

CMI 150 mV RJ 0.5 ps (RMS)

DMI 17.5 mV SJ 3.125 ps

Amplitude 800 mV (Diff)

BER Measurement Pattern Modified Compliance

Figure 72: JTOL Test: Configure Test (Basic)

**JTOL Test**

Calibration Selection  
Connection Diagram  
Link Training Configuration  
**Configure Test**  
Configure JTOL Test  
Configure Advanced JTOL Test  
JTOL Test  
Link Training  
Save Results

Basic **SKP Ordered Set**

**SKP Ordered Set Settings**

☒ Insert SKP OS while sending Training Sequences

Generation	Gen 1-2	Gen 3-5
Symbol Length	COM+3	16 Symbols
Insert double SKP in Loopback.Active state	OFF	OFF
SKP Ordered Set interval	1538	375

☒ Filter / Remove the received SKP Ordered Set


Figure 73: JTOL Test: Configure Test (SKP Ordered Set)

**Table 51: JTOL Test: Configure Test (Basic)**

Parameter	Description
BER Settings	<ul style="list-style-type: none"> <li>BER - Enter the number of bits in error that can be tolerated.</li> <li>Error Limit - Enter the required error limit. The default value is 1.</li> </ul>
Test Length	<ul style="list-style-type: none"> <li>Duration - Enter the test length duration value.</li> <li>Confidence - Displays the test length confidence value.</li> </ul>
Stress Configuration	Select the required stress configuration among calibrated, customized, un-calibrated.
Spread Spectrum Clocking (SSC)	Enables SSC for both Data and Clock
CMI	Displays the CMI value in mV. The stress on the waveform is defined by the parameters of CMI.
DMI	Displays the DMI value in mV. The stress on the waveform is defined by the parameters of DMI.
Amplitude	Displays the Amplitude value in mV. The stress on the waveform is defined by the parameters of Amplitude.
RJ	Displays the RJ value in ps or Ulp-p. The stress on the waveform is defined by the parameters of RJ.
SJ	Displays the SJ value in ps or Ulp-p. The stress on the waveform is defined by the parameters of SJ.
BER Measurement Pattern	Select the required BER measurement pattern from the drop-down list.

**Table 52: JTOL Test: Configure Test (SKP Order Set)**

Parameter	Description
SKP Ordered Set Settings	
Insert SKP OS while sending Training Sequence	Click to insert SKP OS while sending training sequence.
Symbol Length	Select the required symbol length from the drop-down list for the corresponding generation.
Insert double SKP in Loopback.Active state	Select the required option (ON/OFF) from the drop-down list for the corresponding generation.
SKP Ordered Set interval	Select the required interval value from the drop-down list for the corresponding generation.
Filter/Remove the received SKP Order Set	Select to enable the filter or remove the received SKP ordered set.

Click  to move to the next screen.

**5. Configure JTOL Test:** This tab allows you to configure the JTOL test settings.



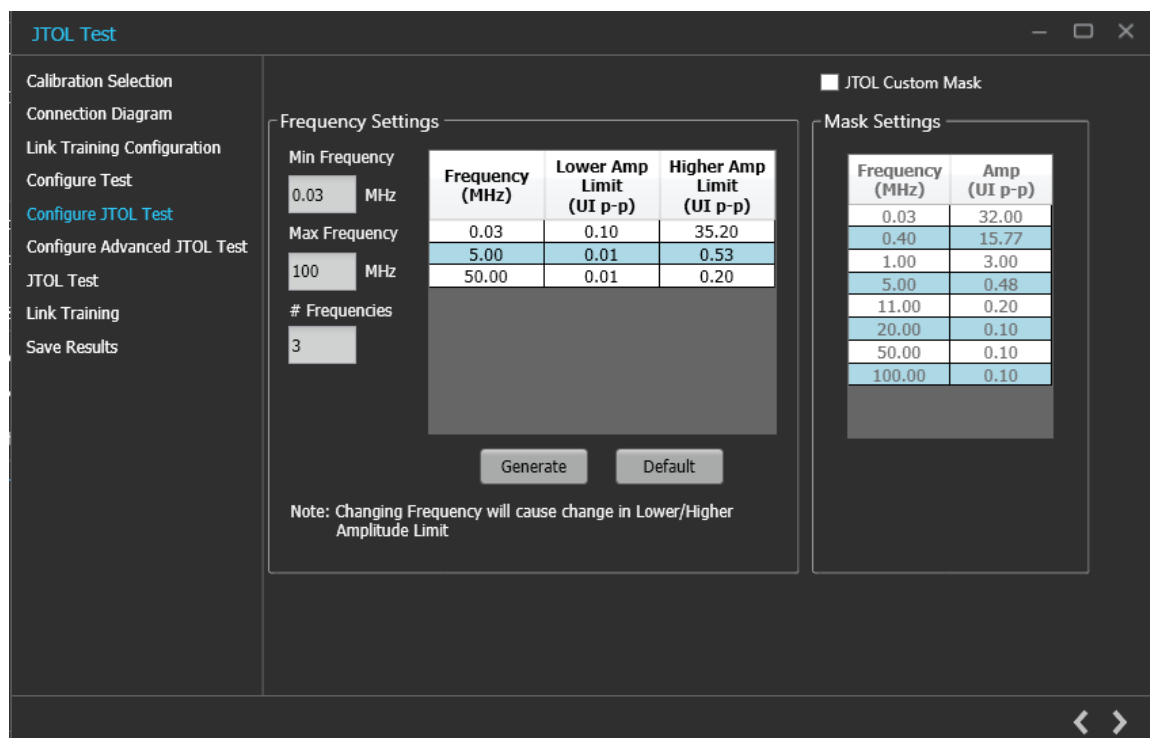



Figure 74: JTOL Test: Configure JTOL Test

Table 53: JTOL Test: Configure JTOL Test

Parameter	Description
<b>Frequency Settings</b>	
Frequency (MHz)	Displays the table of frequencies in MHz for which JTOL test is to be performed.
Lower Amplitude Limit (UI p-p)	Displays the table of lower amplitude limit values at which JTOL test starts for that frequency.
Higher Amplitude Limit (UI p-p)	Displays the table of higher amplitude limit values at which JTOL test ends for that frequency.
Min Frequency	Enter the minimum frequency value.
Max Frequency	Enter the maximum frequency value.
# Frequencies	Enter the desired number of frequencies within the specified range.
Generate	Click to view the table populated with the frequencies.
Default	Click to view the table populated with default list of frequencies.
JTOL Custom Mask	Select to enable the JTOL Custom mask. On JTOL custom mask selection with the defined mask settings, mask will get generated on the plot.

Table continued...

Parameter	Description
<b>Mask Settings</b>	
Frequency (MHz)	Displays the table of knee frequencies for the mask.
Amplitude (UI p-p)	Displays the amplitude of SJ at each knee frequency.

Click  to move to the next screen.

6. **Configure Advanced JTOL Test:** This tab allows you to configure the advanced JTOL test settings.

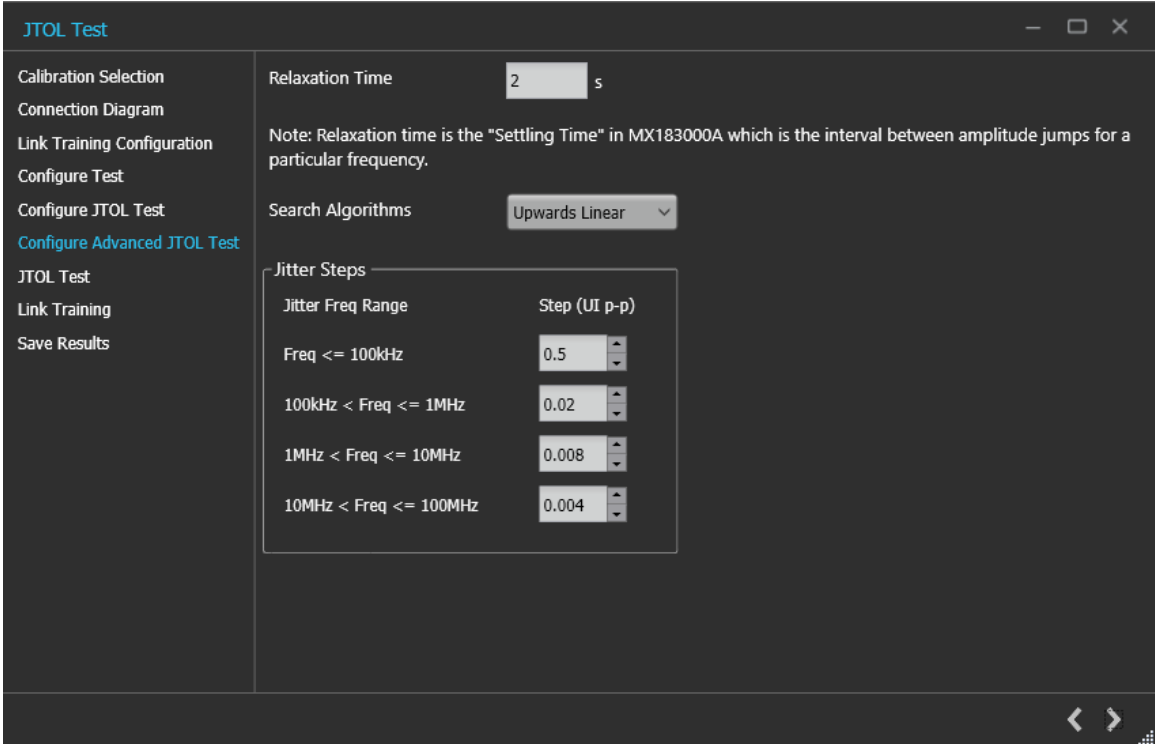



Figure 75: JTOL Test: Configure Advanced JTOL Test

Table 54: JTOL Test: Configure Advanced JTOL Test

Parameter	Description
Relaxation Time	Enter the amount of time BERT needs to relax before running BER for each amplitude point.
Table continued...	

Parameter	Description
Search Algorithms	<p>Select the required search algorithm from the drop-down for JTOL test.</p> <ul style="list-style-type: none"> <li>• Binary</li> <li>• Downwards Linear</li> <li>• Downwards Log</li> <li>• Upwards Log</li> <li>• Upwards Linear</li> <li>• Binary + Linear</li> </ul>
Jitter Steps	
Jitter Freq Range	<p>The different frequency ranges can have different step size for SJ amplitude sweep.</p> <ul style="list-style-type: none"> <li>• Freq &lt;= 100 KHz</li> <li>• 100KHz &lt; Freq &lt;=1 MHz</li> <li>• 1 MHz &lt; Freq &lt;=10 MHz</li> <li>• 10 MHz &lt;Freq &lt;= 100 MHz</li> </ul>
Step (UI p-p)	<p>Sets the SJ amplitude step size for different frequency ranges.</p> <p>Sets the ratios for Downward and Upward-Log search algorithms.</p> <p>No steps size is defined for Binary + Linear search algorithm.</p>

Click  to move to the next screen.

- JTOL Test:** This tab displays a graphical representation of JTOL test result. It includes the result table tab which displays the JTOL test results in a tabular form.

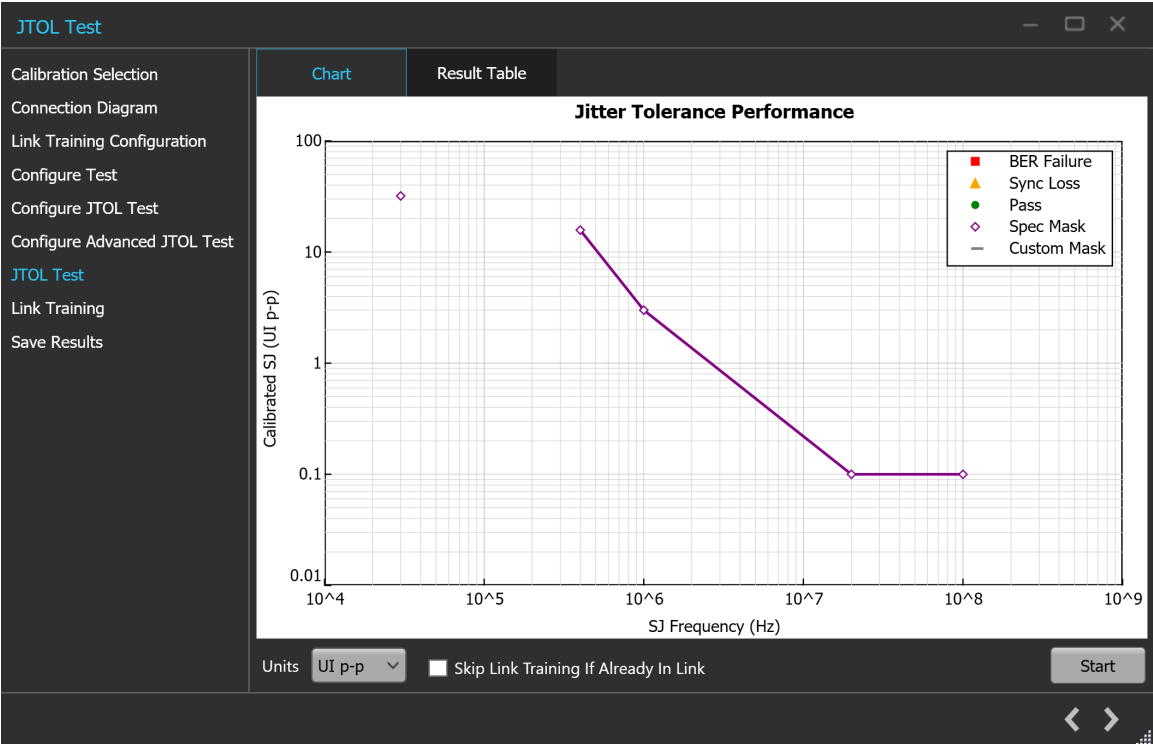


Figure 76: JTOL Test: JTOL Chart

Table 55: JTOL Test: JTOL Chart

Parameter	Description
Units	Select the required unit from the drop-down list. The list contains the following elements: <ul style="list-style-type: none"><li>ps</li><li>UI<sub>p-p</sub></li></ul>
Start	Click <b>Start</b> to run the test.
Skip Link Training	Select if DUT is already in link.

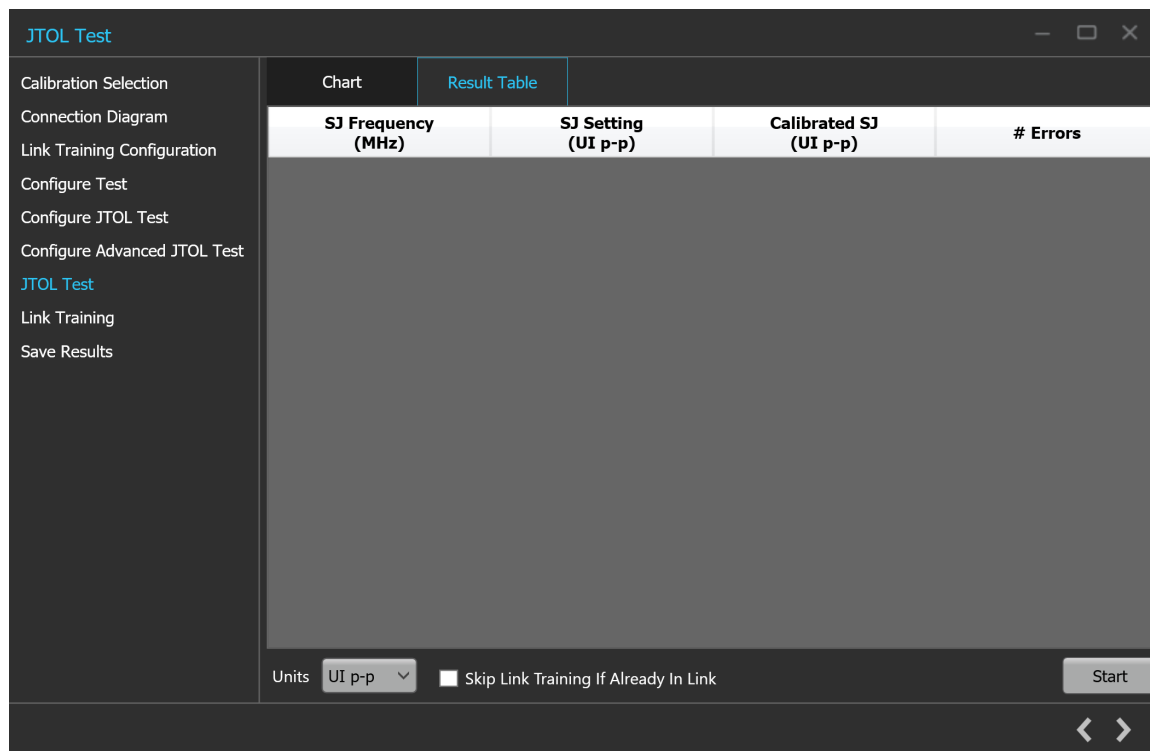



Figure 77: JTOL Test (Result Table)

Table 56: JTOL Test (Results Table)

Parameter	Description
SJ Frequency (MHz)	Displays the frequencies for which JTOL Test was performed.
SJ Setting (UI <sub>p-p</sub> / ps)	Displays the SJ Amplitude on the BERT.
Calibrated SJ (UI <sub>p-p</sub> / ps)	Displays the Calibrated SJ Amplitude.
#Errors	Displays the Error count reported by MX183000A.

Click  to move to the next screen.

8. **Link Training:** This tab displays the loopback steps with its status in a tabular form.

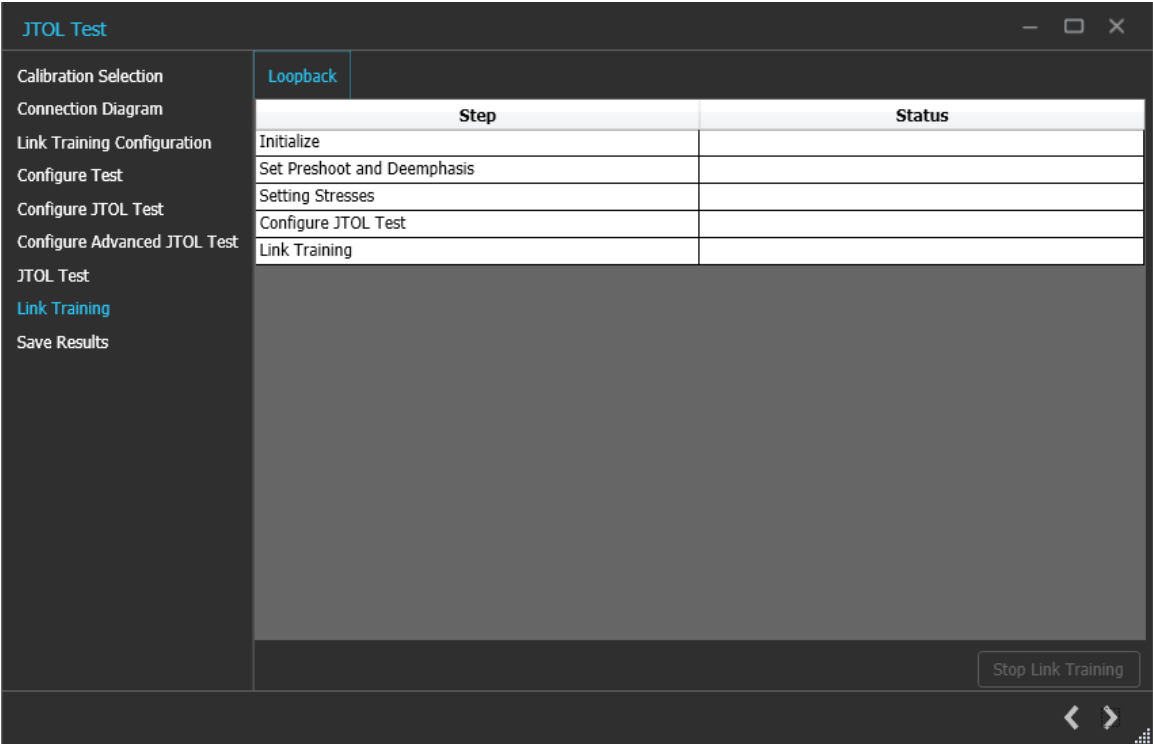



Figure 78: JTOL Test: Link Training

Table 57: JTOL Test: Link Training

Parameter	Description
Step	Lists the different steps that are prerequisite for initiating link training
Status	Indicates the completion status of each activity
Initialize	Initialize the BERT for performing link training
Set Preshoot and deemphasis	Sets the preset as per BERT Initial Preset in Link Training Configuration wizard It sets all the calibrated Presets on the BERT from P0-P9
Setting Stresses	Sets stresses as per the user selection in Configure Test wizard
Configure JTOL Test	Sets the BERT, DUT initial and Target Presets, Loopback mode (Recovery, Config), Link and Lane number
Link Training	Initiates the link training process in MX 183000A

Click  to move to the next screen.

9. **Save Results:** This tab allows you to save the JTOL test results.

Figure 79: JTOL Test: Save Results

Table 58: JTOL Test: Save Results

Parameter	Description
Unique ID	Enter the Unique ID of the calibrated equipment in the text box.
Generated By	Enter the user name in the text box.
Comments (Optional)	Enter the required comments in the comment box.
Save	Click to save the results.

Click  to complete the JTOL Test and close the wizard.

# Programmatic interface commands

## PREF:BERT:IP

This command sets or returns the IP address of the BERT used to connect with the PCIe5.0 (CEM) TekRxTest application.

### Syntax

PREF:BERT:IP <IP address>

PREF:BERT:IP?

### Inputs

<IP address> = <String>

### Outputs

<String>

## PREF:RTS:IP

This command sets or returns the IP address of the Real Time Oscilloscope used to connect with the PCIe5.0 (CEM) TekRxTest application.

### Syntax

PREF:RTS:IP <IP address>

PREF:RTS:IP?

### Inputs

<IP address> = <String>

### Outputs

<String>

## CONN:BERT

This command sets or returns the connection status of the BERT with PCIe5.0 (CEM) TekRxTest application.

### Syntax

CONN:BERT <0 | 1>

CONN:BERT?

### Inputs

<0 | 1>

0 indicates to disconnect the BERT.

1 indicates to connect the BERT.

### Outputs

<0 | 1>



## CONN:RTS

This command sets or returns the connection status of the Real Time Oscilloscope with PCIe5.0 (CEM) TekRxTest application.

### Syntax

```
CONN:RTS <0 | 1>
```

```
CONN:RTS?
```

### Inputs

<0 | 1>

0 indicates to disconnect the Real Time Oscilloscope.

1 indicates to connect the Real Time Oscilloscope.

### Outputs

<0 | 1>

## SETTINGS:TEKRXSERVICE:ANALYSISTIMEOUT

This command sets or returns TekRxService analysis time out value.

### Syntax

```
SETTINGS:TEKRXSERVICE:ANALYSISTIMEOUT<int>
```

```
SETTINGS:TEKRXSERVICE:ANALYSISTIMEOUT?
```

### Inputs

<int> 15 to 1000

### Outputs

<int>

## SETTINGS:SIGTEST:VERSION

This command sets or returns the sigtest version number.

### Syntax

```
SETTINGS:SIGTEST:VERSION <String>
```

```
SETTINGS:SIGTEST:VERSION?
```

### Inputs

<String>

### Outputs

<String>

## SETTINGS:SOCKETSERVER:IP

This command returns the IP address of the socket server.

## Syntax

SETTINGS:SOCKETSERVER:IP?

## Inputs

NA

## Outputs

<String>

# SETTINGS:SOCKETSERVER:LISTENINGPORT

This command returns the listening port of the socket server.

## Syntax

SETTINGS:SOCKETSERVER:LISTENINGPORT?

## Inputs

NA

## Outputs

<String>

# SETTINGS:SOCKETSERVER:TIMEOUT

This command returns the time out value of the socket server.

## Syntax

SETTINGS:SOCKETSERVER:TIMEOUT?

## Inputs

NA

## Outputs

<int>

# SETTINGS:MULTITONESJCAL:ENABLE

This command sets or returns the enable or disable status of Multi-tone SJ calibration.

## Syntax

SETTINGS:MULTITONESJCAL:ENABLE {0|1}

SETTINGS:MULTITONESJCAL:ENABLE?

## Inputs

{0|1}

0 indicates to disable the multi-tone SJ calibration.

1 indicates to enable the multi-tone SJ calibration.

## Outputs

{0 | 1}

## SETTINGS:MULTITONESJCAL:FREQUENCYCOUNT

This command sets or returns the frequency count value for Multi-tone SJ calibration.

### Syntax

```
SETTINGS:MULTITONESJCAL:FREQUENCYCOUNT <NR1>
```

```
SETTINGS:MULTITONESJCAL:FREQUENCYCOUNT?
```

### Inputs

<NR1> 1 to 14

### Outputs

<NR1>

## SETTINGS:MULTITONESJCAL:MAXFREQUENCY

This command sets or returns the maximum frequency value for Multi-tone SJ calibration.

### Syntax

```
SETTINGS:MULTITONESJCAL:MAXFREQUENCY <NR1>
```

```
SETTINGS:MULTITONESJCAL:MAXFREQUENCY?
```

### Inputs

<NR1> 1 to 100 MHz

### Outputs

<NR1>

## SETTINGS:MULTITONESJCAL:MINFREQUENCY

This command sets or returns the minimum frequency value for Multi-tone SJ calibration.

### Syntax

```
SETTINGS:MULTITONESJCAL:MINFREQUENCY <NR1>
```

```
SETTINGS:MULTITONESJCAL:MINFREQUENCY?
```

### Inputs

<NR1> 0.03 to 99 MHz

### Outputs

<NR1>

## SETTINGS:MULTITONESJCAL:POINTS

This command sets or returns the number of points for Multi-tone SJ calibration.

## Syntax

```
SETTINGS:MULTITONESJCAL:POINTS <NR1>
```

```
SETTINGS:MULTITONESJCAL:POINTS?
```

## Inputs

<NR1> 2 to 8

## Outputs

<NR1>

# SETTINGS:EYE:ACQUISITIONS

This command sets or returns the number of acquisitions for stressed eye calibration.

## Syntax

```
SETTINGS:EYE:ACQUISITIONS <int>
```

```
SETTINGS:EYE:ACQUISITIONS?
```

## Inputs

<int> 1 to 20

## Outputs

<int>

# SETTINGS:TP1:CH1DEEMBEDFILE

This command sets or returns the CH1 de-embedding filter file path for TP3 calibration.

## Syntax

```
SETTINGS:TP1:CH1DEEMBEDFILE <"File path">
```

```
SETTINGS:TP1:CH1DEEMBEDFILE?
```

## Inputs

<"File path"> = <String>

## Outputs

<String>

# SETTINGS:TP1:CH2DEEMBEDFILE

This command sets or returns the CH2 de-embedding filter file path for TP3 calibration .

## Syntax

```
SETTINGS:TP1:CH2DEEMBEDFILE <"File path">
```

```
SETTINGS:TP1:CH2DEEMBEDFILE?
```

## Inputs

<"File path"> = <String>

## Outputs

<String>

## SETTINGS:TP1:ENABLECH1DEEMBED

This command sets or returns the enable or disable status of CH1 de-embedding for TP3 calibration.

### Syntax

```
SETTINGS:TP1:ENABLECH1DEEMBED {0 | 1}
```

```
SETTINGS:TP1:ENABLECH1DEEMBED?
```

### Inputs

{0 | 1}

0 - Indicates the CH1 de-embedding is disabled.

1 - Indicated the CH1 de-embedding is enabled

### Outputs

{0 | 1}

## SETTINGS:TP1:ENABLECH2DEEMBED

This command sets or returns the enable or disable status of CH2 de-embedding for TP3 calibration.

### Syntax

```
SETTINGS:TP1:ENABLECH2DEEMBED {0 | 1}
```

```
SETTINGS:TP1:ENABLECH2DEEMBED?
```

### Inputs

{0 | 1}

0 - Indicates the CH2 de-embedding is disabled.

1 - Indicates the CH2 de-embedding is enabled.

### Outputs

{0 | 1}

## SETTINGS:TP2:CH1DEEMBEDFILE

This command sets or returns the filter file path of CH1 de-embedding for TP2 calibration.

### Syntax

```
SETTINGS:TP2:CH1DEEMBEDFILE <"File path">
```

```
SETTINGS:TP2:CH1DEEMBEDFILE?
```

### Inputs

<"File path"> = <String>

## Outputs

<String>

## SETTINGS:TP2:CH2DEEMBEDFILE

This command sets or returns the filter file path of CH2 de-embedding for TP2 calibration.

### Syntax

```
SETTINGS:TP2:CH2DEEMBEDFILE <String>
```

```
SETTINGS:TP2:CH2DEEMBEDFILE?
```

### Inputs

<"File path"> = <String>

### Outputs

<String>

## SETTINGS:TP2:ENABLECH1DEEMBED

This command sets or returns the enable or disable status of CH1 de-embedding for TP2 calibration.

### Syntax

```
SETTINGS:TP2:ENABLECH1DEEMBED {0 | 1}
```

```
SETTINGS:TP2:ENABLECH1DEEMBED?
```

### Inputs

{0 | 1}

0 - Indicates the CH1 de-embedding is disabled.

1 - Indicates the CH1 de-embedding is enabled.

### Outputs

{0 | 1}

## SETTINGS:TP2:ENABLECH2DEEMBED

This command sets or returns the enable or disable status of CH2 de-embedding for TP2 calibration.

### Syntax

```
SETTINGS:TP2:ENABLECH2DEEMBED {0 | 1}
```

```
SETTINGS:TP2:ENABLECH2DEEMBED?
```

### Inputs

{0 | 1}

0 - Indicates the CH2 de-embedding is disabled.

1 - Indicates the CH2 de-embedding is enabled.

## Outputs

{0 | 1}

## SETTINGS:MULTITONESJCAL:DEFAULT

This command sets the SJ Frequencies to its default value for multitone SJ calibration.

### Syntax

```
SETTINGS:MULTITONESJCAL:DEFAULT
```

### Inputs

NA

### Outputs

NA

## SETTINGS:MULTITONESJCAL:GENERATE

This command generates the SJ frequencies for multitone SJ calibration.

### Syntax

```
SETTINGS:MULTITONESJCAL:GENERATE
```

### Inputs

NA

### Outputs

NA

## SETTINGS:TP1:CH1:EXTERNALATTEN

This command sets or returns the external attenuation of CH1 for TP3 calibration.

### Syntax

```
SETTINGS:TP1:CH1:EXTERNALATTEN <int>
```

```
SETTINGS:TP1:CH1:EXTERNALATTEN?
```

### Inputs

<int> 0 to 10

### Outputs

<int>

## SETTINGS:TP1:CH2:EXTERNALATTEN

This command sets or returns the external attenuation of CH2 for TP3 calibration.

### Syntax

```
SETTINGS:TP1:CH2:EXTERNALATTEN <int>
```

SETTINGS:TP1:CH2:EXTERNALATTEN?

### Inputs

<int> 0 to 10

### Outputs

<int>

## SETTINGS:TP2:CH1:EXTERNALATTEN

This command sets or returns the external attenuation of CH1 for TP2 calibration.

### Syntax

SETTINGS:TP2:CH1:EXTERNALATTEN <int>

SETTINGS:TP2:CH1:EXTERNALATTEN?

### Inputs

<int> 0 to 10

### Outputs

<int>

## SETTINGS:TP2:CH2:EXTERNALATTEN

This command sets or returns the external attenuation of CH2 for TP2 calibration.

### Syntax

SETTINGS:TP2:CH2:EXTERNALATTEN <int>

SETTINGS:TP2:CH2:EXTERNALATTEN?

### Inputs

<int> 0 to 10

### Outputs

<int>

## SETTINGS:EYE:ALGO

This command sets or returns the algorithm for stressed eye.

### Syntax

SETTINGS:EYE:ALGO <0 | 1>

SETTINGS:EYE:ALGO?

### Inputs

<0 | 1>

0 - Indicates linear sweep is the algorithm for stressed eye.

1 - Indicates Efficient is the algorithm for stressed eye.



**Outputs**

&lt;0 | 1&gt;

**SETTINGS:CTLE:ANALYSISTOOL**

This command sets or returns the analysis tool selected for preset selection and stressed eye calibration.

**Syntax**

```
SETTINGS:CTLE:ANALYSISTOOL <0 | 1>
```

```
SETTINGS:CTLE:ANALYSISTOOL?
```

**Inputs**

&lt;0 | 1&gt;

0 - Indicates Seasim is the the analysis tool.

1 - Indicates Sigtest is the analysis tool.

**Outputs**

&lt;0 | 1&gt;

**SETTINGS:RESTORE**

This command resets the application to default settings.

**Syntax**

```
Settings:Restore
```

**Inputs**

NA

**Outputs**

NA

**SETTINGS:RECALL**

This command recalls the settings as per specified file.

**Syntax**

```
SETTINGS:RECALL <"File path">
```

**Inputs**

```
<"File path"> = <String>
```

**Outputs**

NA

**SETTINGS:SAVE**

This command saves the settings into the specified file.

### Syntax

```
Settings:Save <"File path">
```

### Inputs

```
<"File path"> = <String>
```

### Outputs

NA

## SETTINGS:RECALL:STATUS

This command returns the status of the recall command execution.

### Syntax

```
SETTINGS:RECALL:STATUS?
```

### Inputs

NA

### Outputs

```
<String>
```

## SETTINGS:RESTORE:STATUS

This command returns the status of restore command execution.

### Syntax

```
SETTINGS:RESTORE:STATUS?
```

### Inputs

NA

### Outputs

```
<String>
```

## SETTINGS:SAVE:STATUS

This command returns the status of the save command execution.

### Syntax

```
SETTINGS:SAVE:STATUS?
```

### Inputs

NA

### Outputs

```
<String>
```

## TP1CAL:OPEN

This command opens the TP3 calibration panel.

### Syntax

TP1CAL:OPEN

### Inputs

NA

### Outputs

NA

## TP1CAL:WIZARD:OPEN

This command opens the TP3 calibration wizard.

### Syntax

TP1CAL:WIZARD:OPEN

### Inputs

NA

### Outputs

NA

## TP1CAL:WIZARD:CLOSE

This command closes the TP3 calibration wizard.

### Syntax

TP1CAL:WIZARD:CLOSE

### Inputs

NA

### Outputs

NA

## TP1CAL:DELETE

This command deletes the selected TP3 calibration file.

### Syntax

TP1CAL:DELETE

### Inputs

NA

### Outputs

NA

## TP1CAL:REPORT

This command generates the report for the selected TP3 calibration.

### Syntax

TP1CAL:REPORT

### Inputs

NA

### Outputs

NA

## TP1CAL:SAVE

This command saves the current TP3 Calibration file to the database.

### Syntax

TP1CAL:SAVE

### Inputs

NA

### Outputs

NA

## TP1CAL:EQUIP:INIT

This command sets the equipment initialization run status for TP3 calibration.

### Syntax

TP1CAL:EQUIP:INIT <0 | 1>

### Inputs

<0 | 1>

0 - Stop the equipment initialization to run.

1 - Start the equipment initialization to run.

### Outputs

NA

## TP1CAL:AUTOCAL

This command sets the TP3 automatic calibration run status.

### Syntax

TP1CAL:AUTOCAL <0 | 1>

### Inputs

<0 | 1>

0 - Stop the TP3 automatic calibration run.

1 - Start the TP3 automatic calibration run.

### Outputs

NA

## TP1CAL:AMPLITUDE:RUN

This command sets the Amplitude calibration run status.

### Syntax

```
TP1CAL:AMPLITUDE:RUN <0 | 1>
```

### Inputs

<0 | 1>

0 - Stop the Amplitude calibration run.

1 - Start the Amplitude calibration run.

### Outputs

NA

## TP1CAL:PRESET:RUN

This command sets the Preset calibration run status.

### Syntax

```
TP1CAL:PRESET:RUN <0 | 1>
```

### Inputs

<0 | 1>

0 - Stop the the Preset calibration run.

1 - Start the the Preset calibration run.

### Outputs

NA

## TP1CAL:RJ:RUN

This command sets the RJ calibration run status.

### Syntax

```
TP1CAL:RJ:RUN <0 | 1>
```

### Inputs

<0 | 1>

0 - Stop the RJ calibration run.

1 - Start the RJ calibration run.

## Outputs

NA

## TP1CAL:SJ:RUN

This command sets the SJ calibration run status.

### Syntax

```
TP1CAL:SJ:RUN <0 | 1>
```

### Inputs

<0 | 1>

0 - Stop the SJ calibration run.

1 - Start the SJ calibration run.

### Outputs

NA

## TP1CAL:MULTITONESJCAL:RUN

This command returns the Multi-tone SJ calibration run status.

### Syntax

```
TP1CAL:MULTITONESJCAL:RUN
```

### Inputs

NA

### Outputs

{InProgress | Done}

## TP1CAL:EQUIP:STATUS

This command returns the equipment initialization run status for TP3 calibration.

### Syntax

```
TP1CAL:EQUIP:STATUS?
```

### Inputs

NA

### Outputs

{InProgress | Done}

## TP1CAL:AMPLITUDE:STATUS

This command returns the amplitude calibration run status.

**Syntax**

```
TP1CAL:AMPLITUDE:STATUS?
```

**Inputs**

NA

**Outputs**

{InProgress | Done}

**TP1CAL:PRESET:STATUS**

This command returns the preset calibration run status.

**Syntax**

```
TP1CAL:PRESET:STATUS?
```

**Inputs**

NA

**Outputs**

{InProgress | Done}

**TP1CAL:PWJCAL:DJ**

This command sets or returns the PWJ DJ value in TP3 calibration.

**Syntax**

```
TP1CAL:PWJCAL:DJ <float>
```

```
TP1CAL:PWJCAL:DJ?
```

**Inputs**

<float> 0 to 1 ps

**Outputs**

<float>

**TP1CAL:PWJCAL:MODE**

This command sets or returns the PWJ calibration type for TP3 calibration.

**Syntax**

```
TP1CAL:PWJCAL:MODE <0 | 1>
```

```
TP1CAL:PWJCAL:MODE?
```

**Inputs**

<0 | 1>

0 - Indicates the mode is manual.

1 - Indicates the mode is measure.

## Outputs

<0 | 1>

## TP1CAL:PWJCAL:RJ

This command sets or returns the PWJ RJ value in TP3 calibration.

### Syntax

TP1CAL:PWJCAL:RJ <float>

TP1CAL:PWJCAL:RJ?

### Inputs

<float> 0 to 1 (RMS) ps

### Outputs

<float>

## TP1CAL:PWJCAL:START

This command starts or stops the PWJ Calibration.

### Syntax

TP1CAL:PWJCAL:START <0 | 1>

### Inputs

<0 | 1>

0 - Indicates to start the PWJ calibration test.

1 - Indicates to stop the PWJ calibration test.

### Outputs

<0 | 1>

## TP1CAL:PWJCAL:STATUS

This command returns the PWJ calibration test run status.

### Syntax

TP1CAL:PWJCAL:STATUS?

### Inputs

N/A

### Outputs

{InProgress | Done}

## TP1CAL:RJ:STATUS

This command returns the RJ calibration run status.



**Syntax**

TP1CAL:RJ:STATUS?

**Inputs**

NA

**Outputs**

{InProgress | Done}

**TP1CAL:SJ:STATUS**

This command returns the SJ calibration run status.

**Syntax**

TP1CAL:SJ:STATUS?

**Inputs**

NA

**Outputs**

{InProgress | Done}

**TP1CAL:MULTITONESJCAL:RUN**

This command returns the Multi-tone SJ calibration run status.

**Syntax**

TP1CAL:MULTITONESJCAL:RUN

**Inputs**

NA

**Outputs**

{InProgress | Done}

**TP1CAL:AMPLITUDE:SETTING**

This command returns the amplitude value for TP3 calibration.

**Syntax**

TP1CAL:AMPLITUDE:SETTING?

**Inputs**

NA

**Outputs**

<int>

## TP1CAL:RJ:SETTING

This command returns the RJ calibrated value for TP3 calibration.

### Syntax

TP1CAL:RJ:SETTING?

### Inputs

NA

### Outputs

<float>

## TP1CAL:SJ:SETTING

This command returns the SJ calibrated value for TP3 calibration.

### Syntax

TP1CAL:SJ:SETTING?

### Inputs

NA

### Outputs

<float>

## TP1CAL:SAVE:ID

This command sets or returns the unique identifier used as key to save the report in database for TP3 calibration.

### Syntax

TP1CAL:SAVE:ID <String>

TP1CAL:SAVE:ID?

### Inputs

<String>

### Outputs

<String>

## TP1CAL:SAVE:GENERATEDBY

This command sets or returns the creator name who save the report in database for TP3 calibration.

### Syntax

TP1CAL:SAVE:GENERATEDBY <String>

TP1CAL:SAVE:GENERATEDBY?

### Inputs

<String>

## Outputs

<String>

## TP1CAL:SAVE:COMMENTS

This command sets or returns the comments given to save the report in database for TP3 calibration.

### Syntax

TP1CAL:SAVE:COMMENTS <String>

TP1CAL:SAVE:COMMENTS?

### Inputs

<String>

### Outputs

<String>

## TP1CAL:ACDC:RUN

This command runs the TP3 AC-DC balance calibration process.

### Syntax

TP1CAL:ACDC:RUN <0 | 1>

### Inputs

<0 | 1>

1 - Start the AC-DC balance calibration run.

0 - Stop the AC-DC balance calibration run.

### Outputs

NA

## TP1CAL:ACDC:STATUS

This command returns the TP3 AC-DC balance calibration run status.

### Syntax

TP1CAL:ACDC:STATUS?

### Inputs

NA

### Outputs

{InProgress | Done}

## TP1CAL:ACDC:SETTING

This command returns the AC-DC balanced value for TP3 calibration.

## Syntax

TP1CAL:ACDC:SETTING?

## Inputs

NA

## Outputs

<float>

## TP1CAL:SJ@210MHz:RUN

This command sets the TP3 SJ@210MHz calibration run status.

## Syntax

TP1CAL:SJ@210MHz:RUN <0 | 1>

## Inputs

<0 | 1>

1 - Start the SJ@210 MHz calibration run.

0 - Stop the SJ@210 MHz calibration run.

## Outputs

NA

## TP1CAL:SJ@210MHz:STATUS

This command returns the status of SJ@210 MHz Calibration run status.

## Syntax

TP1CAL:SJ@210MHz:STATUS?

## Inputs

NA

## Outputs

{InProgress | Done}

## TP1CAL:IL:MODE

This command sets or returns the type of insertion loss in TP3 calibration.

## Syntax

TP1CAL:IL:MODE <0 | 1>

TP1CAL:IL:MODE?

## Inputs

<0 | 1>

0 - Indicates the insertion loss type is in manual mode.

1 - Indicates the insertion loss type is in measure mode.

### Outputs

<0 | 1>

## TP1CAL:MANUAL:IL

This command sets or returns the manual insertion loss value for TP3 calibration.

### Syntax

TP1CAL:MANUAL:IL <float>

TP1CAL:MANUAL:IL?

### Inputs

<float> 0 to 10

### Outputs

<float>

## TP1CAL:MEASURELOSS:START

This command runs the automatic insertion loss calculation process.

### Syntax

TP1CAL:MEASURELOSS:START <0 | 1>

### Inputs

<0 | 1>

1 - Start the insertion loss measurement.

0 - Stop the insertion loss measurement.

### Outputs

NA

## TP1CAL:IL:SCOPEACQS

This command sets or returns the value for scope acquisitions for insertion loss in TP3 calibration.

### Syntax

TP1CAL:IL:SCOPEACQS <int>

TP1CAL:IL:SCOPEACQS?

### Inputs

16 to 2048

### Outputs

<int>

## TP1CAL:IL:AVGS

This command sets or returns the value for the number of waveforms averages for insertion loss in TP3 calibration.

### Syntax

```
TP1CAL:IL:AVGS<int>
```

```
TP1CAL:IL:AVGS?
```

### Inputs

1 to 10

### Outputs

<int>

## TP1CAL:MEASURELOSS:STATUS

This command returns the automatic insertion loss measurement run status.

### Syntax

```
TP1CAL:MEASURELOSS:STATUS?
```

### Inputs

NA

### Outputs

{InProgress | Done}

## TP2CAL:OPEN

This command opens the TP2 calibration panel.

### Syntax

```
TP2CAL:OPEN
```

### Inputs

NA

### Outputs

NA

## TP2CAL:WIZARD:OPEN

This command opens the TP2 calibration wizard.

### Syntax

```
TP2CAL:WIZARD:OPEN
```

### Inputs

NA

## Outputs

NA

## TP2CAL:WIZARD:CLOSE

This command closes the TP2 calibration wizard.

### Syntax

```
TP2CAL:WIZARD:CLOSE
```

### Inputs

NA

### Outputs

NA

## TP2CAL:DUT:TYPE

This command sets or returns the DUT type used for TP2 calibration.

### Syntax

```
TP2CAL:DUT:TYPE <0 | 1>
```

```
TP2CAL:DUT:TYPE?
```

### Inputs

<0 | 1>

0 - Indicates the DUT type is Non-Root Complex.

1 - Indicates the DUT type is Root Complex.

### Outputs

<0 | 1>

## TP2CAL:SELECT:TP1

This command sets or returns the selected TP3 calibration file.

### Syntax

```
TP2CAL:SELECT:TP1 <String>
```

```
TP2CAL:SELECT:TP1?
```

### Inputs

<String>

### Outputs

<String>

## TP2CAL:DELETE

This command deletes the selected TP2 calibration file.

## Syntax

TP2CAL:DELETE

## Inputs

NA

## Outputs

NA

# TP2CAL:REPORT

This command generates the report for selected TP2 calibration.

## Syntax

TP2CAL:REPORT

## Inputs

NA

## Outputs

NA

# TP2CAL:SAVE

This command saves the current TP2 Calibration file to the database.

## Syntax

TP2CAL:SAVE

## Inputs

NA

## Outputs

NA

# TP2CAL:EQUIP:INIT

This command sets the equipment initialization run status for TP2 calibration.

## Syntax

TP2CAL:EQUIP:INIT <0 | 1>

## Inputs

<0 | 1>

0 - Stop the equipment initialization run.

1 - Start the equipment initialization run.

## Outputs

NA



## TP2CAL:CMI:RUN

This command sets the CMI calibration run status.

### Syntax

```
TP2CAL:CMI:RUN <0 | 1>
```

### Inputs

<0 | 1>

0 - Stop the CMI calibration run.

1 - Start the CMI calibration run.

### Outputs

NA

## TP2CAL:ILMEAS:RUN

This command sets the channel loss calculation run status.

### Syntax

```
TP2CAL:ILMEAS:RUN <0 | 1>
```

### Inputs

<0 | 1>

0 - Stop the channel loss calculation run.

1 - Start the channel loss calculation run.

### Outputs

NA

## TP2CAL:CTLEANDPRESET:RUN

This command sets the CTLE and preset selection run status.

### Syntax

```
TP2CAL:CTLEANDPRESET:RUN <0 | 1>
```

### Inputs

<0 | 1>

0 - Stop the CTLE and preset selection run.

1 - Start the CTLE and preset selection run.

### Outputs

NA

## TP2CAL:STRESSEDEYE:RUN

This command sets the stressed eye calibration run status.

## Syntax

TP2CAL:STRESSEDEYE:RUN <0 | 1>

## Inputs

<0 | 1>

0 - Stop the stressed eye calibration run.

1 - Start the stressed eye calibration run.

## Outputs

NA

## TP2CAL:EQUIP:STATUS

This command returns the equipment initialization run status for TP2 calibration.

## Syntax

TP2CAL:EQUIP:STATUS?

## Inputs

NA

## Outputs

{InProgress | Done}

## TP2CAL:CMI:STATUS

This command returns the CMI calibration run status for TP2 calibration.

## Syntax

TP2CAL:CMI:STATUS?

## Inputs

NA

## Outputs

{InProgress | Done}

## TP2CAL:ILMEAS:STATUS

This command returns the channel loss calculation run status for TP2 calibration.

## Syntax

TP2CAL:ILMEAS:STATUS?

## Inputs

NA

## Outputs

{InProgress | Done}

## TP2CAL:CTLEANDPRESET:STATUS

This command returns the CTLe and Preset selection run status for TP2 calibration.

### Syntax

TP2CAL:CTLEANDPRESET:STATUS?

### Inputs

NA

### Outputs

{InProgress | Done}

## TP2CAL:STRESSEDEYE:STATUS

This command returns the stressed eye calibration run status for TP2 calibration.

### Syntax

TP2CAL:STRESSEDEYE:STATUS?

### Inputs

NA

### Outputs

{InProgress | Done}

## TP2CAL:DMI:SETTING

This command returns the DMI calibrated value for TP2 calibration.

### Syntax

TP2CAL:DMI:SETTING?

### Inputs

NA

### Outputs

<float>

## TP2CAL:CMI:SETTING

This command returns the CMI calibrated value for TP2 calibration.

### Syntax

TP2CAL:CMI:SETTING?

### Inputs

NA

### Outputs

<int>

## TP2CAL:SAVE:ID

This command sets or returns the unique identifier used as key to save the report in database for TP2 calibration.

### Syntax

```
TP2CAL:SAVE:ID <String>
```

```
TP2CAL:SAVE:ID?
```

### Inputs

<String>

### Outputs

<String>

## TP2CAL:SAVE:GENERATEDBY

This command sets or returns the creator name who save the report in database for TP2 calibration.

### Syntax

```
TP2CAL:SAVE:GENERATEDBY <String>
```

```
TP2CAL:SAVE:GENERATEDBY?
```

### Inputs

<String>

### Outputs

<String>

## TP2CAL:SAVE:COMMENTS

This command sets or returns the comments given to save the report in database for TP2 calibration.

### Syntax

```
TP2CAL:SAVE:COMMENTS <String>
```

```
TP2CAL:SAVE:COMMENTS?
```

### Inputs

<String>

### Outputs

<String>

## TP2CAL:SAVE:ISIPAIR

This command sets or returns ISI Pair stored in Database.

### Syntax

```
TP2CAL:SAVE:ISIPAIR <String>
```

```
TP2CAL:SAVE:ISIPAIR?
```

**Inputs**

&lt;String&gt;

**Outputs**

&lt;String&gt;

**TP2CAL:ILMEASFORDMI:RUN**

This command sets the run status for Insertion loss calculation before DMI/CMI in TP2 calibration.

**Syntax**

```
TP2CAL:ILMEASFORDMI:RUN <0 | 1>
```

**Inputs**

&lt;0 | 1&gt;

0 - Stop the Insertion loss calculation before DMI/CMI.

1 - Start the Insertion loss calculation before DMI/CMI.

**Outputs**

NA

**TP2CAL:ILMEASFORDMI:STATUS**

This command returns the run status of Insertion loss calculation before DMI/CMI in TP2 calibration.

**Syntax**

```
TP2CAL:ILMEASFORDMI:STATUS?
```

**Inputs**

NA

**Outputs**

{InProgress | Done}

**TP2CAL:STRESSEDEYE:ACQUISITIONS**

This command sets or returns the number of acquisitions value for TP2 stressed eye calibration.

**Syntax**

```
TP2CAL:STRESSEDEYE:ACQUISITIONS<int>
```

```
TP2CAL:STRESSEDEYE:ACQUISITIONS?
```

**Inputs**

&lt;int&gt; 1 to 20

**Outputs**

&lt;int&gt;

## TP2CAL:DMI:RUN

This command sets the run status for TP2 DMI calibration.

### Syntax

TP2CAL:DMI:RUN <0 | 1>

### Inputs

<0 | 1>

0 - Stop the TP2 DMI calibration.

1 - Start the TP2 DMI calibration.

### Outputs

NA

## TP2CAL:DMI:STATUS

This command returns the TP2 DMI calibration run status.

### Syntax

TP2CAL:DMI:STATUS?

### Inputs

NA

### Outputs

{InProgress | Done}

## TP2CAL:CTLEANDPRESET:ACQUISITIONS

This command sets or returns the number of acquisitions value for CTLE or Preset selection in TP2 calibration.

### Syntax

TP2CAL:CTLEANDPRESET:ACQUISITIONS<int>

TP2CAL:CTLEANDPRESET:ACQUISITIONS?

### Inputs

<int> 1 to 20

### Outputs

<int>

## TP2CAL:CTLE:ESTIMATOR

This command sets or returns the CTLE Estimation method for TP2 calibration.

### Syntax

TP2CAL:CTLE:ESTIMATOR <0 | 1>

TP2CAL:CTLE:ESTIMATOR?

**Inputs**

&lt;0 | 1&gt;

0 - Indicates the CTLE method is automatic.

1 - Indicates the CTLE method is manual.

**Outputs**

&lt;0 | 1&gt;

**TP2CAL:SEASIMCTLE:GEN5**

This command sets or returns the manual Seasim CTLE value to be applied on the waveform.

**Syntax**`TP2CAL:SEASIMCTLE:Gen5 <int>``TP2CAL:SEASIMCTLE:Gen5?`**Inputs**

&lt;int&gt; 0 to 10

**Outputs**

&lt;int&gt;

**TP2CAL:STRESSEDEYE:SJ**

This command sets or returns the SJ stress value for Manual Stressed Eye Calibration run.

**Syntax**`TP2CAL:STRESSEDEYE:SJ <float>``TP2CAL:STRESSEDEYE:SJ?`**Inputs**

&lt;float&gt; 1 to 5

**Outputs**

&lt;float&gt;

**TP2CAL:STRESSEDEYE:DMI**

This command sets or returns the DMI stress value for Manual Stressed Eye Calibration run.

**Syntax**`TP2CAL:STRESSEDEYE:DMI <float>``TP2CAL:STRESSEDEYE:DMI?`**Inputs**

&lt;float&gt; 5 to 30

## Outputs

<float>

## TP2CAL:STRESSEDEYE:AMPLITUDE

This command sets or returns the amplitude value for Manual Stressed Eye Calibration run.

### Syntax

TP2CAL:STRESSEDEYE:AMPLITUDE<int>

TP2CAL:STRESSEDEYE:AMPLITUDE?

### Inputs

<int> 720 to 800

### Outputs

<int>

## TP2CAL:IL:MODE

This command sets or returns the type of insertion loss in TP2 calibration.

### Syntax

TP1CAL:IL:MODE <0 | 1>

TP1CAL:IL:MODE?

### Inputs

<0 | 1>

0 - Indicates the insertion loss type is manual entry.

1 - Indicates the insertion loss type is Measure loss.

### Outputs

<0 | 1>

## TP2CAL:MANUAL:IL

This command sets or returns the manual insertion loss value for TP2 calibration.

### Syntax

TP2CAL:MANUAL:IL <float>

TP2CAL:MANUAL:IL?

### Inputs

<float> 0 to 50

### Outputs

<float>



## TP2CAL:IL:SCOPEACQS

This command sets or returns the value for scope acquisitions for insertion loss in TP2 calibration.

### Syntax

```
TP2CAL:IL:SCOPEACQS <int>
```

```
TP2CAL:IL:SCOPEACQS?
```

### Inputs

16 to 2048

### Outputs

<int>

## TP2CAL:IL:AVGS

This command sets or returns the value for the number of waveforms averages for insertion loss in TP2 calibration.

### Syntax

```
TP2CAL:IL:AVGS <int>
```

```
TP2CAL:IL:AVGS?
```

### Inputs

1 to 10

### Outputs

<int>

## TP2CAL:CTLEANDPRESET:CHKPRESET

This command check and uncheck the check box for specific Presets.

### Syntax

```
TP2CAL:CTLEANDPRESET:CHKPRESET <0 to 9> <1 | 0>
```

```
TP2CAL:CTLEANDPRESET:CHKPRESET <0 to 9>?
```

### Inputs

<0 to 9> corresponds to Presets P0 to P9

<1 | 0>, 1 for check and 0 for uncheck

### Outputs

<1 | 0>

## TP2CAL:CTLEANDPRESET:CHKCTLE

This command check and uncheck the check box for specific CTLE's

## Syntax

```
TP2CAL:CTLEANDPRESET:CHKCTLE <5 to 15> <1 | 0>
```

```
TP2CAL:CTLEANDPRESET:CHKCTLE <5 to 15>?
```

## Inputs

<5 to 15> corresponds to CTLE's 5p5 to 15p5

<1 | 0>, 1 for check and 0 for uncheck

## Outputs

<1 | 0>

# TP2CAL:STRESSEDEYE:MANUALCALRUN

This command sets or returns the enable or disable status of the manual calibration run for stressed eye.

## Syntax

```
TP2CAL:STRESSEDEYE:MANUALCALRUN {0 | 1}
```

```
TP2CAL:STRESSEDEYE:MANUALCALRUN?
```

## Inputs

{0 | 1}

0 - Indicates to disable the manual calibration run.

1 - Indicates to enable the manual calibration run.

## Outputs

{0 | 1}

# TP2CAL:STRESSEDEYE:EXHAUSTIVESWEEP

This command sets or returns the min, max settings for the specified sweep parameter for Exhaustive Sweep.

## Syntax

```
TP2CAL:STRESSEDEYE:EXHAUSTIVESWEEP <string> <double/int>
```

```
TP2CAL:STRESSEDEYE:EXHAUSTIVESWEEP? <string>
```

## Inputs

<string> (Sweep Parameter) - Indicates the parameter for which min, max value needs to be set. The Sweep parameters can be Amplitude, SJ, DMI

<double/int> (MIN,MAX) - Indicates the min, max settings for the specified sweep parameter.



**Note:** If sweep parameter is amplitude then min, max values should be of type <int> or <double>

The min, max values should be within the below range:

1. 720 – 800 mV for Amplitude.

2. 1 – 5 ps for SJ.
3. 5 – 30 mV for DMI.

**Example**

TP2CAL:STRESSEDEYE:EXHAUSTIVESWEEP SJ 1,5.

**Output**

<double/int>

**Example**

TP2CAL:STRESSEDEYE:EXHAUSTIVESWEEP SJ?  
1,5.

## TP2CAL:STRESSEDEYE:LINEARSWEEP

This command sets or returns the initial, min, max settings for the specified sweep parameter for Linear Sweep.

**Syntax**

TP2CAL:STRESSEDEYE:LINEARSWEEP <string> <double/int>

TP2CAL:STRESSEDEYE:LINEARSWEEP? <string>

**Inputs**

<string> (Sweep Parameter) - Indicates the parameter for which initial, min, max value needs to be set. The Sweep parameters can be Amplitude, SJ, DMI

<double/int> (Initial,MIN,MAX) - Indicates the Initial, min, max settings for the specified sweep parameter.



**Note:** If sweep parameter is amplitude then initial, min, max values should be of type <int> or <double>

The initial min, max values should be within the below range:

1. 720 – 800 mV for Amplitude.
2. 1 – 5 ps for SJ.
3. 5 – 30 mV for DMI.

**Example**

TP2CAL:STRESSEDEYE:LINEARSWEEP SJ 3.125,1,5.

**Output**

<double/int>

**Example**

TP2CAL:STRESSEDEYE:LINEARSWEEP SJ?  
3.125,1,5.

## TP2CAL:STRESSEDEYE:EXHAUSTIVE

This command sets or returns enable or disable status of Exhaustive Sweep for TP2 Stressed Eye Calibration

## Syntax

TP2CAL:STRESSEDEYE:EXHAUSTIVE <0 / 1>

TP2CAL:STRESSEDEYE:EXHAUSTIVE?

## Inputs

<0 / 1>

0 - Indicates the Exhaustive Sweep is disabled.

1 - Indicates the Exhaustive Sweep is enabled.

## Output

<0 | 1>

# TP2CAL:STRESSEDEYE:STEP SIZE

The Command sets or returns the step size settings for the specified sweep parameter of TP2 Calibration

## Syntax

TP2CAL:STRESSEDEYE:STEP SIZE <string> <double/int>

TP2CAL:STRESSEDEYE:STEP SIZE? <string>

## Inputs

<string> (Sweep Parameter) - Indicates the parameter for which step size value needs to be set. The Sweep parameters can be Amplitude, SJ, DMI

<double/int> (Step Size) - Indicates the step size value for the specified sweep parameter



**Note:** If sweep parameter is amplitude then step size value should be of type <int> or <double>

The Step Size values should be within the below range:

1. 2 – 20 mV for Amplitude.
2. 0.1 – 0.25 ps for SJ.
3. 0.1 – 2.5 mV for DMI.

## Example

TP2CAL:STRESSEDEYE:STEP SIZE SJ 0.25.

## Output

<double/int>

## Example

TP2CAL:STRESSEDEYE: STEP SIZE SJ?

0.25.

# TEST:SELECT:TEST DURATION

This command sets or returns the test length duration value.

## Syntax

```
TEST:SELECT:TESTDURATION <float>
```

```
TEST:SELECT:TESTDURATION?
```

## Inputs

<float> 1 to 1000

## Outputs

<float>

# TEST:SELECT:STRESSCONFIGTYPE

This command sets or returns the required stress config type.

## Syntax

```
TEST:SELECT:STRESSCONFIGTYPE <0 | 1 | 2>
```

```
TEST:SELECT:STRESSCONFIGTYPE?
```

## Inputs

0 indicates that stress config type is calibrated.

1 indicates that stress config type is customized

2 indicates that stress config type is un-calibrated.

## Outputs

<0 | 1 | 2>

# TEST:SELECT:AMP

This command sets or returns the amplitude value used for the test.

## Syntax

```
TEST:SELECT:AMP <int>
```

```
TEST:SELECT:AMP?
```

## Inputs

<int> 100 to 800 for customized stress selection.

<int> 100 to 650 for un-calibrated stress selection.

## Outputs

<int>

# TEST:SELECT:DMI

This command sets or returns the DMI value to be used for non-compliance test.

## Syntax

```
TEST:SELECT:DMI <float>
```

TEST:SELECT:DMI?

### Inputs

<float> 0 to 200

### Outputs

<float>

## TEST:SELECT:CMI

This command sets or returns the CMI value to be used for non-compliance test.

### Syntax

TEST:SELECT:CMI <float>

TEST:SELECT:CMI?

### Inputs

<float> 0 to 250

### Outputs

<float>

## TEST:SELECT:RJ

This command sets or returns the RJ value used for the test.

### Syntax

TEST:SELECT:RJ <float>

TEST:SELECT:RJ?

### Inputs

<float> 0 to 15.5 for customized stress selection.

<float> 0 to 0.496 for un-calibrated stress selection.

### Outputs

<float>

## TEST:SELECT:SJ

This command sets or returns the SJ value used for the test.

### Syntax

TEST:SELECT:SJ <float>

TEST:SELECT:SJ?

### Inputs

<float> 0 to 15.62 for customized stress selection.

<float> 0 to 0.5 for un-calibrated stress selection.

## Outputs

<float>

## TEST:SELECT:BER

This command sets or returns the BER value over which the test should be done.

### Syntax

```
TEST:SELECT:BER <int>
```

```
TEST:SELECT:BER?
```

### Inputs

<int> 9 to 20

### Outputs

<int>

## TEST:SELECT:ERRORLIMIT

This command sets or returns the maximum errors limit value.

### Syntax

```
TEST:SELECT:ERRORLIMIT <int>
```

```
TEST:SELECT:ERRORLIMIT?
```

### Inputs

<int> 1 to 1000

### Outputs

<int>

## LOOPBACK:SELECT:CONFIGURATIONTYPE

This command sets or returns the configuration type for loop back setting.

### Syntax

```
LOOPBACK:SELECT:CONFIGURATIONTYPE <0 | 1>
```

```
LOOPBACK:SELECT:CONFIGURATIONTYPE?
```

### Inputs

<0 | 1>

0 - Indicates the configuration type is Link training.

1 - Indicates the configuration type is Forced loopback.

### Outputs

<0 | 1>

## LOOPBACK:SELECT:PRESETSNAME

This command sets or returns the PCIe Preset, controls preshoot and deemphasis values.

### Syntax

```
LOOPBACK:SELECT:PRESETSNAME <int>
```

```
LOOPBACK:SELECT:PRESETSNAME?
```

### Inputs

<int> 0-11; P0-P10 for Corresponding Preset and 11 for Custom Preset

### Outputs

<int>

## LOOPBACK:SELECT:PRESETSPRESHOOT

This command sets or returns the preshoot value to be applied during loopback training.

### Syntax

```
LOOPBACK:SELECT:PRESETSPRESHOOT <float>
```

```
LOOPBACK:SELECT:PRESETSPRESHOOT?
```

### Inputs

<float> 0 to 12

### Outputs

<float>

## LOOPBACK:SELECT:PRESETSDEEMPHASIS

This command sets or returns the preset deemphasis value to be applied during loopback training.

### Syntax

```
LOOPBACK:SELECT:PRESETSDEEMPHASIS <float>
```

```
LOOPBACK:SELECT:PRESETSDEEMPHASIS?
```

### Inputs

<float> -20 to 0

### Outputs

<float>

## LOOPBACK:SELECT:BERTCTLEMODE

This command sets or returns the BERT CTLE mode.

### Syntax

```
LOOPBACK:SELECT:BERTCTLEMODE <0 | 1>
```

```
LOOPBACK:SELECT:BERTCTLEMODE?
```



**Inputs**

&lt;0 | 1&gt;

0 - Indicates BERT CTLE mode is Automatic.

1 - Indicates BERT CTLE mode is Manual.

**Outputs**

&lt;0 | 1&gt;

**LOOPBACK:SELECT:BERTCTLETYPE**

This command sets or returns the BERT CTLE Type when loopback configuration type selected is forced loopback.

**Syntax**

```
LOOPBACK:SELECT:BERTCTLETYPE<0 | 1>
```

```
LOOPBACK:SELECT:BERTCTLETYPE?
```

**Inputs**

&lt;0 | 1&gt;

0 - Indicates the BERT CTLE type is OFF.

1 - Indicates the BERT CTLE type is ON.

**Outputs**

&lt;0 | 1&gt;

**LOOPBACK:SELECT:BERTCTLEVALUE**

This command sets or returns the BERT CTLE value.

**Syntax**

```
LOOPBACK:SEL:BERTCTLEVALUE <float>
```

```
LOOPBACK:SEL:BERTCTLEVALUE?
```

**Inputs**

&lt;float&gt; -12 to 0.

**Outputs**

&lt;float&gt;

**LOOPBACK:SELECT:AUTOSEARCHMODE**

This command sets or returns the auto search mode when loopback configuration type selected is forced loopback.

**Syntax**

```
LOOPBACK:SELECT:AUTOSEARCHMODE <0 | 1>
```

```
LOOPBACK:SELECT:AUTOSEARCHMODE?
```

## Inputs

<0 | 1>

0 - Indicates the auto search mode is Fine.

1 - Indicates the auto search mode is Coarse.

## Outputs

<0 | 1>

# JTOLTEST:OPEN

This command opens the JTOL test panel.

## Syntax

JTOLTEST:OPEN

## Inputs

NA

## Outputs

NA

# JTOLTEST:WIZARD:OPEN

This command opens the JTOL test wizard.

## Syntax

JTOLTEST:WIZARD:OPEN

## Inputs

NA

## Outputs

NA

# JTOLTEST:WIZARD:CLOSE

This command closes the JTOL test wizard.

## Syntax

JTOLTEST:WIZARD:CLOSE

## Inputs

NA

## Outputs

NA

## JTOLTEST:JITTERSTEP:HIGHFREQ

This command sets or returns the jitter step size/ratio (high frequency) value for linear and log based search algorithms respectively.

### Syntax

```
JTOLTEST:JITTERSTEP:HIGHFREQ <int>
```

```
JTOLTEST:JITTERSTEP:HIGHFREQ?
```

### Inputs

<int> = 0.01 to 1 for log algorithms / 0.004 to 0.5 for linear algorithms.

### Outputs

<int>

## JTOLTEST:JITTERSTEP:LOWFREQ

This command sets or returns the jitter step size/ratio (low frequency) value for linear and log based search algorithms respectively.

### Syntax

```
JTOLTEST:JITTERSTEP:LOWFREQ <int>
```

```
JTOLTEST:JITTERSTEP:LOWFREQ?
```

### Inputs

<int> = 0.01 to 1 for log algorithms / 0.004 to 75 for linear algorithms.

### Outputs

<int>

## JTOLTEST:JITTERSTEP:MIDDLEFREQ

This command sets or returns the jitter step size/ratio (middle frequency) value for linear and log based search algorithms respectively.

### Syntax

```
JTOLTEST:JITTERSTEP:MIDDLEFREQ <int>
```

```
JTOLTEST:JITTERSTEP:MIDDLEFREQ?
```

### Inputs

<int> = 0.01 to 1 for log algorithms / 0.004 to 7.5 for linear algorithms.

### Outputs

<int>

## JTOLTEST:JITTERSTEP:VERYLOWFREQ

This command sets or returns the jitter step size/ratio (very low frequency) value for linear and log based search algorithms respectively.

### Syntax

```
JTOLTEST:JITTERSTEP:VERYLOWFREQ <int>
```

```
JTOLTEST:JITTERSTEP:VERYLOWFREQ?
```

## Inputs

<int> = 0.01 to 1 for log algorithms / 0.004 to 1000 for linear algorithms.

## Outputs

<int>

# JTOLTEST:SELECT:TP2FILE

This command sets or returns the selected TP2 calibration file for the JTOL test.

## Syntax

```
JTOLTEST:SELECT:TP2FILE <String>
```

```
JTOLTEST:SELECT:TP2FILE:FILE?
```

## Inputs

<String>

## Outputs

<String>

# JTOLTEST:SELECT:CUSTOM:MASK

This command sets or returns the enable or disable status of configuring user-defined mask for the JTOL test.

## Syntax

```
JTOLTEST:SELECT:CUSTOM:MASK {0 | 1}
```

```
JTOLTEST:SELECT:CUSTOM:MASK?
```

## Inputs

{0 | 1}

0 - Indicates that custom mask is disabled.

1 - Indicates that custom mask is enabled.

## Outputs

{0 | 1}

# JTOLTEST:MIN:FREQ

This command sets or returns the minimum frequency value for JTOL test.

## Syntax

```
JTOLTEST:MIN:FREQ <float>
```

```
JTOLTEST:MIN:FREQ?
```

## Inputs

<float> 0.03 to 99

## Outputs

<float>

## JTOLTEST:MAX:FREQ

This command sets or returns the maximum frequency value for JTOL test.

### Syntax

```
JTOLTEST:MAX:FREQ <float>
```

```
JTOLTEST:MAX:FREQ?
```

### Inputs

<float> 1 to 100

### Outputs

<float>

## JTOLTEST:FREQ:POINTS

This command sets or returns the number of SJ Frequencies for JTOL Test.

### Syntax

```
JTOLTEST:FREQ:POINTS <int>
```

```
JTOLTEST:FREQ:POINTS?
```

### Inputs

<int> 1 to 14

### Outputs

<int>

## JTOLTEST:FREQ:GENERATE

This command generates frequency in grid view.

### Syntax

```
JTOLTEST:FREQ:GENERATE
```

### Inputs

NA

### Outputs

NA

## JTOLTEST:FREQ:DEFAULT

This command loads the grid with calibrated SJ-tone values.

## Syntax

JTOLTEST:FREQ:DEFAULT

## Inputs

NA

## Outputs

NA

# JTOLTEST:SELECT:RELAXATION

This command sets or returns the relaxation time to ignore the BER bits before running every amplitude points in JTOL test.

## Syntax

JTOLTEST:SELECT:RELAXATION <int>

JTOLTEST:SELECT:RELAXATION?

## Inputs

<int> 1 to 10

## Outputs

<int>

# JTOLTEST:SEARCH:ALGO

This command sets or returns the selected search algorithm type for JTOL test.

## Syntax

JTOLTEST:SEARCH:ALGO <0 | 1 | 2 | 3 | 4 | 5>

JTOLTEST:SEARCH:ALGO?

## Inputs

0 indicates that search algorithm type is Binary.

1 indicates that search algorithm type is Downwards linear.

2 indicates that search algorithm type is Downwards log.

3 indicates that search algorithm type is Upwards linear.

4 indicates that search algorithm type is Upwards log.

5 indicates that search algorithm type is Binary+Linear.

## Outputs

<0 | 1 | 2 | 3 | 4 | 5>

# JTOLTEST:RUN

This commands sets the run status of JTOL test.

## Syntax

```
JTOLTEST:RUN <0 | 1>
```

## Inputs

<0 | 1>

0 - Stop the JTOL test run.

1 - Start the JTOL test run.

## Outputs

NA

## JTOLTEST:SAVE:ID

This command sets or returns the unique identifier used as key to save the report in database for JTOL test.

## Syntax

```
JTOLTEST:SAVE:ID <String>
```

```
JTOLTEST:SAVE:ID?
```

## Inputs

<String>

## Outputs

<String>

## JTOLTEST:SAVE:GENERATEDBY

This command sets or returns the creator name who save the report in database for JTOL test.

## Syntax

```
JTOLTEST:SAVE:GENERATEDBY <String>
```

```
JTOLTEST:SAVE:GENERATEDBY?
```

## Inputs

<String>

## Outputs

<String>

## JTOLTEST:SAVE:COMMENTS

This command sets or returns the comments given to save the report in database for JTOL test.

## Syntax

```
JTOLTEST:SAVE:COMMENTS <String>
```

```
JTOLTEST:SAVE:COMMENTS?
```

## Inputs

<String>

## Outputs

<String>

# JTOLTEST:SAVE

This command saves the current JTOL test file to the database.

## Syntax

```
JTOLTEST:SAVE
```

## Inputs

NA

## Outputs

NA

# JTOLTEST:RUNSTATUS

This command returns the JTOL test run status.

## Syntax

```
JTOLTEST:RUNSTATUS?
```

## Inputs

NA

## Outputs

{InProgress | Done}

# JTOLTEST:FREQ

This command returns the JTOL test result for the specified frequency.

## Syntax

```
JTOLTEST:FREQ <Freq>?
```

## Inputs

<Freq> = <int> Frequency for which JTOL results need to be shown.

## Outputs

<String>

# JTOLTEST:PLOT:POINTS

This command returns the number of plotted points in JTOL test plot.



## Syntax

```
JTOLTEST:PLOT:POINTS?
```

## Inputs

NA

## Outputs

<int>

# JTOLTEST:SELECT:SJAMPUNITS

This command sets or returns the SJ Amplitude unit for JTOL test.

## Syntax

```
JTOLTEST:SELECT:SJAMPUNITS <0 | 1>
```

```
JTOLTEST:SELECT:SJAMPUNITS?
```

## Inputs

<0 | 1>

0 - Indicates the unit is ps.

1 - Indicates the unit is UI p-p.

## Outputs

<0 | 1>

# JTOLTEST:SELECT:CLOCKTYPE

This command sets or returns the clock type used for JTOL test.

## Syntax

```
JTOLTEST:SELECT:CLOCKTYPE <0 | 1>
```

```
JTOLTEST:SELECT:CLOCKTYPE?
```

## Inputs

<0 | 1>

0 - Indicates the clock type is 100 MHz External.

1 - Indicates the clock type is Internal.

## Outputs

<0 | 1>

# JTOLTEST:PLOT

This command displays the JTOL test results plot.

## Syntax

```
JTOLTEST:PLOT
```

### Inputs

NA

### Outputs

NA

## JTOLTEST:TABLE

This command displays the JTOL test results table.

### Syntax

```
JTOLTEST:TABLE
```

### Inputs

NA

### Outputs

NA

## JTOLTEST:SELECT:DUTTYPE

This command sets or returns the DUT Type used for JTOL test.

### Syntax

```
JTOLTEST:SELECT:DUTTYPE <0 | 1>
```

```
JTOLTEST:SELECT:DUTTYPE?
```

### Inputs

<0 | 1>

0 - Indicates the DUT type is Non-RootComplex.

1 - Indicates the DUT type is RootComplex.

### Outputs

<0 | 1>

## JTOLTEST:BERMEASUREMENT:PATTERN

This command sets or returns the BER Measurement patterns for link training in JTOL test.

### Syntax

```
JTOLTEST:BERMEASUREMENT:PATTERN <0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11>
```

```
JTOLTEST:BERMEASUREMENT:PATTERN?
```

### Inputs

<0-11>

<0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11>

0 - Indicates BER Measurement pattern is Modified compliance.

- 1 - Indicates BER Measurement pattern is Clock.
- 2 - Indicates BER Measurement pattern is Compliance.
- 3 - Indicates BER Measurement pattern is PRBS7.
- 4 - Indicates BER Measurement Pattern is PRBS9.
- 5 - Indicates BER Measurement pattern is PRBS10.
- 6 - Indicates BER Measurement pattern is PRBS11.
- 7 - Indicates BER Measurement pattern is PRBS15.
- 8 - Indicates BER Measurement pattern is PRBS20.
- 9 - Indicates BER Measurement pattern is PRBS23.
- 10 - Indicates BER Measurement pattern is PRBS31.
- 11 - Indicates BER Measurement pattern is User.

### Outputs

<0-11>

## JTOLTEST:LINKTRAINING:LOOPBACKMODEGEN5

This command sets to select the mode for loopback during the JTOL Test.

### Syntax

JTOLTEST:LINKTRAINING:LOOPBACKMODEGEN5 <0 | 1 | 2 | 3>

### Inputs

<0 | 1 | 2 | 3>

- 0 - Indicates the loopbackmode is Config EQ Bypass to 32G.
- 1 - Indicates the loopbackmode is to Config No EQ.
- 2 - Indicates the loopbackmode is to Recovery EQ Bypass to 32G.
- 3 - Indicates the loopbackmode is to Recovery Full EQ

### Outputs

<0 | 1 | 2 | 3>

## JTOLTEST:LINKTRAINING:BERTINITIALPRESET

This command sets or returns the initial preset set at the BERT in the link training for JTOL test.

### Syntax

JTOLTEST:LINKTRAINING:BERTINITIALPRESET <0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9>

JTOLTEST:LINKTRAINING:BERTINITIALPRESET?

### Inputs

<0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9>

0 to 9 indicates P0 to P9.

## Outputs

<0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9>

## JTOLTEST:LINKTRAINING:DUTINITIALPRESET

This command sets or returns the initial preset for DUT in the link training for JTOL test.

### Syntax

JTOLTEST:LINKTRAINING:DUTINITIALPRESET <0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9>

JTOLTEST:LINKTRAINING:DUTINITIALPRESET?

### Inputs

<0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9>

0 to 9 indicates P0 to P9.

### Outputs

<0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9>

## JTOLTEST:LINKTRAINING:DUTTARGETPRESET

This command sets or returns the final preset for DUT in the link training for JTOL test.

### Syntax

JTOLTEST:LINKTRAINING:DUTTARGETPRESET <0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9>

JTOLTEST:LINKTRAINING:DUTTARGETPRESET?

### Inputs

<0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9>

0 to 9 indicates P0 to P9.

### Outputs

<0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9>

## JTOLTEST:LINKTRAINING:LANENUMBER

This command sets or returns the lane number for link training in JTOL test.

### Syntax

JTOLTEST:LINKTRAINING:LANENUMBER <int>

JTOLTEST:LINKTRAINING:LANENUMBER?

### Inputs

<int> 0 to 15

### Outputs

<int>

## JTOLTEST:LINKTRAINING:LINKNUMBER

This command sets or returns the link number for link training in JTOL test.

### Syntax

```
JTOLTEST:LINKTRAINING:LINKNUMBER <int>
```

```
JTOLTEST:LINKTRAINING:LINKNUMBER?
```

### Inputs

<int> 0 to 255

### Outputs

<int>

## JTOLTEST:LINKTRAINING:STRESSTYPE

This command sets or returns the type of stress to be used during the JTOL test.

### Syntax

```
JTOLTEST:LINKTRAINING:STRESSTYPE <0 | 1 | 2>
```

```
JTOLTEST:LINKTRAINING:STRESSTYPE?
```

### Inputs

<0 | 1 | 2>

0 - Indicates the stress type is Apply stress.

1- Indicates the stress type is Inhibit stress during loopback.

2 - Indicates the stress type is Disable stress.

### Outputs

<0 | 1 | 2>

## JTOLTEST:LINKTRAINING:CTLE

This command sets or returns the CTLE value in link training for JTOL test.

### Syntax

```
JTOLTEST:LINKTRAINING:CTLE <float>
```

```
JTOLTEST:LINKTRAINING:CTLE?
```

### Inputs

<float> -12 to 0

### Outputs

<float>

## JTOLTEST:LINKTRAINING:DUTPOWERONTYPE

This command sets or returns the DUT Power ON type in the link training for JTOL test.

## Syntax

JTOLTEST:LINKTRAINING:DUTPOWERONTYPE <0 | 1 | 2>

JTOLTEST:LINKTRAINING:DUTPOWERONTYPE?

## Inputs

<0 | 1 | 2>

0 - Indicates the DUT Power ON type is Manual.

1 - Indicates the DUT Power ON type is Pause for power cycle.

2 - Indicates the DUT Power ON type is Automatic.

## Outputs

<0 | 1 | 2>

# JTOLTEST:LINKTRAINING:SCRIPTLOCATION

This command sets or returns the script file location for the link training in JTOL test.

## Syntax

JTOLTEST:LINKTRAINING:SCRIPTLOCATION <Filepath>

JTOLTEST:LINKTRAINING:SCRIPTLOCATION ?

## Inputs

<Filepath> = <String>

## Outputs

<String>

# JTOLTEST:LINKTRAINING:DUTPOWERDELAY

This command sets or returns the DUT Power ON delay value for link training in JTOL test.

## Syntax

JTOLTEST:LINKTRAINING:DUTPOWERDELAY <int>

JTOLTEST:LINKTRAINING:DUTPOWERDELAY?

## Inputs

<int> 0 to 300

## Outputs

<int>

# JTOLTEST:CLOCK:ARCHITECTURE

This command sets or returns the clock architecture type for the JTOL test.

## Syntax

JTOLTEST:CLOCK:ARCHITECTURE <0 | 1 | 2>

JTOLTEST:CLOCK:ARCHITECTURE?

### Inputs

<0 | 1 | 2>

0 - Indicates the clock architecture type is Common.

1 - Indicates the clock architecture type is SRIS.

2 - Indicates the clock architecture type is SRNS.

### Outputs

<0 | 1 | 2>

## JTOLTEST:COMMONCLOCK:SKP:GEN12:INTERVAL

This command sets or returns the SKP ordered set interval value for Gen1 and Gen2 in JTOL test.

### Syntax

JTOLTEST:COMMONCLOCK:SKP:GEN12:INTERVAL <int>

JTOLTEST:COMMONCLOCK:SKP:GEN12:INTERVAL?

### Inputs

<int> = 80 to 3076

### Outputs

<int>

## JTOLTEST:COMMONCLOCK:SKP:GEN345:INTERVAL

This command sets or returns the SKP ordered set interval value for Gen3, Gen4, and Gen5 in JTOL test.

### Syntax

JTOLTEST:COMMONCLOCK:SKP:GEN345:INTERVAL <int>

JTOLTEST:COMMONCLOCK:SKP:GEN345:INTERVAL?

### Inputs

<int> = 20 to 750

### Outputs

<int>

## JTOLTEST:FILTER:SKP

This command sets or returns the enable or disable status to filter/remove the received SKP ordered set in JTOL test.

### Syntax

JTOLTEST:FILTER:SKP {0 | 1}

JTOLTEST:FILTER:SKP?

## Inputs

{0 | 1}

0 - Disables the option to filter/remove the received SKP ordered set.

1 - Enables the option to filter/remove the received SKP ordered set.

## Outputs

{0 | 1}

# JTOLTEST:INSERT:SKP

This command sets or returns the enable or disable status to insert the SKP OS while sending training sequences in JTOL test.

## Syntax

```
JTOLTEST:INSERT:SKP {0 | 1}
```

```
JTOLTEST:INSERT:SKP?
```

## Inputs

{0 | 1}

0 - Disables the option to insert the SKP OS while sending training sequences.

1 - Enables the option to insert the SKP OS while sending training sequences.

## Outputs

{0 | 1}

# JTOLTEST:LINKTRAINING:CTLETYPE

This command sets or returns the enable or disable status of BERT CTLE type during Link training in JTOL test.

## Syntax

```
JTOLTEST:LINKTRAINING:CTLETYPE <0 | 1>
```

```
JTOLTEST:LINKTRAINING:CTLETYPE?
```

## Inputs

<0 | 1>

0 - Indicates the BERT CTLE type is disabled.

1 - Indicates the BERT CTLE type is enabled.

## Outputs

<0 | 1>

# JTOLTEST:LINKTRAINING:CBBAUTORESET

This command sets or returns the CBB auto reset method for Link Training in JTOL test.

## Syntax

```
JTOLTEST:LINKTRAINING:CBBAUTORESET <0 | 1>
```



JTOLTEST:LINKTRAINING:CBBAUTORESET?

### Inputs

<0 | 1>

0 - Indicates the CBB auto reset method is Power Reset.

1 - Indicates the CBB auto reset method is Power Cycle.

### Outputs

<0 | 1>

## JTOLTEST:LINKTRAINING:CBBPOWERCYCLE

This command sets or returns the time value to send a Power OFF signal to CBB during the specified time (seconds).

### Syntax

JTOLTEST:LINKTRAINING:CBBPOWERCYCLE <float>

JTOLTEST:LINKTRAINING:CBBPOWERCYCLE?

### Inputs

<float> 0.1 to 20.0 seconds

### Outputs

<float>

## JTOLTEST:LINKTRAINING:CBBPOWERRESET

This command sets or returns the time value to send a Power Reset signal to CBB during the specified time (seconds).

### Syntax

JTOLTEST:LINKTRAINING:CBBPOWERRESET <float>

JTOLTEST:LINKTRAINING:CBBPOWERRESET?

### Inputs

<float> 0.1 to 20.0 seconds

### Outputs

<float>

## JTOLTEST:LINKTRAINING:CBBWAITINGTIME

This command sets or returns the waiting time after the DUT is powered ON.

### Syntax

JTOLTEST:LINKTRAINING:CBBWAITINGTIME <float>

JTOLTEST:LINKTRAINING:CBBWAITINGTIME?

### Inputs

<float> 0.1 to 300 seconds

## Outputs

<float>

## JTOLTEST:LINKTRAINING:POWEROPTIONTYPE

This command sets or returns the DUT Power Option for Link Training in JTOL test.

### Syntax

JTOLTEST:LINKTRAINING:POWEROPTIONTYPE <0 | 1>

JTOLTEST:LINKTRAINING:POWEROPTIONTYPE?

### Inputs

<0 | 1>

0 - Indicates the power option is External.

1 - Indicates the power option is CBB Controller.

### Outputs

<0 | 1>

## JTOLTEST:LINKTRAINING:ENABLEDUTLOOPBACKAFTERTEST

This command sets or returns the enable and disable status to keep the DUT in loopback state even after JTOL test execution is complete.

### Syntax

JTOLTEST:LINKTRAINING:ENABLEDUTLOOPBACKAFTERTEST {0 | 1}

JTOLTEST:LINKTRAINING:ENABLEDUTLOOPBACKAFTERTEST?

### Inputs

{0 | 1}

0 - Indicates to disable the option to keep DUT in loopback state even after JTOL test execution is complete.

1 - Indicates to enable the option to keep DUT in loopback state even after JTOL test execution is complete.

### Outputs

{0 | 1}

## JTOLTEST:LINKTRAINING:USERPATTERNLOCATION

This command sets or returns the user pattern location file path for the link training in JTOL test.

### Syntax

JTOLTEST:LINKTRAINING:USERPATTERNLOCATION <"Filepath">

JTOLTEST:LINKTRAINING:USERPATTERNLOCATION?

### Inputs

<Filepath> = <String>

**Outputs**

&lt;String&gt;

**JTOLTEST:SKP:GEN12:DOUBLESKP**

This command sets or returns the ON or OFF status to insert the double SKP in loopback for Gen1 and Gen2 in JTOL test.

**Syntax**

```
JTOLTEST:SKP:GEN12:DOUBLESKP {0 | 1}
```

```
JTOLTEST:SKP:GEN12:DOUBLESKP?
```

**Inputs**

{0 | 1}

0 - Indicates the status is OFF.

1 - Indicates the status is ON.

**Outputs**

{0 | 1}

**JTOLTEST:SKP:GEN12:SYMBOLLENGTH**

This command sets or returns the symbol length for Gen1 and Gen2 in JTOL test.

**Syntax**

```
JTOLTEST:SKP:GEN12:SYMBOLLENGTH <0 | 1 | 2 | 3 | 4>
```

```
JTOLTEST:SKP:GEN12:SYMBOLLENGTH?
```

**Inputs**

&lt;0 | 1 | 2 | 3 | 4&gt;

0 - Indicates the symbol length is COM+1.

1 - Indicates the symbol length is COM+2.

2 - Indicates the symbol length is COM+3.

3 - Indicates the symbol length is COM+4.

4 - Indicates the symbol length is COM+5.

**Outputs**

&lt;0 | 1 | 2 | 3 | 4&gt;

**JTOLTEST:SKP:GEN345:DOUBLESKP**

This command sets or returns the ON or OFF status to insert the double SKP in loopback for Gen3, Gen4, and Gen5 in JTOL test.

**Syntax**

```
JTOLTEST:SKP:GEN345:DOUBLESKP {0 | 1}
```

```
JTOLTEST:SKP:GEN345:DOUBLESKP?
```

## Inputs

{0 | 1}

0 - Indicates the status is OFF.

1 - Indicates the status is ON.

## Outputs

{0 | 1}

# JTOLTEST:SKP:GEN345:SYMBOLLENGTH

This command sets or returns the symbol length for Gen3, Gen4 and Gen5 in JTOL test.

## Syntax

JTOLTEST:SKP:GEN345:SYMBOLLENGTH <0 | 1 | 2 | 3 | 4>

JTOLTEST:SKP:GEN345:SYMBOLLENGTH?

## Inputs

<0 | 1 | 2 | 3 | 4>

0 - Indicates the symbol length is 8.

1 - Indicates the symbol length is 12.

2 - Indicates the symbol length is 16.

3 - Indicates the symbol length is 20.

4 - Indicates the symbol length is 24.

## Outputs

<0 | 1 | 2 | 3 | 4>

# LEQRXTEST:OPEN

This command opens the LEQRx test panel.

## Syntax

LEQRXTEST:OPEN

## Inputs

NA

## Outputs

NA

# LEQRXTEST:WIZARD:OPEN

This command opens the LEQRx test wizard.

## Syntax

LEQRXTEST:WIZARD:OPEN

**Inputs**

NA

**Outputs**

NA

**LEQRXTEST:WIZARD:CLOSE**

This command closes the LEQRx test wizard.

**Syntax**

```
LEQRXTEST:WIZARD:CLOSE
```

**Inputs**

NA

**Outputs**

NA

**LEQRXTEST:DUTTYPE**

This command selects the DUT Type for LEQRx test.

**Syntax**

```
LEQRXTEST:DUTTYPE <0 | 1>
```

```
LEQRXTEST:DUTTYPE?
```

**Inputs**

&lt;0 | 1&gt;

0 indicates the DUT type is Non-Root Complex/AIC.

1 indicates the DUT type is Root Complex/System.

**Outputs**

&lt;0 | 1&gt;

**LEQRXTEST:CLOCKTYPE**

This command selects the Clock Type for LEQRx test.

**Syntax**

```
LEQRXTEST:CLOCKTYPE <0 | 1>
```

```
LEQRXTEST:CLOCKTYPE?
```

**Inputs**

&lt;0 | 1&gt;

0 indicates the Clock type is 100 MHz External.

1 indicates the Clock type is Internal.

## Outputs

<0 | 1>

## LEQRXTEST:SHOW:CONNECTIONDIAGRAM

This command displays the connection diagram of the LEQRx test.

### Syntax

LEQRXTEST:SHOW:CONNECTIONDIAGRAM

### Inputs

NA

### Outputs

NA

## LEQRXTEST:LINKTRAINING:BERTINITIALPRESET

This command sets or returns the initial preset set at the BERT end for the link training in LEQRx test.

### Syntax

LEQRXTEST:LINKTRAINING:BERTINITIALPRESET <0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9>

LEQRXTEST:LINKTRAINING:BERTINITIALPRESET?

### Inputs

0 to 9 indicates P0 to P9.

### Outputs

<0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9>

## LEQRXTEST:LINKTRAINING:DUTINITIALPRESET

This command sets or returns the initial preset for the DUT in LEQRx test.

### Syntax

LEQRXTEST:LINKTRAINING:DUTINITIALPRESET <0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9>

LEQRXTEST:LINKTRAINING:DUTINITIALPRESET?

### Inputs

0 to 9 indicates P0 to P9.

### Outputs

<0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9>

## LEQRXTEST:LINKTRAINING:DUTTARGETPRESET

This command sets or returns the final preset for the DUT in LEQRx test.

**Syntax**

```
LEQRXTEST:LINKTRAINING:DUTTARGETPRESET <0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9>
LEQRXTEST:LINKTRAINING:DUTTARGETPRESET?
```

**Inputs**

0 to 9 indicates P0 to P9.

**Outputs**

```
<0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9>
```

**LEQRXTEST:LINKTRAINING:LINKNUMBER**

This command sets or returns the link number for link training in the LEQRx test.

**Syntax**

```
LEQRXTEST:LINKTRAINING:LINKNUMBER <int>
LEQRXTEST:LINKTRAINING:LINKNUMBER?
```

**Inputs**

<int> 0 to 255

**Outputs**

```
<int>
```

**LEQRXTEST:LINKTRAINING:LANENUMBER**

This command sets or returns the lane number for link training in the LEQRx test.

**Syntax**

```
LEQRXTEST:LINKTRAINING:LANENUMBER <int>
LEQRXTEST:LINKTRAINING:LANENUMBER?
```

**Inputs**

<int> 0 to 15

**Outputs**

```
<int>
```

**LEQRXTEST:LINKTRAINING:LOOPBACKMODEGEN5**

This command sets to select the mode for loopback during Rx LEQ Test.

**Syntax**

```
LEQRXTEST:LINKTRAINING:LOOPBACKMODEGEN5 <0 | 1 | 2 | 3>
```

**Inputs**

```
<0 | 1 | 2 | 3>
```

0 indicates the loopback mode is Config EQ Bypass to 32G.

1 indicates the loopback mode is Config No EQ.

2 indicates the loopback mode is Recovery EQ Bypass to 32G.

3 indicates the loopback mode is Recovery Full EQ.

### Outputs

<0 | 1 | 2 | 3>

## LEQRXTEST:LINKTRAINING:CTLETYPE

This command sets or returns the enable or disable status of BERT CTLE type during Link training in LEQ Rx test.

### Syntax

LEQRXTEST:LINKTRAINING:CTLETYPE <0 | 1>

LEQRXTEST:LINKTRAINING:CTLETYPE?

### Inputs

<0 | 1>

0 - Indicates the BERT CTLE type is disabled.

1 - Indicates the BERT CTLE type is enabled.

### Outputs

<0 | 1>

## LEQRXTEST:LINKTRAINING:POWEROPTIONTYPE

This command sets or returns the DUT power option for Link Training in LEQ Rx test.

### Syntax

LEQRXTEST:LINKTRAINING:POWEROPTIONTYPE <0 | 1>

LEQRXTEST:LINKTRAINING:POWEROPTIONTYPE?

### Inputs

<0 | 1>

0 - Indicates the power option is External.

1 - Indicates the power option is CBB Controller.

### Outputs

<0 | 1>

## LEQRXTEST:LINKTRAINING:CBBAUTORESET

This command sets or returns the CBB auto reset method for Link Training in LEQ Rx test.

### Syntax

LEQRXTEST:LINKTRAINING:CBBAUTORESET <0 | 1>

LEQRXTEST:LINKTRAINING:CBBAUTORESET?



**Inputs**

&lt;0 | 1&gt;

0 - Indicates the CBB auto reset method is Power Reset.

1 - Indicates the CBB auto reset method is Power Cycle.

**Outputs**

&lt;0 | 1&gt;

**LEQRXTEST:SSC:STATE**

This command enable or disable applying SSC to data and clock output for LEQ Rx Test.

**Syntax**

LEQRXTEST:SSC:STATE &lt;1 | 0&gt;

LEQRXTEST:SSC:STATE?

**Inputs**

&lt;0 | 1&gt;

0 - Disable the option to apply SSC to data and clock output.

1 - Enable the option to apply SSC to data and clock output.

**Outputs**

&lt;1 | 0&gt;

**LEQRXTEST:LINKTRAINING:AUTOSEARCHANDTUNECDR**

This command enable or disable option to perform Auto Search and Tune CDR during LEQ Rx Test.

**Syntax**

LEQRXTEST:LINKTRAINING:AUTOSEARCHANDTUNECDR &lt;1 | 0&gt;

LEQRXTEST:LINKTRAINING:AUTOSEARCHANDTUNECDR?

**Inputs**

&lt;0 | 1&gt;

0 - Disable the option to perform Auto Search and Tune CDR.

1 - Enable the option to perform Auto Search and Tune CDR.

**Outputs**

&lt;1 | 0&gt;

**LEQRXTEST:LINKTRAINING:CBBPOWERCYCLE**

This command sets or returns the time value to sends a power OFF signal to CBB during the specified time (seconds).

**Syntax**

LEQRXTEST:LINKTRAINING:CBBPOWERCYCLE &lt;float&gt;.

LEQRXTEST:LINKTRAINING:CBBPOWERCYCLE?

### Inputs

<float> 0.1 to 20.0 seconds

### Outputs

<float>

## LEQRXTEST:LINKTRAINING:CBBPOWERRESET

This command sets or returns the time value to send a Power Reset signal to CBB during the specified time (seconds).

### Syntax

LEQRXTEST:LINKTRAINING:CBBPOWERRESET <float>

LEQRXTEST:LINKTRAINING:CBBPOWERRESET?

### Inputs

<float> 0.1 to 20.0 seconds

### Outputs

<float>

## LEQRXTEST:LINKTRAINING:CBBWAITINGTIME

This command sets or returns the waiting time after the DUT is powered ON.

### Syntax

LEQRXTEST:LINKTRAINING:CBBWAITINGTIME <float>

LEQRXTEST:LINKTRAINING:CBBWAITINGTIME?

### Inputs

<float> 0.1 to 300 seconds

### Outputs

<float>

## LEQRXTEST:LINKTRAINING:ENABLEDUTLOOPBACKAFTERTEST

This command sets or returns the enable and disable status to keep the DUT in loopback state even after LEQ Rx test execution is complete.

### Syntax

LEQRXTEST:LINKTRAINING:ENABLEDUTLOOPBACKAFTERTEST {0 | 1}

LEQRXTEST:LINKTRAINING:ENABLEDUTLOOPBACKAFTERTEST?

### Inputs

{0 | 1}

0 - Indicates to disable the option to keep DUT in loopback state even after LEQ Rx test execution is complete.

1 - Indicates to enable the option to keep DUT in loopback state even after LEQ Rx test execution is complete.

**Outputs**

{0 | 1}

**LEQRXTEST:CLOCK:ARCHITECTURE**

This command sets or returns the clock architecture type for the LEQRx test.

**Syntax**

LEQRXTEST:CLOCK:ARCHITECTURE &lt;0 | 1 | 2&gt;

LEQRXTEST:CLOCK:ARCHITECTURE?

**Inputs**

&lt;0 | 1 | 2&gt;

0 - Indicates the clock architecture type is Common.

1 - Indicates the clock architecture type is SRIS.

2 - Indicates the clock architecture type is SRNS.

**Outputs**

&lt;0 | 1 | 2&gt;

**LEQRXTEST:COMMONCLOCK:SKP:GEN12:INTERVAL**

This command sets or returns the SKP ordered set interval value for Gen1 and Gen2 in LEQRx test.

**Syntax**

LEQRXTEST:COMMONCLOCK:SKP:GEN12:INTERVAL &lt;int&gt;

LEQRXTEST:COMMONCLOCK:SKP:GEN12:INTERVAL?

**Inputs**

&lt;int&gt; = 80 to 3076

**Outputs**

&lt;int&gt;

**LEQRXTEST:COMMONCLOCK:SKP:GEN345:INTERVAL**

This command sets or returns the SKP ordered set interval value for Gen3, Gen4, and Gen5 in LEQRx test.

**Syntax**

LEQRXTEST:COMMONCLOCK:SKP:GEN345:INTERVAL &lt;int&gt;

LEQRXTEST:COMMONCLOCK:SKP:GEN345:INTERVAL?

**Inputs**

&lt;int&gt; = 20 to 750

**Outputs**

&lt;int&gt;

## LEQRXTEST:FILTER:SKP

This command sets or returns the enable or disable status to filter/remove the received SKP ordered set in LEQRx test.

### Syntax

```
LEQRXTEST:FILTER:SKP {0 | 1}
```

```
LEQRXTEST:FILTER:SKP?
```

### Inputs

{0 | 1}

0 - Disables the option to filter/remove the received SKP ordered set.

1 - Enables the option to filter/remove the received SKP ordered set.

### Outputs

{0 | 1}

## LEQRXTEST:INSERT:SKP

This command sets or returns the enable or disable status to insert the SKP OS while sending training sequences in LEQRx test.

### Syntax

```
LEQRXTEST:INSERT:SKP {0 | 1}
```

```
LEQRXTEST:INSERT:SKP?
```

### Inputs

{0 | 1}

0 - Disables the option to insert the SKP OS while sending training sequences.

1 - Enables the option to insert the SKP OS while sending training sequences.

### Outputs

{0 | 1}

## LEQRXTEST:SKP:GEN12:DOUBLESKP

This command sets or returns the ON or OFF status to insert the double SKP in loopback for Gen1 and Gen2 in LEQRx test.

### Syntax

```
LEQRXTEST:SKP:GEN12:DOUBLESKP {0 | 1}
```

```
LEQRXTEST:SKP:GEN12:DOUBLESKP?
```

### Inputs

{0 | 1}

0 - Indicates the status is OFF.

1 - Indicates the status is ON.

### Outputs

{0 | 1}

## LEQRXTEST:SKP:GEN12:SYMBOLLENGTH

This command sets or returns the symbol length for Gen1 and Gen2 in LEQRx test.

### Syntax

```
LEQRXTEST:SKP:GEN12:SYMBOLLENGTH <0 | 1 | 2 | 3 | 4>
```

```
LEQRXTEST:SKP:GEN12:SYMBOLLENGTH?
```

### Inputs

```
<0 | 1 | 2 | 3 | 4>
```

0 - Indicates the symbol length is COM+1.

1 - Indicates the symbol length is COM+2.

2 - Indicates the symbol length is COM+3.

3 - Indicates the symbol length is COM+4.

4 - Indicates the symbol length is COM+5.

### Outputs

```
<0 | 1 | 2 | 3 | 4>
```

## LEQRXTEST:SKP:GEN345:DOUBLESKP

This command sets or returns the ON or OFF status to insert the double SKP in loopback for Gen3, Gen4, and Gen5 in LEQRx test.

### Syntax

```
LEQRXTEST:SKP:GEN345:DOUBLESKP {0 | 1}
```

```
LEQRXTEST:SKP:GEN345:DOUBLESKP?
```

### Inputs

```
{0 | 1}
```

0 - Indicates the status is OFF.

1 - Indicates the status is ON.

### Outputs

```
{0 | 1}
```

## LEQRXTEST:SKP:GEN345:SYMBOLLENGTH

This command sets or returns the symbol length for Gen3, Gen4 and Gen5 in LEQRx test.

### Syntax

```
LEQRXTEST:SKP:GEN345:SYMBOLLENGTH <0 | 1 | 2 | 3 | 4>
```

```
LEQRXTEST:SKP:GEN345:SYMBOLLENGTH?
```

### Inputs

```
<0 | 1 | 2 | 3 | 4>
```

0 - Indicates the symbol length is 8.

- 1 - Indicates the symbol length is 12.
- 2 - Indicates the symbol length is 16.
- 3 - Indicates the symbol length is 20.
- 4 - Indicates the symbol length is 24.

### Outputs

<0 | 1 | 2 | 3 | 4>

## LEQRXTEST:LINKTRAINING:USERPATTERNLOCATION

This command sets or returns the user pattern location file path for the link training in LEQRx test.

### Syntax

LEQRXTEST:LINKTRAINING:USERPATTERNLOCATION <"Filepath">

LEQRXTEST:LINKTRAINING:USERPATTERNLOCATION?

### Inputs

<Filepath> = <String>

### Outputs

<String>

## LEQRXTEST:SSC:STATE

This command enable or disable applying SSC to data and clock output for LEQ Rx Test.

### Syntax

LEQRXTEST:SSC:STATE <1 | 0>

LEQRXTEST:SSC:STATE?

### Inputs

<0 | 1>

0 - Disable the option to apply SSC to data and clock output.

1 - Enable the option to apply SSC to data and clock output.

### Outputs

<1 | 0>

## LEQRXTEST:LINKTRAINING:AUTOSEARCHANDTUNECDR

This command enable or disable option to perform Auto Search and Tune CDR during LEQ Rx Test.

### Syntax

LEQRXTEST:LINKTRAINING:AUTOSEARCHANDTUNECDR <1 | 0>

LEQRXTEST:LINKTRAINING:AUTOSEARCHANDTUNECDR?

**Inputs**

&lt;0 | 1&gt;

0 - Disable the option to perform Auto Search and Tune CDR.

1 - Enable the option to perform Auto Search and Tune CDR.

**Outputs**

&lt;1 | 0&gt;

**LEQRXTEST:LINKTRAINING:DUTPOWERONTYPE**

This command sets or returns the DUT Power ON type for link training in the LEQRx test.

**Syntax**

LEQRXTEST:LINKTRAINING:DUTPOWERONTYPE &lt;0 | 1 | 2&gt;

LEQRXTEST:LINKTRAINING:DUTPOWERONTYPE?

**Inputs**

&lt;0 | 1 | 2&gt;

0 indicates the DUT Power On type is Manual.

1 indicates the DUT Power On type is Pause for power cycle.

2 indicates the DUT Power On type is Automatic.

**Outputs**

&lt;0 | 1 | 2&gt;

**LEQRXTEST:LINKTRAINING:DUTPOWERDELAY**

This command gets or returns the delay value of the DUT power On for the link training in LEQRx test.

**Syntax**

LEQRXTEST:LINKTRAINING:DUTPOWERDELAY &lt;int&gt;

LEQRXTEST:LINKTRAINING:DUTPOWERDELAY?

**Inputs**

&lt;int&gt; 0 to 300

**Outputs**

&lt;int&gt;

**LEQRXTEST:LINKTRAINING:SCRIPTLOCATION**

This command sets or returns the script file location for the link training in LEQRx test.

**Syntax**

LEQRXTEST:LINKTRAINING:SCRIPTLOCATION &lt;Filepath&gt;

LEQRXTEST:LINKTRAINING:SCRIPTLOCATION?

## Inputs

<Filepath> = <string>

## Outputs

<string>

# LEQRXTEST:BERMEASUREMENT:PATTERN

This command sets or returns the BER measurement patterns selected for the link training in LEQRx test.

## Syntax

LEQRXTEST:BERMEASUREMENT:PATTERN <0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11>

LEQRXTEST:BERMEASUREMENT:PATTERN?

## Inputs

0- 11

<0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11>

0 - Indicates BER Measurement pattern is Modified compliance.

1 - Indicates BER Measurement pattern is Clock.

2 - Indicates BER Measurement pattern is Compliance.

3 - Indicates BER Measurement pattern is PRBS7.

4 - Indicates BER Measurement Pattern is PRBS9.

5 - Indicates BER Measurement pattern is PRBS10.

6 - Indicates BER Measurement pattern is PRBS11.

7 - Indicates BER Measurement pattern is PRBS15.

8 - Indicates BER Measurement pattern is PRBS20.

9 - Indicates BER Measurement pattern is PRBS23.

10 - Indicates BER Measurement pattern is PRBS31.

11 - Indicates BER Measurement pattern is User

## Outputs

<0 -11>

# LEQRXTEST:LINKTRAINING:STRESSTYPE

This command sets or returns the stress type selected for the link training in LEQRx test.

## Syntax

LEQRXTEST:LINKTRAINING:STRESSTYPE <0 | 1 | 2>

LEQRXTEST:LINKTRAINING:STRESSTYPE?

## Inputs

<0 | 1 | 2>



0 indicates the stress type is Apply stress.

1 indicates the stress type is Inhibit stress during loopback.

2 indicates the stress type is Disable stress.

### Outputs

<0 | 1 | 2>

## LEQRXTEST:LINKTRAINING:CTLE

This command sets or returns the CTLE value for the link training in LEQRx test.

### Syntax

LEQRXTEST:LINKTRAINING:CTLE <float>

LEQRXTEST:LINKTRAINING:CTLE?

### Inputs

<float> -12 to 0

### Outputs

<float>

## LEQRXTEST:LINKTRAINING:ENABLEDUTLOOPBACKAFTERTEST

This command sets or returns the enable and disable status to keep the DUT in loopback state even after LEQRx test execution is complete.

### Syntax

LEQRXTEST:LINKTRAINING:ENABLEDUTLOOPBACKAFTERTEST {0 | 1}

LEQRXTEST:LINKTRAINING:ENABLEDUTLOOPBACKAFTERTEST?

### Inputs

{0 | 1}

0 indicates to disable the option to keep DUT in loopback state even after LEQ Rx Test execution is complete.

1 indicates to enable the option to keep DUT in loopback state even after LEQ Rx Test execution is complete.

### Outputs

{0 | 1}

## LEQRXTEST:RUN

This command sets the LEQRx test run status.

### Syntax

LEQRXTEST:RUN <0 | 1>

### Inputs

<0 | 1>

0 - Stop the LEQRx test run.

1 - Start the LEQRx test run.

### Outputs

<0 | 1>

## LEQRXTEST:STATUS

This command returns the run status of LEQRx test.

### Syntax

LEQRXTEST:STATUS?

### Inputs

NA

### Outputs

{Inprogress | Done}

## LEQRXTEST:LINKTRAINING:STATUS

This command returns the result status of link training during LEQRx test.

### Syntax

LEQRXTEST:LINKTRAINING:STATUS?

### Inputs

NA

### Outputs

{Returns | Success | Fail}

## LEQRXTEST:LINKTRAINING:STOP

This command stops the link training process during LEQRx test.

### Syntax

LEQRXTEST:LINKTRAINING:STOP

### Inputs

NA

### Outputs

NA

## LEQRXTEST:TEST:ADDERROR

This command manually add errors during BER run during LEQRx test.

### Syntax

LEQRXTEST:TEST:ADDERROR

**Inputs**

NA

**Outputs**

NA

**LEQRXTEST:TEST:CURRENTBER**

This command returns the current BER value in the DUT.

**Syntax**`LEQRXTEST:TEST:CURRENTBER?`**Inputs**

NA

**Outputs**

&lt;String&gt;

**LEQRXTEST:TEST:CURRENTERRORCOUNT**

This command returns the number of errors in the DUT for LEQRx test..

**Syntax**`LEQRXTEST:TEST:CURRENTERRORCOUNT?`**Inputs**

NA

**Outputs**

&lt;int&gt;

**LEQRXTEST:TEST:CURRENTTOTALBITS**

This command returns the total number of bits transmitted during test execution in LEQRx test.

**Syntax**`LEQRXTEST:TEST:CURRENTTOTALBITS?`**Inputs**

NA

**Outputs**

&lt;float&gt;

**LEQRXTEST:TEST:RESULT**

This command returns the result status of the LEQRx test.

## Syntax

LEQRXTEST:TEST:RESULT?

## Inputs

NA

## Outputs

{Pass | Fail}

# LEQRXTEST:SAVE:ID

This command sets or returns the unique identifier used as key to save the report in database for LEQRx test.

## Syntax

LEQRXTEST:SAVE:ID <string>

LEQRXTEST:SAVE:ID?

## Inputs

<string>

## Outputs

<string>

# LEQRXTEST:SAVE:GENERATEDBY

This command sets or returns the creator name who save the report in database for LEQRx test.

## Syntax

LEQRXTEST:SAVE:GENERATEDBY <string>

LEQRXTEST:SAVE:GENERATEDBY?

## Inputs

<string>

## Outputs

<string>

# LEQRXTEST:SAVE:COMMENTS

This command sets or returns the comments given to save the report in database for LEQRx test.

## Syntax

LEQRXTEST:SAVE:COMMENTS <String>

LEQRXTEST:SAVE:COMMENTS?

## Inputs

<string>

## Outputs

<string>

## LEQRXTEST:SAVE

This command saves the LEQRx test report to the database.

### Syntax

LEQRXTEST:SAVE

### Inputs

NA

### Outputs

NA

## LEQTXTEST:OPEN

This command opens LEQTx test panel.

### Syntax

LEQTXTEST:OPEN

### Inputs

NA

### Outputs

NA

## LEQTXTEST:WIZARD:OPEN

This command opens LEQTx test wizard.

### Syntax

LEQTXTEST:WIZARD:OPEN

### Inputs

NA

### Outputs

NA

## LEQTXTEST:WIZARD:CLOSE

This command closes LEQTx test wizard.

### Syntax

LEQTXTEST:WIZARD:CLOSE

## Inputs

NA

## Outputs

NA

# LEQTXTEST:SELECT:TP1FILE

This command selects the TP3 Calibration file for LEQTx test..

## Syntax

```
LEQTXTEST:SELECT:TP1FILE <string>
```

```
LEQTXTEST:SELECT:TP1FILE?
```

## Inputs

<string>

## Outputs

<string>

# LEQTXTEST:DUTTYPE

This command sets or returns the DUT type for LEQTx test.

## Syntax

```
LEQTXTEST:DUTTYPE <0 | 1>>
```

```
LEQTXTEST:DUTTYPE?
```

## Inputs

<0 | 1>

0 - Indicates the DUT type is Non-Root Complex/AIC.

1 - Indicates the DUT type is Root Complex/System.

## Outputs

<0 | 1>

# LEQTXTEST:CLOCKTYPE

This command sets or returns the Clock type for LEQTx test..

## Syntax

```
LEQTXTEST:CLOCKTYPE <0 | 1>
```

```
LEQTXTEST:CLOCKTYPE?
```

## Inputs

<0 | 1>

0 - Indicates the Clock type is 100 MHz External.

1 - Indicates the Clock type is Internal.

### Outputs

<0 | 1>

## LEQTXTEST:SELECT:TEST

This command sets or returns the LEQTx test selected to be executed.

### Syntax

LEQTXTEST:SELECT:TEST <0 | 1 | 2>

LEQTXTEST:SELECT:TEST?

### Inputs

<0 | 1 | 2>

0 - Indicates the tests are AIC Initial Tx EQ tests.

1 - Indicates the tests is AIC Response Time test.

2 - Indicates the tests is System Response Time test.

### Outputs

<0 | 1 | 2>

## LEQTXTEST:LINKTRAINING:BERTINITIALPRESET

This command sets or returns the initial preset set at the BERT end for the link training in LEQTx test.

### Syntax

LEQTXTEST:LINKTRAINING:BERTINITIALPRESET <0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9>

LEQTXTEST:LINKTRAINING:BERTINITIALPRESET?

### Inputs

0 to 9 indicates P0 to P9

### Outputs

<0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9>

## LEQTXTEST:LINKTRAINING:LINKNUMBER

This command sets or returns the link number for link training in LEQTx test.

### Syntax

LEQTXTEST:LINKTRAINING:LINKNUMBER <int>

LEQTXTEST:LINKTRAINING:LINKNUMBER?

### Inputs

<int> 0 to 255

## Outputs

<int>

## LEQTXTEST:LINKTRAINING:LANENUMBER

This command sets or returns the lane number for link training in LEQTx test.

### Syntax

```
LEQTXTEST:LINKTRAINING:LANENUMBER <int>
```

```
LEQTXTEST:LINKTRAINING:LANENUMBER?
```

### Inputs

<int> 0 to 255

### Outputs

<int>

## LEQTXTEST:LINKTRAINING:DUTPOWERONTYPE

This command sets or returns the DUT Power ON type for the link training in LEQTx test.

### Syntax

```
LEQTXTEST:LINKTRAINING:DUTPOWERONTYPE <0 | 1 | 2>
```

```
LEQTXTEST:LINKTRAINING:DUTPOWERONTYPE?
```

### Inputs

<0 | 1 | 2>

0 - Indicates the DUT Power ON type is Manual.

1 - Indicates the DUT Power ON type is Pause for power cycle.

2 - Indicates the DUT Power ON type is Automatic.

### Outputs

<0 | 1 | 2>

## LEQTXTEST:LINKTRAINING:DUTPOWERDELAY

This command sets or returns the DUT Power On delay value for link training in LEQTx test.

### Syntax

```
LEQTXTEST:LINKTRAINING:DUTPOWERDELAY <int>
```

```
LEQTXTEST:LINKTRAINING:DUTPOWERDELAY?
```

### Inputs

<int> 0 to 300

### Outputs

<int>



## LEQTXTEST:LINKTRAINING:SCRIPTLOCATION

This command sets or returns the script file location for the link training in LEQTx test.

### Syntax

```
LEQTXTEST:LINKTRAINING:SCRIPTLOCATION <Filepath>
```

```
LEQTXTEST:LINKTRAINING:SCRIPTLOCATION?
```

### Inputs

<Filepath> = <string>

### Outputs

<string>

## LEQTXTEST:LINKTRAINING:CTLE

This command sets or returns the CTLE value for LEQTx test.

### Syntax

```
LEQTXTEST:LINKTRAINING:CTLE <float>
```

```
LEQTXTEST:LINKTRAINING:CTLE?
```

### Inputs

<float> -12 to 0

### Outputs

<float>

## LEQTXTEST:STRESSTYPE

This command sets or returns the Amplitude Configuration type for the LEQTx test.

### Syntax

```
LEQTXTEST:STRESSTYPE <0 | 1 | 2>
```

```
LEQTXTEST:STRESSTYPE?
```

### Inputs

<0 | 1 | 2>

0 - Indicates the Amplitude Configuration type is Calibrated.

1 - Indicates the Amplitude Configuration type is Customized.

2 - Indicates the Amplitude Configuration type is Un-calibrated.

### Outputs

<0 | 1 | 2>

## LEQTXTEST:AMPLITUDE

This command sets or returns the amplitude value for LEQTx test.

## Syntax

LEQTXTEST:AMPLITUDE <int>

LEQTXTEST:AMPLITUDE?

## Inputs

<int>

## Outputs

<int>

# LEQTXTEST:APPLYSOFTEQ

This command sets or returns the enable or disable status to apply software CTLE to the DUT Waveform in LEQTx test.

## Syntax

LEQTXTEST:APPLYSOFTEQ {0 | 1}

LEQTXTEST:APPLYSOFTEQ?

## Inputs

{0 | 1}

0 - Disables the option to apply software CTLE to the DUT Waveform.

1 - Enables the option to apply software CTLE to the DUT Waveform.

## Outputs

{0 | 1}

# LEQTXTEST:FILTERFILE

This command sets or returns the filter file name for software CTLE in LEQTx test.

## Syntax

LEQTXTEST:FILTERFILE <string>

LEQTXTEST:FILTERFILE?

## Inputs

<String>

## Outputs

<String>

# LEQTXTEST:DUTWFMSCALE

This command sets or returns the waveform scale value for the DUT waveform in LEQTx test.

## Syntax

LEQTXTEST:DUTWFMSCALE <float>

LEQTXTEST:DUTWFMSCALE?

**Inputs**

&lt;float&gt; 20 to 200

**Outputs**

&lt;float&gt;

**LEQTXTEST:LOOPBACKRUN**

This command sets or returns the number of retrials when loopback is failed in LEQTx test.

**Syntax**`LEQTXTEST:LOOPBACKRUN <int>``LEQTXTEST:LOOPBACKRUN?`**Inputs**

&lt;int&gt;

**Outputs**

&lt;int&gt;

**LEQTXTEST:DUTID**

This command sets or returns the DUT ID for creating folder to save the waveforms in LEQTx test.

**Syntax**`LEQTXTEST:DUTID <String>``LEQTXTEST:DUTID?`**Inputs**

&lt;String&gt;

**Outputs**

&lt;String&gt;

**LEQTXTEST:CLEARALL**

This command un-checks all the presets for LEQTx test.

**Syntax**`LEQTXTEST:CLEARALL`**Inputs**

NA

**Outputs**

NA

## LEQTXTEST:RUN

This command sets the run status of LEQTx test.

### Syntax

```
LEQTXTEST:RUN <0 | 1>
```

```
LEQTXTEST:RUN?
```

### Inputs

<0 | 1>

0 - Stops the LEQTx test run.

1 - Starts the LEQTx test run.

### Outputs

<0 | 1>

## LEQTXTEST:STATUS

This command returns the run status of LEQTx test.

### Syntax

```
LEQTXTEST:STATUS?
```

### Inputs

NA

### Outputs

{InProgress | Done}

## LEQTXTEST:LINKTRAINING:STATUS

This command returns the status of linktraining during LEQTx test.

### Syntax

```
LEQTXTEST:LINKTRAINING:STATUS?
```

### Inputs

NA

### Outputs

{Running | Success | Fail}

## LEQTXTEST:LINKTRAINING:STOP

This command stops the link training process.

### Syntax

```
LEQTXTEST:LINKTRAINING:STOP
```

**Inputs**

NA

**Outputs**

NA

**LEQTXTEST:SAVE:ID**

This command sets or returns the unique identifier used as key to save the report in database for LEQTx test.

**Syntax**

```
LEQTXTEST:SAVE:ID <String>
```

```
LEQTXTEST:SAVE:ID?
```

**Inputs**

&lt;String&gt;

**Outputs**

&lt;String&gt;

**LEQTXTEST:SAVE:COMMENTS**

This command sets or returns the comments given to save the report in database for LEQTx test.

**Syntax**

```
LEQTXTEST:SAVE:COMMENTS <string>
```

```
LEQTXTEST:SAVE:COMMENTS ?
```

**Inputs**

&lt;string&gt;

**Outputs**

&lt;string&gt;

**LEQTXTEST:SAVE:GENERATEDBY**

This command sets or returns the creator name who save the report in database for LEQTx test.

**Syntax**

```
LEQTXTEST:SAVE:GENERATEDBY <String>
```

```
LEQTXTEST:SAVE:GENERATEDBY?
```

**Inputs**

&lt;String&gt;

**Outputs**

&lt;String&gt;

## LEQTXTEST:INITIALPRESET

This command sets the DUT Initial preset for AIC response test in LEQTx test.

### Syntax

```
LEQTXTEST:INITIALPRESET <Row index> <0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9>
```

### Inputs

<Row index> = <int> 0 to 19

0 = Indicates the DUT initial preset is P0.

1 = Indicates the DUT initial preset is P1.

2 = Indicates the DUT initial preset is P2.

3 = Indicates the DUT initial preset is P3.

4 = Indicates the DUT initial preset is P4.

5 = Indicates the DUT initial preset is P5.

6 = Indicates the DUT initial preset is P6.

7 = Indicates the DUT initial preset is P7.

8 = Indicates the DUT initial preset is P8.

9 = Indicates the DUT initial preset is P9.

### Outputs

NA

## LEQTXTEST:SELECTPRESET

This command sets the preset or coefficients for LEQTx test execution.

### Syntax

```
LEQTXTEST:SELECTPRESET <Row index> {0 | 1}
```

### Inputs

<Row index> = <int> 0 to 9 for Initial Tx EQ and 0 to 19 for response time.

0 = Disables the preset checkbox.

1 = Enables the preset checkbox.

### Outputs

NA

## LEQTXTEST:LINKTRAINING:CBBAUTORESET

This command to sets or returns the CBB auto reset method for Link Training in LEQ Tx test.

### Syntax

```
LEQTXTEST:LINKTRAINING:CBBAUTORESET <0 | 1>
```

```
LEQTXTEST:LINKTRAINING:CBBAUTORESET?
```

**Inputs**

&lt;0 | 1&gt;

0 - Indicates the CBB auto reset method is Power Reset.

1 - Indicates the CBB auto reset method is Power Cycle.

**Outputs**

&lt;0 | 1&gt;

**LEQTXTEST:LINKTRAINING:CBBPOWERCYCLE**

This command sets or returns the time value to send a power OFF signal to CBB during the specified time (seconds).

**Syntax**

LEQTXTEST:LINKTRAINING:CBBPOWERCYCLE &lt;float&gt;

LEQTXTEST:LINKTRAINING:CBBPOWERCYCLE?

**Inputs**

&lt;float&gt; 0.1 to 20.0 seconds

**Outputs**

&lt;float&gt;

**LEQTXTEST:LINKTRAINING:CBBPOWERRESET**

This command sends a power reset signal to CBB during the specified time (seconds).

**Syntax**

LEQTXTEST:LINKTRAINING:CBBPOWERRESET &lt;float&gt;

LEQTXTEST:LINKTRAINING:CBBPOWERRESET?

**Inputs**

&lt;float&gt; 0.1 to 20.0 seconds

**Outputs**

&lt;float&gt;

**LEQTXTEST:LINKTRAINING:CBBWAITINGTIME**

This command sets or returns the waiting time after the DUT is powered ON.

**Syntax**

LEQTXTEST:LINKTRAINING:CBBWAITINGTIME &lt;float&gt;

LEQTXTEST:LINKTRAINING:CBBWaitingTime?

**Inputs**

&lt;float&gt; 0.1 to 300 seconds

## Outputs

<float>

## LEQTXTEST:LINKTRAINING:POWEROPTIONTYPE

This command sets or returns the DUT power option for Link Training in LEQ Tx test.

### Syntax

LEQTXTEST:LINKTRAINING:POWEROPTIONTYPE <0 | 1>

LEQTXTEST:LINKTRAINING:POWEROPTIONTYPE?

### Inputs

<0 | 1>

0 - Indicates the power option is External.

1 - Indicates the power option is CBB Controller.

### Outputs

<0 | 1>

## LEQTXTEST:SOFTWAREQTYPE <0/1>

This command sets or returns the Software Equalization type.

### Syntax

LEQTXTEST:SOFTWAREQTYPE <0/1>

### Inputs

<0 | 1>

0 - Indicates Software Equalization type is Automatic.

1 - Indicates Software Equalization type is Manual.

### Outputs

<0 | 1>