


# ACS Basic Edition Semiconductor Parametric Test Software for Component and Discrete Devices

## Datasheet

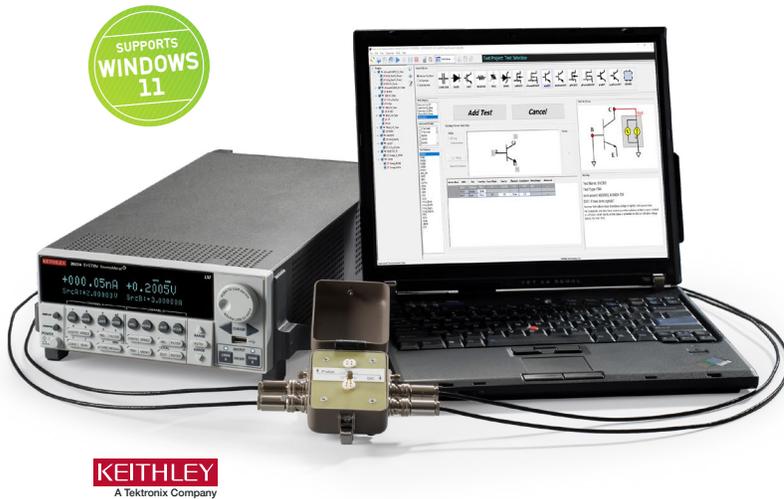

Optimized for parametric testing of component and discrete (packaged) semiconductor devices, ACS Basic Edition maximizes the productivity of technicians and engineers in research and development. The versatile architecture of this software allows it to meet the wide ranging and ever changing requirements of semiconductor device testing. It supports Keithley's source and measure instrument products, including Series 2600B, Series 2400, and Series 2400 Touchscreen SourceMeter® Source Measure Unit (SMU) instruments, 2651A and 2657A SourceMeter SMU instruments, and 4200A-SCS SMUs and capacitance-voltage units (CVUs).

This powerful, yet cost effective solution includes Keithley's rich set of proven parametric libraries. Simply choose the desired test and begin running it to immediately start gathering data and analyzing it. Users also have the option of customizing any test with the embedded script editor.


### Key Features

- Designed for packaged devices (MOSFETs, BJTs, IGBTs, diodes, resistors, etc.)
- Rich set of test libraries for fast and easy test setup and execution without programming
- Built-in data analysis tools for quick analysis of parametric data
- Supports Keithley's Series 2600B, Series 2400, and Series 2400 Touchscreen SourceMeter® Source Measure Unit (SMU) instruments and 2651A and 2657A System SourceMeter SMU instruments
- Simplified instrument configuration using the automated hardware management tool
- Windows 11 and 10 compatible


The built-in data analysis tools allow users to quickly analyze the parametric data. For example, place device curves developed from newly collected data over “golden” curves for fast comparisons. To perform specialized calculations on raw data, use the mathematical formulator tool to create customized parameter calculations. Data can be easily saved in graphical and/or tabular formats.

ACS Basic offers three modes of operation:

- Single Test Mode—for single device, single test operations
- Multi Test Mode—for multiple test operations on a single device
- Trace Mode—for mapping out the operating range and characteristics of a semiconductor device while minimizing the risk of damage to it. This mode offers an interactive method of controlling the voltage level of a sweep with a slide bar or the arrow keys on the PC keyboard.

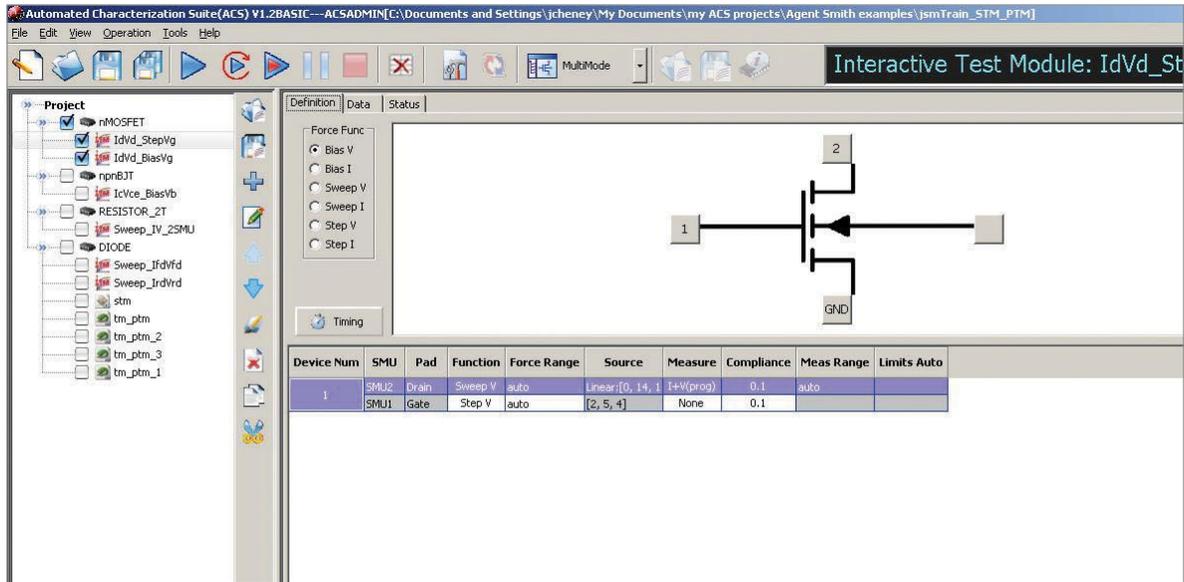

Multi Test Mode allows multiple tests to be performed on a device.

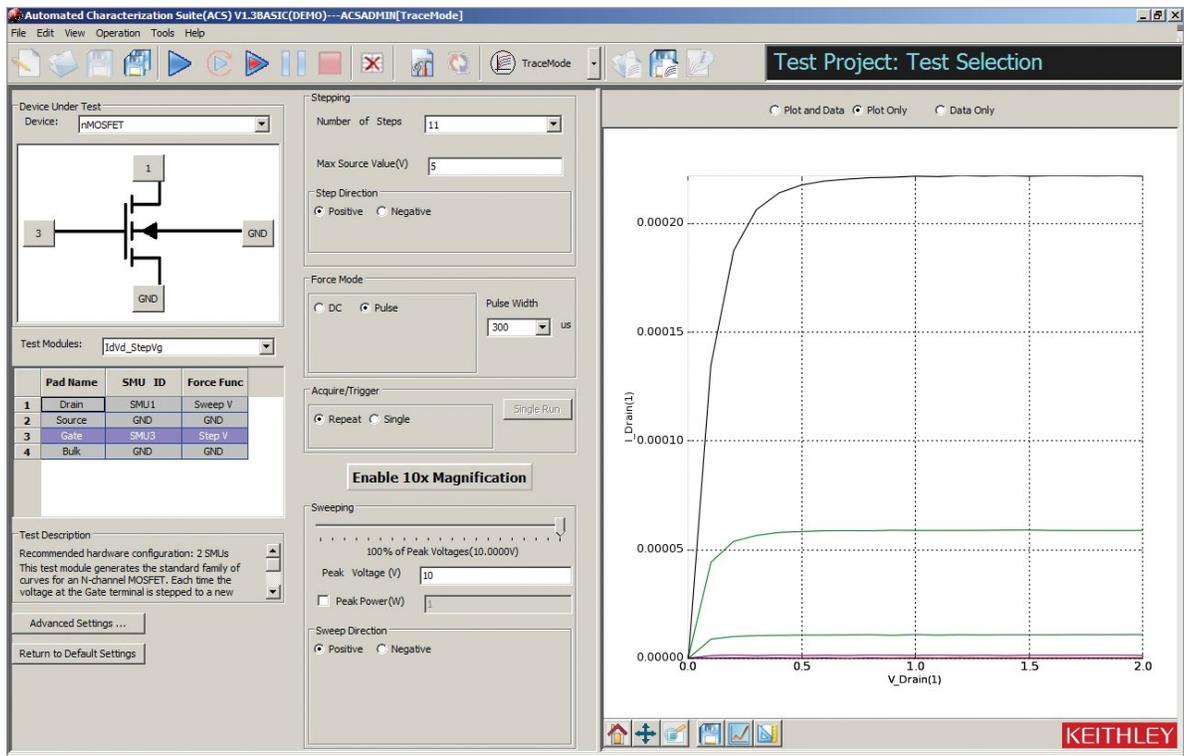

Trace Mode supports interactive testing of a device.

## Key Applications

- Materials and device development
- Quality assurance
- Device inspection

## Related Products

For applications requiring wafer level testing, use ACS Integrated Test Systems or ACS Wafer Level Reliability Systems. These systems supply a wafer map, prober automation capabilities, and analysis options for yield monitoring as well as related statistical calculations for maximizing productivity in wafer level test environments.

## Summary of Typical Tests

Device	Leakage	Breakdown	Gain	On-State
Bipolar Junction Transistor	IEBO, IECO, IEVEB, ICVCB	BVCBO, BVCEI, BVCEO, BVCEV, BVEBO, BVECO	HFE	IBCO, IBEO, IBICVBE, IBVBE, ICBO, ICEV, ICVCE_BiasIB, ICVCE_BiasVB, ICVCE_StepIB, ICVCE_StepVB, VBCO, VCE
MOSFET	IDL, IDS_ISD, IGL, ISL	BVDSS, BVDSV, BVGDO, BVGDS, BVGSO	GM	IDVD_BiasVG, IDVD_StepVG, IDVG_BiasVD, IDVG_StepVD, IDVG_StepVSUB, IGVG, VTCI, VTEXT, VTEXT_IISQ
Diode	IRDVRD	VBRIRD	NA	DYNAMICZ, IFDVFD, VFDIFD, VRDIRD
Resistor	NA	NA	NA	IV
Capacitor	IV		NA	

## Formulator Function Summary

Type	
Math	ABS, AVG, DELTA, DIFF, EXP, LN, LOG, LOG10, SQRT
Parametric Extractions	GMMAX, RES, RES_4WIRE, RES_AVG, SS, SSVTCI, TTF_DID_LGT, TTF_LGDID_T, TTF_DID_T, TTF_LGDID_LGT, VTCI, VTLINGM, VTSATGM
Fitting	EXPFIT, EXPFITA, EXPFITB, LINFIT, LINFITSLP, LINFITXINT, LINFITYINT, REGFIT, REGFITSLP, REGFITXINT, REGFITYINT, REGFIT_LGX_LGY, REGFIT_LGX_Y, REGFIT_X_LGY, TANFIT, TANFITSLP, TANFITXINT, TANFITYINT
Manipulation	AT, FINDD, FINDLIN, FINDU, FIRSTPOS, JOIN, LASTPOS, MAX, MAXPOS, MIN, MINPOX, POW, SMOOTH

## ACS Basic Pre-installation Software Requirements

### Minimum Configuration for a Computer

<b>Operating System</b>	Windows 7 × 86 (32-bit), or Windows 7 × 64 (64-bit), Windows 10 × 86 (32 bit), or Windows 10 × 64 (64 bit)
<b>CPU</b>	2 cores or higher, 1 gigahertz (GHz) or faster processor or System on a Chip (SoC)
<b>System Memory (RAM)</b>	8 GB for 32-bit or 16 GB for 64-bit
<b>Hard Disk</b>	16 GB for 32-bit OS 32 GB for 64-bit OS
<b>Graphics Card</b>	DirectX 9 or later with WDDM 1.0 driver
<b>Screen Display</b>	1024 × 768, 32-bit True Color

### Recommended Configuration for a Computer

<b>Operating System</b>	Windows 10 × 86 (32 bit), or Windows 10 × 64 (64 bit)
<b>CPU</b>	4 cores or higher, at least 2 gigahertz (GHz) or faster processor
<b>System Memory (RAM)</b>	8GB for 32-bit or 16GB for 64-bit
<b>Hard Disk</b>	32 GB for 32-bit OS 64 GB for 64-bit
<b>Graphics Card</b>	DirectX 9 or later with WDDM 1.0 driver
<b>Screen</b>	1280 × 1024, 32-bit True Color

## Available Accessories

2600-FIX-TRX	Grounded Phoenix-to-Triax Cable Adapter
8101-4TRX	Leaded Component Test Fixture
ACS-COMP	PC for Installed and Bench-top ACS Systems
KUSB-488B	IEEE-488.2 USB-to-GPIB Interface Adapter for USB Port

## Ordering Information

### ACS Basic Edition

ACS-BASICFL	ACS Basic Edition Instrument Control Software; Perpetual Floating License*
ACS-BASICFL-UP	Annual Maintenance License for extending support of Perpetual Floating License

\* Perpetual Licenses: The software can be used indefinitely; license does not expire but updates/support only available for the first 12 months. Support can be extended by purchasing a maintenance license. If a perpetual license goes out of support, all features will be frozen to the last released version before the support expired. The software will continue to work, but you cannot get any updates newer than the support expiration date.

- Maintenance Licenses – Apply to perpetual licenses only. Maintenance license is an extension license that extends the period of support of an original perpetual license for 12 months.

**Contact Information:**

- Australia** 1 800 709 465
- Austria\*** 00800 2255 4835
- Balkans, Israel, South Africa and other ISE Countries** +41 52 675 3777
- Belgium\*** 00800 2255 4835
- Brazil** +55 (11) 3759 7627
- Canada** 1 800 833 9200
- Central East Europe / Baltics** +41 52 675 3777
- Central Europe / Greece** +41 52 675 3777
- Denmark** +45 80 88 1401
- Finland** +41 52 675 3777
- France\*** 00800 2255 4835
- Germany\*** 00800 2255 4835
- Hong Kong** 400 820 5835
- India** 000 800 650 1835
- Indonesia** 007 803 601 5249
- Italy** 00800 2255 4835
- Japan** 81 (3) 6714 3010
- Luxembourg** +41 52 675 3777
- Malaysia** 1 800 22 55835
- Mexico, Central/South America and Caribbean** 52 (55) 56 04 50 90
- Middle East, Asia, and North Africa** +41 52 675 3777
- The Netherlands\*** 00800 2255 4835
- New Zealand** 0800 800 238
- Norway** 800 16098
- People's Republic of China** 400 820 5835
- Philippines** 1 800 1601 0077
- Poland** +41 52 675 3777
- Portugal** 80 08 12370
- Republic of Korea** +82 2 565 1455
- Russia / CIS** +7 (495) 6647564
- Singapore** 800 6011 473
- South Africa** +41 52 675 3777
- Spain\*** 00800 2255 4835
- Sweden\*** 00800 2255 4835
- Switzerland\*** 00800 2255 4835
- Taiwan** 886 (2) 2656 6688
- Thailand** 1 800 011 931
- United Kingdom / Ireland\*** 00800 2255 4835
- USA** 1 800 833 9200
- Vietnam** 12060128

\* European toll-free number. If not accessible, call: +41 52 675 3777



Find more valuable resources at [TEK.COM](http://TEK.COM)

