


## 3730 6×16, High Density, Matrix Card

96 two-pole crosspoints with column expansion relays

### DATA SHEET

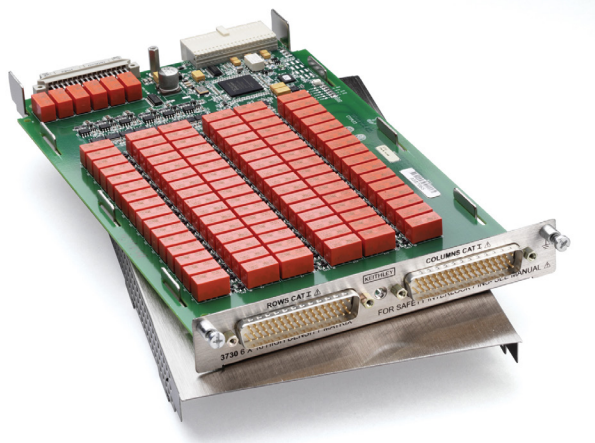



The 3730 is a two-pole, 6 row by 16 column matrix card. It can connect up to six differential instrument channels to any combination of 16 DUTs (devices under test). Any row can be connected to the Series 3700A mainframe backplane by using the analog backplane connection relays. This allows for easy matrix column expansion. A matrix of up to 6 rows by 96 columns can be supported within a single 3706A mainframe (with six 3730 cards).

### Key Features

- 6 row by 16 column matrix (2-pole)
- Analog backplane connection relays provide easy column expansion
- 300 V, 1 A switched or 2 A carry signal capacity; 60 Ω, 125 VA
- Screw terminal connections provided on removable 3730-ST accessory
- 2 μV and 100 pA offsets
- Relay closures stored in onboard memory
- Latching electromechanical relays

The 3730 uses two 50-pin male D-sub connectors for signal connections. For screw terminal connections, use the detachable 3730-ST accessory.

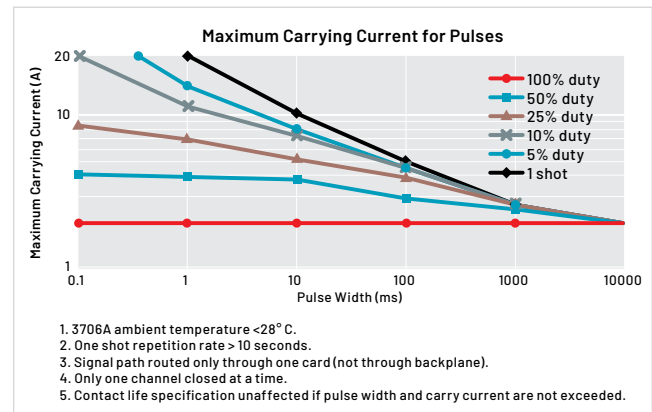

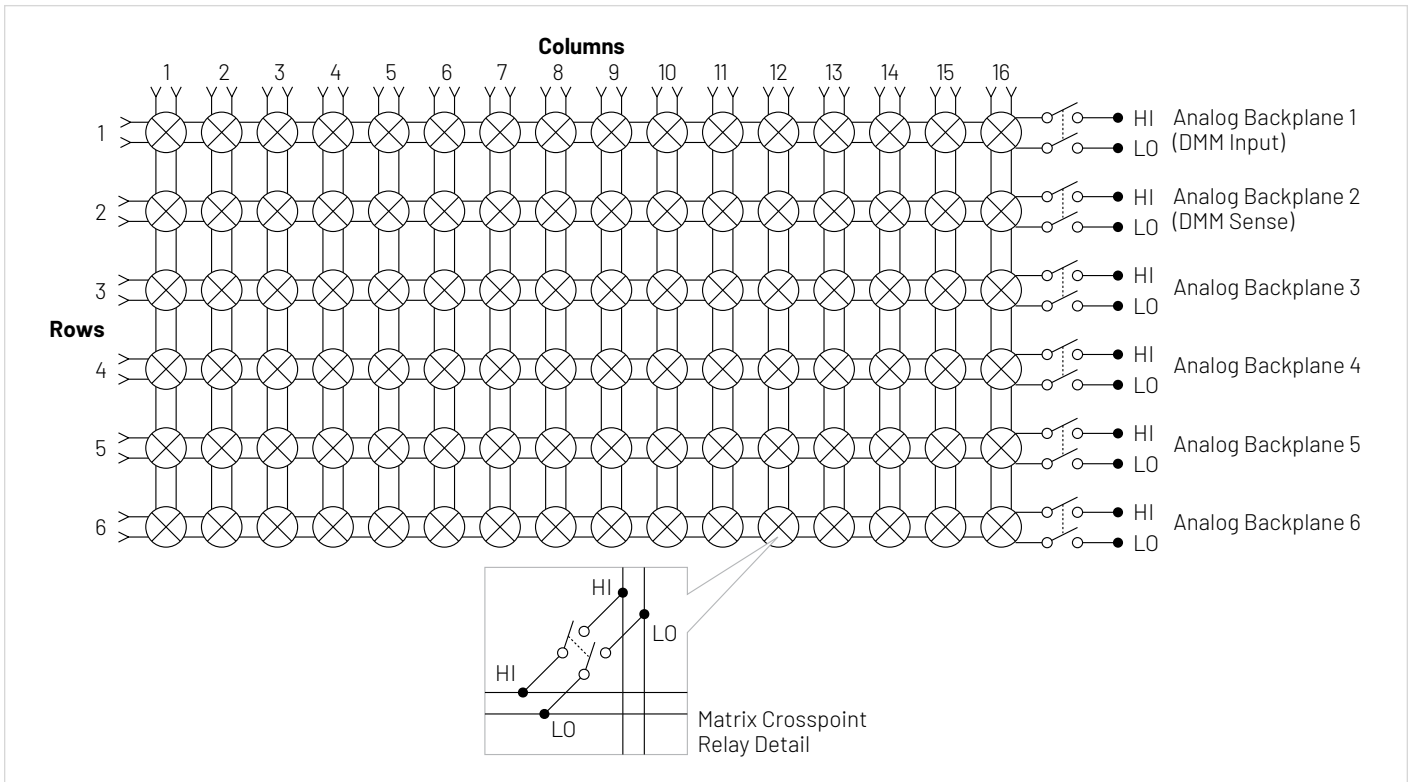

## Specifications

<b>Matrix Configuration</b>	6 row by 16 column matrix. Columns can be expanded using the backplane or isolated by relays.
<b>Contact Configuration</b>	2-pole form A.
<b>Connector Type</b>	Two 50-pin male D-shells.
<b>3730-ST Screw Terminal Option</b>	#22 AWG typical wire size with 0.062 inch O.D. 88 conductors maximum. #16 AWG maximum wire size with 0.092 inch O.D. 44 conductor per card maximum.
<b>Maximum Signal Level</b>	300 V DC or RMS, 1 A switched (2 A carry), 60 Ω, 125 VA.
<b>Common Mode Voltage</b>	300 V DC or RMS between any terminal and chassis.
<b>Volt-Hertz Limit</b>	$8 \times 10^7$ .
<b>Contact Life</b>	$>10^5$ operations @ maximum signal level. $>10^8$ operations no load. <sup>1</sup>

		<b>6×16<sup>2,3</sup></b>
Channel Resistance (end of contact life)		$<1.0 \Omega$
Contact Potential (differential)		$<\pm 2 \mu\text{V}$
Offset Current		$<\pm 100 \text{ pA}$
Isolation	Differential	$10^{10} \Omega, 250 \text{ pF}$
	Channel-channel	$10^{10} \Omega, 75 \text{ pF}$
	Common Mode	$10^{10} \Omega, 150 \text{ pF}$
Crosstalk Channel-Channel	300 kHz	$<-65 \text{ dB}$
	1 MHz	$<-55 \text{ dB}$
	20 MHz	$<-30 \text{ dB}$
Bandwidth		27 MHz

### Notes

1. Minimum signal level 10mV, 10μA.
2. Connections made using 3730-ST accessory.
3. 3706A mainframe with all DMM backplane relays disconnected.

## General

<b>Actuation Time</b>	4 ms.
<b>Relay Type</b>	Latching electromechanical.
<b>Relay Drive Scheme</b>	Hybrid Matrix.
<b>Interlock</b>	Backplane relays disabled when terminal assembly is removed.
<b>Operating Environment</b>	Specified for 0° to 50°C. Specified to 70% R.H. at 35°C.
<b>Storage Environment</b>	-25° to 65°C.
<b>Weight</b>	2.5 lbs.
<b>Safety</b>	Conforms to European Union Directive 73/23/EEC, EN61010-1.
<b>EMC</b>	Conforms to European Union Directive 2004/108/EC, EN61326-1.

## Ordering Information

---

<b>3730</b>	6×16, High Density, Matrix Card
-------------	---------------------------------

## Available Accessories

---

<b>3721-MTC-3</b>	50-pin D-sub Female to Male Cable, 3 m (10 ft.)
-------------------	---

<b>3730-ST</b>	Screw Terminal Block
----------------	----------------------

## Available Services

---

<b>3730-3Y-EW-STD</b>	1-year factory warranty extended to 3 years from date of shipment
-----------------------	---

<b>3730-5Y-EW-STD</b>	1-year factory warranty extended to 5 years from date of shipment
-----------------------	---

<b>C/3730-3Y-STD</b>	3 (Z540-1 compliant) calibrations within 3 years of purchase*
----------------------	---

\*Not available in all countries

## Contact Information:

Australia 1 800 709 465  
Austria\* 00800 2255 4835  
Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777  
Belgium\* 00800 2255 4835  
Brazil +55 (11) 3530-8901  
Canada 1 800 833 9200  
Central East Europe / Baltics +41 52 675 3777  
Central Europe / Greece +41 52 675 3777  
Denmark +45 80 88 1401  
Finland +41 52 675 3777  
France\* 00800 2255 4835  
Germany\* 00800 2255 4835  
Hong Kong 400 820 5835  
India 000 800 650 1835  
Indonesia 007 803 601 5249  
Italy 00800 2255 4835  
Japan 81(3) 6714 3086  
Luxembourg +41 52 675 3777  
Malaysia 1 800 22 55835  
Mexico, Central/South America and Caribbean 52 (55) 88 69 35 25  
Middle East, Asia, and North Africa +41 52 675 3777  
The Netherlands\* 00800 2255 4835  
New Zealand 0800 800 238  
Norway 800 16098  
People's Republic of China 400 820 5835  
Philippines 1 800 1601 0077  
Poland +41 52 675 3777  
Portugal 80 08 12370  
Republic of Korea +82 2 565 1455  
Russia / CIS +7(495) 6647564  
Singapore 800 6011 473  
South Africa +41 52 675 3777  
Spain\* 00800 2255 4835  
Sweden\* 00800 2255 4835  
Switzerland\* 00800 2255 4835  
Taiwan 886 (2) 2656 6688  
Thailand 1 800 011 931  
United Kingdom / Ireland\* 00800 2255 4835  
USA 1 800 833 9200  
Vietnam 12060128

\* European toll-free number. If not accessible, call: +41 52 675 3777

Rev. 02.2022



Find more valuable resources at [TEK.COM](https://www.tek.com)

Copyright © Tektronix. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks or registered trademarks of their respective companies.

061324 SBG 1KW-74083-1

