

Series 2281S Battery Simulator and Precision DC Power Supply



KEITHLEY
A Tektronix Company

Key Features

- Simulate a battery's output during the charge and discharge cycles
- Create, edit, import, and export battery models
- Build a library of battery models using a Source Measure instrument as a model generator
- Display the real-time change of the SOC, V_{oc} , and V_t for the simulated battery
- Compute battery capacity in Amp-Hour and Equivalent Series Resistance (ESR)
- Program the battery SOC, V_{oc} , capacity, and internal resistance (ESR)
- Provide two modes of simulation—dynamic and static
- Monitor charge/discharge current and voltage
- Output up to 120 W of low noise, linear regulated power
- Monitor load currents from 100 nA to 6 A with high accuracy in power supply mode
- Measure voltage and current with 6½-digit resolution
- Sink current up to 1 A and source current up to 6 A
- Built-in graphing simplifies analyzing trends or displaying voltage or current waveforms
- High resolution TFT display and soft-key/icon-based user interface simplify operation
- Digital I/O for direct communication with other devices and instruments
- GPIB, USB, and LAN interfaces
- Automate tests easily with KickStart Software

The Series 2281S Battery Simulator and Precision DC Power Supply innovatively integrates battery simulation with the functions of a high-precision power supply. The 2281S-20-6 can analyze the DC current consumption of a device under test and generate a battery model based on a battery charging process, and simulate a battery based on a battery model. The 2281S-20-6 can output 120 W with 20 V and 6 A, and sink current up to 1 A.

The 2281S uses linear regulation to ensure low-output noise and superior load current measurement sensitivity. A high resolution color thin film transistor (TFT) screen displays a wide range of information on measurements. Soft-key buttons and a navigation wheel combine with the TFT display to provide an easy-to-navigate user interface that accelerates instrument setup and operation. In addition, built-in plotting functions allow monitoring trends such as drift. These features provide the flexibility required for both benchtop and automated test system applications. In addition, the 2281S provides a list mode, triggers, and other speed optimization functions to minimize test time in automated testing applications.

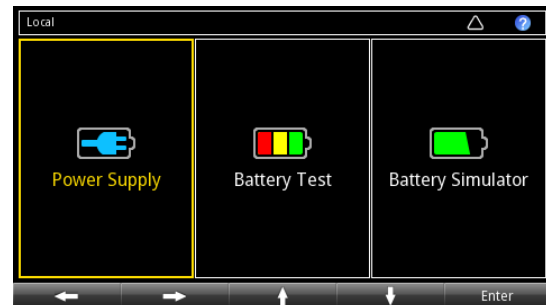


Figure 1. Series 2281S startup screen.

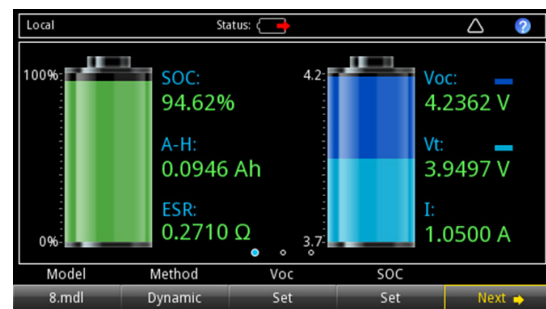


Figure 2. Battery simulator home screen.

Battery Simulation Based on a Battery Model

In the battery simulator function of the 2281S, real battery output performance can be simulated based on a selected battery model. State of charge (SOC) and voltage open circuit (V_{oc}) can be set to any state to test a device-under-test's (DUT's) performance at various states of the battery.

There are two modes from which to choose:

- Static: During the static simulation, V_{oc} and SOC stay the same.
- Dynamic: During the dynamic simulation, V_{oc} and SOC change according to charging and discharging as with a real battery.

Capacity can also be reduced to accelerate the charging and discharging process for better test efficiency.

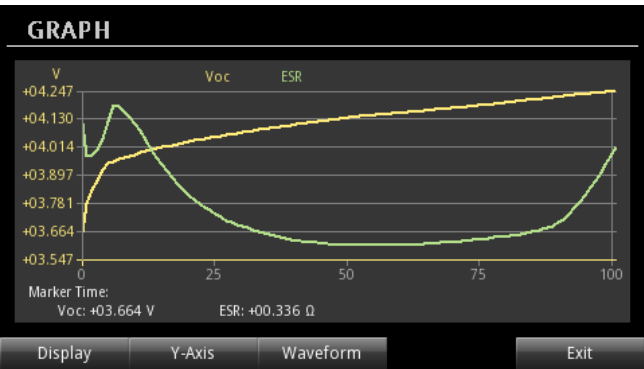


Figure 3. Plot of V_{oc} and ESR as a function of State of Charge (SOC).

Battery Model Parameters	
Points in Simulation	101(0% State of Charge to 100% State of Charge)
Simulated ESR Range	0 to 10 ohms
Simulated ESR Resolution	1 milliohm
Simulated ESR Offset	-100 to 100 ohms
Simulated V_{oc} Range	0 to 20 Volts
Simulated V_{oc} Resolution	1 mV
Simulated Capacity Range	1 mAh to 99 Ah
Simulated Capacity Resolution	1 mAh

Use a Source Measure Unit to Discharge a Battery and Create a Battery Model



Use a Keithley 2450 or 2460 Series SMU with a model generating test script to discharge batteries and create battery models for the 2281S-20-6 Battery Simulator.

Determine SOC and ESR and Create a Battery Model During Battery Testing

In the 2281S battery test function, charge/discharge testing on a battery can be performed. Charging current ranges from 0 to 6 A, and the maximum discharging current is 1 A. During charging, the sampling interval can be set for the internal 6½-digit multimeter to sample the charging current and voltage continuously. In this way, the capacity of the battery and its internal resistance (ESR value) are automatically computed.

After the test, a battery model can be generated based on the measurement result of the battery charging process. A battery model can be edited, created, imported, or exported in a CSV file format.

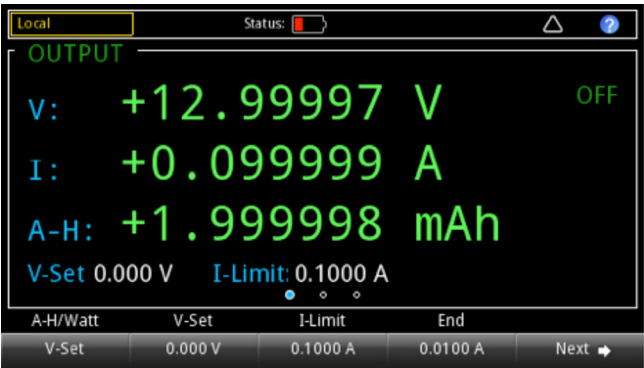


Figure 4. Battery test display.

BATTERY MODEL

Model 1 Fine Save

Select or import a model

SOC(%)	Open Voltage(V)	ESR(Ω)
0	10.000	0.015
1	10.050	0.015
2	10.072	0.016
3	10.083	0.016

← → ↑ ↓ Enter

Figure 5. Battery model table.

Easily View and Control Every Parameter of the Battery Test and Simulation Function

The bright, 4.3-inch TFT display shows voltage, current, and amp-hour readings, source settings, and many additional settings in large, easy-to-read characters. The icon-based main menu provides all the functions users can control and program for fast access to source setup, measurement setup, display formats, trigger options, and system settings. Menus are short, and menu options are easy to find and are clearly described, enabling test parameters to be setup quickly by using the navigation wheel, keypad, or soft-keys. Many setup parameters, such as voltage and current settings, can be entered directly from the home screen. Less complex tests don't require access to the main menu to make adjustments – just use soft keys on the home screen. Whether test requirements are simple or complex, the Series 2281S supplies provide a simple way to set up all required parameters.

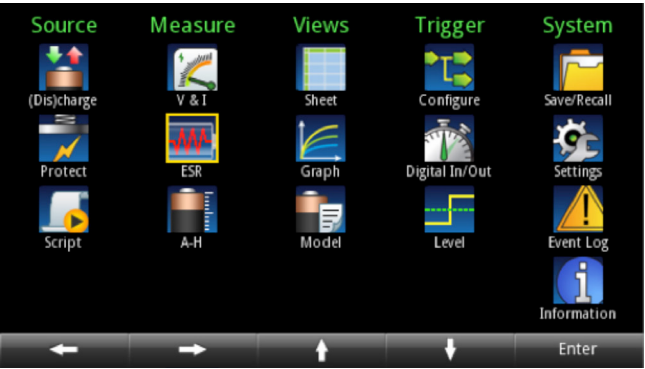


Figure 6. Battery test menu.

Precision DC Power Supply, with DMM-quality High Resolution, Low Current Measurements Capability

Unlike conventional power supplies, Series 2281S supplies feature up to 120 W, 20 V, and 6 A output and can also make measurements with up to 6½ digits of resolution. Voltage output measurements can be resolved down to 100 μ V. These supplies measure load currents from 100 nA to amps. Four load current measurement ranges (10 A, 1 A, 100 mA, and 10 mA) support measuring a device's full load current, standby mode current, and small sleep mode current with DMM-quality accuracy. The high resolution allows discerning small changes in load currents with confidence. It also makes it possible to make a broad range of measurements or a single range with excellent accuracy across both low and high current values.

Optimized Performance for Production Test

The 2281S-20-6 supplies are as powerful in a production test system as they are flexible on the R&D benchtop. They provide SCPI commands for all measurement functions. In addition, several other features can help minimize test time in automated systems. For example, an external trigger input allows hardware synchronization and control by other instruments in the test system. For the battery test and battery simulator function, the digital I/O can be configured as input or output. If the digital I/O is configured as input, the measurement can be triggered by external signals; if the digital I/O is configured as output, the digital I/O pin will send out a signal when the measurement is finished. Furthermore, to reduce measurement time, reading speed can be increased by reducing the acquisition time from 16.6 ms (or 20 ms) to 33 μ s (40 μ s).

A choice of front or rear panel terminals provides enhanced connection flexibility. For maximum voltage accuracy, 4-wire remote sensing ensures that the output voltage programmed is actually the level applied to the load. In addition, the sense lines are monitored in order to detect any breaks in them. These features ensure

that any production problems can be quickly identified and corrected. Series 2281S supplies can be controlled via their built-in GPIB, USB, or LAN interfaces. The USB interface is test and measurement system (TMC) compliant.



Figure 7. 2281S rear panel.

Specifications

18 °C to 28 °C with 1-hour instrument warmup.

DC Output Ratings

Voltage	0 to 20 V.
Current	0 to 6 A.
Maximum Power	120 W.

Voltage¹

Source Setting

Accuracy	$\pm(0.02\% + 3 \text{ mV})$.
Resolution	1 mV.

Measurement² (0.5 V overrange)

Accuracy	$\pm(0.02\% + 2 \text{ mV})$.
Resolution	0.1 mV.

Additional Offset at Faster Measurement Settings

5½ (0.1 PLC)	0.21 mV.
4½ (0.01 PLC)	1.44 mV.
3½ (0.002 PLC)	7.60 mV.

Regulation

Load	$\pm(0.01\% + 2 \text{ mV})$.
Line	$\pm(0.01\% + 1 \text{ mV})$.

Output Ripple and Noise

Bandwidth 20 Hz to 20 MHz	<1 mV RMS, <6 mV p-p.
---------------------------	-----------------------

Load Transient Recovery Time	Resistive load change 50% load to 100% load or 100% load to 50% load: <50 μs to within 15 mV of V-set.
------------------------------	--

Slew Rate	Rising Voltage and Falling Voltage: 10 V/s to 100 V/s. Up to 1000 V/s under limited conditions ³ . 100 V/s (default).
-----------	---

Maximum Source Voltage Drop per Lead	To Maintain Specified Voltage Accuracy: 1 V.
--------------------------------------	--

Maximum Sense HI and Sense LO Lead Resistance	To Maintain Specified Voltage Accuracy: 2 Ω .
---	--

¹ Specifications based on using remote sense connections. For 2-wire connections, add an offset of 0.5 mV/A (front terminals).

² 6½-digit resolution, 1 PLC reading rate, Filter on, Autozero on.

³ 100 V/s to 1000 V/s slew rate is limited to 5 V changes at a maximum of 3 A.

Current

Current Limit Setting

Full-scale Amps	6.1 A.
Accuracy	$\pm(0.05\% + 5 \text{ mA})$.
Resolution	0.1 mA.

Measurement⁴ (120% overrange except 10 A)

Range	Resolution	Accuracy
10 mA	10 nA	$\pm(0.04\% + 10 \text{ } \mu\text{A})$
100 mA	100 nA	$\pm(0.04\% + 10 \text{ } \mu\text{A})$
1 A	1 μA	$\pm(0.04\% + 250 \text{ } \mu\text{A})$
10 A	10 μA	$\pm(0.05\% + 250 \text{ } \mu\text{A})$

Additional Offset at Faster Measurement Settings⁵

Measure Resolution and (NPLC)	Range	Resolution
5½ (0.1 PLC)	10 mA	5.0 μA
	100 mA	20 μA
	1 A	80 μA
	10 A	2.0 mA
4½ (0.01 PLC)	10 mA	20 μA
	100 mA	40 μA
	1 A	500 μA
	10 A	10 mA
3½ (0.002 PLC)	10 mA	30 μA
	100 mA	250 μA
	1 A	20 mA
	10 A	75 mA

Current Pulse Measurement⁶

Minimum Pulse Width (10 mA and 100 mA range) ⁷	2 ms.
Minimum Pulse Width (1 A and 10 A range) ⁷	140 μs .
Minimum Time To Capture Two Consecutive Pulses	0.5 ms.

⁴ 6½-digit resolution, 1 PLC reading rate, filter on, autozero on.

⁵ Filter on, 10 mA and 100 mA ranges: Source Delay 2 ms. 1 A and 10 A ranges: Source Delay 1 ms.

⁶ Settings: Autozero off, 0.002 PLC, Arm Source: External, Trigger Source: Immediate.

⁷ Time includes trigger detection, latency plus jitter of start of measurement, and measurement integration time, 0.002 PLC.

Regulation

Load	±(0.01% + 0.25 mA).
Line	±(0.01% ± 0.25 mA).

Output Ripple and Noise

Bandwidth 20 Hz to 20 MHz	<3 mA RMS.
---------------------------	------------

Maximum Continuous Average Sink Current

Non-programmable	1.02 A ± 0.1 A (typical).
------------------	---------------------------

System Measurement Speeds

Readings/s	Settings	Concurrent (V+I)	
	Measure Resolution and (NPLC)	Autozero On 60 Hz (50 Hz)	Autozero OFF 60 Hz (50 Hz)
‘Read?’ with BUS Transfer	6½ (5 PLC)	2.0 (1.5)	5.4 (4.5)
	6½ (1 PLC)	9.0 (8.0)	20 (18)
	5½ (0.1 PLC)	48 (38)	50 (48)
‘*TRG and TRACe:DATa?’ with BUS Transfer	4½ (0.01 PLC) ⁸	680 (646)	
	3½ (0.002 PLC) ⁸	845 (833)	

Other Timing Data

CV to CC Transition Time (V-Set = 5 V, I-limit = 0.5 A, Resistive Load Change 25 Ω to 2.5 Ω)
2.4 ms.

CC to CV Transition Time (V-Set = 5 V, I-limit = 0.5 A, Resistive Load change 2.5 Ω to 25 Ω)
1.1 ms.

Function Change (from detection of bus command to function change completed)
10 ms (typical).

Output Off/On (from detection of bus command to voltage beginning to decrease)
5 ms (typical).

Reverse Leads Actuation	>1.5 ms.
-------------------------	----------

8 Settings: Autozero Off, Output On, Output Delay Off, Fixed Source: Voltage.

Protection

Overvoltage Protection (OVP)	
Setting Accuracy	$\pm(0.25\% + 0.25\text{ V})$.
Resolution	125 mV.
Response Time	<1.5 ms. ⁹

Overcurrent Protection (OCP)	
Setting Accuracy	$\pm(0.25\% + 0.10\text{ A})$.
Resolution	25 mA.
Response Time	<1.5 ms. ⁹

Overtemperature Protection (OTP)	
Output Turn-off Temperature	>93 °C (typical).
Response Time	<1.5 ms (typical). ⁹

General

Common Mode Current	<6 μA peak-peak (typical).		
Chassis Isolation	±240 V, any terminal to chassis. >1 GΩ in parallel with <6.8 nF.		
Temperature Coefficient	Add the following to all accuracy specifications when outside the range, 18°C to 28 °C (0.15 × specification)/ °C for 0° to 18 °C and 28° to 40 °C.		
Measurement Display Modes	Voltage and current, voltage only, current only.		
Measurement Acquisition Control	Continuous, manual, external digital input, PC bus.		
List Mode	Maximum number of stored lists: 9. Number of points in a list: 2 to 99. List storage location: Internal memory or USB memory stick.		
Math and Filter Functions			
REL	Removes offset from current reading display, Range −1 × 106 to +1 × 106.		
Mx+b	Reading = x, M = −1 × 106 to +1 × 106, b = −1 × 106 to + 1 × 106.		
Filter	Moving average, Count2-100, Window	0.01% to 100%.	
Memory Buffer	2500 locations; each location contains voltage measurement, current measurement, CV/CC Mode, and time stamp. 9 memory slot for saving battery model. NVRAM.		
Display	4.3 in. front panel color display, resolution 480 pixels × 272 pixels.		
Display Modes			
	Real time voltage and current readings and settings.		
Plots of stored data	Voltage vs. data point, current vs. data point, voltage and current vs. data point, 100 point resolution. Plots can also display statistics: mean, maximum, minimum, peak-peak, standard deviation.		
Table of stored data	Time/date, voltage, current. Soft button and navigation wheel control.		

9 Time defined as from detection of condition to start of output turn-off.

Communications	
GPIO	IEEE-488.2 compliant and status model topology.
LAN	RJ-45 connector, 10/100BT, Auto MDIX.
IP Configuration	Static or DHCP.
USB	LXI Core 2011, version 1.4. USB 2.0 device (rear panel, type B), USBTMC compliant. USB 2.0 host (front panel, type A), full speed, support U-disk drives.
Input Connections	
Front	(2-wire). Adjustable supporting, safety shrouded banana, spade lug, or wire.
Rear	(4-wire sense). 6-pin removal screw terminal, safety shrouded cover, removable local sense jumpers.
Real-Time Clock	Capacitive charged, 20 days between next power on cycle at 23 °C and ≤50% relative humidity.
Digital I/O	9-pin female D-sub. 6 Input/Output pins.
Input Signal Levels	0.7 V (maximum logic low). 3.7 V (minimum logic high).
Input Voltage Limits	-0.25 V (Absolute minimum). +5.25 V (Absolute maximum).
Maximum Source Current	+2.0 mA @ >2.7 V (per pin).
Maximum Sink Current	-50 mA @ 0.7 V (per pin, solid-state fuse protected).
	5 V power supply, limited to 0.5 A @ >4 V (solid-state fuse protected).
	Trig In minimum pulse ≥4 μs, Logic Low pulse.
	Meter Ready Pulse, 15-30 μs, Logic Low Pulse.
EMC	Conforms to European Union EMC directive.
Safety	
U.S. NRTL Listing	UL61010-1 3rd ed 2012.
Canadian Certification	CAN/CSA C22.2 No. 61010-1 3rd ed 2012.
European Union Compliance	Low Voltage Directive, EN/IEC 61010-1 3rd ed 2010.
Cooling	Forced air, side intake, and rear exhaust.
Power Supply	100 V / 120 V / 220 V / 240 V ±10%.
Power Line Frequency	50/60 Hz ±3 Hz, automatically sensed at power-on.
Power Consumption	630 VA peak.
Operating Environment	For indoor, non-residential use only 0° to 40 °C, ≤80% relative humidity up to 35 °C, non-condensing. Altitude: Up to 2000 meters.
Storage Environment	-25°C to 70 °C.
LXI Web Browser Compatible Operating System and Software	
	Windows 2000, Win 7, and XP compatible, supports Web browsers with Java plug-in (requires Java plug-in 1.7 or higher). Web page served by 2281S.
Rack Dimensions	(W×H×D), without boot: 213.8 × 88.4 × 383.3 mm (8.42 × 3.48 × 15.1 in.).
Bench Dimensions	(W×H×D) with boot: 255.3 × 107.2 × 415.0 mm (10.1 × 4.22 × 16.34 in.)
Shipping Weight	13.29 kg (29.3 lb).
Net Weight	10.85 kg (23.9 lb).
Warranty	3 years.

Ordering Information

2281S-20-6	Precision DC Supply and Battery Simulator, 20 V, 6 A
------------	--

Supplied Accessories


07134300X	Quick Start Guide
	LAN Crossover Cable
	Power Cord
2280-001	Rear Panel Mating Connector with Cover

Available Accessories

2280-001	Rear Panel Mating Connector and Cover
174694600	LAN Crossover Cable, 3 m (9.8 ft)
4299-7	Universal Fixed Shelf Rack-Mount Kit
4299-8	Single Fixed Rack-Mount Kit
4299-9	Dual Fixed Rack-Mount Kit
7007-05	Double Shielded Premium IEEE-488 Interface Cables, 0.5 m (1.6 ft)
7007-1	Double Shielded Premium IEEE-488 Interface Cables, 1 m (3.2 ft)
KPCI-488LPA	IEEE-488.2 Interface Board for the PCI Bus
KUSB-488B	IEEE-488.2 USB-GPIB Interface Adapter for USB Port with 2 m (6.6 ft) cable

Available Services

2281S-20-6-EW	1 Additional Year of Factory Warranty (total of 4 years)
2281S-20-6-5Y-EW	2 Additional Years of Factory Warranty (total of 5 years)
C/2281S-20-6-3Y-STD	3 Calibrations within 3 Years of Purchase
C/2281S-20-6-3Y-DATA	3 (ANSI-Z540-1 compliant) Calibrations within 3 Years of Purchase
C/2281S-20-6-5Y-STD	5 Calibrations Within 5 Years of Purchase
C/2281S-20-6-5Y-DATA	5 (ANSI-Z540-1 compliant) Calibrations within 5 Years of Purchase

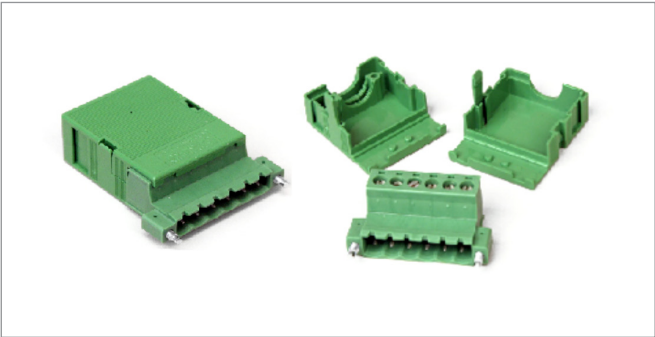

2280-001: Rear Panel Mounting Connector and Cover
(assembled view on the left, and connector and top and bottom cover shown separately on the right)

Contact Information:

Australia* 1 800 709 465
Austria 00800 2255 4835
Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777
Belgium* 00800 2255 4835
Brazil +55 (11) 3759 7627
Canada 1 800 833 9200
Central East Europe / Baltics +41 52 675 3777
Central Europe / Greece +41 52 675 3777
Denmark +45 80 88 1401
Finland +41 52 675 3777
France* 00800 2255 4835
Germany* 00800 2255 4835
Hong Kong 400 820 5835
India 000 800 650 1835
Indonesia 007 803 601 5249
Italy 00800 2255 4835
Japan 81 (3) 6714 3010
Luxembourg +41 52 675 3777
Malaysia 1 800 22 55835
Mexico, Central/South America and Caribbean 52 (55) 56 04 50 90
Middle East, Asia, and North Africa +41 52 675 3777
The Netherlands* 00800 2255 4835
New Zealand 0800 800 238
Norway 800 16098
People's Republic of China 400 820 5835
Philippines 1 800 1601 0077
Poland +41 52 675 3777
Portugal 80 08 12370
Republic of Korea +82 2 565 1455
Russia / CIS +7 (495) 6647564
Singapore 800 6011 473
South Africa +41 52 675 3777
Spain* 00800 2255 4835
Sweden* 00800 2255 4835
Switzerland* 00800 2255 4835
Taiwan 886 (2) 2656 6688
Thailand 1 800 011 931
United Kingdom / Ireland* 00800 2255 4835
USA 1 800 833 9200
Vietnam 12060128

* European toll-free number. If not accessible, call: +41 52 675 3777



Find more valuable resources at [TEK.COM](https://www.tek.com)

Copyright © Tektronix. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks or registered trademarks of their respective companies.

072126 KEI 1KW-60206-1

