

Digital Power Management and Analysis Software - Enabling Power Integrity Analysis

5/6 Series MSO Option 5-DPMBAS, 5-DPM, and 6-DPM Application Datasheet



Most of today's electronic designs require different supply voltages to function properly. Some components within a given circuit require multiple voltage levels. Testing a product for its specification is a time consuming process; debugging is even more cumbersome process. Hence, power integrity has started playing a significant role and the companies are able to improve their time to market.

The Digital Power Management and Analysis (DPM) software option provides automated power rail measurements for the Power Integrity Analysis on the 5/6 Series MSO oscilloscopes. The solution enables simultaneous analysis of multiple power rails using power rail probes and sequencing of measurements using passive probes. The solution is designed with the user work flow in mind to help design engineers meet their time-to-market needs. It also generates an automated report that includes measurements, test results, and plot images.

The solution in combination with the Tektronix 5/6 Series MSO and Power Rail Probes helps engineers to measure and analyze Ripple, Transient characteristics, Power Supply Sequencing, Amplitude, Jitter, Eye and timing diagrams and perform measurements repeatably, analyse results to increase accuracy. The multiple FlexChannel® inputs and the next generation user interface of the 5/6 Series MSO enables engineers to view the waveform (time-domain), a spectral view (frequency domain), or both simultaneously to efficiently debug and analyze the circuit design.

Salient Features of the software solution

- Test up to 7 rails simultaneously with automated measurements and configure each channel
- Allows you to identify the source of the ripple
- Analyze high frequency ripple overlaid on ripple for better design – Ripple on Ripple
- Single click detection and set up of probes
- Auto-zero: User can deskew probes from menu for each channel

Customer applications

Power integrity analysis plays a critical role especially with highly-integrated system on chip and microprocessor designs in which multiple technologies interface together. It is important to look at each DC line to see if the power supplied is within the tolerance band of a target system or device. The typical applications can be found across industries that need power conversion and have multiple DC voltage levels in the circuit design. Some examples include:


- Mobiles, Computers, and Tablets
- Automotive
- Industrial

Measurement overview

Two of the most important measurements while analyzing a Power Supply design are Ripple and Transient. However, when looking at the complex IC designs these days, there are a few other measurements like Power Sequencing and Jitter that have also become important.

Ripple analysis


In simple terms, Ripple is defined as the residual AC voltage on a constant DC component (offset). Typically, the ripple component is often small in magnitude relative to the DC component.

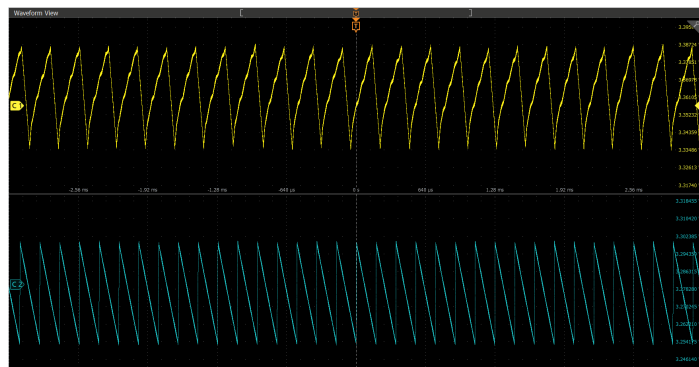


Designers should not confuse Ripple with the System noise. It is possible to see only the ripple by minimizing oscilloscope and probe noise when measuring DC power rails.

The Digital Power Management solution enables the analysis of multiple power rails simultaneously to reduce test times during design and validation. The 8-Channel 5/6 Series MSO can measure up to 7 power rails at once.

The solution also leverages the Spectrum View capability to perform Spectrum Analysis on the ripple. This helps the designers to identify the source of ripple and help to save a lot of time and effort on debugging.

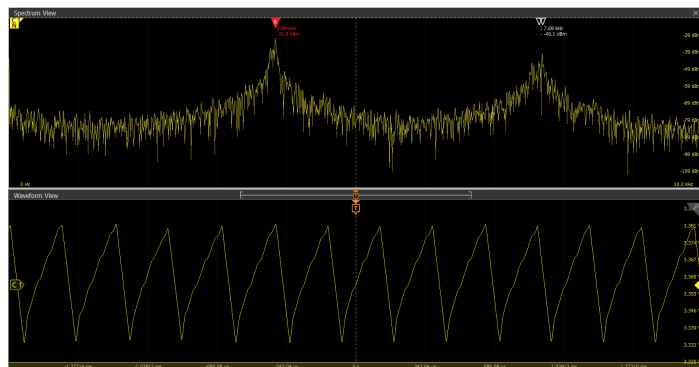

Analyze cycle-by-cycle by selecting a PWM clock (if available) and view peak-peak and RMS values for each ripple cycle. This gives statistics for all of the cycles within an acquisition. Bandwidth limit capability enables designers to analyze the ripple numbers at different bandwidths.

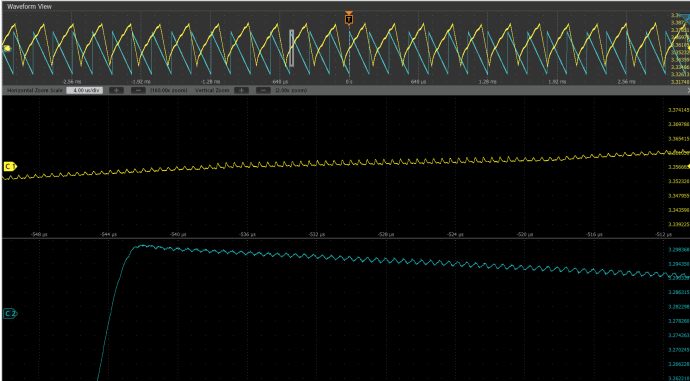


One of the unique features of the DPM solution is the ability to leverage the capabilities of the Power Rail probes to analyze additional high frequency noise overlaid on the ripple. This is typically known as Ripple-on-Ripple.

Power sequence analysis

Power sequence analysis enables power designers to ensure that the power rails reach the on or off states within the expected times.

Power sequence analysis runs simultaneously on up to seven power rails. Configure the eighth source as a reference input to measure the turn-on and turn-off time. This enables the designers to measure the power sequencing of their power rails and ensure they reach their turn-on and turn-off states within the required times. Automating these tests helps achieve consistent and accurate results under different load conditions.

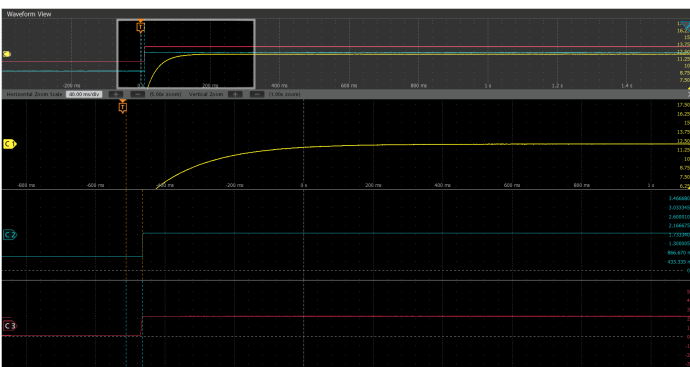


To set up the test, configure the nominal input and output voltages, trigger level, and wait time (duration). Pressing the Power Rail Preset button initiates an optimization process in which the software optimizes scale settings, record length, and sample rate for the best results. Turn-on and turn-off times are displayed in the results badge and indicated on the waveform with colors. Results are also available in a tabular format. Compare and validate the design for wait times by observing the results table for anomalies.

Transient analysis

A transient phenomenon in a system is caused by a change of the operating conditions or the system configuration. The importance of

transient analysis is to identify the effects the disturbances have on the system performance or the failures they cause to power equipment.


Transient analysis typically includes overshoot and undershoot measurements. Just like Ripple, the application allows for simultaneous automated measurements with a few simple steps. A reference voltage is entered for each power rail before initiating the test. The overshoot measurement gives the difference between the maximum voltage and the reference voltage. The undershoot measurement gives the difference between the minimum voltage and the reference voltage.

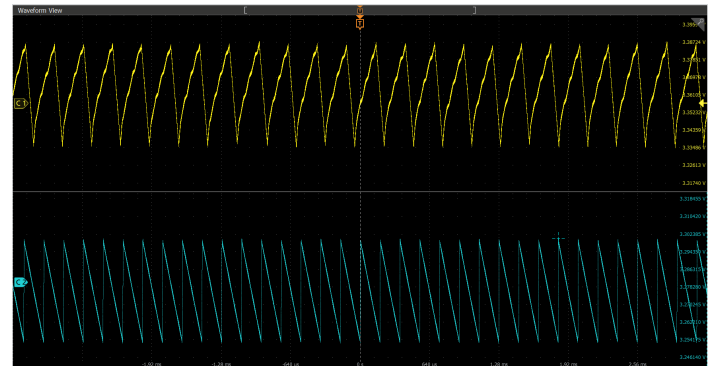

Perform this measurement for a single cycle within an acquisition or over every cycle within an acquisition (Cycle Mode). Synchronize cycles based on a power rail signal or another signal in the system. Cycle-by-cycle measurements are analyzed using statistics, histograms, or plots. Bandwidth limit capability enables designers to analyze the ripple numbers at different bandwidths.

Jitter analysis

Jitter measurements help to validate the jitter tolerances on the high-speed side, which uses the DPM outputs to power-on their loads. The common noise sources are crosstalk from data signals, coupling from clocks and power supply switching noise (and harmonics) and SSN (Simultaneous Switching Noise). The DPM multi-rail outputs power on different loads such as FPGA, system/CPU clocks, DDR memories, transceivers, etc. Both, Power Integrity (PI) and Signal Integrity (SI) functions are interrelated and it is important to know that the PI modifications will improve the SI. Power artifacts impact high-speed loads. It is important to understand that the power supply noise results in high-speed jitter, which eventually results in bit errors, and one can observe the eye closure.

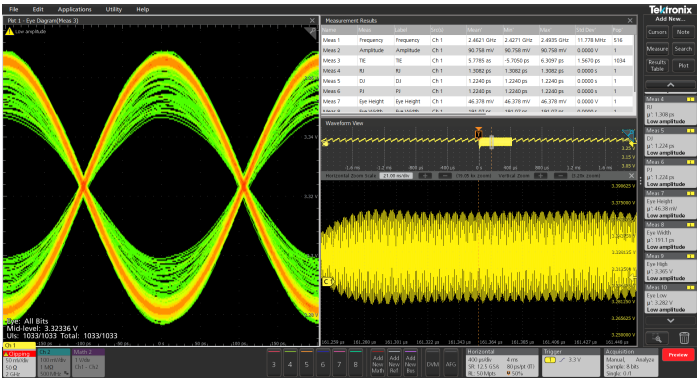

For instance, a SI (Signal Integrity) engineer can measure POL (Point of Load) powering the clock and observe the eye diagram where it is clean and opens up. If the eye diagram is not clean and if there are spurs from POL, then the PI (Power Integrity) engineer can work to modify their power supply design to get better sensitivity. This makes SI engineer see the improvement on the HSS load.

To set up the test, specify the jitter frequency, reference levels, and clock recovery. The Jitter Analysis is included with 5/6-DPM only and is not supported on the 5-DPM-BAS package.

Summary of measurements and features supported


Ripple Analysis	<ul style="list-style-type: none">Based on the oscilloscope and the power rail probes used, the ripple varies:<ul style="list-style-type: none"><10 mV (MSO6x)>10 mV (MSO5x)Spectrum View enables to identify the source of rippleSet bandwidth limit from the measurementsConfigure ripple frequency for each power rail
Transient Analysis	<ul style="list-style-type: none">Measurements include Overshoot, Turn-on Undershoot, and DC Rail VoltageAllows designers to enter voltage levels and reference voltage levels for calculating overshoot and undershootSet bandwidth limit from the measurements
Power Sequence Analysis	<ul style="list-style-type: none">Turn-on and Turn-off times testing enables designers to find out the Turn-on or Turn-off times of all rails in one goAllows designers to configure the capture time.

Table continued...

Jitter Analysis (available on 5/6-DPM only)	Measurements include TIE, RJ, DJ, PJ, Eye High, Eye Low, Eye Height, and Eye Width <ul style="list-style-type: none">Capture jitter across multiple rails at one go
Plots	Eye Diagram, Spectrum, and Histogram
Reporting	<ul style="list-style-type: none">MHT and PDF formatRaw data can be exported to CSV format
Degauss / Deskew (Static)	<ul style="list-style-type: none">Automatic detection of probes,Auto Zero: allows to deskew probes from the menu of each channelManually deskew from the menus for each channel.
Source Support	Live analog signals, reference waveforms, and math waveforms

Report generation

The application allows for data collection, archiving, and documentation necessary for the design and development process. The DPM software provides the ability to compile all the results of a test run into different report formats (MHT or PDF) with pass/fail results for easy analysis.

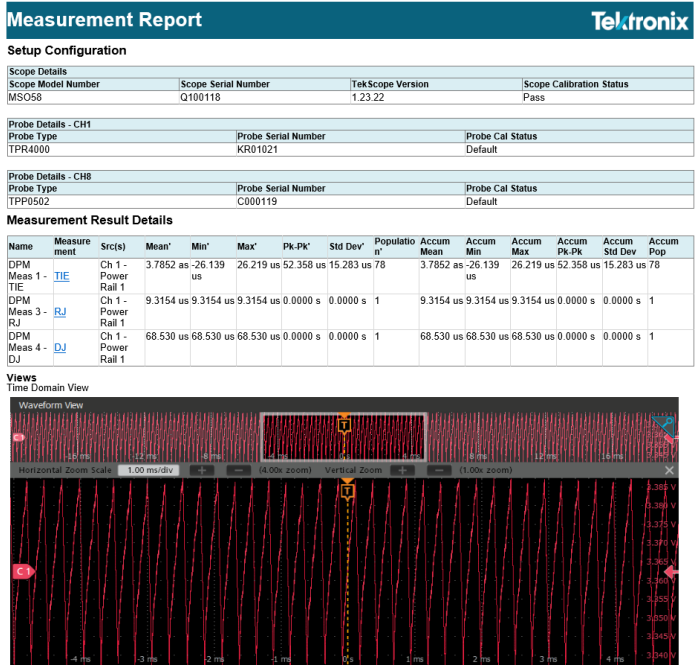

Ordering information

Models

Order type	Nomenclature	Applicable on Scopes
New Instrument	5-DPMBAS (Jitter package not included)	MSO54, MSO56, MSO58
	5-DPM	MSO54, MSO56, MSO58, MSO58-LP
	6-DPM	MSO64, MSO64B, MSO66B, MSO68B
Upgrade software on an existing Scope	SUP5-DPMBAS (Jitter package not included)	MSO54, MSO56, MSO58
	SUP5-DPM	MSO54, MSO56, MSO58, MSO58-LP
	SUP6-DPM	MSO64, MSO64B, MSO66B, MSO68B

Software Bundles

Bundle Options	Supported Instruments	Description
5-PRO-POWER-1Y	5 Series MSO	1 Year License Pro Power Bundle for 5 Series MSO
5-PRO-POWER-PER	5 Series MSO	Perpetual License Pro Power Bundle for 5 Series MSO
5-ULTIMATE-1Y	5 Series MSO	1 Year License Ultimate Bundle for 5 Series MSO
5-ULTIMATE-PER	5 Series MSO	Perpetual License Ultimate Bundle for 5 Series MSO
6-PRO-POWER-1Y	6 Series MSO	1 Year License Pro Power Bundle for 6 Series MSO
6-PRO-POWER-PER	6 Series MSO	Perpetual License Pro Power Bundle for 6 Series MSO
6-ULTIMATE-1Y	6 Series MSO	1 Year License Ultimate Bundle for 6 Series MSO
6-ULTIMATE-PER	6 Series MSO	Perpetual License Ultimate Bundle for 6 Series MSO

Recommended oscilloscopes series

Oscilloscope series	Nomenclature	Description
5 Series MSO	<ul style="list-style-type: none"> MSO54 MSO56 MSO58 MSO58-LP 	Available bandwidth option: <ul style="list-style-type: none"> 350 MHz, 500 MHz, 1GHz, 2 GHz
6 Series MSO	<ul style="list-style-type: none"> MSO64 MSO64B MSO66B MSO68B 	Available Bandwidth Option: <ul style="list-style-type: none"> 1 GHz, 2.5 GHz, 4 GHz, 6 GHz, 8 GHz, 10 GHz

Recommended probes

Probe type	Nomenclature	Probe bandwidth
Power Rail Probes	TPR1000	1 GHz Probe
	TPR4000	4 GHz Probe

Note:

- TPR1000 and TPR4000 are the recommended probes for the DPM measurement. The TPR1000 and TPR4000 probes and oscilloscope provides a low-noise measurement solution. The higher input impedance in the probes minimizes the oscilloscope loading effect on the DC rails (50 k Ω at DC).
- Do not confuse the noise of the oscilloscope and probe with the noise and ripple of the measured DC supply.
- P6150 and Direct SMA cable with DC Block can also be used for power rail measurement.



Tektronix is registered to ISO 9001 and ISO 14001 by SRI Quality System Registrar.



Product(s) complies with IEEE Standard 488.1-1987, RS-232-C, and with Tektronix Standard Codes and Formats.



Product Area Assessed: The planning, design/development and manufacture of electronic Test and Measurement instruments.

ASEAN / Australasia (65) 6356 3900	Austria 00800 2255 4835*	Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777
Belgium 00800 2255 4835*	Brazil +55 (11) 3759 7627	Canada 1 800 833 9200
Central East Europe and the Baltics +41 52 675 3777	Central Europe & Greece +41 52 675 3777	Denmark +45 80 88 1401
Finland +41 52 675 3777	France 00800 2255 4835*	Germany 00800 2255 4835*
Hong Kong 400 820 5835	India 000 800 650 1835	Italy 00800 2255 4835*
Japan 81 (3) 6714 3086	Luxembourg +41 52 675 3777	Mexico, Central/South America & Caribbean 52 (55) 56 04 50 90
Middle East, Asia, and North Africa +41 52 675 3777	The Netherlands 00800 2255 4835*	Norway 800 16098
People's Republic of China 400 820 5835	Poland +41 52 675 3777	Portugal 80 08 12370
Republic of Korea +822 6917 5084, 822 6917 5080	Russia & CIS +7 (495) 6647564	South Africa +41 52 675 3777
Spain 00800 2255 4835*	Sweden 00800 2255 4835*	Switzerland 00800 2255 4835*
Taiwan 886 (2) 2656 6688	United Kingdom & Ireland 00800 2255 4835*	USA 1 800 833 9200

* European toll-free number. If not accessible, call: +41 52 675 3777

For Further Information. Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit www.tek.com.
Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.