

PatternPro[®] Error Detector

PED3200 and PED4000 Series Datasheet



The PED3200 and PED4000 series programmable error detectors offer effective multi-channel BER for stressed receiver testing of data communications designs. Available with full or half rate clock inputs.

Notice to EU customers

This product is not updated to comply with the RoHS 2 Directive 2011/65/EU and will not be shipped to the EU. Customers may be able to purchase products from inventory that were placed on the EU market prior to July 22, 2017 until supplies are depleted. Tektronix is committed to helping you with your solution needs. Please contact your local sales representative for further assistance or to determine if alternative product(s) are available. Tektronix will continue service to the end of worldwide support life.

Key performance specifications

- Data rate range:
 - PED3200 series: 3 Gb/s to 32 Gb/s
 - PED4000 series: 4 Gb/s to 40 Gb/s

Key features

- Available with 1 or 2 input channels (independent data on each channel)
- PRBS and user defined patterns


- High input sensitivity and bandwidth
- Auto-adjustment or manual adjustment of data to clock phase and threshold
- Auto-synchronization to input pattern
- PC GUI software:
 - Remote instrument control
 - Bathtub and Contour Analysis
 - JTOL measurements
 - J2/J9 measurements
- Front panel touch screen GUI or USB TMC computer control

Applications

- 25 Gb/s testing for 100G Ethernet
- 32 Gb/s DPQPSK testing
- Semiconductor and component testing
- Design validation and production testing
- Transmitter testing and validation up to 40 Gb/s

Product description

The Tektronix PED line of high sensitivity and high bandwidth error detectors offer single and two-channel standalone configurations capable of BER measurement at data rates up to 40 Gb/s. The PED products support either PRBS or user-defined data patterns, with simple to use automatic or manual alignment of input clock and data, and pattern synchronization. The PED product makes an ideal companion for the Tektronix PPG pattern generator product family.

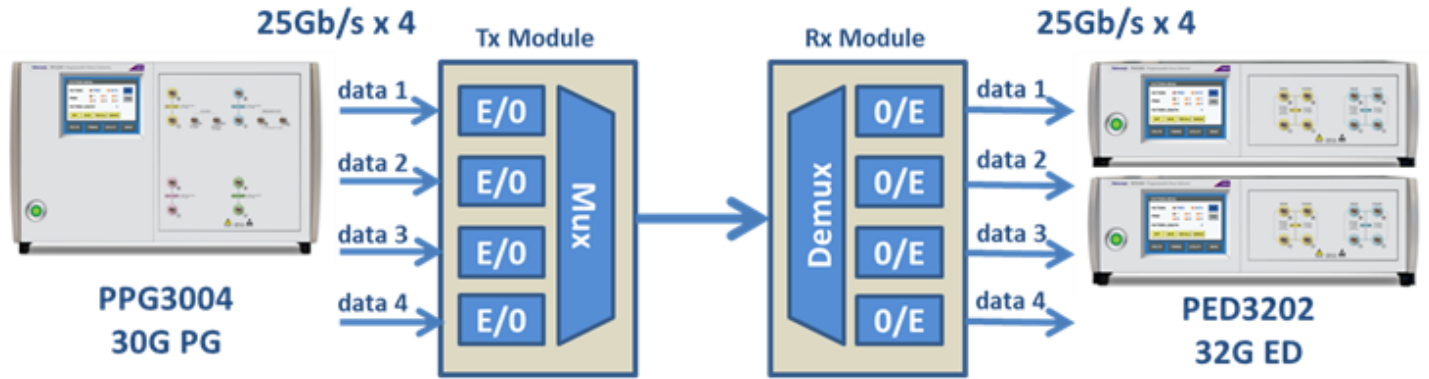

100G Ethernet four lane end-to-end test using PED3200 series error detector and PPG3000 series pattern generator

Specifications

All specifications are guaranteed unless noted otherwise. All specifications apply to all models unless noted otherwise.

Data input

Data rate

Range (PED3200)	3 Gb/s to 32 Gb/s
Range (PED4000)	4 Gb/s to 40 Gb/s

Data input

AC coupled input with broadband bias tees featuring a 3 dB bandwidth of 10 kHz to >50 GHz.

Differential amplitude	6 mV to 1.0 V _{p-p}
Single-ended amplitude	6 mV to 750 mV _{p-p}
Termination voltage	0.0 V
Input impedance	50 Ω
Connector	2.4 mm

ESD sensitivity	250 V, Human body model (HBM)
-----------------	-------------------------------

Sampling point set points

Eye edge BER threshold

Range	1e-1 to 1e-11
Resolution	1e-1

Sync BER threshold

Range	1e-1 to 1e-8
Resolution	1e-1

Full rate clock input option

Amplitude	AC coupled, full rate
Differential range	300 mV _{P,P} to 1.0 V _{P,P}
Single-ended range	300 mV _{P,P} to 1.0 V _{P,P}
Connector	2.4 mm
<hr/>	
Clock to data phase adjustment	100 ps (-50 ps to +50 ps)
<hr/>	
ESD sensitivity	1000 V, Human body model (HBM)

Half rate clock input option

Amplitude	AC coupled, half rate
Differential range	300 mV _{P,P} to 1.0 V _{P,P}
Single-ended range	300 mV _{P,P} to 1.0 V _{P,P}
Connector	2.4 mm
<hr/>	
Clock to data phase adjustment	100 ps (-50 ps to +50 ps)
<hr/>	
ESD sensitivity	1000 V, Human body model (HBM)

Data patterns

Pattern type	Data (from memory) or PRBS. Length and type are individually settable on each channel.
--------------	---

PRBS pattern lengths

2 ⁷ - 1 bits	Polynomial = X ⁷ + X ⁶ + 1
2 ⁹ - 1 bits	Polynomial = X ⁹ + X ⁵ + 1
2 ¹¹ - 1 bits	Polynomial = X ¹¹ + X ⁹ + 1
2 ¹⁵ - 1 bits	Polynomial = X ¹⁵ + X ¹⁴ + 1
2 ²³ - 1 bits	Polynomial = X ²³ + X ¹⁸ + 1
2 ³¹ - 1 bits	Polynomial = X ³¹ + X ²⁸ + 1

User-defined pattern depth	Number of channels	Single bit pattern resolution
	1 channel	4 Mbit
	2 channels	2 Mbit

Mechanical

Front panel width (with mounting tabs)	48.3 cm (19.0 in)
Height	13.3 cm (5.25 in)
Width	45.1 cm (17.75 in)
Depth (rack mount)	34.3 cm (13.5 in)

Mechanical

Weight (1 channel)	11.1 kg (24.5 lbs)
Operating temperature	0 °C to 40 °C (32 °F to 104 °F)

Ordering information

Models

PED3201	32 Gb/s Programmable error detector, 1 channel
PED3202	32 Gb/s Programmable error detector, 2 channels
PED4001	40 Gb/s Programmable error detector, 1 channel
PED4002	40 Gb/s Programmable error detector, 2 channels

Options

Instrument options

PED3201 HCLK	Half rate clock input option for PED3201
PED3201 FLCLK	Full rate clock input option for PED3201
PED3202 HCLK	Half rate clock input option for PED3202
PED3202 FLCLK	Full rate clock input option for PED3202
PED4001 HCLK	Half rate clock input option for PED4001
PED4001 FLCLK	Full rate clock input option for PED4001
PED4002 HCLK	Half rate clock input option for PED4002
PED4002 FLCLK	Full rate clock input option for PED4002



Power plug options

Opt. A0	North America power plug (115 V, 60 Hz)
Opt. A1	Universal Euro power plug (220 V, 50 Hz)
Opt. A2	United Kingdom power plug (240 V, 50 Hz)
Opt. A6	Japan power plug (100 V, 50/60 Hz)
Opt. A10	China power plug (50 Hz)
Opt. A11	India power plug (50 Hz)
Opt. A99	No power cord

Manuals



071-3413-xx	Printed PPG/PED Installation & Safety Instructions
077-1095-xx	PED3200/PED4000 Series Programmable Error Detector User Manual, PDF-only, downloadable from Tektronix.com

PC Software GUI and Analysis Tool

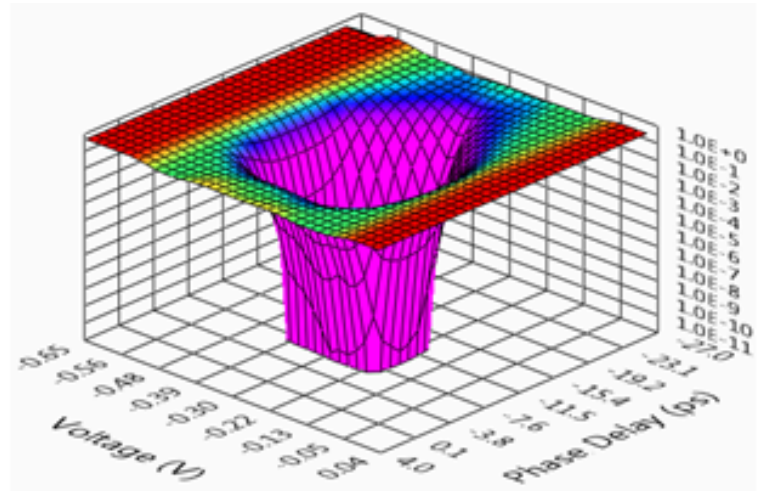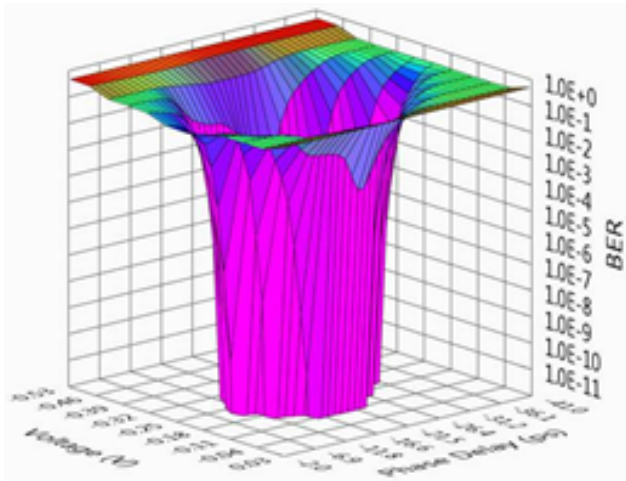

25 Gb/s and 32 Gb/s NRZ Signal Contour Analysis

A PC-based software tool for remotely controlling the instrument, gathering and saving data (such as bathtub and contour plots), and performing data systems analysis (J2/J9 and JTOL measurements) is available for use with both PED3200 and PED4000 error detectors. The tool is an executable file and is available upon request from Tektronix.

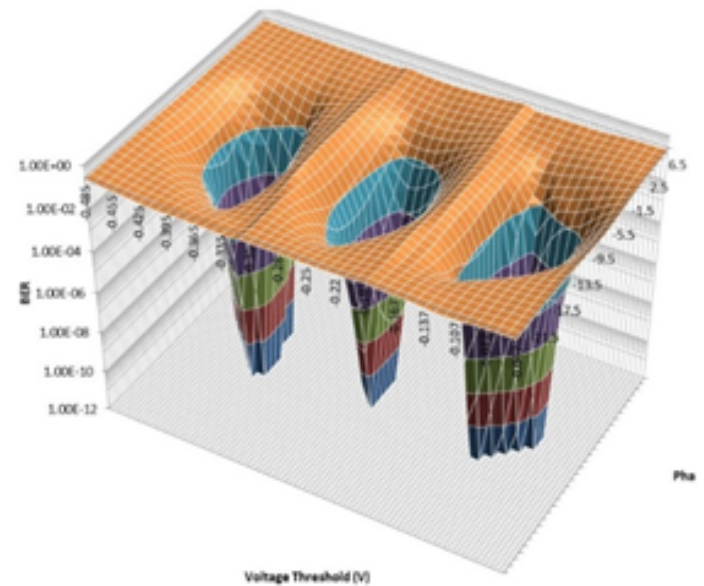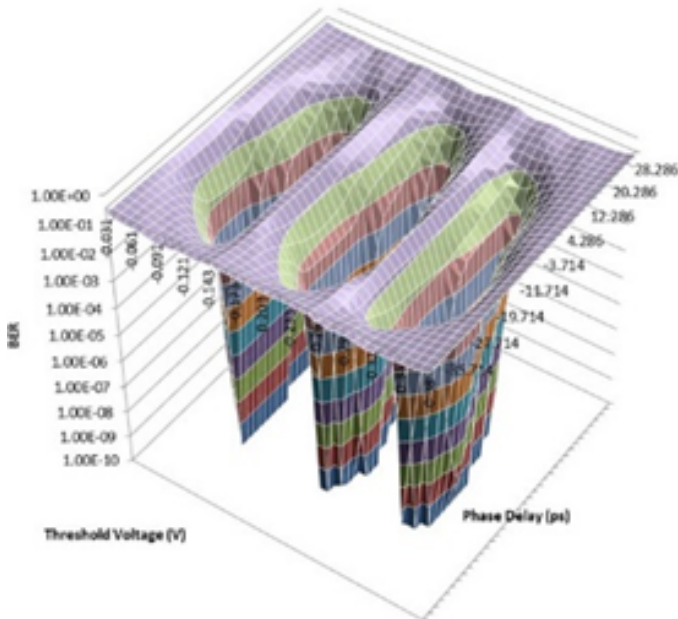

14 Gb/s and 25 Gb/s PAM4 Signal Contour Analysis



Tektronix is registered to ISO 9001 and ISO 14001 by SRI Quality System Registrar.



Product(s) complies with IEEE Standard 488.1-1987, RS-232-C, and with Tektronix Standard Codes and Formats.

ASEAN / Australasia (65) 6356 3900
Belgium 00800 2255 4835*
Central East Europe and the Baltics +41 52 675 3777
Finland +41 52 675 3777
Hong Kong 400 820 5835
Japan 81 (3) 6714 3086
Middle East, Asia, and North Africa +41 52 675 3777
People's Republic of China 400 820 5835
Republic of Korea +822 6917 5084, 822 6917 5080
Spain 00800 2255 4835*
Taiwan 886 (2) 2656 6688

Austria 00800 2255 4835*
Brazil +55 (11) 3759 7627
Central Europe & Greece +41 52 675 3777
France 00800 2255 4835*
India 000 800 650 1835
Luxembourg +41 52 675 3777
The Netherlands 00800 2255 4835*
Poland +41 52 675 3777
Russia & CIS +7 (495) 6647564
Sweden 00800 2255 4835*
United Kingdom & Ireland 00800 2255 4835*

Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777
Canada 1 800 833 9200
Denmark +45 80 88 1401
Germany 00800 2255 4835*
Italy 00800 2255 4835*
Mexico, Central/South America & Caribbean 52 (55) 56 04 50 90
Norway 800 16098
Portugal 80 08 12370
South Africa +41 52 675 3777
Switzerland 00800 2255 4835*
USA 1 800 833 9200

* European toll-free number. If not accessible, call: +41 52 675 3777

For Further Information. Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit www.tek.com.

Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.

