


# 14 dB 5x Pick-off Tee

## PSPL5361 Datasheet










The PSPL5361 is a broadband, resistive pick-off tee. The pick-off Port 3 output is a 1/5 scale replica of the signal passing through the tee. The PSPL5361 exhibits excellent through-line insertion loss and pick-off stability from DC to over 40 GHz. It also features <11 ps rise time. Pick-off resistor tolerance of 1% ensures excellent DC accuracy.

### Key performance specifications

- DC to >40 GHz
- 11 ps rise time
- 14 dB

## Typical performance

Frequency Domain Responses from 40 MHz to 40 GHz

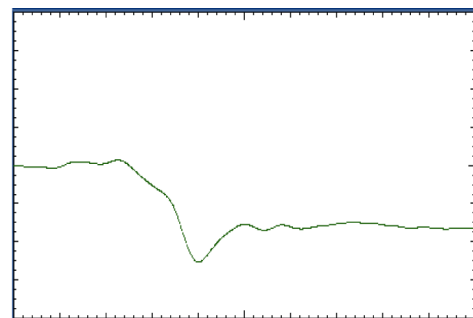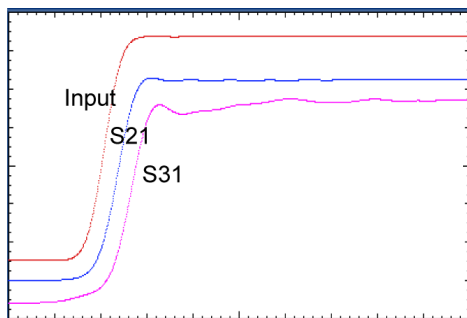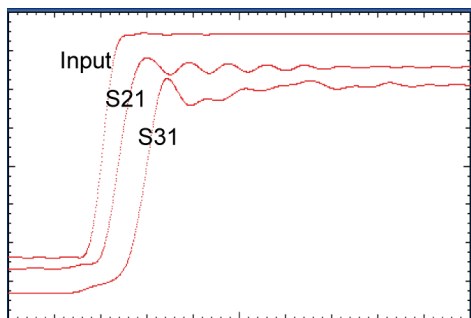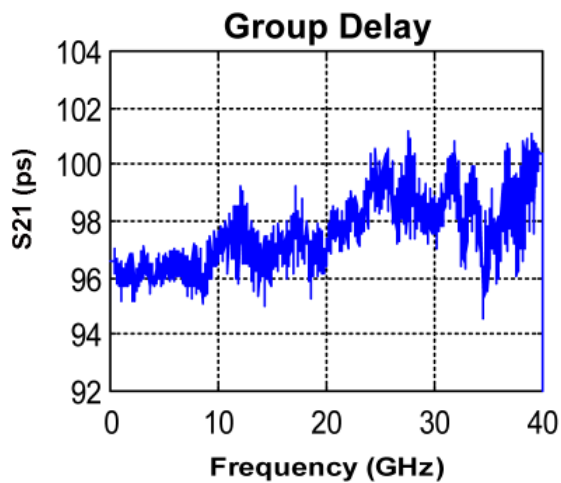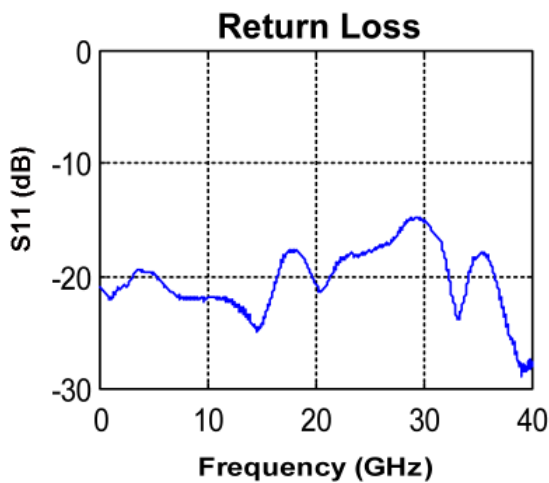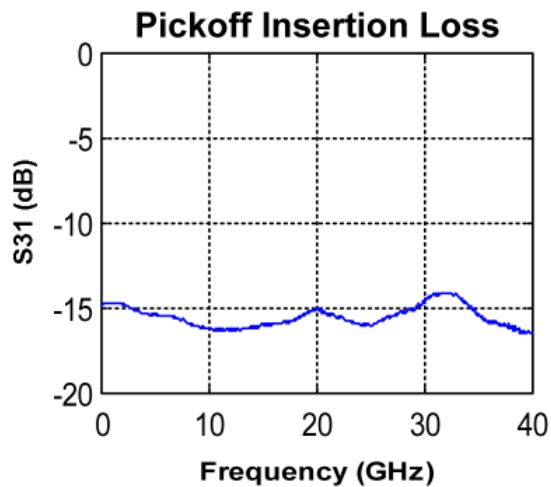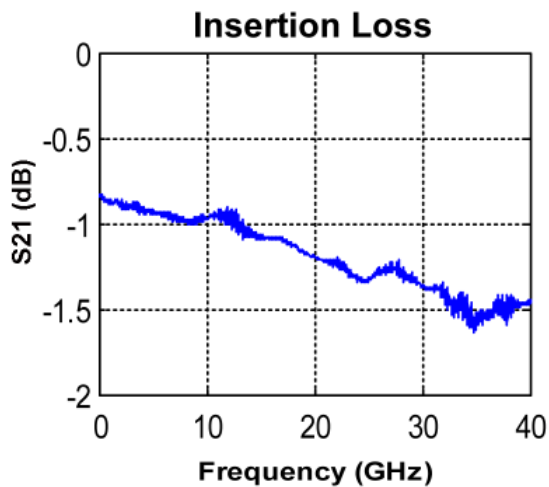


Transmission Responses to 10 and 15 ps Rise time steps into Port 1. Timebase 20 ps/div. Pick-off Transmission (S31) scaled 5x.

S11 Input TDR Response to 25 ps Rise time TDR Pulse, Scale 5% p/div, Timebase 50 ps/div

## Specifications

Parameter <sup>1</sup>	Value
Rise time	7 ps, through-line 11 ps, pick-off line
Bandwidth	DC to >40 GHz
Through-line Insertion Loss, DC	0.8 dB
Through-line Insertion Loss, AC	<1.2 dB, 0 – 15 GHz <1.8 dB, 15 – 40 GHz ≤2.0 dB, 0 – 40 GHz, guaranteed
Pick-off Resistor	200 Ω ±1%
Pick-off Insertion Loss, DC	14.8 dB
Pick-off Insertion Loss, AC	15 ±1 dB, 0 – 40 GHz
Delay	98 ps
Input Impedance, DC	41.7 Ω, port 1 and 2
Return Loss (Port 1 and 2)	>20 dB, DC >17 dB, 0 – 15 GHz >12 dB, 15 – 40 GHz
Max Input Power, avg	3.5 Watts, CW
Temperature Range	-55 to 90 °C @3.5 W, linearly derate to 0 W at 110 °C
Connectors	2.92 mm jacks (f)
Warranty	One Year

## Mechanical dimensions

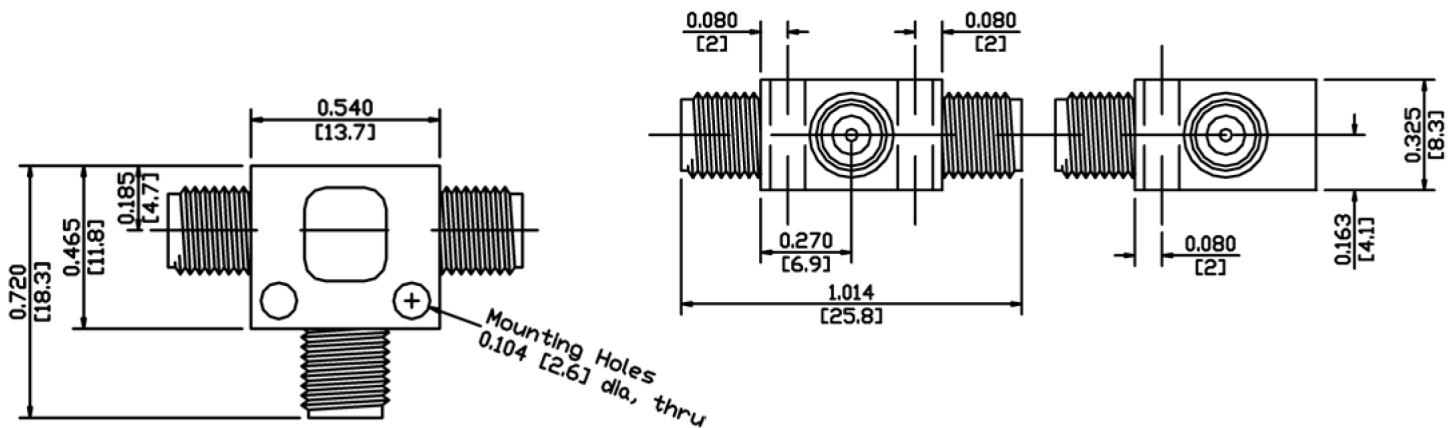

Dimensions in inches and [millimeters]  
Tolerance = +/- 0.005 [0.13]

<sup>1</sup> All parameters listed are typical unless max/min guaranteed limits are provided. The DC specs are valid only when used with 50 Ω source and terminations.

## Ordering information

### Models

PSPL5361 Pick-Off Tee, 14 dB, 5x

### Ordering information

OPT 292JJJ 2.92 mm connectors, Ports 1,2,3 = jacks (f)

**ASEAN / Australasia** (65) 6356 3900  
**Belgium** 00800 2255 4835\*  
**Central East Europe and the Baltics** +41 52 675 3777  
**Finland** +41 52 675 3777  
**Hong Kong** 400 820 5835  
**Japan** 81 (3) 6714 3086  
**Middle East, Asia, and North Africa** +41 52 675 3777  
**People's Republic of China** 400 820 5835  
**Republic of Korea** +822 6917 5084, 822 6917 5080  
**Spain** 00800 2255 4835\*  
**Taiwan** 886 (2) 2656 6688

**Austria** 00800 2255 4835\*  
**Brazil** +55 (11) 3759 7627  
**Central Europe & Greece** +41 52 675 3777  
**France** 00800 2255 4835\*  
**India** 000 800 650 1835  
**Luxembourg** +41 52 675 3777  
**The Netherlands** 00800 2255 4835\*  
**Poland** +41 52 675 3777  
**Russia & CIS** +7 (495) 6647564  
**Sweden** 00800 2255 4835\*  
**United Kingdom & Ireland** 00800 2255 4835\*

**Balkans, Israel, South Africa and other ISE Countries** +41 52 675 3777  
**Canada** 1 800 833 9200  
**Denmark** +45 80 88 1401  
**Germany** 00800 2255 4835\*  
**Italy** 00800 2255 4835\*  
**Mexico, Central/South America & Caribbean** 52 (55) 56 04 50 90  
**Norway** 800 16098  
**Portugal** 80 08 12370  
**South Africa** +41 52 675 3777  
**Switzerland** 00800 2255 4835\*  
**USA** 1 800 833 9200

\* European toll-free number. If not accessible, call: +41 52 675 3777

**For Further Information.** Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit [www.tek.com](http://www.tek.com).

Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.



08 Apr 2019 1PW-30592-1

