


PCI Express® Transmitter Compliance/Debug Solution

DPO-MSO70000 Option PCE3, PCE4 and PCE5 Datasheet

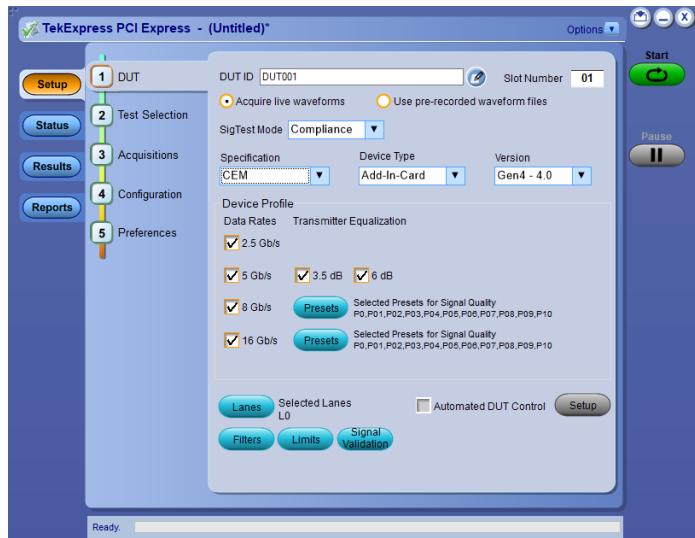

The Tektronix Option PCE3 (Gen 1/2/3), Option PCE4 (Gen4) and Option PCE5 (Gen5) applications provide the most comprehensive solution for PCI Express Transmitter compliance testing as well as debug and validation of PCI Express devices against the PCI-SIG® specifications.


Features and benefits

- PCIe test supports compliance and validation of PCIe Gen1/2/3/4/5 interfaces based on PCIe Base and CEM specifications for Tektronix DPO/MSO70000 Series oscilloscopes
- Automated setup. Automatically sets up the oscilloscope horizontal and vertical scales to optimize signal quality for accurate analysis
- Automated acquisition / waveform management. Automatically acquires and saves the waveform per the PCI-SIG®-recommended naming convention to manage numerous waveforms that need to be acquired per lane for completing the Transmitter (Tx) test
- Automated DUT control. Automatically controls the DUT and steps it through the various supported speeds and presets necessary for Tx testing
- RF switch automation of PCIe3 test solution, supporting up to x16 lanes
- Support for NVMe physical layer testing, via add-in card device, or through a U.2 or M.2 connector
- De-embedding. De-embeds the effects of the channel, test fixtures, and cables to provide results that more accurately represent the signal (requires Option SDLA64 Serial Data Link Analysis)
- Test selection. Select the specification against which to perform the analysis, and select individual tests or groups of tests to perform targeted compliance analysis for failing tests
- SigTest integration. Uses SigTest EXE (using command line interface) to perform the analysis of acquired waveforms, providing the ability to test a system using the PCI-SIG®-recommended analysis tool
- Reporting. Compiles all test results into a customizable report with Pass/Fail results for easy analysis and record keeping
- Pattern matching. Verifies that the correct set of compliance patterns are sent by the transmitter before acquiring signals for compliance analysis
- PHY level protocol decode. Decodes and displays the PCIe data in a protocol-aware view. A time-correlated event table view with waveforms allows for quickly searching through events of interest
- Multi-lane testing. Perform analysis on multiple lanes of PCIe express data to speed up the Tx analysis in a multi-lane system

- Compliance and debug. Provides a toolkit of DPOJET-based setups to quickly switch into debug and validation mode when a DUT fails compliance
- Analysis and debug tools. Tektronix provides a broad range of compliance, debug, and validation tools for Transmitter (Tx), Receiver (Rx), and protocol testing
- Comprehensive programmatic interface. Enables automation programs and scripts to call PCIe functions

Applications

Tektronix provides the most comprehensive solutions to serve the needs of engineers designing PCI Express silicon for computer systems, add-in cards, and embedded systems, as well as those validating the physical-layer compliance of PCI Express devices to the PCI Express Compliance Test Specification.

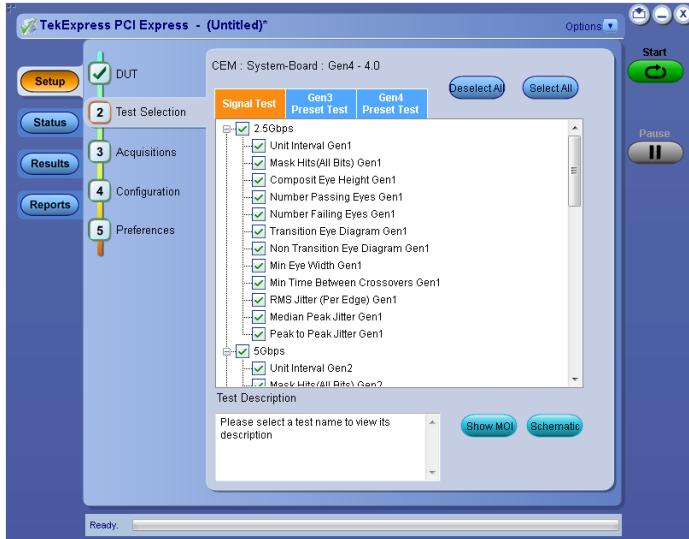

TekExpress PCIe test selection for compliance test analysis


The Tektronix Option PCE3 (Gen1/2/3), PCE4 (Gen4) and PCE5 (Gen5) includes compliance and debug testing and electrical validation for the following:

- Root complex
- Endpoints
- Switches
- Bridges
- Add-In cards
- System boards
- Embedded systems
- Express module

The Tektronix Option PCE3, PCE4 and PCE5 applications include a TekExpress™ compliance automation solution that integrates SigTest from the PCI-SIG as well as Tektronix DPOJET-based PCI Express Jitter and Eye Diagram analysis tools for debug purposes in a single software package.

TekExpress compliance automation is available now for PCIe Gen 1-3 CEM and Gen 3 Base via Option PCE3, Gen4 CEM and Gen4 Base via Option PCE4 and Gen5 Base via Option PCE5.

The Tektronix Option PCE3, Option PCE4 and Option PCE5 applications are compatible with Tektronix DPO/MSO70000 series oscilloscopes that are designed to meet the challenges of the next generation of serial data standards such as PCI Express. These oscilloscopes provide the industry's leading vertical noise performance with the highest number of effective bits (ENOB) and flattest frequency response for oscilloscopes in their class. The Tektronix DPO/MSO70000 series of oscilloscopes have been approved by PCI-SIG for compliance testing.

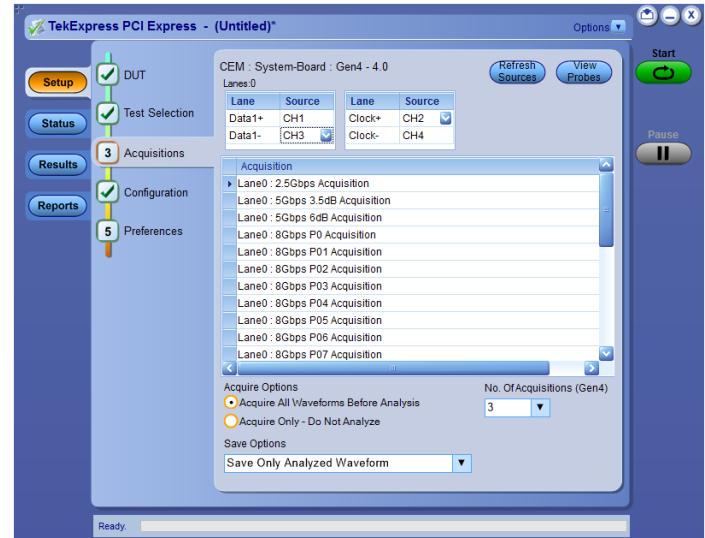

TekExpress oscilloscope acquisition setup


Compliance testing

The PCI-SIG provides PCI Express compliance tests for testing PCI Express systems and add-in cards. For a PCI Express system or a device to be placed on the Integrators List, the system or device must pass interoperability and compliance testing. For electrical validation, the PCI-SIG uses SigTest Post Capture Analysis Software that uses acquisitions from an oscilloscope connected to the PCI-SIG's CBB (main board + riser) test fixture for add-in cards or CLB test fixture for systems to perform the analysis. Manually capturing the required waveforms and analyzing them is tedious, time consuming, and error prone.


The Tektronix Option PCE3, Option PCE4 and Option PCE5 TekExpress Automation for PCI Express Transmitter Compliance reduces the effort and accelerates the compliance testing for PCI Express systems and devices with several unique and innovative capabilities. These options ultimately allow the testing of devices that support various technologies, such as NVMe, which is supported as an add-in card device, or through a U.2 or M.2 connector.

The Option PCE3 and Option PCE4 TekExpress Automation software can control the DUT using selected models of a Tektronix AFG or AWG or GRL PCIe34 Controller pattern source and automatically cycle it through various speeds, de-emphasis, and presets that are necessary for the compliance test. This eliminates the error-prone manual push button approach normally used for DUT control on the CBB and CLB test fixtures.

A complete test run requires multiple waveforms to be acquired at different DUT settings per lane. This waveform set will increase by the number of lanes that need to be analyzed. The ability to manage and store the required data for analysis and future reference is an important criterion for any compliance solution. The Option PCE3, Option PCE4 and Option PCE5 TekExpress automation software, apart from adjusting the horizontal and vertical settings as well as the acquisition depth for optimal signal quality for accurate analysis, provides easy analysis to manage multiple acquired waveforms.

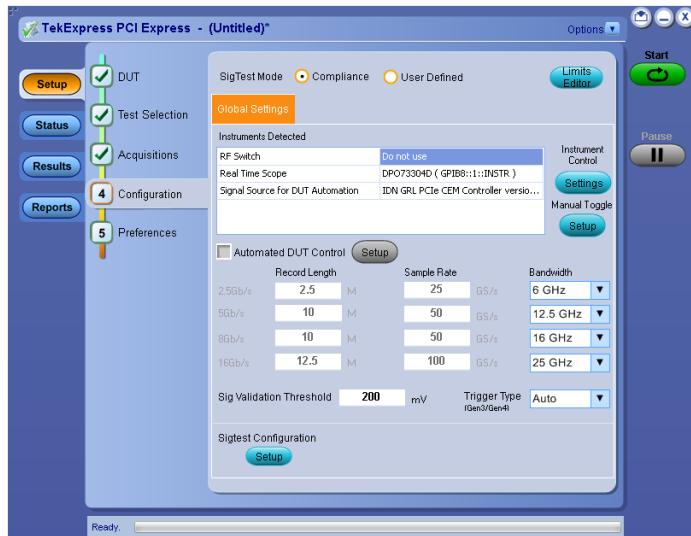

TekExpress setup configuration

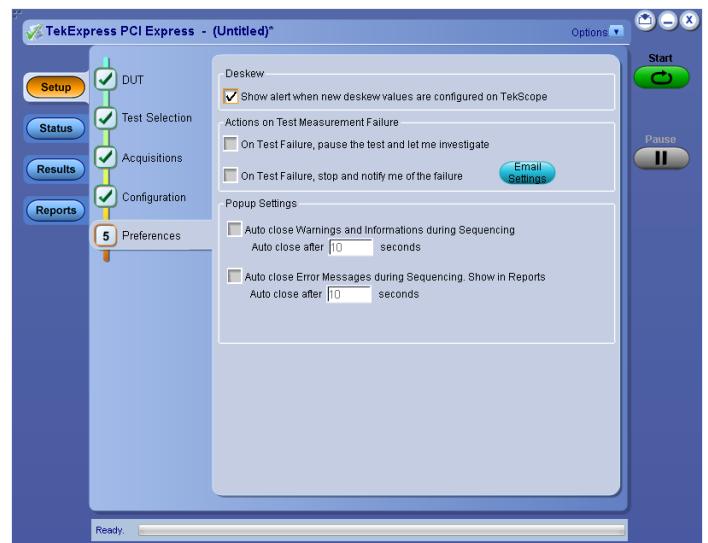


TekExpress setup preferences


This makes the PCI-SIG's SigTest EXE is used to analyze the acquired waveforms. The makes results of the analysis consistent with the SigTest post-capture analysis software used at PCI-SIG workshops for compliance testing.

The Option PCE3, Option PCE4 and Option PCE5 TekExpress automation software provides flexibility in selecting data rates, voltage swing, presets, and the tests to run. It also provides the option to de-embed the effects of the channel and the test fixtures and provide an accurate representation of the signal at the pins as required by the specification.

All the analysis results are compiled in a PDF/HTML formatted report that can include pass/fail summary, eye diagrams, setup configuration, and user comments. The contents of the report can be customized to include information of interest such as append results and custom report generation based on test name/pass fail/equalization.

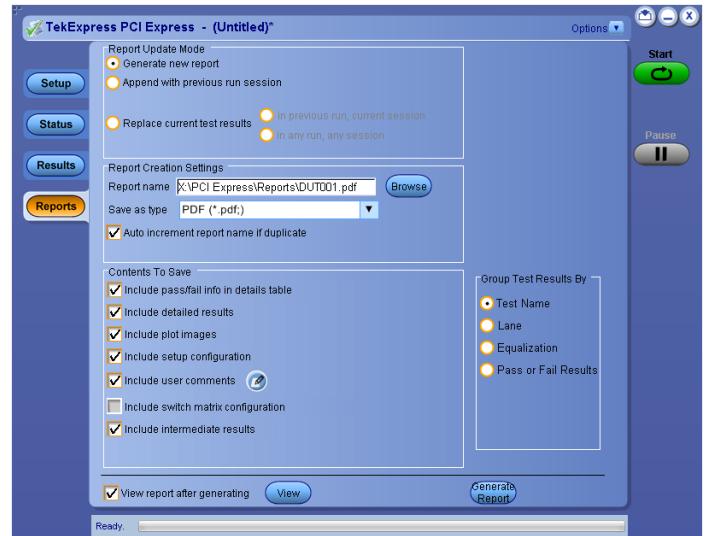

TekExpress report generation preferences

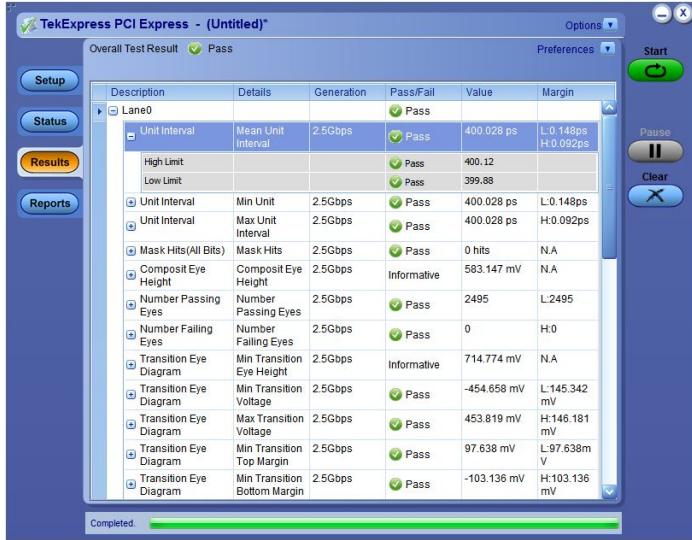

TekExpress results summary

Switch Matrix automation

Switch Matrix application allows to configure and setup automated multi-lane testing using RF switch. The solution allows you to map each of the several transmitter signals and forward the selected input either to another relay or to the oscilloscope channel. Option SWX-PCE supports x12 and x16 lanes using Keithley and Gigatronics switches respectively, and enhances throughput and automated test speed.



Switch Matrix application settings



Switch configuration example

Debug and validation




If a DUT or Add-In card fails any portion of the compliance test, the application includes a DPOJET-based debug and analysis tool kit customized for debug and validation of PCI Express interfaces.

The new jitter measurements introduced with PCIe Gen3 and Gen 4 provide separate limits for data dependent (DDJ) and uncorrelated deterministic jitter (UDJDD). It is important to separate DDJ (which can be compensated with transmitter and receiver equalization) and UDJDD (which can be caused by effects such as crosstalk and power supply noise).

Apart from the above Jitter measurements, Pulse Width Jitter (PWJ) is a new measurement that addresses the increased channel loss at 8 to 16 Gb/s. The purpose of the PWJ measurement is to ensure that lone bits meet minimum pulse width requirements. All new jitter measurements implement Q-scale extrapolation as defined in the base specification. Option PCE3 and Option PCE4 provide the complete set of PCI Express 3.0 and 4.0 Base Spec jitter measurements enabling silicon designers to verify that their silicon meets the base specification requirements.

Furthermore, the base specification requirements are defined at the pins of the transmitter. Before the measurements are computed the test channel must be de-embedded. De-embed filters can be easily created using the Tektronix Option SDLA64 Serial Data Link Analysis software and then quickly entered into the Option PCE3 and Option PCE4 base specification measurement setup and saved for future use. In addition to jitter, Option PCE3 and Option PCE4 also provide voltage, package loss, and transmitter equalization measurements.

Option PCE3 and Option PCE4 leverage the channel modeling and receiver equalization functionality of the Tektronix Option SDLA64 software to support CEM measurements. Unlike other solutions, Option PCE3 and Option PCE4 provide full visibility to the signal as it has been modified to embed the compliance channel and provide receiver equalization. Eye diagrams and measurements can be set up to visually see the results of channel embedding, CTLE application, and DFE. For example, when determining the optimal Rx Equalization settings (CTLE setting and DFE tap value) the resulting eye diagrams and measurements show the effects of post processing on the acquired signal. Compliance measurements can then be taken on the waveform.

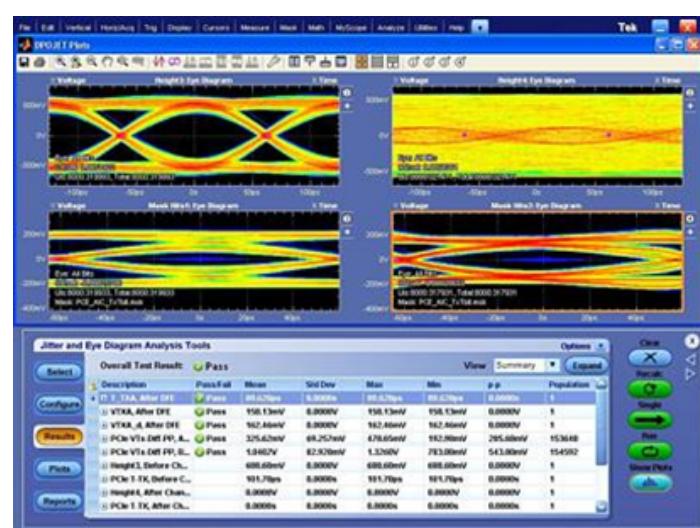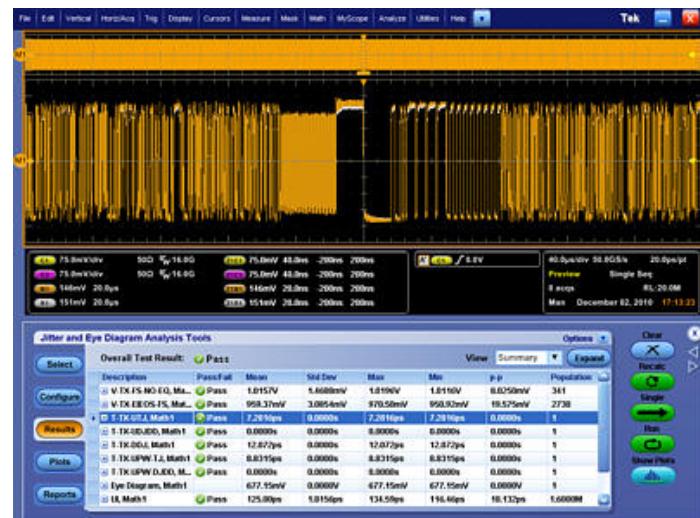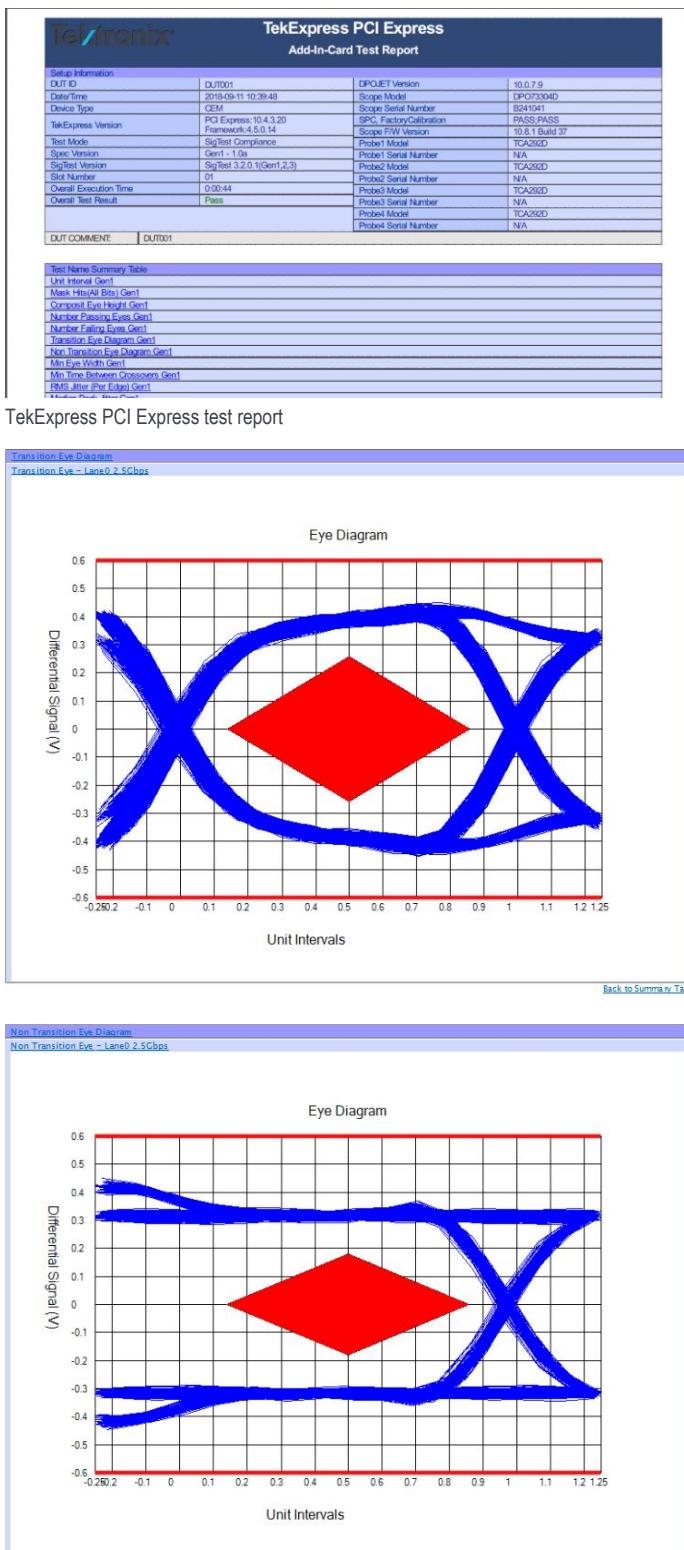


DPOJET based Reference Clock measurements

The Tektronix DPOJET based RefClock measurements provide a reliable way to implement the Reference clock specifications described in the PCI Express Base Specification Rev 1.0 for Gen1, Gen2, Gen3, Gen4 and Gen5.



Example of RefClk measurements, together with generated plots

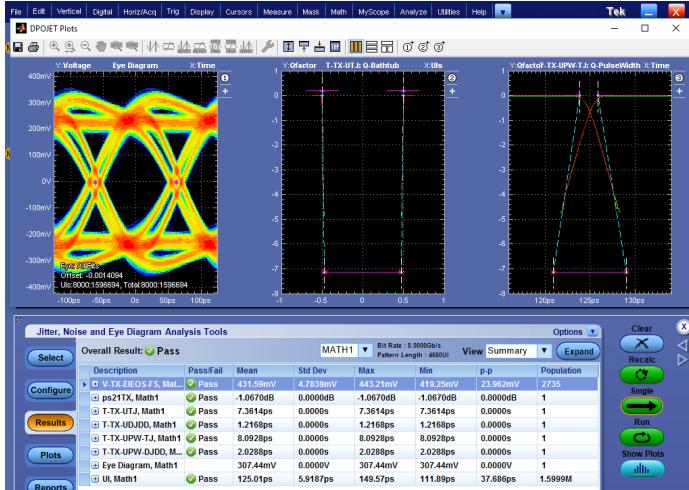

DPOJET measurements and their plots

Comprehensive programmatic interface

You can use Standard Commands for Programmable Instruments (SCPI) to communicate with the TekExpress application. The Online Help document of TekExpress application describes the steps for TCPIP socket configuration and TekVISA configuration to execute the SCPI commands.

PCI Express Decoder for Gen 1 - 4 (Option SR-PCIe)

Decode and Display of PCIe data in a protocol-aware view with the characters and names that are familiar from the standard such as the ordered sets: SKP, Electrical Idle, and EIEOS. A time correlated event table view with waveform allows for quickly searching through events of interest simultaneously. All decoding features support PCIe generations 1 - 4. The PCIe trigger is easily configured through Bus Setup under the oscilloscope's Vertical menu with a variety of user-adjustable settings. The PCIe data stream is integrated with serial bus trigger and search for PCIe gen 1 and 2 allows for triggering on information of interest.



Comprehensive measurements for PCIe validation, debug, and precompliance


Tektronix Option PCE3, Option PCE4 and Option PCE5 provide measurements that span multiple test points and versions of the PCIe specification. All PCIe specifications, test points, and measurements supported are listed in the following sections.

Test method	Spec revision	PCI Express specification title	Test points defined
Rev 1.1	Rev 1.1	Base Specification	Transmitter and Receiver
	Rev 1.1	CEM Specification	System and Add-in Card Reference Clock
	Rev 1.0	Express Module Specification	Transmitter Path and System Board
	Rev 1.0	PCMCIA Express Card Standard	Host System Transmitter Express Card Transmitter
	Ver. 3.0 Rev 1.1	Mobile PCI Express Module (MXM) Electromechanical Specification	PCI Express
Rev 2.0	Rev 1.0	External Cabling Specification	Transmitter and Receiver Path
	Rev 2.0	Base Specification	Transmitter and Receiver Mobile Low-power Transmitter
	Rev 2.0	CEM Specification	System and Add-in Card (3.5 and 6 dB de-emphasis)
	Ver. 3.0 Rev 1.1	Mobile PCI Express Module (MXM) Electromechanical Specification	PCI Express
Rev 3.0	Rev 1.0	Base Specification	Transmitter
	Rev 1.0	CEM Specification	System and Add-in Card
	Rev 3.0	Test Specification	System and Add-in Card
Rev 4.0	Rev 1.0	CEM Specification	System and Add-in Card
Rev 5.0	Rev 1.0	Base Specification	Transmitter

SignalConnect™ software and TCS70902 Calibration Source



SignalCorrect allows quick characterization of cables, fixtures and other types of interconnects using the TCS70902 fast step source and the response captured on a DPO70000SX Series real-time oscilloscope.

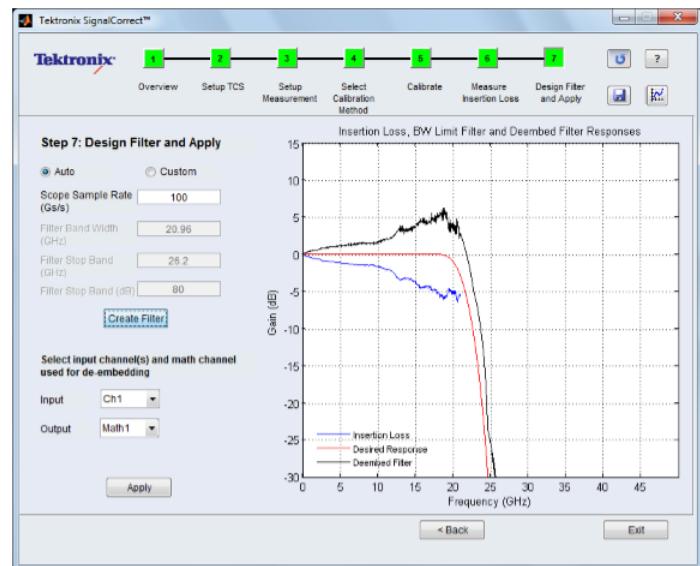

SignalCorrect creates a filter that you can apply to your oscilloscope inputs to de-embed your device or interconnect under test.

Specifications

All specifications apply to all models unless noted otherwise.

Supported Reference clock measurements

Supported Reference clock measurements	Generation	Architecture	Measurements	Limits
PCIe 1.1	Common clock	T-CC-RCLK	Specified	
		T-WST-CC-RCLK	Specified	
	Independent RefClock	IR2.5GBPS	Specified	
PCIe 2.1	Common clock	T-RMSSC-RCLK-5GBPS	Specified	
		T-WST-RMSSC-RCLK-5GBPS	Specified	
	Independent RefClock	IR5GBPS	Specified	
PCIe 3.1	Common clock	T-RMSSC-RCLK	Specified	
		T-WST-RMSSC-RCLK	Specified	
	Independent RefClock	IR8GBPS	Specified	
PCI4 4.0	Common clock	PCIE4_T-RMSSC-REFCLK	Specified	
		PCIE4_T-WST-RMSSC-REFCLK	Specified	
	Independent RefClock	IR16GBPS	Specified	
PCI4 5.0	Common clock	PCIE5_T_RMSSC-REFCLK	Specified	
		PCIE5_T-WST-RMSSC-REFclk	Specified	
	Independent RefClock	PCIE5_IR	Specified	

Supported AC reference clock measurements

AC reference clock specifications	Generation	Specifications	Measurements	Symbol
Common across all generations	AC reference clock specifications	Cycle to Cycle jitter	CC_JITTER	
		Differential Input High Voltage	V_IH	
		Differential Input Low Voltage	V_IL	
		Duty Cycle	Duty Cycle	
		Absolute Max input voltage	V_max	
		Absolute Min input voltage	V_min	
		Absolute Period (including Jitter and Spread Spectrum modulation)	Period Abs	
		Falling Edge Rate	Falling-Edge-Rate	
		Rising Edge Rate	Rising-Edge-Rate	
		Average Clock Period Accuracy	Avg Prd Accur	
		Rising edge rate (REFCLK+) to falling edge rate (REFCLK-) matching	Rise fall Match	
		Absolute crossing point voltage	VCROSS	

Supported base specification measurements

Supported PCI Express 4.0 Base Transmitter measurements	Parameter	DPOJET measurement	8.0 GT/s, Rev 3.0	16.0 GT/s, Rev 1.0
	Unit interval	UI	Specified	Specified
	Full Swing Tx voltage with noTxEq	V-TX-FS-NO-EQ	Specified	Specified
	Reduced Swing Tx voltage with noTxEq	V-TX-RS-NO-EQ	Specified	Specified
	Min swing during EIEOS for full swing	V-TX-EIEOS-FS	Specified	Specified
	Min swing during EIEOS for reduced swing	V-TX-EIEOS-RS	Specified	Specified
	Pseudo package loss Root device	ps21TXRootdevice	Specified	Specified
	Pseudo package loss AIC device	ps21TXAICdevice	NA	Specified
	Tx uncorrelated total Jitter	T-TX-UTJ	Specified	Specified
	Tx uncorrelated deterministic jitter	T-TX-UDJDD	Specified	Specified
	Data dependent jitter	T-TX-DDJ	Specified	NA
	Total uncorrelated PWJ	T-TX-UPW-TJ	Specified	Specified
	Deterministic DjDD uncorrelated PWJ	T-TX-UPW-DJDD	Specified	Specified
	Maximum Boost voltage ratio for full swing	V-TX-FS-BOOST	Specified	Specified
	Maximum Boost voltage ratio for reduced swing	V-TX-RS-BOOST	Specified	Specified

Supported PCI Express 5.0 Base Transmitter measurements	Parameter	DPOJET measurement	32.0 GT/s, Rev 5.0
	Tx uncorrelated total Jitter	T-TX-UTJ	6.25 ps (max)
	Tx uncorrelated deterministic Jitter	T-TX-UDJDD	3.125 ps (max)
	Data dependent Jitter	T-TX-DDJ	NA
	Total uncorrelated PWJ	T-TX-UPW-TJ	6.25 ps (max)
	Total Random Jitter (informative)	T-TX-RJ	0.23-0.45 ps rms
	Deterministic DjDD uncorrelated PWJ	T-TX- UPW-DJDD	2.5 ps (max)
	RMS Refolk jitter for common Refolk architecture	T-RMSCC-RCLK	0.25 ps (max)
	IR Refolk jitter	IR32GBPS	NA
	Pseudo Package Loss	ps21Tx	(max) 8.5dB
	Boost ratio	VTX-BOOST	8.0 (min) dB
	EIEOS	VTX-EIEOS	250 mV
	TX Differential Peak to Peak	VTX-DIFF-PP	800 mV (max) 1300mV

Supported base specification measurements

Differential transmitter (Tx) output measurements	Parameter	Symbol(s)	2.5 GT/s Rev 1.1/2.0	5 GT/s Rev 2.0
Clock Recovery	NA	Specified	Specified	Specified
Unit Interval	UI	Specified	Specified	Specified
Differential Peak-to-Peak Tx Voltage Swing	$V_{TX-DIFF-P-P}$ $V_{TX-SWING}$ $V_{TX-EYE-FULL}$	Specified	Specified	Specified
Low-power Differential Peak-to-Peak Tx Voltage Swing	$V_{TX-SWING-LOW}$ $V_{TX-EYE-HALF}$	Specified	Specified	Specified
De-emphasized Output Voltage Ratio	$V_{TX-DE-RATIO}$	Not Specified	Specified	Specified
Instantaneous Lane Pulse Width	$T_{MIN-PULSE}$	Not Specified	Specified	Specified
Transmitter Eye including All Jitter Sources	T_{TX-EYE} $T_{TX-EYE-TJ}$	Specified	Specified	Specified
Maximum Time between the Jitter Median and Maximum Deviation from the Median	$T_{TX-EYEMEDIAN-to-MAXJITTER}$	Specified	Specified	Specified
Deterministic Jitter	$T_{TX-DJ-DD}$	Not Specified	Specified	Specified
Tx RMS Jitter <1.5 MHz	$T_{TX-LF-RMS}$	Not Specified	Specified	Specified
D+/D– Tx Output Rise/Fall Time	$T_{TX-RISE}$ $T_{TX-FALL}$	Specified	Specified	Specified
Tx Rise/Fall Mismatch	$T_{RF-MISMATCH}$	Not Specified	Specified	Specified
AC Peak-to-Peak Common Mode Output Voltage	$V_{TX-CM-AC-PP}$	Not Specified	Specified	Specified
AC Peak Common Mode Output Voltage	$V_{TX-CM-AC-P}$	Specified	Specified	Specified
Absolute Delta of DC Common Mode Voltage between D+ and D–	$V_{TX-CM-DC-LINE-DELTA}$	Specified	Specified	Specified

Differential receiver (Rx) input measurements ¹	Parameter	Symbols	2.5 GT/s Rev 1.1/2.0	5 GT/s Rev 2.0
Clock Recovery	NA	Specified	Not Specified	Specified
Unit Interval	UI	Specified	Specified	Specified
Minimum Receiver Eye Opening	V_{RX-EYE}	Specified	Specified	Specified
Receiver Deterministic Jitter – DJ	$T_{RX-DJ-DD}$	Not Specified	Specified	Specified
Minimum Width Pulse at Rx	$T_{RX-MIN-PULSE}$	Not Specified	Specified	Specified
Maximum Time between the Jitter Median and Maximum Deviation from the Median	$T_{TX-EYEMEDIAN-to-MAXJITTER}$	Specified	Not Specified	Specified
Rx AC Common Mode Voltage	$V_{RX-CM-AC-P}$	Specified	Specified	Specified

¹ The Rx input measurements are not specified for 8 GT/s and 16 GT/s.

Supported CEM specification measurements

	Parameter	Symbol	
Add-in Card 8 GT/s transmitter path compliance measurements	Transition Eye Voltage	PCIe V-TXA	
	Nontransition Eye Voltage	PCIe V-TXA-d	
	Eye Width	PCIe T-TXA	
Add-in Card transmitter path compliance measurements	Parameter	Symbol(s)	2.5 Gt/s Rev 1.1/2.0
	Clock Recovery	NA	Specified
	Unit Interval	UI	Specified
	Eye Height of Transition Bits	V _{TXA}	Specified
	Eye Height of Nontransition Bits	V _{TXA_d}	Specified
	Eye Width with Sample Size of 10 ⁶ UI	T _{TXA} in Rev 1.1	Specified
	Jitter Eye Opening at BER 10 ⁻¹²	T _{TXA} in Rev 2.0	Specified
	Maximum Median-Max Jitter Outlier with Sample Size of 10 ⁶ UI	J _{TXA-MEDIAN-to-MAX-JITTER}	Specified
	Total Jitter at BER 10 ⁻¹²	TJ at BER 10 ⁻¹²	Not Specified
	Deterministic Jitter at BER 10 ⁻¹²	Max DJ	Specified
System board transmitter path measurements	Parameter	Symbol(s)	2.5 GT/s Rev 1.1/2.0
	Clock Recovery	NA	Specified
	Unit Interval	UI	Specified
	Eye Height of Transition Bits	V _{TXS}	Specified
	Eye Height of Nontransition Bits	V _{TXS_d}	Specified
	Eye Width with Sample Size of 10 ⁶ UI	T _{TXS} in Rev 1.1	Specified
	Jitter Eye Opening at BER 10 ⁻¹²	T _{TXS} in Rev 2.0	Specified
	Maximum Median-Max Jitter Outlier with Sample Size of 10 ⁶ UI	J _{TXS-MEDIAN-to-MAX-JITTER}	Specified
	Total Jitter at BER 10 ⁻¹²	TJ at BER 10 ⁻¹²	Not Specified
	Deterministic Jitter at BER 10 ⁻¹²	Max DJ	Specified
Reference clock measurements	Parameter	Symbol	2.5 Gt/s Rev 1.1/2.0
	Reference Clock Phase Jitter at BER 10 ⁻⁶	NA	Specified

PCI ExpressModule™ measurements

ExpressModule Add-in Card transmitter path measurements	Parameter	Symbol	Rev 1.0
Clock Recovery	NA		Specified
Unit Interval	UI		Specified
Eye Height of Transition Bits	V_{TXA}		Specified
Eye Height of Nontransition Bits	V_{TXA_d}		Specified
Eye Width with Sample Size of 10^6 UI	T_{TXA} in Rev 1.1		Specified
Jitter Eye Opening at BER 10^{-12}	NA		Specified
Maximum Median-Max Jitter Outlier with Sample Size of 10^6 UI	$J_{TXA-MEDIAN-to-MAX-JITTER}$		Specified

ExpressModule system board transmitter path measurements	Parameter	Symbol	Gen1 Rev 1.0
Clock Recovery	NA		Specified
Unit Interval	UI		Specified
Eye Height of Transition Bits	V_{TXS}		Specified
Eye Height of Nontransition Bits	V_{TXS_d}		Specified
Eye Width with Sample Size of 10^6 UI	T_{TXS}		Specified
Jitter Eye Opening at BER 10^{-12}	NA		Specified
Maximum Median-Max Jitter Outlier with Sample Size of 10^6 UI	$J_{TXA-MEDIAN-to-MAX-JITTER}$		Specified

PCI Express external cabling measurements

External cabling transmitter path measurements	Parameter	Symbol	Rev 1.0
Clock Recovery	NA		Specified
Unit Interval	UI		Specified
Eye Height of Transition Bits	V_{TXA}		Specified
Eye Height of Nontransition Bits	V_{TXA_d}		Specified
Jitter Eye Opening at BER 10^{-12}	TrxA at BER 10^{-12}		Specified
Eye Width with Sample Size of 10^6 UI	TrxA at 10^6 Samples		Specified

External cabling receiver path measurements	Parameter	Symbol	Gen1 Rev 1.0
Clock Recovery	NA		Specified
Unit Interval	UI		Specified
Eye Height of Transition Bits	V_{RXA}		Specified
Eye Height of Nontransition Bits	V_{RXA_d}		Specified
Jitter Eye Opening at BER 10^{-12}	TrxA at BER 10^{-12}		Specified
Eye Width with Sample Size of 10^6 UI	TrxA at 10^6 Samples		Specified

PCMCIA ExpressCard™ measurements

ExpressCard - Module transmitter path measurements	Parameter	Symbol	Release 1.0
	Clock Recovery	NA	Specified
	Unit Interval	UI	Specified
	Eye Height of Transition Bits	V_{TXA}	Specified
	Eye Height of Nontransition Bits	V_{TXA_d}	Specified
	Eye Width across any 250 UIs	T_{TXA}	Specified

ExpressCard™ - Host system transmitter path measurements	Parameter	Symbol	Release 1.0
	Clock Recovery	NA	Specified
	Unit Interval	UI	Specified
	Eye Height of Transition Bits	V_{txS}	Specified
	Eye Height of Nontransition Bits	V_{txS_d}	Specified
	Eye Width across any 250 UIs	T_{txS}	Specified

MXM measurements

PCI Express measurements ²	Parameter	Symbol	Release 1.1
	Eye Height of Transition Bits	V_{TXS}	Specified
	Eye Height of Nontransition Bits	V_{TXS_d}	Specified
	Width at BER	T_{TXS}	Specified
	Deterministic Jitter	DJ	Specified
	Total Jitter	TJ	Specified

² All de-emphasis levels supported

Ordering information

PCE3³	PCI Express Gen1/2/3 TekExpress Compliance/Debug Automation with DPOJet Measurements Software
New instrument orders	Option PCE3
Product upgrades	DPO-UP Option PCE3
Floating licenses	DPOFL-PCE3
PCE4⁴	PCI Express Gen4 TekExpress Compliance/Debug Automation with DPOJet Measurements Software Requires PCE3 option to support PCI Express Gen1/2/3 TekExpress Compliance/Debug Automation with DPOJet Measurements Software For CEM System/Host Test ⁵
New instrument orders	Option PCE4
Product upgrades	DPO-UP Option PCE4
Floating licenses	DPOFL-PCE4
PCE5	PCI Express Gen1/2/3/4/5 TekExpress Compliance/Debug Automation with DPOJet Measurements Software
New instrument orders	Option PCE5
Product upgrades	DPO-UP Option PCE5
Floating licenses	DPOFL-PCE5
SWX-PCE⁶	Switch configurator for PCIe Gen 1/2/3 (please note the RF Switch will not support PCIe Gen4 Tx testing)
New instrument orders	Option SWX-PCE
Floating licenses	DPOFL-SWX-PCE

³ Requires Option DJA (DPOJET Jitter and Eye Diagram Analysis) and Option SDLA64 (serial Data Link Analysis Visualizer) highly recommended. Option DJA is standard on MSO70000 Series oscilloscopes, and can be ordered for DPO70000 Series oscilloscopes.

⁴ Require option PCE3. For Debug solution DJA and SDLA64 is required. If user need only Automated TekExpress solution then DJA and SDLA64 is optional

⁵ CEM System/Host Test Configuration

- 1 x MSO/DPO72504DX or DPO73304SX Oscilloscope with P76xx probe or DPS73308SX, min BW = 25GHz
- 2 x P7625 or P7633 probe required for MSO/DPO72504DX or DPO73304SX
- 2 x P76CA-292 probe tip required for MSO/DPO72504DX or DPO73304SX

⁶ Requires Option PCE3

Recommended DPO/MSO70000 Series Oscilloscopes

2.5 Gb/s (PCI Express 1.0/1.1)	DPO/MSO70000 Series (6 GHz or higher bandwidth models required for compliance testing)
5.0 Gb/s (PCI Express 2.0)	DPO/MSO70000 Series (12.5 GHz or higher bandwidth models)
8.0 Gb/s (PCI Express 3.0)	DPO/MSO70000 Series (12.5 GHz or higher bandwidth models)
16.0 Gb/s (PCI Express 4.0)	DPO/MSO70000 Series (25 GHz or higher bandwidth models)
32.0 Gb/s (PCI Express 5.0)	DPS77004SX Series (50 GHz or higher bandwidth models)

Support for DPO/MSO70000 SX Series oscilloscopes Supported DPO70000 Series configurations

Model	Description	Option PCE3	Option PCE4	Option PCE5
DPO71604C	16 GHz DPO; 2 Ch, 100 GS/s or 4 Ch, 50 GS/s	✓		
DPO72004C	20 GHz DPO; 2 Ch, 100 GS/s or 4 Ch, 50 GS/s	✓		
DSA71604C	16 GHz DSA; 2 Ch, 100 GS/s or 4 Ch, 50 GS/s	✓		
DSA72004C	20 GHz DSA; 2 Ch, 100 GS/s or 4 Ch, 50 GS/s	✓		
MSO71604C	16 GHz MSO; 2 Ch, 100 GS/s or 4 Ch, 50 GS/s	✓		
MSO72004C	20 GHz MSO; 2 Ch, 100 GS/s or 4 Ch, 50 GS/s	✓		
DPO72504D	25 GHz DPO; 2 Ch, 100 GS/s or 4 Ch, 50 GS/s	✓	✓	
DPO73304D	33 GHz DPO; 2 Ch, 100 GS/s or 4 Ch, 50 GS/s	✓	✓	
DSA72504D	25 GHz DSA; 2 Ch, 100 GS/s or 4 Ch, 50 GS/s	✓	✓	
DSA73304D	33 GHz DSA; 2 Ch, 100 GS/s or 4 Ch, 50 GS/s	✓	✓	
DPO72304DX	23 GHz DPO; 2 Ch, 100 GS/s or 4 Ch, 50 GS/s	✓		
DPO72504DX	25 GHz DPO; 2 Ch, 100 GS/s or 4 Ch, 50 GS/s	✓	✓	
DPO73304DX	33 GHz DPO; 2 Ch, 100 GS/s or 4 Ch, 50 GS/s	✓	✓	
MSO72304DX	23 GHz MSO; 2 Ch, 100 GS/s or 4 Ch, 50 GS/s	✓		
MSO72504DX	23 GHz MSO; 2 Ch, 100 GS/s or 4 Ch, 50 GS/s	✓	✓	
MSO73304DX	33 GHz MSO; 2 Ch, 100 GS/s or 4 Ch, 50 GS/s	✓	✓	
DPO77002SX	70 GHz ATI; 1 Ch, 70 GHz, 200 GS/s or 2 Ch, 33 GHz, 100 GS/s	✓	✓	
DPS77004SX	70 GHz ATI System; 2 Ch: 70 GHz: 200 GS/s or 4 Ch: 33 GHz: 100 GS/s	✓	✓	✓
DPO75902SX	59 GHz ATI; 1 Ch, 59 GHz, 200 GS/s or 2 Ch, 33 GHz, 100 GS/s	✓	✓	
DPS75904SX	59 GHz ATI System; 2 Ch: 59 GHz: 200 GS/s or 4 Ch: 33 GHz: 100 GS/s	✓	✓	✓
DPO75002SX	50 GHz ATI; 1 Ch, 50 GHz, 200 GS/s or 2 Ch, 33 GHz, 100 GS/s	✓	✓	
DPS75004SX	50 GHz ATI System; 2 Ch: 50 GHz: 200 GS/s or 4 Ch: 33 GHz: 100 GS/s	✓	✓	✓
DPO73304SX	33 GHz DPO; 2 Ch, 33 GHz, 100 GS/s or 4 Ch, 23 GHz, 50 GS/s	✓	✓	
DPS73308SX	33 GHz DPO System; 4 Ch: 33 GHz: 100 GS/s or 4 Ch: 23 GHz: 50 GS/s	✓	✓	
DPO72304SX	23 GHz DPO; 4 Ch: 23 GHz: 50 GS/s or 2 Ch: 23 GHz: 100 GS/s	✓		
DPO71604SX	16GHz DPO; 4 Ch: 16GHz: 50GS/s or 2 Ch: 16 GHz: 100 GS/s	✓	✓	
DPO71304SX	13GHz DPO; 4 Ch: 13GHz: 50GS/s or 2 Ch: 13 GHz: 100 GS/s	✓	✓	

Accessories

Recommended accessories

P75xx, P76xx, and P77xx Series
(TriMode™ Differential Probes)

P7513, P7513A, P7516, P7520A, P7625, P7630, P7633, P7713, P7716, P7720 with respective tips

PCI Express		TCA-SMA (Max 18 GHz)	TCA-292D (Max 33 GHz)	P7500 (Max 20 GHz)	P7700 (Max 20 GHz)	P7600 (Max 33 GHz)
Speed	Minimum oscilloscope bandwidth					
2.5 GT/s	6 GHz	✓	✓	✓	✓	✓
5.0 GT/s	12.5 GHz	✓	✓	✓	✓	✓
8.0 GT/s	12.5 GHz	✓	✓	✓	✓	✓
16.0 GT/s	25 GHz		✓			✓
32.0 GT/s	50 GHz					
100 MHz RefClk	5 GHz	✓	✓	✓	✓	✓

Option SDLA64

Serial Data Link Analysis Visualizer ⁷

Option SR-PCIe

Bus decode support for PCI Express serial busses ⁸

Recommended for automated DUT control

RF Switch

Keithley System S46T RF Microwave Switch for X12 PCIe

Gigatronics RF Switch 26 GHz (8902-L-48TS26) for x16 PCIe

Tektronix AFG3252

Arbitrary Function Generator

Tektronix AFG3252C

Arbitrary Function Generator

AWG5002B/C

Arbitrary Waveform Generator

AWG5012B/C

Arbitrary Waveform Generator

AWG5014B/C

Arbitrary Waveform Generator

AWG7082B/C

Arbitrary Waveform Generator

AWG7122B/C

Arbitrary Function Generator

AWG70001A

Arbitrary Waveform Generator

AWG70002A

Arbitrary Waveform Generator

AFG3125

Arbitrary Function Generator

AFG31251

Arbitrary Function Generator

AFG3252C

Arbitrary Function Generator

GRL PCIE34 Controller for
automatic test pattern toggling
and DUT power cycle (for Add-In-
Card)

Part number : GRL-PCIE34-P1


Contact GRL at support@graniteriverlabs.com for support and quote@graniteriverlabs.com to request for a quote.

⁷ SDLA is not required for TekExpress automation solutions. It is mandatory for DPOJET PCIe.

⁸ This is required to perform pattern decoding using TekExpress which gives Preset number and Lane number information (Only for Gen3, currently Gen4 is not supported).

Recommended test fixtures, cables, and tools

Description	Image
<p>Description: [PCI-SIG] PCIe 4.0 Preliminary CEM Fixture Kit</p> <p>PN: PCIe-CLB-X1X16, PCIe-CLB-X4X8, PCIe-CBB-MAIN, and PCIe-VAR-ISI</p> <p>The PCIe 4.0 CEM Beta fixtures require a VNA based characterization to determine the appropriate Insertion Loss for performing the 16 GT/s Tx Signal Quality Test and the 16 GT/s Rx Link Equalization Test. This characterization will not be performed by the PCI-SIG, but must be performed by the end user after the fixtures are delivered.</p> <p>Quantity: 1</p> <p>Description: PCI Express Compliance Base Board (CBB) test fixture, revision 3.0. For testing PCI Express add-in cards, x1/x4/x8/x16 PCIe connectors on PCIe devices/add-in cards.</p> <p>Vendor: PCI-SIG www.pcisig.com/specifications/order_form</p> <p>Vendor PN: CBB3</p> <p>Tektronix PN: Only available from PCI-SIG</p> <p>Quantity: 1</p>	
<p>Description: PCI Express Compliance Load Board (CLB3) test fixture, revision 3.0. For testing PCI Express Platforms, x1 & x16 PCIe connectors on PCIe systems/mother boards.</p> <p>Vendor: PCI-SIG www.pcisig.com/specifications/order_form</p> <p>Vendor PN: x1/x16 CLB3</p> <p>Tektronix PN: Only available from PCI-SIG</p> <p>Quantity: 1</p>	
<p>Description: PCI Express Compliance Load Board (CLB3), Revision 3.0. For testing PCI Express Platforms, x4 & x8 PCIe connectors on PCIe systems/mother boards.</p> <p>Vendor: PCI-SIG www.pcisig.com/specifications/order_form</p> <p>Vendor PN: x4/x8 CLB3</p> <p>Tektronix PN: Only available from PCI-SIG</p> <p>Quantity: 1</p>	

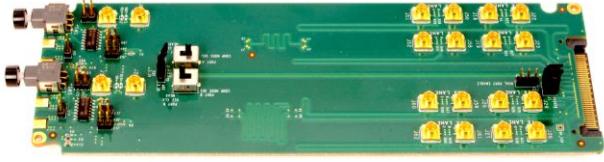Description	Image
<p>Description: PCI Express Compliance Load Board (U.2 CLB3) test fixture, revision 3.0. For testing PCI Express Platforms, x1 & x4 PCIe connectors on PCIe devices/add-in cards.</p> <p>Vendor: PCI-SIG www.pcisig.com/specifications/order_form</p> <p>Vendor PN: U.2 CLB3</p> <p>Tektronix PN: Only available from PCI-SIG</p> <p>Quantity: 1</p> <p>Note: U.2 was formerly known as SFF-8639.</p>	
<p>Description: PCI Express Compliance Load Board (U.2 CLB3), Revision 3.0. For testing PCI Express Platforms, x1 & x4 PCIe connectors on PCIe systems/mother boards.</p> <p>Vendor: PCI-SIG www.pcisig.com/specifications/order_form</p> <p>Vendor PN: U.2 CLB3</p> <p>Tektronix PN: Only available from PCI-SIG</p> <p>Quantity: 1</p> <p>Note: U.2 was formerly known as SFF-8639.</p>	
<p>Description: Any ATX PC power supply</p> <p>Vendor: Tektronix recommends "PC Power & Cooling 750 W Silencer MK III Series" or similar.</p> <p>Quantity: 1</p>	
<p>Description: SMP terminator, 50 Ω, limited detent.</p> <p>Vendor: Fairview Microwave www.fairviewmicrowave.com/rf-load-0.25-watts-26.5-ghz-smp-female-st2645-p.aspx</p> <p>Vendor PN: ST2645</p> <p>Tektronix PN: 131-9399-xx</p> <p>Quantity needed per PCIe DUT link width:</p> <ul style="list-style-type: none"> • x1: 0 • x4: 6 • x8: 14 • x16: 30 	

Description	Image
<p>Description: SMA Female to BNC Male adapter. Vendor: Tektronix Tektronix PN: 015-0572-xx www.tek.com Quantity: 2</p>	
<p>Description: DC Block, SMA, 26 GHz Vendor: Tektronix www.tek.com Tektronix PN: PSPL5500A, PSPL5501A, or PSPL5508 Quantity: 2 Note: This is an optional accessory and not shown in any of connection diagrams, but can be used if DC offset is encountered in any signal path.</p>	
<p>Description: USB2.0 Cable, Type A Male to Type B Male, 6 foot Vendor: Tektronix Tektronix PN: 174-6053-xx www.tek.com Quantity: 1</p>	
<p>Description: SMA-to-SMA, H+S SF104E Phase Kit (#84077556), Straight, 1 m, 1.5 ps phase-matched. Vendor: Tektronix www.tek.com Tektronix PN: PMCABLE1M Quantity: 1 cable pair per lane</p>	
<p>Description: SMA-to-SMP right-angle cable pair, 102 mm, 1 ps phase-matched. Tektronix PN: 174-6657-xx Quantity: 1 cable pair Note: Applicable only for Gen3</p>	

Description	Image
<p>Description: SMA-to-SMP right-angle cable pair, 1 m, 1 ps phase-matched (one for AFG to Rx Lane0, one for 100 MHz RefClk for Ch3+4 for System Testing)</p> <p>Tektronix PN: 174-6659-xx</p> <p>Quantity: 1 cable pair</p>	
<p>Description: SMP to SMP right-angle cable pair, 305 mm, 2.5 ps phase-matched set.</p> <p>Tektronix PN: 174-6658-xx</p> <p>Quantity: 1 cable pair</p>	
<p>Description: SMA torque wrench, 8.0 in-lbs.</p> <p>Vendor: Fairview Microwave www.fairviewmicrowave.com/sma-fixed-torque-wrench-click-st-sma3-p.aspx</p> <p>Vendor PN: ST-SMA3</p> <p>Tektronix PN: 003-1940-xx</p> <p>Quantity: 1</p>	

Description	Image
<p>Description: SMP right-angle cable extraction tool. Vendor: Fairview Microwave www.fairviewmicrowave.com/undefined-mmtl2682-p.aspx Vendor PN: MMTL2682 Tektronix PN: 003-1941-xx Quantity: 1</p>	
<p>Description: SMP terminator installation/extraction tool. Vendor: Fairview Microwave www.fairviewmicrowave.com/undefined-mmtl4991-p.aspx Vendor PN: MMTL4991 Tektronix PN: 003-1939-xx Quantity: 1</p>	

Additional information

PCI Express receiver testing

A complete PCI Express receiver testing solution from Tektronix. Includes stressed pattern generation as required by PCI-SIG test specifications and support for automated clock multiplication and eye opening measurements. Automated DUT loopback control simplifies the testing process and reduces time to test results. The receiver testing solution also supports adding pre-emphasis to the stress pattern, common-mode interference testing, and PLL loop BW testing.



PCIe receiver test setup

The Receiver testing solution consists of the following components:

- BSX240 for Pattern Generation, stressed eye sources, and Error Detection
- New BSXPCI4BSE and BSXPCI4CEM SW for Auto calibration, link training, and testing
- MSO/DPO70000 or DPS75004SX Series Real-Time Oscilloscope for calibration


TLA7SA00 Series Protocol Analyzers

The TLA7SA00 Series logic protocol analyzer modules provide an innovative approach to PCI Express validation that spans all layers of the protocol from the physical layer to the transaction layer.



TLA7SA00 series instrument

Feature rich software provides improved information density for viewing statistical summary and protocol analysis using innovative Transaction and Summary Profile windows.

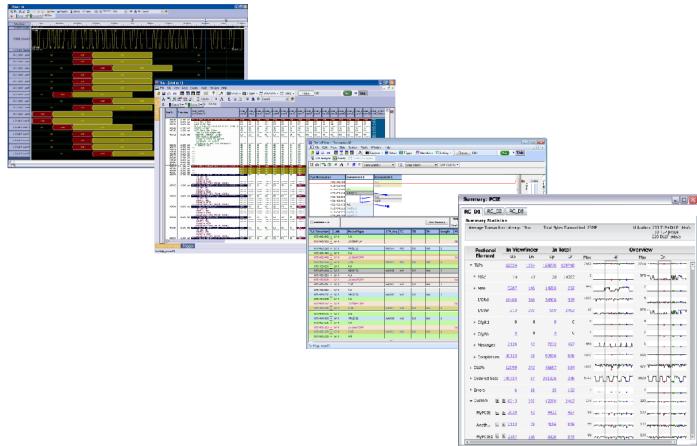

TLA7SA00 data views

Hardware capabilities including hardware acceleration, OpenEYE, ScopePHY, and FastSYNC provide fast access to data and helps shorten the time it takes to build confidence in the test system. Powerful trigger and filtering capabilities provide the ability to quickly focus on the data of interest. Provides a complete suite of probing solutions targeted for various form factors and applications.



Tektronix is registered to ISO 9001 and ISO 14001 by SRI Quality System Registrar.

Datasheet

ASEAN / Australasia (65) 6356 3900
Belgium 00800 2255 4835*
Central East Europe and the Baltics +41 52 675 3777
Finland +41 52 675 3777
Hong Kong 400 820 5835
Japan 81 (3) 6714 3086
Middle East, Asia, and North Africa +41 52 675 3777
People's Republic of China 400 820 5835
Republic of Korea +822 6917 5084, 822 6917 5080
Spain 00800 2255 4835*
Taiwan 886 (2) 2656 6688

Austria 00800 2255 4835*
Brazil +55 (11) 3759 7627
Central Europe & Greece +41 52 675 3777
France 00800 2255 4835*
India 000 800 650 1835
Luxembourg +41 52 675 3777
The Netherlands 00800 2255 4835*
Poland +41 52 675 3777
Russia & CIS +7 (495) 6647564
Sweden 00800 2255 4835*
United Kingdom & Ireland 00800 2255 4835*

Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777
Canada 1 800 833 9200
Denmark +45 80 88 1401
Germany 00800 2255 4835*
Italy 00800 2255 4835*
Mexico, Central/South America & Caribbean 52 (55) 56 04 50 90
Norway 800 16098
Portugal 80 08 12370
South Africa +41 52 675 3777
Switzerland 00800 2255 4835*
USA 1 800 833 9200

* European toll-free number. If not accessible, call: +41 52 675 3777

For Further Information. Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit www.tek.com.

Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.



02 Apr 2020 61W-24540-21

www.tek.com

Tektronix®