


DisplayPort 2.0 Pre-Compliance and Debug Solution

Opt. DP20 Application Datasheet

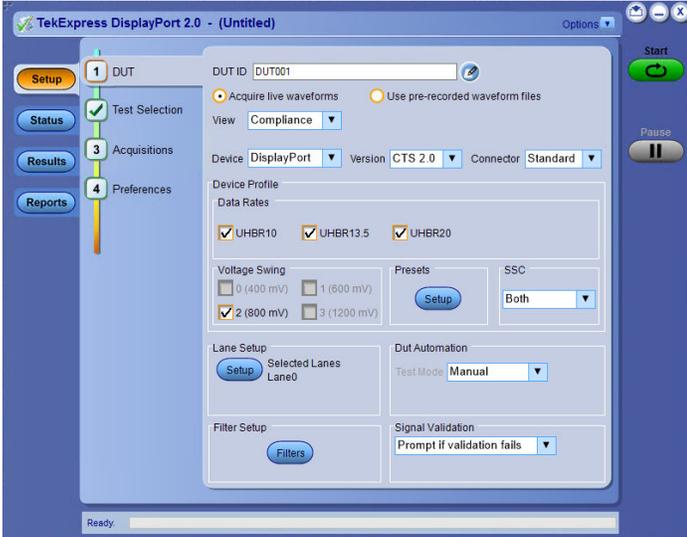

Tektronix provides the most comprehensive solution to serve the need of engineers designing DisplayPort silicon for computer systems and embedded systems, as well as for those who are validating the physical-layer compliance of DisplayPort devices as per the DisplayPort 2.0 Compliance Test Specification. Tektronix TekExpress DisplayPort 2.0 pre-compliance/debug solution help the customers to test their DP2.0 DUTs. The Tektronix Opt. DP20 application is compatible with Tektronix DPO/MSO 70000 DX/SX Series oscilloscopes that are designed to meet the challenges of the next generation of display standards such as HDMI and DisplayPort.

key features

- Complete testing of UHBR10, UHBR13.5, and UHBR20 as per DisplayPort 2.0 Specification
- Fixture De-embedding in differential and single-ended mode by creating a custom filter file using SDLA software to leverage the channel modeling and receiver equalization functionality
- Use of SDLA for TP3_EQ test point analysis
- Support repeatability of measurements
- Single report for UHBR10, UHBR135, and UHBR20 tests
- Optimized algorithms to execute tests with improved accuracy
- Optional signal validation helps to detect anomalies quickly in the signal
- Reports are available in mht, pdf, and csv formats for advanced data analysis
- Measurement results in the report can be grouped by lane

- Automation support and scripting interface with Iron Python which supports socket-based programming remote interface
- Capture and save DUT waveforms for offline analysis
- Measurement can be run for all selected Preset. Capability to run particular measurement on a subset of selected presets.

Solution overview

TekExpress DisplayPort 2.0 supports 16 presets for UHBR data rates. The DisplayPort 2.0 solution allows you to select preset to run individual measurements. With the support for TP2 test point and TP3_EQ test point, TekExpress DisplayPort allows you to have the flexibility to select settings for individual test and complete their DUT validation. The TekExpress solution provides the flexibility to select the cable models for the tests at TP3_EQ test point.



Preset selection panel for signal quality measurements

DisplayPort 2.0 Transmitter test overview

DisplayPort sources (transmitters) have state control requirements in order to transmit the data patterns and signal properties required to demonstrate conformance as per the compliance test specification. The following properties and patterns need to be transmitted for full measurement coverage:


- Bit rates: UHBR10, UHBR135, and UHBR20
- Data patterns: PRBS15
- Preset: 16 presets as defined
- Output levels: 800 mV
- SSC (spread spectrum): On/Off

Compliance to characterization support

Tektronix offers DisplayPort 2.0 DPOJET essentials package which comes bundled with TekExpress DisplayPort 2.0 Pre-Compliance and Debug solution that can be used to characterize a DUT and analyzing its finer behavior. It serves as an analysis tool when the DUT fails any portion of the compliance tests or you want to take a deeper look into the failures. All the compliance tests which are supported in the application and requires a single acquisition are supported in this package. You can build automation scripts around these measurements to setup a custom test environment. The DisplayPort 2.0 DPOJET solution also supports all measurement for lower data rates e.g., RBR, HBR, HBR2, and HBR3.

You can enable this package by running DisplayPort 2.0 from the **Oscilloscope** → **Analyze** menu. The DisplayPort 2.0 DPOJET measurement library helps in characterizing the silicon. Other advantage of this library is the ability to debug the measurement in case of failures. If any of the tests fail during compliance testing, you can tap into the DPOJET DisplayPort measurement library for a deeper dive into the failures such as Eye diagram mask hit failures and look at relation between Pre-emphasis level vs Voltage swing tests to perform root cause analysis. The solution also gives users the flexibility to configure measurements with different settings, make configuration changes in existing measurements on the fly, and run tests in single-shot or free-run repetitive modes.

DisplayPort 2.0 DPOJET solution comes with setup files. All measurements corresponding to a data rate and a particular pattern are clubbed in a single setup file. Setup files for lower data rates e.g. RBR, HBR, HBR2, and HBR3 are also included. Setup file helps to avoid any manual mistakes while configuring a measurement. This ensures that a non-expert user can also use the debug solution and validate the results.

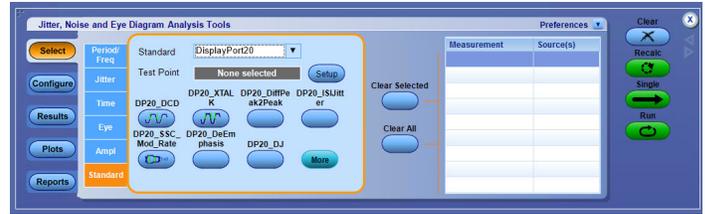

DPOJET DisplayPort 2.0 standard dropdown



DPOJET CIO standard dropdown

SDLA features

SDLA enables the user to probe and visualize data at the required location (de-embed / embed) using virtual probing through test points. It can remove (de-embed) the effects of the cables, probes, and fixtures to get more accurate measurement results. It can embed user defined channel models to simulate the signal at the end of the link. It can also be used to open a closed eye using receiver equalization, Continuous Time Linear Equalizer (CTLE), Decision Feedback (DFE), or Feed Forward Equalization (FFE). SDLA also has advanced analysis and modeling capabilities. One can view and measure multiple test points using DPOJET Jitter and Eye analysis comprehensive frequency and time domain plots, enable quick verification of S-parameters and test point transfer functions.

For DisplayPort 2.0, SDLA has been enhanced to provide the flexibility of choosing the optimal CTLE. To calculate optimal CTLE based on Eye Area, SDLA selects the appropriate DisplayPort standard from the CTLE dropdown menu and runs the configuration from 0 dB to -9 dB. Optimal CTLE waveforms gets loaded on the oscilloscope and can be configured.



RX setup in SDLA

Proposed measurements

List of supported measurements

Measurement	UHBR10		UHBR135		UHBR20	
	TP2	TP3_EQ	TP2	TP3_EQ	TP2	TP3_EQ
Eye Diagram	Yes	Yes	Yes	Yes	Yes	Yes
Total Jitter (TJ)	Yes	Yes	Yes	Yes	Yes	Yes
Random Jitter (RJ)	Yes	Yes	Yes	Yes	Yes	Yes
Uncorrelated Jitter (UJ)	Yes	Yes	Yes	Yes	Yes	Yes
Uncorrelated Deterministic Jitter (UDJ)	Yes	Yes	Yes	Yes	Yes	Yes
Data Dependent Jitter (DDJ)	Yes	Yes	Yes	Yes	Yes	Yes
SSC Phase Deviation	Yes	No	Yes	No	Yes	No
SSC Down Spread	Yes	No	Yes	No	Yes	No
Low Frequency UDJ (LFUDJ)	Yes	No	Yes	No	Yes	No
SSC Slew Rate	Yes	No	Yes	No	Yes	No
Unit Interval (UI)	Yes	No	Yes	No	Yes	No

General characteristics

Physical characteristics

Configuration	Description
Oscilloscope	<ul style="list-style-type: none"> DPO/MSO 70000 DX/SX or above Oscilloscopes with Opt. DJA, 5XL, and SDLA64 Bandwidth ≥ 16 GHz recommended for UHBR10 Bandwidth ≥ 21 GHz recommended for UHBR13.5 and UHBR20
Probe	<ul style="list-style-type: none"> Trimode probe P7625, P7633 with P76CA-292C probe tip Direct SMA

Ordering information

DPO/MSO 70000SX/DX	Tektronix DPO (Digital Phosphor Oscilloscope) or MSO (Mixed Signal Oscilloscope) – 23 GHz and above with DPOJET (DJA) and SDLA64 installed
DPO/MSO70000SX/DX Opt. DP20	TekExpress DP20 Pre-Compliance and DPOJET: DP20 TX Plugin Solution (Requires Opt. CIO, DJA, and SDLA64)
DPO-UP DP20	TekExpress DP20 Pre-Compliance and DPOJET: DP20 TX Plugin Solution (Requires Opt. CIO, DJA, and SDLA64)
DPOFL-DP20	TekExpress DP20 Pre-Compliance and DPOJET: DP20 TX Plugin Solution (Requires Opt. CIO, DJA, and SDLA64), Floating
DPOFT-DP20	TekExpress DP20 Pre-Compliance and DPOJET: DP20 TX Plugin Solution (Requires Opt. CIO, DJA, and SDLA64), Floating Trial

Oscilloscope and software prerequisite

Operating System	DPO/MSO 70000 SX/DX with Microsoft Windows 10 OS
------------------	--

Recommended accessories

Item	Vendor	Quantity
PMCABLE1M Phase Matched SMA cable set	Tektronix	Min 1- Max 4
P7625 or P7633 Probes [Optional]	Tektronix	4
P76CA-292 or P76CA-292C or P76CA-SMP or P76TA [Optional]	Tektronix	4

ASEAN / Australasia (65) 6356 3900
 Belgium 00800 2255 4835*
 Central East Europe and the Baltics +41 52 675 3777
 Finland +41 52 675 3777
 Hong Kong 400 820 5835
 Japan 81 (120) 441 046
 Middle East, Asia, and North Africa +41 52 675 3777
 People's Republic of China 400 820 5835
 Republic of Korea +822 6917 5084, 822 6917 5080
 Spain 00800 2255 4835*
 Taiwan 886 (2) 2656 6688

Austria 00800 2255 4835*
 Brazil +55 (11) 3759 7627
 Central Europe & Greece +41 52 675 3777
 France 00800 2255 4835*
 India 000 800 650 1835
 Luxembourg +41 52 675 3777
 The Netherlands 00800 2255 4835*
 Poland +41 52 675 3777
 Russia & CIS +7 (495) 6647564
 Sweden 00800 2255 4835*
 United Kingdom & Ireland 00800 2255 4835*

Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777
 Canada 1 800 833 9200
 Denmark +45 80 88 1401
 Germany 00800 2255 4835*
 Italy 00800 2255 4835*
 Mexico, Central/South America & Caribbean 52 (55) 56 04 50 90
 Norway 800 16098
 Portugal 80 08 12370
 South Africa +41 52 675 3777
 Switzerland 00800 2255 4835*
 USA 1 800 833 9200

* European toll-free number. If not accessible, call: +41 52 675 3777

For Further Information. Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit www.tek.com.

Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.

15 Mar 2021 61W-73786-0
www.tek.com

Tektronix[®]