


Video Quality Monitors

Medius Application Manager • VNM-MED2 Datasheet

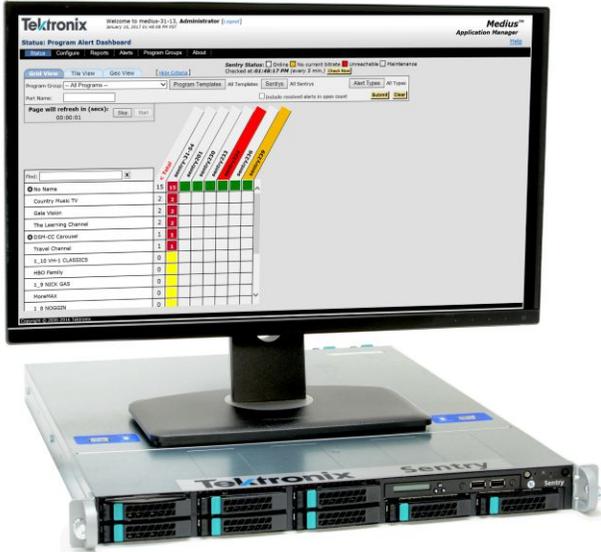

Medius offers an advanced reporting package that is particularly helpful in capturing detailed QoE information that quickly highlights the top offending programs and/or locations. The reporting capabilities allow each user to generate customized reports that provide as much or as little detail as required, from monthly high-level reports for executive staff to immediate notices for technicians as incidents occur.

Features and benefits

- Consolidate data from multiple Sentry units
- Centralized alarm reporting
- Historical reporting and graphing
- Alert filtering and resolution tracking
- User-defined reporting template
- Custom reports
- Customizable dashboard display

- Ability to upgrade multiple Sentry units
- Error second and program availability reporting


Applications

- Multiple-view alert dashboard reporting
- QoE reporting
- Automated report generation and email
- Single point for NMS integration
- Program statistics and availability reporting

Monitor your entire network with rich graphs and an easy-to-use Web-based interface

Medius is ideal for Network Operation Centers (NOCs) and provides a single interface for consolidated status, alerts, and reports from multiple Sentry and/or Sentry Verify, Sentry Assure, and Sentry Edge units across the network.

The complexity of today's networks makes detecting, evaluating, reporting, and resolving subscriber audio and video QoE impacting events a costly and time-consuming headache. Medius provides operators with an alert dashboard that takes the guesswork out of error detection by quickly and accurately reporting and diagnosing video and audio issues occurring anywhere in the network. The alert dashboard includes a geographical view that displays all of the monitoring points on a map, showing which of them have alerts to quickly highlight problem areas or regions; a grid view that shows a program's alert status across all monitoring points for fast identification and repair of the source locations having video and audio problems; and a tile view that provides a quick snapshot of the alert status of all programs or services and quickly highlights which programs need the most attention. This functionality dramatically reduces the number of technicians – and the time they spend – solving problems. By streamlining – or entirely eliminating in many cases – the need for the traditional “process of elimination” methodology, operators can dramatically reduce operational costs while ensuring subscribers enjoy a premium quality of experience (QoE).

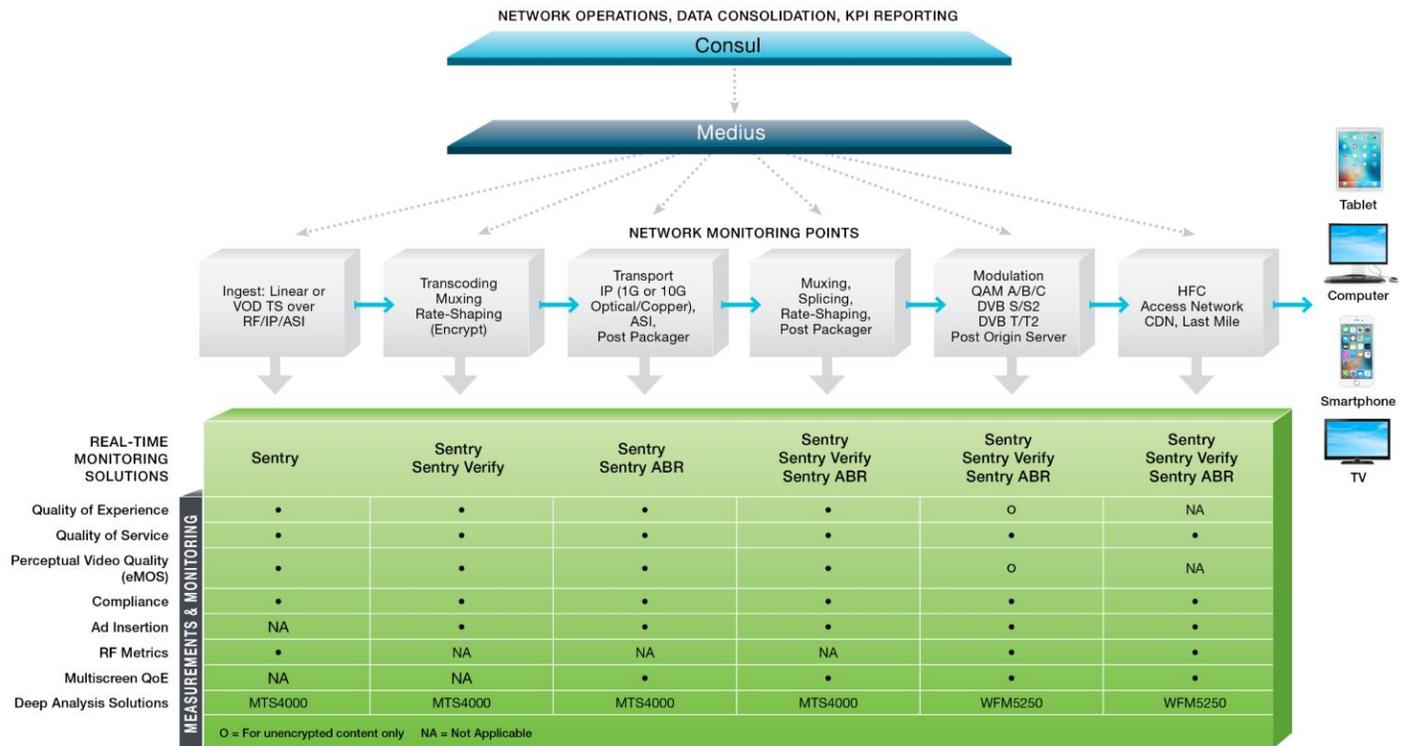

Medius™ offers video service providers an effective way of managing and aggregating status, alerts, and reports from multiple Sentry®, Sentry Verify™, and Sentry Edge™ units deployed throughout a network.

Specifications

Platform Characteristics

Browser Support	Firefox, Safari, and Internet Explorer
------------------------	--

MPEG/IP Input Port	1000BASE-T Ethernet interface
---------------------------	-------------------------------

Management Port	1000BASE-T Ethernet interface
------------------------	-------------------------------

Physical Characteristics

Dimensions

Height	44 mm (1.73 in)
---------------	-----------------

Width	437 mm (17.2 in)
--------------	------------------

Depth	600 mm (29.5 in)
--------------	------------------

Weight (net)	12.4 kg (27 lb.)
---------------------	------------------

Power Requirements	100-240 V AC, 50-60 Hz
---------------------------	------------------------

Environmental Characteristics

Temperature

Operating	+10°C to +35°C, 30°C per hour maximum gradient
------------------	--

Temperature of the intake air at the front and sides of the instrument

Non-operating	-20°C to +60°C, 30°C per hour maximum gradient
----------------------	--

Power	4.0-1.7 A maximum, 100 - 240 V, 50/60 Hz
--------------	--

The maximum power consumption for any board combination measured is 175 W at 120 V by safety test

Ordering Information

Models

VNM-MED2 Medius Application Manager

Power Plug Options

Opt. A0	North America power plug (115 V, 60 Hz)
Opt. A1	Universal Euro power plug (220 V, 50 Hz)
Opt. A2	United Kingdom power plug (240 V, 50 Hz)
Opt. A3	Australia power plug (240 V, 50 Hz)
Opt. A4	North America power plug (240 V, 50 Hz)
Opt. A5	Switzerland power plug (220 V, 50 Hz)
Opt. A6	Japan power plug (100 V, 50/60 Hz)
Opt. A10	China power plug (50 Hz)
Opt. A11	India power plug (50 Hz)
Opt. A12	Brazil power plug (60 Hz)
Opt. A99	No power cord



Tektronix is registered to ISO 9001 and ISO 14001 by SRI Quality System Registrar.

ASEAN / Australasia (65) 6356 3900
Belgium 00800 2255 4835*
Central East Europe and the Baltics +41 52 675 3777
Finland +41 52 675 3777
Hong Kong 400 820 5835
Japan 81 (3) 6714 3086
Middle East, Asia, and North Africa +41 52 675 3777
People's Republic of China 400 820 5835
Republic of Korea +822 6917 5084, 822 6917 5080
Spain 00800 2255 4835*
Taiwan 886 (2) 2656 6688

Austria 00800 2255 4835*
Brazil +55 (11) 3759 7627
Central Europe & Greece +41 52 675 3777
France 00800 2255 4835*
India 000 800 650 1835
Luxembourg +41 52 675 3777
The Netherlands 00800 2255 4835*
Poland +41 52 675 3777
Russia & CIS +7 (495) 6647564
Sweden 00800 2255 4835*
United Kingdom & Ireland 00800 2255 4835*

Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777
Canada 1 800 833 9200
Denmark +45 80 88 1401
Germany 00800 2255 4835*
Italy 00800 2255 4835*
Mexico, Central/South America & Caribbean 52 (55) 56 04 50 90
Norway 800 16098
Portugal 80 08 12370
South Africa +41 52 675 3777
Switzerland 00800 2255 4835*
USA 1 800 833 9200

* European toll-free number. If not accessible, call: +41 52 675 3777

For Further Information. Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit www.tek.com.

Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.



29 Jun 2017 2CW-61218-0

www.tek.com

Tektronix®

