RF and Vector Signal Analysis for Oscilloscopes

SignalVu® Datasheet



SignalVu RF and vector signal analysis software combines analysis engine of the real time spectrum analyzer with that of the industry's leading digital oscilloscopes, making it possible for designers to evaluate complex signals without an external down converter. You get the functionality of a vector signal analyzer, a spectrum analyzer, and the powerful trigger capabilities of a digital oscilloscope - all in a single package. You can use SignalVu with a DPO/MSO70000 Series digital oscilloscope to easily validate wideband designs and characterize wideband spectral events. Whether your design validation needs include wideband radar, high data rate satellite links, and wireless LAN, WiGig IEEE 802.11ad/ay, or frequency-hopping communications, SignalVu can speed your time-to-insight by showing you the time-variant behavior of these wideband signals.

Key features

- Trigger
  - Integrated RF signal analysis package lets you take full advantage of oscilloscope settings
  - Pinpoint™ triggering offers over 1400 combinations to address virtually any triggering situation
- Capture
  - Direct observation of microwave signals on up to 4 channels simultaneously
  - All signals up to the analog bandwidth of oscilloscope are captured into memory
  - Customize oscilloscope acquisition parameters for effective use of capture memory
  - FastFrame™ segmented memory captures signal bursts without storing the signal's off time
  - Supports RF, I and Q, and differential I and Q signals using the oscilloscope's 4 analog inputs
- Analyze
  - 5G New Radio (NR) uplink/downlink RF power, Power dynamics, Signal quality, and Emissions measurements based on the 3GPP release 15/16 Standard
  - Extensive time-correlated, multidomain displays connect events in time, frequency, phase, and amplitude for quicker understanding of cause and effect when troubleshooting. Density and waterfall (Ogram) views reveal intermittent behavior across many captured frames
  - Power measurements and signal statistics help you characterize components and systems: SEM, Multicarrier ACLR, Power vs. Time, CCDF, OBW/EBW, and Spur Search
  - WLAN spectrum and modulation transmitter measurements based on IEEE 802.11 a/b/g/j/p/n/ac standards (Opts. SV23, SV24, and SV25)
  - WiGig IEEE 802.11ad/ay Spectral and modulation transmitter measurements (Opt. SV30)
  - Bluetooth® Transmitter Measurements based on Bluetooth SIG RF Specifications for Basic Rate and Low Energy. Some support of Enhanced Data Rate. (Option SV27)
  - LTE™ FDD and TDD Base Station (eNB) Transmitter RF measurements (Option SV28)
  - Complete APCO Project 25 transmitter testing and analysis for Phase 1 (C4FM) and Phase 2 (TDMA) (Opt. SV26)
  - AM/FM/PM Modulation and Audio Measurements (Opt. SVA) for characterization of analog transmitters and audio signals
  - Settling Time Measurements, Frequency, and Phase (Opt. SVT) for characterization of wideband frequency-agile oscillators
  - Advanced pulse analysis suite (Opt. SVP) provides deep insight into pulse train behavior. Measure pulse statistics over many acquisitions (millions of pulses) and automatically classify each pulse's modulation type using machine learning. Multi-channel support enabled with MSO/DPO oscilloscopes

- General purpose digital modulation analysis (SVM) provides modulation analysis of 26 modulation types, from FSK to 1024QAM. Multi-channel analysis is enabled with MSO/DPO oscilloscopes
- Flexible OFDM analysis (Opt. SVO) with support for 802.11a/g/j and WiMAX 802.16-2004 signals
- Frequency offset control for analyzing baseband signals with near-zero intermediate frequencies (IF)
- Tektronix OpenChoice® makes for easy transfer to a variety of analysis programs such as Excel and Matlab

Applications


- Wideband radar and pulsed RF signals
- Frequency agile communications
- Broadband satellite and microwave backhaul links
- Phased array and beam forming systems
- Wireless LAN, WiGig, Bluetooth, Commercial Wireless
- Land Mobile Radio (LMR), APCO P25
- Long Term Evolution (LTE), Cellular

Wideband signal characterization

SignalVu helps you easily validate wideband designs and characterize wideband spectral events using DPO70000SX or MSO/DPO70000DX oscilloscopes. You can easily switch between the SignalVu application and the oscilloscope's user interface to optimize the collection of wideband signals.

Trigger

SignalVu software works seamlessly with the oscilloscope allowing users to utilize all of its powerful triggering capabilities. The ability to trigger on time- and amplitude-varying events of interest is paramount in wideband system design, debug, and validation. The Tektronix oscilloscopes' trigger systems allow selection of virtually all trigger types on both A and B trigger events, whether they be transition, state, time, or logic qualified triggers. Fundamental triggers (such as Edge) can be configured from the SignalVu user interface directly. While a full assortment of triggers can be configured from the oscilloscope software application. Once triggered, SignalVu processes the acquisition for analysis in multiple domains.

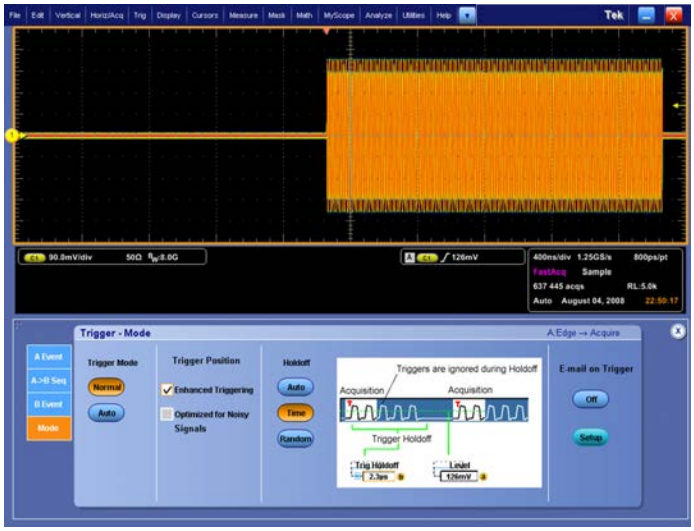


Powerful oscilloscope triggers allow the user to capture only the relevant portion of wideband signals. Pinpoint trigger functions such as combining A and B events with Edge with Holdoff can capture a pulse train during a specific transmitter mode of operation.

Capture

Capture once - make multiple measurements without recapturing. All signals in an acquisition bandwidth are recorded into the oscilloscope's deep memory. Up to four channels can be captured and analyzed simultaneously by SignalVu software. Channels can be RF, I and Q, or differential inputs. Users can also apply math functions to the acquisition prior to analysis by SignalVu. Acquisition lengths vary depending upon the selected capture bandwidth and up to 2.5 ms can be captured on a single channel with the DPO/MSO70000 Series. Significantly longer capture times can be realized with lower oscilloscope sample rates.

Using the FastFrame segmented memory feature in SignalVu enables you to capture events of interest, such as low duty cycle pulsed signals, while conserving acquisition memory. Using multiple trigger events, FastFrame captures and stores short-duration, bursty signals and passes them to SignalVu vector signal analysis functions. Capturing thousands of frames is possible, so long-term trends and changes in the bursty signal can be analyzed. Density and Ogram displays let you review the captured frames together, making it easier to spot intermittent behavior across many frames.

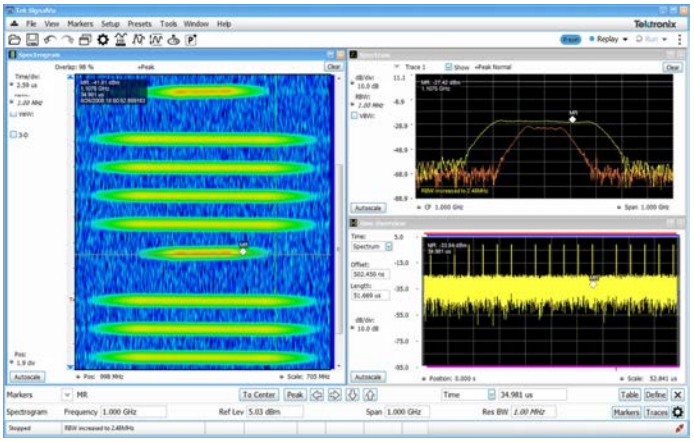


Once captured into memory, SignalVu provides detailed analysis in multiple domains. The spectrogram display (left panel) shows the frequency of a 500 MHz wide LFM pulse changing over time. By selecting the point in time in the spectrogram during the On time of the pulse, the chirp behavior can be seen as it sweeps from low to high (upper right panel).

Analyze

SignalVu RF and vector signal analysis software use the same analysis capabilities found in the real time spectrum analyzers. SignalVu advances productivity for engineers working on components or in wideband RF system design, integration, and performance verification, or operations engineers working in networks, or spectrum management. In addition to spectrum analysis, spectrograms display both frequency and amplitude changes over time. Density and Ogram views of amplitude, frequency, and phase versus time help reveal intermittent signal behavior. Time-correlated measurements can be made across the frequency, phase, amplitude, and modulation domains. This is ideal for signal analysis, that includes frequency hopping, pulse characteristics, modulation switching, settling time, bandwidth changes, and intermittent signals.

SignalVu can process RF, I and Q, and differential I and Q signals from any one of the four available oscilloscope inputs. Math functions applied by the oscilloscope are also utilized by SignalVu, allowing users to apply custom filtering prior to vector signal analysis.

The Microsoft Windows environment makes this multidomain analysis even easier with an unlimited number of analysis windows, all time-correlated, to provide deeper insight into signal behavior. A user interface that adapts to your preferences (keyboard, front panel, touch screen, and mouse) makes learning SignalVu easy for both first-time users and experienced hands.

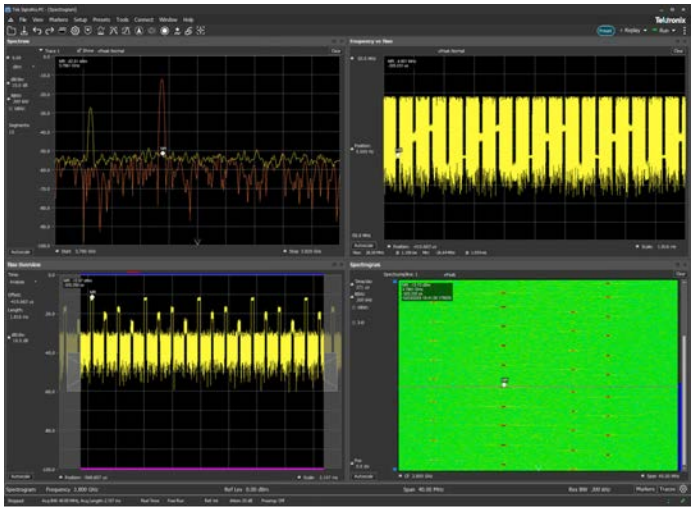


Time-correlated, multidomain, multi-channel views provide a new level of insight into design or operational problems not possible with conventional analysis solutions. Here, the hop patterns of a narrowband signal can be observed using Spectrogram (bottom right), and its hop characteristics can be precisely measured with the Frequency versus Time display (upper right). The time and frequency responses can be observed in the two top views as the signal hops from one frequency to the next.

Multi-channel support

Beginning with SignalVu v5.3, you gain the capability to perform wideband multi-channel acquisition and analysis of up to 33 GHz in frequency and bandwidth on 4 channels using Tektronix DPO70000SX or MSO/DPO70000DX oscilloscopes. Or 50 to 70 GHz on 4 channels using a stack of four instruments. Tight synchronization of multiple instruments using the UltraSync™ architecture provides configuration flexibility, allowing you to easily add acquisition channels and maintain channel-to-channel timing accuracy. Greater than four channels can be acquired and analyzed through a combination of programmatic control and separate instances of SignalVu. Supported multi-channel displays include the general signal viewing (opt. SVE), advanced pulse radar analysis (SVP), and general-purpose digital modulation analysis (SVM) displays. This advancement empowers you to attain a thorough comprehension of multi-emitter RADAR/EW pulse train behavior, non-contiguous uplink/downlink systems, and phased-array systems spanning parameters pertaining to RF power, time, quality/integrity, frequency, and phase.

For applications requiring up to eight channels, the 5 or 6 Series MSO oscilloscopes (less than 10 GHz in frequency and up to 2 GHz in analysis bandwidth) or the 8-channel 7 Series DPO oscilloscopes ([frequency] in frequency and [bandwidth] in analysis bandwidth) with SignalVu-PC are more suitable. Refer to the SignalVu-PC datasheet for more detail.

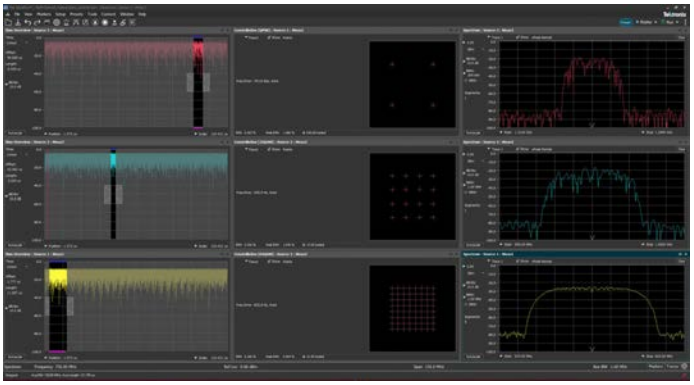


Three signals, each from a separate channel of the MSO64B, are acquired and analyzed with unique center frequencies, spans, and RBWs. These signals, featuring three different modulation schemes, are demodulated and analyzed within separate time slots, highlighting the independent control capabilities of each channel.

Shared acquisition multi-signal support

SignalVu software expands your analysis capabilities even further on oscilloscope by enabling simultaneous analysis of multiple frequency dispersed signals within a single acquisition bandwidth. By configuring multiple sources to one physical oscilloscope channel, it supports independent analysis of signals at different frequency bands from I/Q data acquired by a single channel. This capability offers critical insights into advanced, multi-standard systems, streamlining development and validation.


One example among many where such analysis is beneficial involves electronic warfare or military communications research, where analyzing pulse radar and 64QAM signals simultaneously on the same medium helps test and ensure system reliability under mixed signal conditions.

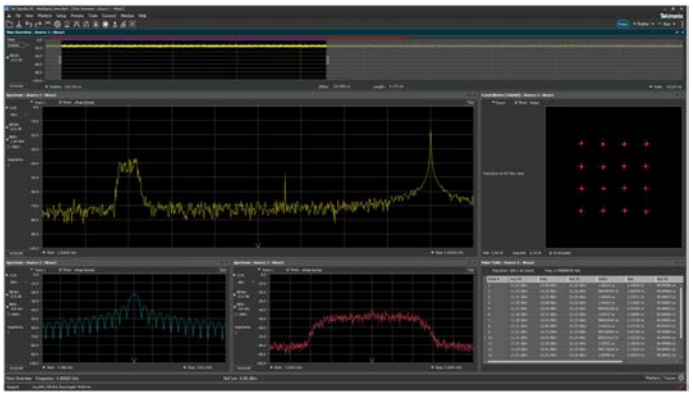

Analyze both wide and narrow bandwidths simultaneously. On the same oscilloscope channel of the 6 Series MSO, a 64QAM signal and a pulsed radar signal are captured using Source 1. For detailed analysis, Source 2 zooms in on the radar signal, while Source 3 focuses on the 64QAM signal.


Options tailored for your wideband applications

SignalVu RF and vector signal analysis software offers options to meet your specific application, whether it be wideband radar characterization, broadband satellite, or spectrum management. SignalVu Essentials (Opt. SVE) provides the fundamental capability for all measurements and is required for pulse analysis (Opt. SVP), settling time (Opt. SVT), digital modulation analysis (Opt. SVM), flexible OFDM analysis, and AM/FM/PM Modulation and Audio Measurements (Opt. SVA).

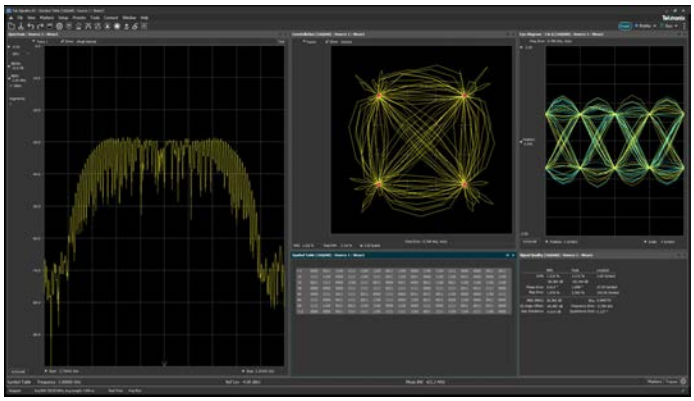

Wideband satellite and point-to-point microwave links can be directly observed with SignalVu analysis software. Here, General Purpose Digital Modulation Analysis (Opt. SVM) is demodulating a 16QAM backhaul link running at 312.5 MS/s.

From FSK to 1024QAM, general purpose digital modulation analysis (SVM) provides precise modulation accuracy and essential physical layer measurements for 26 prevalent digital modulation types.

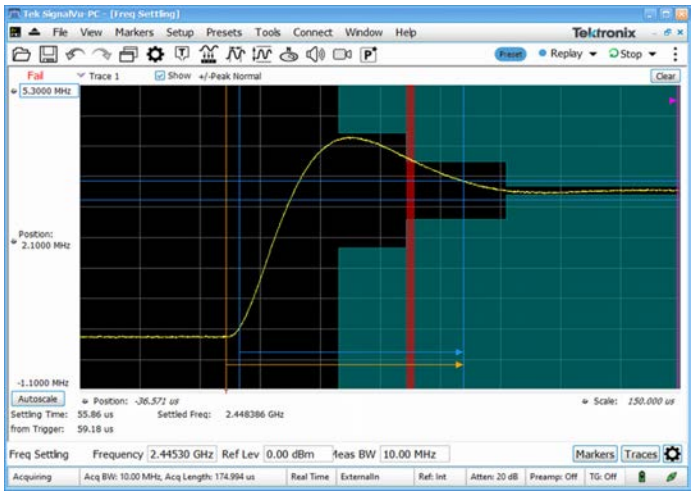

Settling time measurements (Opt. SVT) are easy and automated. You can select measurement bandwidth, tolerance bands, reference frequency (auto or manual), and establish up to 3 tolerance bands vs. time for Pass/Fail testing. Settling time may be referenced to external or internal trigger, and from the last


settled frequency or phase. In the illustration, frequency settling time for a hopped oscillator is measured from an external trigger point from the device under test.


Advanced pulse analysis

The Advanced Pulse Analysis package (Opt. SVP) provides 31 individual measurements, plus machine-learning-based pulse modulation classification, to automatically characterize the long pulse trains. Each pulse's modulation type is reported in the pulse table with a confidence value and can be exported with the other pulse results. A 500 MHz wide LFM chirp centered at 1 GHz is seen here with the measurements for pulses 1 through 10 (lower right). The shape of the pulse can be seen in the Amplitude vs. Time plot shown in the upper left. Detailed views of pulse number 8's frequency deviation and parabolic phase trajectory are shown in the other two views.


SignalVu (v5.3) software provides wideband multi-channel analysis up to 70 GHz or 33 GHz on four channels using Tektronix DPO70000SX or MSO/DPO70000DX oscilloscopes.

NOTE: Multi-channel support has been fully tested on DPO77002SX, DPS77004SX, and DPO75002SX model instruments. It is expected towork on all other SX and DX oscilloscope models but they have not been tested at this time. Refer to SignalVu-PC for multi-channel support on 5 and 6 Series MSO Oscilloscopes.

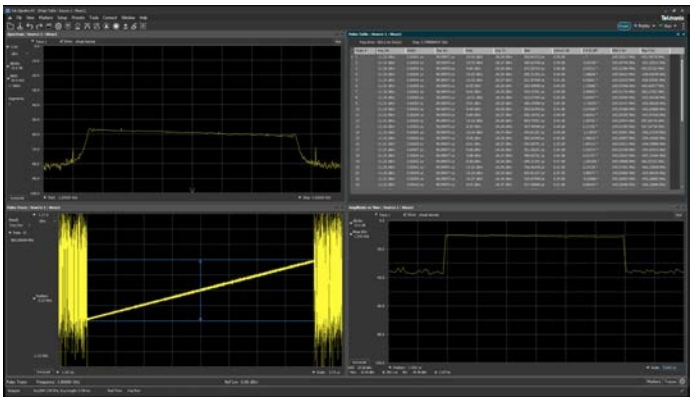

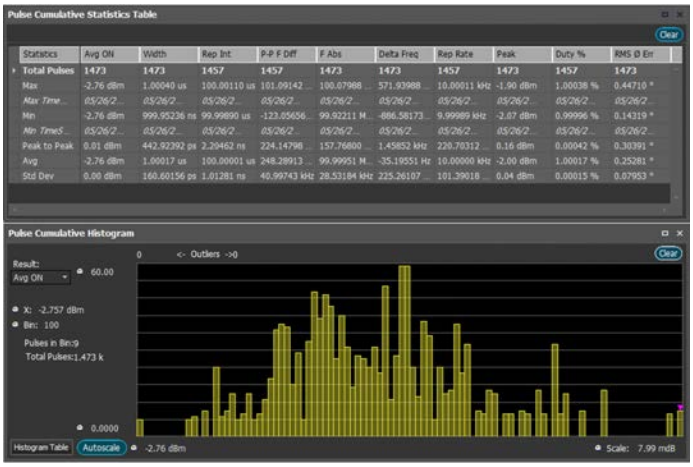

Cumulative statistics provides timestamps for Min, Max values as well as Peak to Peak, Average and Standard deviation over multiple acquisitions, further extending the analysis. Histogram shows you outliers on the right and left.

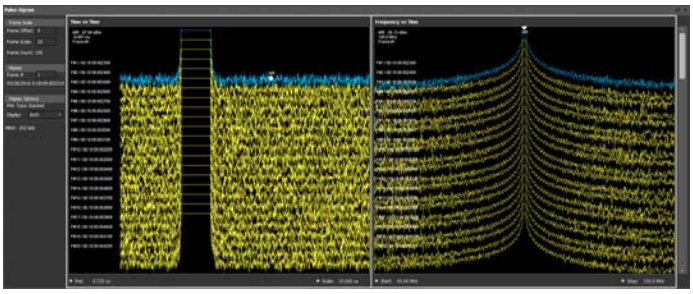

Pulse-Ogram displays a waterfall of multiple segmented captures, with correlated amplitude vs time and spectrum of each pulse. Can be used with an external trigger to show target range and speed.



Pulse-Ogram displays a waterfall of multiple segmented captures, with correlated amplitude vs time and spectrum of each pulse. Can be used with an external trigger to show target range and speed.

WLAN transmitter testing

With the WLAN measurement options, you can perform standards-based transmitter measurements in the time, frequency, and modulation domains.

- Option SV23 supports IEEE 802.11a, b, g, j and p signals
- Option SV24 supports IEEE 802.11n 20 MHz and 40 MHz SISO signals
- Option SV25 supports IEEE 802.11ac 20/40/80/160 MHz SISO signals

The table below described the modulation formats and frequency bands of IEEE 802.11 WLAN signals

Standard	Std PHY	Freq bands	Signal	Modulation formats	Bandwidth (max)	802.11-2012 section
802.11b	DSSS HR/ DSSS	2.4 GHz	DSSS/CCK 1 - 11 Mbps	DBSK, DQPSK CCK5.5M, CCK11M	20 MHz	16 & 17
802.11g	ERP	2.4 GHz	DSSS/ CCK/PBCC 1 - 33 Mbps	BPSK DQPSK	20 MHz	17
802.11a	OFDM	5 GHz	OFDM 64 <54 Mbps	BPSK QPSK 16QAM 64QAM	20 MHz	18
802.11g		2.4 GHz			20 MHz	19
802.11j/p		5 GHz			5, 10, 20 MHz	18
802.11n	HT	2.4 GHz & 5 GHz	OFDM 64, 128 ≤ 150 Mbps	BPSK QPSK 16QAM 64QAM	20 , 40 MHz	20
802.11ac	VHT	5 GHz	OFDM 64, 128, 256, 512 ≤ 867 Mbps	BPSK QPSK 16QAM 64QAM 256QAM	20, 40, 80, 160 MHz	22

The Frequency Band (Freq Bands) provides the minimum requirement for the bandwidth of the oscilloscope to use.

Inside SignalVu, the WLAN presets make the EVM, Constellation and SEM measurements push-button. The WLAN RF transmitter measurements are defined by the IEEE 802.11- 2012 revision of the standard and listed below with the reference to the section and the limit to reach.


IEEE 802.11 RF layer test	IEEE reference 802.11-2012	Limit tested
Transmit Power On/Off Ramp	16.4.7.8 (DSSS)	(10%-90%) 2 usec
	7.4.7.7 ("b")	(10%-90%) 2 usec
Transmit Spectrum mask	16.4.7.5 (DSSS)	std mask
	17.4.7.4 ("b")	std mask
	18.3.9.3("a")	std mask
	19.5.5 ("g")	std mask
	20.3.20.1 ("n")	std mask
	22.3.18.1 ("ac")	std mask
RF Carrier suppression	16.4.7.9 ("DSSS")	-15 dB
	17.4.7.8 ("b")	-15 dB
Centre frequency leakage	18.3.9.7.2 ("a")	-15 dB or +2 dB with respect to average subcarrier power
	20.3.20.7.2 ("n")	20 MHz follow 18.3.9.7.2
		40 MHz: -20 bBc or 0 dB with respect to average subcarrier power
Transmit Spectral flatness	18.3.9.7.3 ("a")	+/-4 dB (SC = -16... 16), +4/-6 dB (other)
	20.3.20.2 ("n")	+/-4 dB, +4/-6 dB
	22.3.18.2 ("ac")	+/-4 dB, +4/-6 dB (various BWs, 20-160 MHz)
Transmit Centre frequency tolerance	16.4.7.6 ("DSSS")	+/-25 ppm
	17.4.7.5 ("b")	+/-25 ppm
	18.3.9.5 ("a")	+/-20 ppm (20 MHz and 10 MHz), +/-10 ppm (5 MHz)
	19.4.8.3 ("g")	+/-25 ppm
	20.3.20.4 ("n")	+/-20 ppm (5 Hz band), +/-25 ppm (2.4 GHz band)
	22.3.18.3 ("ac")	+/-20 ppm

IEEE 802.11 RF layer test	IEEE reference 802.11-2012	Limit tested
Symbol clock frequency tolerance	16.4.7.7 ("DSSS")	+/-25 ppm
	17.4.7.6 ("b")	+/-25 ppm
	18.3.9.6 ("a")	+/-20 ppm (20 MHz and 10 MHz), +/- 10 ppm (5 MHz)
	19.4.8.4 ("g")	+/-25 ppm
	20.3.20.6 ("n")	+/-20 ppm (5 GHz band), +/-25 ppm (2.4 GHz band)
	22.3.18.3 ("ac")	+/-20 ppm
Transmit Modulation accuracy	16.4.7.10 ("DSSS")	Peak EVM < 0.35
	17.4.7.9 ("b")	Peak EVM < 0.36


IEEE 802.11 WLAN transmitter test summary

IEEE 802.11 RF layer test	IEEE reference 802.11-2012	Limit tested		
Transmitter Constellation Error	18.3.9.7.4 ("a")	Modulation	Coding rate (R)	Relative constellation error (dB)
		BPSK	1/2	-5
		BPSK	3/4	-8
		QPSK	1/2	-10
		QPSK	3/4	-13
		16QAM	1/2	-16
		16QAM	3/4	-19
		64QAM	2/3	-22
		64QAM	3/4	-25

IEEE 802.11 RF layer test	IEEE reference 802.11-2012	Limit tested		
Transmitter Constellation Error	20.3.20.7.3 ("n")	BPSK	1/2	-5
		QPSK	1/2	-10
		QPSK	3/4	-13
		16QAM	1/2	-16
		16QAM	3/4	-19
		64QAM	2/3	-22
		64QAM	3/4	-25
		64QAM	5/6	-27
	22.3.18.4.3 ("ac")	BPSK	1/2	-5
		QPSK	1/2	-10
		QPSK	3/4	-13
		16QAM	1/2	-16
		16QAM	3/4	-19
		64QAM	2/3	-22
		64QAM	3/4	-25
		64QAM	5/6	-27
		256QAM	3/4	-30
		256QAM	5/6	-32

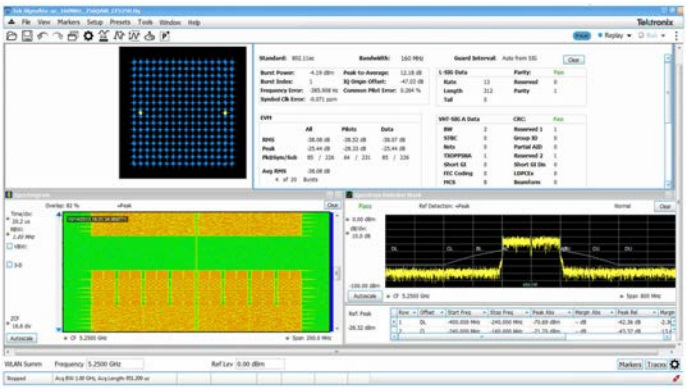

Easy analysis of WLAN 802.11ac transmitter with a WLAN preset that provides spectral emission mask, constellation diagram, and decoded burst information.

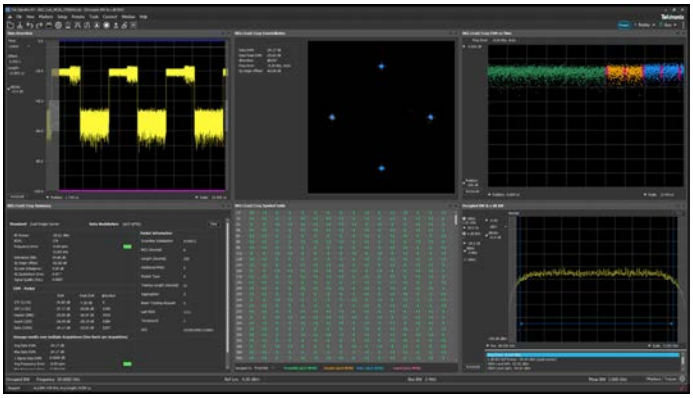

DPO770002SX with SV30 provides the industry's most accurate EVM. It allows easy setup to perform transmitter measurements including time overview of the bursts, spectrum, constellation diagram, decoded burst information, and EVM measurements.

WiGig IEEE802.11ad/ay transmitter testing

Option SV30 provides comprehensive analysis for WiGig IEEE802.11ad/ay IC characterization. Used together with the DPO77002SX, it delivers the industry's most accurate signal quality measurement at 60 GHz. Automatically detect the packet start, as well as decode packet information in the Header; synchronize to preamble using the Golay codes in the short training field; demodulates preamble, header, and payload separately; and measures EVM in each of these sections per the standard.

SV30 provides significant margin in EVM performance compared to what is required by the standard. Channel Impulse coefficients are also available. Both Control PHY (802.11ad) and Single Carrier PHY (802.11ad and 802.11ay) are supported and this option provides analysis of 802.11ay 2.16 GHz packets or 4.23 GHz adjacent 2-channel bonded packets.

Testing and verification can be done on IF and RF setups. RF power, Received Power Indicator (RCPI), Frequency error (Max, Average, Std. Deviation), DC Offset, IQ DC origin offset, IQ Gain and Phase imbalance, Signal Quality, and estimated SNR measurements are reported in the Summary display. Pass/Fail results are reported using customizable limits and the presets make the test set-up push-button.

For further insight into the signal, color coding is available in the user interface, allowing you to visualize the EVM spread across the analyzed packet with color codes differentiating regions. You can also view the demodulated symbols in tabular form with different color codes and with an option to traverse to the start of each region for easier navigation.

Modulation formats	**802.11ad**: MCS0-12.6 **802.11ay**: MCS1-21
	802.11ad/ay Single carrier: π/2 BPSK, π/2 QPSK, π/2 16QAM, π/2 64QAM **802.11ad Control PHY**: π/2 DBPSK
Measurements	RF output power, Received Channel Power Indicator (RCPI), Estimated SNR, Frequency Error, Symbol Rate Error, IQ Origin Offset, IQ Phase Imbalance, IQ Gain Imbalance, IQ Quadrature Error, EVM results for each packet region (STF, CEF, Header and Data). Packet information includes the Packet type, Preamble, Synchronization Word or Access Code, Packet Header, Payload length, and CRC details.
Displays	Constellation, EVM vs Time, Symbol Table, Summary

Residual EVM, measured at RF (Channel 1-6) on DP0770002SX

NOTE: (Measurement uncertainty: 'b1 0.3% due to pre-compensation filter and affects of the AWG70000 andupconverter.)

	802.11ad MCS0-12.6	**802.11ay MCS1-21**
Channel1-4	1.2 - 1.6% (-38.4 to -35.9 dBc)	1.2 - 1.6% (-38.4 to -35.9 dBc)

	802.11ad MCS0-12.6	802.11ay MCS1-21
Channel 5-6	1.4 - 2.5% (-37.1 to -32.0 dBc)	1.4 - 2.5% (-37.1 to -32.0 dBc)
Channel 1-2, 2-3, 3-4 (adjacent bonded)	NA	1.2 - 1.7% (-38.4 to -35.4 dBc)
Channel 4-5, 5-6 (adjacent bonded)	NA	< 2.5% (< -32.0 dBc)

Bluetooth transmitter testing


Two options have been added to help with Bluetooth SIG standard base transmitter RF measurements in the time, frequency and modulation domains. Option SV27 supports Basic Rate and Low Energy Transmitter measurements defined by RF.TS.4.2.0 and RF-PHY.TS. 4.2.0 Test Specification. It also demodulates and provides symbol information for Enhanced Data Rate (EDR) packets. Option SV31 supports Bluetooth 5 standards (LE 1M, LE 2M, LE Coded) and measurements defined in the Core Specification. Both options also decode the physical layer data that is transmitted and color-encode the fields of packet in the Symbol Table for clear identification.

Pass/Fail results are provided with customizable limits and the Bluetooth presets make the different test set-ups push-button.

Below is a summary of the measurements that are automated with option SV27 and SV31 (unless noted):

- Bluetooth Low Energy (BLE) transmitter measurements
  - Output power at NOC TRM-LE/CA/01/C and at EOC TRM-LE/CA/02/C
  - In-band emission at NOC TRM-LE/CA/03/C and at EOC TRM-LE/CA/04/C
  - Modulation characteristics TRM-LE/CA/05/C
  - Carrier frequency offset and drift at NOC TRM-LE/CA/06/C and at EOC TRM-LE/CA/07/C
- Basic Rate transmitter measurements
  - Output power TRM/CA/01/C
  - Power Density TRM/CA/02/C (no preset)
  - Power Control TRM/CA/03/C (no preset)
  - Tx output Spectrum – Frequency Range TRM/CA/04/C (no preset)
  - Tx output spectrum - 20 dB Bandwidth TRM/CA/05/C
  - Tx output spectrum - Adjacent Channel Power TRM/CA/06/C
  - Modulation characteristics TRM/CA/07/C
  - Initial carrier frequency tolerance TRM/CA/08/C
  - Carrier frequency-drift TRM/CA/09/C

The following additional information is also available with SV27 and SV31: symbol table with color coded field information, constellation, eye diagram, frequency deviation vs time with highlighted packet and octet, frequency offset and drift detailed table, as well as packet header field decoding. Markers can be used to cross-correlate the time, vector, and frequency information.

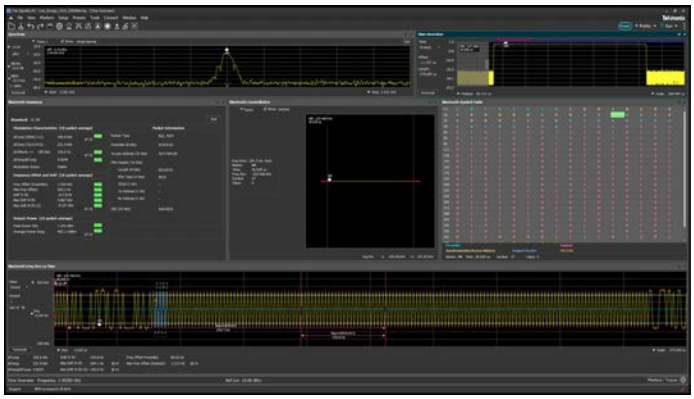

Easy validation of Bluetooth transmitter with pushbutton preset, pass/fail information, and clear correlation between displays.

LTE FDD and TDD base station transmitter RF testing


Option SV28 enables the following LTE measurements:

- Cell ID
- Channel Power
- Occupied Bandwidth (OBW)
- Adjacent Channel Leakage Ratio (ACLR)
- Spectrum Emission Mask (SEM)
- Transmitter Off Power for TDD
- Reference Signal Power

There are four presets to accelerate pre-compliance testing and determine the Cell ID. These presets are defined as Cell ID, ACLR, SEM, Channel Power and TDD Toff Power. The measurements follow the definition in 3GPP TS Version 12.5 and support all base station categories, including picocells and femtocells. Pass/Fail information is reported and all channel bandwidths are supported.

The Cell ID preset displays the Primary Synchronization Signal (PSS) and the Secondary Synchronization Signal (SSS) in a Constellation diagram. It also provides Frequency Error and Reference Signal (RS) Power.

The ACLR preset measures the E-UTRA and the UTRA adjacent channels, with different chip rates for UTRA. ACLR also supports Noise Correction based on the noise measured when there is no input. Both ACLR and SEM will operate in swept mode (default) or in faster single acquisition if the instrument has enough acquisition bandwidth.

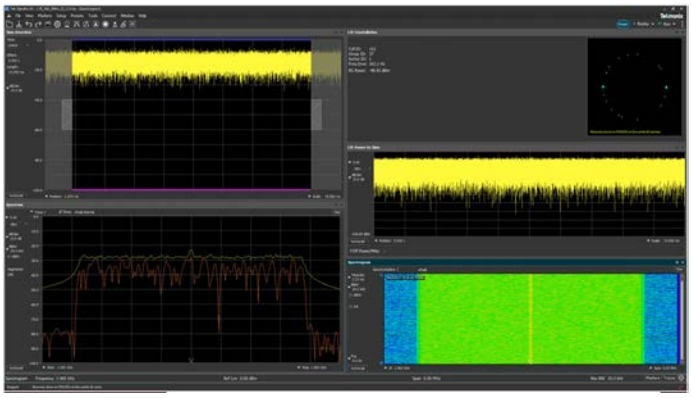

Fast validation of LTE base station transmitter with push button preset, and pass/fail information.

Measurement functions

Spectrum analyzer measurements (Opt. SVE)	Channel Power, Adjacent Channel Power, Multicarrier Adjacent Channel Power/Leakage Ratio, Occupied Bandwidth, xdB Down, dBm/Hz Marker, dBc/Hz Marker
Time domain and statistical measurements (Opt. SVE)	RF IQ vs. Time, Amplitude vs. Time, Power vs. Time, Frequency vs. Time, Phase vs. Time, CCDF, Peak-to-Average Ratio, Amplitude, Frequency, and Phase Modulation Analysis
Spur search measurements (Opt. SVE)	Up to 20 ranges, user-selected detectors (peak, average, CISPR peak), filters (RBW, CISPR, MIL) and VBW in each range. Linear or Log frequency scale. Measurements and violations in absolute power or relative to a carrier. Up to 999 violations identified in tabular form for export in CSV format
WLAN 802.11a/b/g/j/p measurement application (Opt. SV23)	All of the RF transmitter measurements as defined in the IEEE standard, and a wide range of additional scalar measurements such as Carrier Frequency error, Symbol Timing error, Average/ peak burst power, IQ Origin Offset, RMS/Peak EVM, and analysis displays, such as EVM and Phase/Magnitude Error vs time/frequency or vs symbols/ subcarriers, as well as packet header decoded information and symbol table. Option SV23 requires Option SVE Option SV24 requires Option SV23 Option SV25 requires Option SV24
WLAN 802.11n measurement application (Opt. SV24)	
WLAN 802.11ac measurement application (Opt. SV25)	
APCO P25 compliance testing and analysis application (Opt. SV26)	Complete set of push-button TIA-102 standard-based transmitter measurements with pass/fail results including ACPR, transmitter power and encoder attack times, transmitter throughput delay, frequency deviation, modulation fidelity, symbol rate accuracy, and transient frequency behavior, as well as HCPM transmitter logical channel peak ACPR, off slot power, power envelope, and time alignment. Option SV26 requires Option SVE
Bluetooth Basic LE TX SIG measurements (Opt. SV27)	Presets for transmitter measurements defined by Bluetooth SIG for Basic Rate and Bluetooth Low Energy. Results also include Pass/Fail information. Application also provides Packet Header Field Decoding and can automatically detect the standard including Enhanced Data Rate.
LTE Downlink RF measurements (Opt. SV28)	Presets for Cell ID, ACLR, SEM, Channel Power and TDD Toff Power. Supports TDD and FDD frame format and all base stations defined by 3GPP TS version 12.5. Results include Pass/Fail information. Real-Time settings make the ACLR and the SEM measurements fast, if the connected instrument has enough bandwidth.
WiGig IEEE 802.11ad/ay measurement application (Opt. SV30)	Presets for Control PHY (802.11ad) and Single Carrier PHY (802.11ad and 802.11ay). The 802.11ay analysis results are shown for the EDMG, PreEDMG1, and PreEDMG2 regions. Both measure EVM in each of the packet fields per the standard, and decodes the header packet information. RF power, Received Channel Power Indicator, Frequency error, IQ DC origin offset, IQ Gain and Phase imbalance are reported in the Summary display. Pass/Fail results are reported using customizable limits.
AM/FM/PM modulation and audio measurements (Opt. SVA)	Carrier Power, Frequency Error, Modulation Frequency, Modulation Parameters (±peak, peak-peak/2, RMS), SINAD, Modulation Distortion, S/N, THD, TNHD, Hum and Noise
Settling time (frequency and phase) (Opt. SVT)	Measured Frequency, Settling Time from last settled frequency, Settling Time from last settled phase, Settling Time from Trigger. Automatic or manual reference frequency selection. User-adjustable measurement bandwidth, averaging, and smoothing. Pass/Fail Mask Testing with 3 user-settable zones

Advanced Pulse analysis (Opt. SVP)	Pulse-Ogram™ waterfall display of multiple segmented captures, with amplitude vs time and spectrum of each pulse. Pulse frequency, Delta Frequency, Average on power, Peak power, Average transmitted power, Pulse width, Rise time, Fall time, Repetition interval (seconds), Repetition interval (Hz), Duty factor (%), Duty factor (ratio), Ripple (dB), Ripple (%), Droop (dB), Droop (%), Overshoot (dB), Overshoot (%), Pulse- Ref Pulse frequency difference, Pulse- Ref Pulse phase difference, Pulse- Pulse frequency difference, Pulse- Pulse phase difference, RMS frequency error, Max frequency error, RMS phase error, Max phase error, Frequency deviation, Phase deviation, Impulse response (dB), Impulse response (time), Time stamp, Pulse modulation type with classification confidence (machine-learning-based).
Flexible OFDM analysis (Opt. SVO)	OFDM analysis with support for WLAN 802.11a/g/j and WiMAX 802.16-2004. Constellation, Scalar Measurement Summary, EVM or Power vs. Carrier, Symbol Table (Binary or Hexadecimal)
General purpose digital modulation analysis (Opt. SVM)	Error Vector Magnitude (EVM) (RMS, Peak, EVM vs. Time), Modulation Error Ratio (MER), Magnitude Error (RMS, Peak, Mag Error vs. Time), Phase Error (RMS, Peak, Phase Error vs. Time), Origin Offset, Frequency Error, Gain Imbalance, Quadrature Error, Rho, Constellation, Symbol Table. FSK only: Frequency Deviation, Symbol Timing Error

Specifications

Performance (typical)

The following is typical performance of SignalVu® running on any DPO70000 SX oscilloscope models, or DPO/MSO70000 DX Series oscilloscopes.

Frequency-related

Frequency range

See appropriate instrument data sheet

Initial center frequency setting accuracy

Equal to time-base accuracy of instrument

Center frequency setting resolution

0.1 Hz

Frequency offset range

0 Hz to the maximum bandwidth of the oscilloscope

Frequency marker readout accuracy

±(Reference Frequency Error × Marker Frequency + 0.001 × Span + 2) Hz

Span accuracy

±0.3%

Reference frequency error

Equal to oscilloscope reference frequency accuracy, aging, and drift. Refer to appropriate DPO/MSO data sheet.

Tuning Tables

Tables that present frequency selection in the form of standards-based channels are available for the following.

Cellular standards families: AMPS, NADC, NMT-450, PDC, GSM, CDMA, CDMA-2000, 1xEV-DO WCDMA, TD-SCDMA, LTE, WiMax

Unlicensed short range: 802.11a/b/j/g/p/n/ac, Bluetooth

Cordless phone: DECT, PHS

Broadcast: AM, FM, ATSC, DVBT/H, NTSC

Mobile radio, pagers, other: GMRS/FRS, iDEN, FLEX, P25, PWT, SMR, WiMax

3rd order inter-modulation distortion

Center frequency	DPO/MSO70000	DPO70000SX
2 GHz	-55 dBc	< -60 dBc
10 GHz	-48 dBc	< -50 dBc
18 GHz	-50 dBc	< -50 dBc

NOTE: Conditions for non-SX: Each signal level -5 dBm, reference level 0 dBm, 1 MHz tone separation. Math traces off.DPO7054/7104 and MSO/DPO5034/5054/5104 performance not listed.

NOTE: Conditions for SX: 6.25 mV/div (10 mV/div for ATI), input level -26 dBm (-22 dBm for ATI channel), ~5 divisions.

Residual responses

DPO/MSO70000DX/SX series (all spans)

-60 dBm

NOTE: Conditions: RF input terminated, reference level 0 dBm, measurements made after specified oscilloscope warmup and SPC calibration. Does not include zero Hz spur.

Displayed average noise level

Span	DPO/MSO70000	DPO70000SX
DC - 500 MHz	-103 dBm	< -145 dBm/Hz
>500 MHz - 3.5 GHz	-103 dBm	< -155 dBm/Hz
>3.5 GHz - 14 GHz	-101 dBm	< -155 dBm/Hz
>14 GHz - 20 GHz	-88 dBm	< -155 dBm/Hz
>20 GHz - 25 GHz	-87 dBm	< -150 dBm/Hz
>25 GHz - 33 GHz	-85 dBm	< -150 dBm/Hz
>33 GHz - 70 GHz	-	< -150 dBm/Hz

NOTE: Conditions for non-SX: RF input terminated, 10 kHz RBW, 100 averages, reference level -10 dBm, trace detectionaverage. Measurements made after specified oscilloscope warm-up and SPC calibration.

NOTE: Conditions for SX: RF input terminated, 1 kHz RBW, averaged trace, 6.25 mV/div (10 mV/div for ATI), peak detector, 500 kHz span.

Input-related

Number of inputs

4

NOTE: Beginning with version 5.3, for the general signal viewing and advanced pulse analysis displays only, SignalVucan process acquisitions from up to four of the oscilloscope channels simultaneously. For all other measurement displays, SignalVu can process acquisitions from one channel at a time. You can also apply custom math and filter functions to each of the oscilloscope's acquisition channels. The resulting Math channel can then be selected by SignalVu for signal processing.

Input signal types

RF, I and Q (single ended), I and Q (differential)

Maximum input level

+26 dBm for 50 Ω input (5 V_{RMS})

Trigger-related

Trigger modes

Free Run and Triggered. Trigger sensitivity and characteristics can be found in the appropriate oscilloscope data sheet.

Acquisition-related

SignalVu provides long acquisitions of waveform captures with high time and frequency resolution. Maximum acquisition time will vary based on the oscilloscope's available memory and analog bandwidth. The following table highlights each model's single-channel capabilities given its maximum available memory configuration.

70000SX models

		Oscilloscope dependent	SignalVu dependency		Oscilloscope dependent
Model	**Max span**	**Max acquisition time at max sample rate**	**Min RBW at max sample rate**	**Min IQ time resolution**	**Max number of FastFrames**
DPO77002SX	70 GHz	5 ms	600 Hz	20 ps SX 10 ps DX	369 K
DPO75002SX	50 GHz				
DPO73304SX	33 GHz	10 ms	300 Hz	10 ps	
DPO72504SX	25 GHz			20 ps	
DPO72304SX	23 GHz				
DPO71604SX	16 GHz				
DPO71304SX	13 GHz				

NOTE: Max acquisition time at max sample rate : On SX channels: 200 GS/S real samples, 50 GS/s complex samples, Oscilloscope: 70 GHz Span, SignalVu 40 GHz SPAN, 20 pS/sample. On DX Channels:100 GS/S real samples, 100 GS/S Complex Samples, Oscilloscope: 33 GHz Span,SignalVu 40 GHz Span, 10 pS/Sample.

Analysis-related

Frequency (Opt. SVE)

Spectrum (Amplitude vs. Linear or Log Frequency)

Spectrogram (Amplitude vs. Frequency over Time)

Spurious (Amplitude vs. Linear or Log Frequency)

Time and statistics (Opt. SVE)

Amplitude vs. Time

Frequency vs. Time

Phase vs. Time

Amplitude Modulation vs. Time

Frequency Modulation vs. Time

Phase Modulation vs. Time

RF IQ vs. Time

Time Overview

CCDF

Peak-to-Average Ratio

Settling time, frequency, and phase (Opt. SVT)

Frequency Settling vs. Time

Phase Settling vs. Time

Advanced Pulse measurements suite (Opt. SVP)

Pulse results Table

Pulse trace (Selectable by pulse number)

Pulse statistics (Trend of pulse results, FFT of time trend and histogram)

Cumulative Statistics, Cumulative Histogram and Pulse-Ogram

Digital demod (Opt. SVM)

Constellation diagram

EVM vs. Time

Symbol table (binary or hexadecimal)

Magnitude and Phase Error vs. Time, and Signal Quality

Demodulated IQ vs. Time

Eye diagram

Trellis diagram

Frequency Deviation vs. Time

Flexible OFDM (Opt. SVO)

EVM vs. Symbol, vs. Subcarrier

Subcarrier Power vs. Symbol, vs. Subcarrier

Subcarrier constellation

Symbol data table

Mag Error vs. Symbol, vs. Subcarrier

Phase Error vs. Symbol, vs. Subcarrier

Channel frequency response

Supported file formats

SignalVu can recall saved acquisitions from DPO/MSO70000 Series instruments. Both WFM and TIQ file extensions can be recalled for postprocessing by SignalVu.

RF and spectrum analysis performance

Resolution bandwidth

Resolution bandwidth (spectrum analysis)

1, 2, 3, 5 sequence, auto-coupled, or user selected (arbitrary)

Resolution bandwidth shape

Approximately Gaussian, shape factor 4.1:1 (60:3 dB) ±10%, typical

Resolution bandwidth accuracy

±1% (auto-coupled RBW mode)

Alternative resolution bandwidth types

Kaiser window (RBW), –6 dB Mil, CISPR, Blackman-Harris 4B window, Uniform window (none), flat-top window (CW ampl.), Hanning window

Video bandwidth

Video bandwidth range

Dependent on oscilloscope record length setting. approximately 500 Hz to 5 MHz

RBW/VBW maximum

10,000:1

RBW/VBW minimum

1:1

Resolution

5% of entered value

Accuracy (typical)

±10%

Time domain bandwidth (amplitude vs. time display)

Time domain bandwidth range

At least 1/2 to 1/10,000 of acquisition bandwidth

Time domain bandwidth shape

Approximately Gaussian, shape factor 4.1:1(60:3 dB), ±10% typical

Shape factor <2.5:1 (60:3 dB) typical for all bandwidths

Time domain bandwidth accuracy

±10%

Spectrum and Spurious display traces, detectors, and functions

Traces

Three traces + 1 math trace + 1 trace from spectrogram for spectrum display, four traces for spurious display

Detector

Peak, –peak, average, CISPR peak, and when option SVQP is enabled, CISPR quasi-peak and average (not available when connected to MDO4000B/C or MSO5/6 Series)

Trace functions

Normal, Average, Max Hold, Min Hold

Spectrum trace length

801, 2401, 4001, 8001, 10401, 16001, 32001, or 64001 points

AM/FM/PM modulation and audio measurements (SVA)

All published performance based on conditions of Input Signal: 0 dBm, Input Frequency: 100 MHz, RBW: Auto, Averaging: Off, Filters: Off. Sampling and input parameters optimized for best results.

Carrier frequency range

1 kHz or (1/2 × audio analysis bandwidth) to maximum input frequency

---

NOTE: Sampling rates of the oscilloscope are recommended to be adjusted to no more than 10X the audio carrier frequency for modulated signals, and 10X the audio analysis bandwidth for direct input audio. This reduces the length of acquisition required for narrow-band audio analysis.

Maximum audio frequency span

10 MHz

Audio filters

Low pass (kHz)

0.3, 3, 15, 30, 80, 300, and user-entered up to 0.9 × audio bandwidth

High pass (Hz)

20, 50, 300, 400, and user-entered up to 0.9 × audio bandwidth

Standard

CCITT, C-Message

De-emphasis (µs)

25, 50, 75, 750, and user-entered

File

User-supplied .TXT or .CSV file of amplitude/frequency pairs. Maximum 1000 pairs.

FM modulation analysis

FM measurements

Carrier power, carrier frequency error, audio frequency, deviation (+peak, –peak, peak-peak/2, RMS), SINAD, modulation distortion, S/N, total harmonic distortion, total non-harmonic distortion, hum and noise

FM deviation accuracy

±1.5% of deviation

FM rate accuracy

±1.0 Hz

Carrier frequency accuracy

±1 Hz + (transmitter frequency × reference frequency error)

Residuals (FM) (rate: 1 kHz to 10 kHz, deviation: 5 kHz)

THD

0.2% (DPO70000 Series)

SINAD

44 dB (DPO70000 Series)

AM modulation analysis

AM measurements

Carrier power, audio frequency, modulation depth (+peak, –peak, peak-peak/2), RMS, SINAD, modulation distortion, S/N, total harmonic distortion, total non-harmonic distortion, hum and noise

AM depth accuracy (rate: 1 kHz, depth: 50%)

±1% + 0.01 × measured value

AM rate accuracy (rate: 1 kHz, depth: 50%)

±1.0 Hz

Residuals (AM)

THD

0.3% (DPO70000 Series)

SINAD

48 dB (DPO70000 Series)

PM modulation analysis

PM measurement

Carrier power, carrier frequency error, audio frequency, deviation (+peak, –peak, peak-peak/2, RMS), SINAD, modulation distortion, S/N, total harmonic distortion, total non-harmonic distortion, hum and noise

PM deviation accuracy (rate: 1 kHz, deviation: 0.628 rad)

±100% × (0.01 + (rate / 1 MHz))

PM rate accuracy (rate: 1 kHz, deviation: 0.628 rad)

±1 Hz

Residuals (PM)

THD

0.1% (DPO70000 Series)

SINAD

48 dB (DPO70000 Series)

Direct audio input

Audio measurements

Signal power, audio frequency (+peak, –peak, peak-peak/2, RMS), SINAD, modulation distortion, S/N, total harmonic distortion, total non-harmonic distortion, hum and noise

Direct input frequency range (for audio measurements only)

1 Hz to 10 MHz

Maximum audio frequency span

10 MHz

Audio frequency accuracy

±1 Hz

Residuals (PM)

THD

1.5%

SINAD

38 dB

Minimum audio analysis bandwidth and RBW vs. oscilloscope memory and sample rate (Opt. SVA)

Model	Sample rate: 1 GS/s				Sample rate: maximum			
	Standard memory		Maximum memory		Standard memory		Maximum memory	
	Min. Aud. BW	RBW (Auto)	Min. Aud. BW	RBW (Auto)	Min. Aud. BW	RBW (Auto)	Min. Aud. BW	RBW (Auto)
DPO/ MSO 70000 ≥12.5 GHz BW	200 kHz	400 Hz	10 kHz	20 Hz	not recommended	>4 kHz	1 MHz	2 kHz
DPO/ MSO 70000 <12.5 GHz BW	200 kHz	400 Hz	20 kHz	40 Hz	not recommended	>4 kHz	500 kHz	1 kHz

Settling time, frequency, and phase (SVT)

NOTE: Settled Frequency or Phase at the measurement frequency. Measured signal level>-20 dBm, Attenuator: Auto.

Measurement frequency: 1 GHz

Averages	Frequency uncertainty at stated measurement bandwidth			
	1 GHz	100 MHz	10 MHz	1 MHz
Single measurement	20 kHz	2 kHz	500 Hz	100 Hz
100 averages	10 kHz	500 Hz	200 Hz	50 Hz
1000 averages	2 kHz	200 Hz	50 Hz	10 Hz

Measurement frequency: 9 GHz

Averages	Frequency uncertainty at stated measurement bandwidth			
	1 GHz	100 MHz	10 MHz	1 MHz
Single Measurement	20 kHz	5 kHz	2 kHz	200 Hz
100 Averages	10 kHz	2 kHz	500 Hz	50 Hz
1000 Averages	2 kHz	500 Hz	200 Hz	20 Hz

Settled phase uncertainty

Measurement frequency: 1 GHz

Averages	Phase uncertainty at stated measurement bandwidth			
	1 GHz	100 MHz	10 MHz	1 MHz
Single measurement	2°	2°	2°	2°
100 averages	0.5°	0.5°	0.5°	0.5°
1000 averages	0.2°	0.2°	0.2°	0.2°

Measurement frequency: 9 GHz

Averages	Phase uncertainty at stated measurement bandwidth			
	1 GHz	100 MHz	10 MHz	1 MHz
Single measurement	5°	5°	5°	5°
100 averages	2°	2°	2°	2°
1000 averages	0.5°	0.5°	0.5°	0.5°

Advanced Pulse measurement suite (Opt. SVP)

General characteristics

Measurements

Pulse-Ogram™ waterfall display of multiple segmented captures, with amplitude vs time and spectrum of each pulse. Pulse frequency, Delta Frequency, Average on power, Peak power, Average transmitted power, Pulse width, Rise time, Fall time, Repetition interval (seconds), Repetition interval (Hz), Duty factor (%), Duty factor (ratio), Ripple (dB), Ripple (%), Droop (dB), Droop (%), Overshoot (dB), Overshoot (%), Pulse- Ref Pulse frequency difference, Pulse- Ref Pulse phase difference, Pulse- Pulse frequency difference, Pulse-

Pulse phase difference, RMS frequency error, Max frequency error, RMS phase error, Max phase error, Frequency deviation, Phase deviation, Impulse response (dB), Impulse response (time), Time stamp, Pulse modulation type with classification confidence (machine-learning-based).

Number of pulses

1 to 100,000 in one acquisition; Supports offline analysis of more than 200,000 continuous pulses. Provides measurement statistics for millions of pulses captured over many acquisitions.

Actual number depends on time length, pulse bandwidth and instrument configuration.

System rise time (typical)

Equal to oscilloscope rise time

Minimum pulse width for detection

Model	Minimum PW
DPO77002SX	40 ps
DPO75002SX	40 ps
DPO73304SX	40 ps
DPO72504SX	40 ps
DPO72304SX	40 ps
DPO71604SX	40 ps
DPO71304SX	40 ps

NOTE: Conditions: Approximately equal to 10/(IQ sampling rate). IQ sampling rate is the final sample rate afterfrequency domain processing from the oscilloscope. Pulse measurement filter set to max bandwidth.

Pulse measurement accuracy (typical)

NOTE: Conditions: Pulse Width > 450 ns, S/N Ratio ≥ 30 dB, Duty Cycle 0.5 to 0.001, Temperature 18 °C to 28 °C.

Average on power

±0.3 dB + Absolute Amplitude Accuracy of instrument

Average transmitted power

±0.4 dB + Absolute Amplitude Accuracy of instrument

Peak power

±0.4 dB + Absolute Amplitude Accuracy of instrument

Pulse width

±(3% of reading + 0.5 × sample period)

Pulse repetition rate

±(3% of reading + 0.5 × sample period)

Digital modulation analysis (SVM)

Modulation formats

π/2DBPSK, BPSK, SBPSK, QPSK, DQPSK, π/4DQPSK, D8PSK, 8PSK, OQPSK, SOQPSK, CPM, 16/32/64/128/256/1024QAM, MSK, 2-FSK, 4-FSK, 8-FSK, 16-FSK, C4FM, D16PSK, 16APSK, and 32APSK

Analysis period

Up to 80,000 samples

Measurement filters

Square-root raised cosine, raised cosine, Gaussian, rectangular, IS-95, IS-95 EQ, C4FM-P25, half-sine, None, User Defined

Reference filters

Raised cosine, Gaussian, rectangular, IS-95, SBPSK-MIL, SOQPSK-MIL, SOQPSK-ARTM, None, User Defined

Alpha/B x T range

0.001 to 1, 0.001 step

Measurements

Constellation, Error Vector Magnitude (EVM) vs time, Modulation error ratio (MER), Magnitude error vs time, Phase error vs time, Signal quality, Symbol table

rhoFSK only: Frequency deviation, Symbol timing error

Symbol rate range

1 kS/s to (0.4 * Sample Rate) GS/s (modulated signal must be contained entirely within the acquisition bandwidth)

Adaptive equalizer

Type

Linear, decision-directed, feed-forward (FIR) equalizer with coefficient adaptation and adjustable convergence rate

Modulation types supported

BPSK, QPSK, OQPSK π/2 DQPSK, π/4 DQPSK, 8PSK, D8PSK, D16PSK, 16/32/64/128/256/1024QAM

Reference filters for all modulation types except OQPSK

Raised cosine, Rectangular, None

Reference filters for OQPSK

Raised cosine, Half sine

Filter length

1-128 taps

Taps/symbol: raised cosine, half sine, no filter

1, 2, 4, 8

Taps/symbol: rectangular filter

1

Equalizer controls

Off, Train, Hold, Reset

16QAM Residual EVM (typical) for DPO/MSO70000 series

Symbol Rate	RF	IQ
100 MS/s	< 2.0%	< 2.0%
312.5 MS/s	< 3.0%	< 3.0%

NOTE: CF = 1 GHz, Measurement Filter = root raised cosine, Reference Filter = raised cosine, Analysis Length = 200 symbols.

OFDM residual EVM, 802.11g Signal at 2.4 GHz, input level optimized for best performance

DPO/MSO70000 Series

-38 dB

WLAN IEEE802.11a/b/g/j/p (Opt. SV23)

General characteristics

Modulation formats

DBPSK (DSSS1M), DQPSK (DSSS2M), CCK5.5M, CCK11M, OFDM (BPSK, QPSK, 16 or 64QAM)

Measurements

RMS and Peak EVM for Pilots/Data, Peak EVM located per symbol and subcarrier

Packet header format information

Average power and RMS EVM per section of the header

WLAN power vs time, WLAN symbol table, WLAN constellation

Spectrum Emission Mask, Spurious

Error Vector Magnitude (EVM) vs symbol (or time), vs subcarrier (or frequency)

Mag error vs symbol (or time), vs subcarrier (or frequency)

Phase error vs symbol (or time), vs subcarrier (or frequency)

WLAN channel frequency response vs symbol (or time), vs subcarrier (or frequency)

WLAN spectral flatness vs symbol (or time), vs subcarrier (or frequency)

WLAN IEEE802.11n (Opt. SV24)

General characteristics

Modulation formats

OFDM (BPSK, QPSK, 16 or 64 QAM), SISO

Measurements

Burst index, Burst power, Peak to average burst power, IQ origin offset, Frequency error, Common pilot error, Symbol clock error

RMS and peak EVM for Pilots/Data, peak EVM located per symbol and subcarrier

Packet header format information

Average power and RMS EVM per section of the header

WLAN power vs time, WLAN symbol table, WLAN constellation

Spectrum emission mask, spurious

Error Vector Magnitude (EVM) vs symbol (or time), vs subcarrier (or frequency)

Mag error vs symbol (or time), vs subcarrier (or frequency)

Phase error vs symbol (or time), vs subcarrier (or frequency)

WLAN channel frequency response vs symbol (or time), vs subcarrier (or frequency)

WLAN spectral flatness vs symbol (or time), vs subcarrier (or frequency)

WLAN IEEE802.11ac (Opt. SV25)

General characteristics

Modulation formats

OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM), SISO

Measurements

Burst index, Burst power, Peak to average burst power, IQ origin offset,Frequency error, Common pilot error, Symbol clock error

RMS and peak EVM for Pilots/Data, Peak EVM located per symbol and subcarrier

Packet header format information

Average power and RMS EVM per section of the header

WLAN Power vs time, WLAN symbol table, WLAN constellation

Spectrum emission mask, spurious

Error Vector Magnitude (EVM) vs symbol (or time), vs subcarrier (or frequency)

Mag error vs symbol (or time), vs subcarrier (or frequency)

Phase error vs symbol (or time), vs subcarrier (or frequency)

WLAN channel frequency response vs symbol (or time), vs subcarrier (or frequency)

WLAN spectral flatness vs symbol (or time), vs subcarrier (or frequency)

WiGig 802.11ad/ay (Opt. SV30)

Modulation formats

802.11ad MCS0-12.6,

802.11ay MCS1-21

802.11ad Control PHY (pi/2 DBPSK)

802.11ad and 802.11ay Single Carrier PHY (pi/2 BPSK, pi/2 QPSK, pi/2 16QAM, pi/2 64QAM)

Measurements and displays 802.11ad

RF output power, Received Channel Power Indicator (RCPI), Estimated SNR, Frequency Error,

Symbol Rate Error, IQ Origin Offset, IQ Gain Imbalance, IQ Phase Imbalance, IQ Quadrature Error,

EVM results for each packet region: Packet information, 802.11ad (STF, CEF, Header, Guard, and Data), 802.11ay (LSTF, LCEF, L Header, EDMG Header-A, EDMG STF, EDMG CEF Guard and Data

include the Packet type, Preamble, Synchronization Word or Access Code, Packet

Header, Payload length, and CRC details.

Residual EVM, measured at RF (Channel 1-6) on DPO770002SX

Residual EVM

Measurement uncertainty: ± 0.3% due to pre-compensation filter and affects of the AWG70000 and upconverter.

	802.11ad MCS0-12.6	802.11ay MCS1-21
Channel1-4	1.2 - 1.6% (-38.4 to -35.9 dBc)	1.2 - 1.6% (-38.4 to -35.9 dBc)
Channel 5-6	1.4 - 2.5% (-37.1 to -32.0 dBc)	1.4 - 2.5% (-37.1 to -32.0 dBc)
Channel 1-2, 2-3, 3-4 (adjacent bonded)	NA	1.2 - 1.7% (-38.4 to -35.4 dBc)
Channel 4-5, 5-6 (adjacent bonded)	NA	< 2.5% (< -32.0 dBc)

APCO P25 (Opt. SV26)

Modulation formats

Phase 1 (C4FM), Phase 2 (HCPM, HDQPSK)

Measurements and displays

RF output power, operating frequency accuracy, modulation emission spectrum, unwanted emissions spurious, adjacent channel power ratio, frequency deviation, modulation fidelity, frequency error, eye diagram, symbol table, symbol rate accuracy, transmitter power and encoder attack time, transmitter throughput delay, frequency deviation vs. time, power vs. time, transient frequency behavior, HCPM transmitter logical channel peak adjacent channel power ratio, HCPM transmitter logical channel off slot power, HCPM transmitter logical channel power envelope, HCPM transmitter logical channel time alignment

Bluetooth (Opt. SV27)

Modulation formats

Bluetooth® 4.2 Basic Rate, Bluetooth® 4.2 Low Energy, Bluetooth® 4.2 Enhanced Data Rate. Bluetooth® 5 when SV31 is enabled.

Measurements and displays

Peak Power, Average Power, Adjacent Channel Power or InBand Emission mask, -20 dB Bandwidth, Frequency Error, Modulation Characteristics including ΔF1avg (11110000), ΔF2avg (10101010), ΔF2 > 115 kHz, ΔF2/ΔF1 ratio, frequency deviation vs. time with packet and octet level measurement information, Carrier Frequency f0, Frequency Offset (Preamble and Payload), Max Frequency Offset, Frequency Drift f_1-f_0, Max Drift Rate f_n-f_0 and f_n-f_{n-5}, Center Frequency Offset Table and Frequency Drift table, color-coded Symbol table, Packet header decoding information, eye diagram, constellation diagram.

LTE Downlink (Opt. SV28)

Standard Supported

3GPP TS 36.141 Version 12.5

Frame Format supported

FDD and TDD

Measurements and Displays Supported

Adjacent Channel Leakage Ratio (ACLR), Spectrum Emission Mask (SEM), Channel Power, Occupied Bandwidth, Power vs. Time showing Transmitter OFF power for TDD signals and LTE constellation diagram for PSS, SSS with Cell ID, Group ID, Sector ID and Frequency Error.

General characteristics

GPIB

SCPI-compatible, see programmer manual for exceptions

Ordering information

SignalVu® Vector Signal Analysis software is compatible with DPO/MSO70000 Series digital oscilloscopes with firmware version V5.1.0 or higher. SignalVu Essentials (Opt. SVE) provides basic vector signal analysis and is required for all other analysis options.

Options

Opt. SVE

SignalVu Essentials - Vector Signal Analysis Software

Opt. SV23

WLAN 802.11a/b/g/j/p measurement application (requires Opt. SVE, requires oscilloscope of bandwidth of 2.5 GHz or above)

Opt. SV24

WLAN 802.11n measurement application (requires Opt. SV23, requires oscilloscope of bandwidth of 2.5 GHz or above)

Opt. SV25

WLAN 802.11ac measurement application (requires Opt. SV24, requires oscilloscope of bandwidth of 6.0 GHz or above)

Opt. SV26

APCO P25 measurement application

Opt. SV27

Bluetooth Basic LE Tx Measurements (requires Opt. SVE, requires oscilloscope of bandwidth of 2.5 GHz or above)

Opt. SV28

LTE Downlink RF measurements (requires Opt. SVE, requires oscilloscope of bandwidth 1 GHz or above).

Opt. SV30

IEEE802.11ad/ay SC Wideband Waveform Analysis (requires Opt. SVE, requires oscilloscope of bandwidth >3 GHz

Opt. SVP

Advanced pulse radar analysis (requires Opt. SVE)

Opt. SVM

General Purpose Digital Modulation Analysis (requires Opt. SVE)

Opt. SVT

Settling Time, Frequency, and Phase (requires Opt. SVE)

Opt. SVO

Flexible OFDM with support for 802.11a/j/g and 802.16-2044 (fixed WiMAX) modulation types.

Opt. SVA

AM/FM/PM Modulation and Audio Measurements (requires Opt. SVE)

SignalVu ordering and upgrade guide for new and existing instruments

Option ordering nomenclature for all oscilloscopes. Option SVE is required for all other options listed.

For information on analysis software that runs on your personal computer, please see the SignalVu-PC datasheet.

New and existing models

Model	Ordering on new instrument	Upgrade existing instrument
DPO/MSO70000 Series ≤8 GHz	Opt. SVE (Essentials)	DPO-UP Opt. SVEH
DPO/MSO70000 Series >8 GHz	Opt. SVE (Essentials)	DPO-UP Opt. SVEU
Option SVE required for all other options listed	Opt. SVT (Settling time)	DPO-UP Opt. SVT
	Opt. SVP (Pulse measurements)	DPO-UP Opt. SVP
	Opt. SVM (GP modulation analysis)	DPO-UP Opt. SVM
	Opt. SVO (OFDM)	DPO-UP Opt. SVO
	Opt. SVA (AM/FM/PM Audio)	DPO-UP Opt. SVA
	Opt. SV26 (APCO P25)	DPO-UP Opt. SV26
DPO/MSO70000 Series ≥2.5 GHz	Opt. SV23 (IEEE802.11a/b/g/j/p)	DPO-UP Opt. SV23
Option SV23 required for SV24	Opt. SV24 (IEEE802.11n)	DPO-UP Opt .SV24
Option SV24 required for SV25	Opt. SV25 (IEEE802.11ac)	DPO-UP Opt. SV25
DPO/MSO70000 Series ≥2.5 GHz	Opt. SV27 (Bluetooth)	DPO-UP Opt. SV27
DPO/MSO70000 Series ≥1 GHz	Opt. SV28 (LTE Downlink)	DPO-UP Opt. SV28
DPO70000 SX Series only	Opt. SV30 (IEEE 802.11ad/ay)	DPO-UP Opt. SV30

Legacy models

DPO7000 Series, DPO/DSA/MSO70000 Series

Earlier DPO/DSA/MSO70000 Series oscilloscopes may be retrofitted with SignalVu. These instruments use a Microsoft Windows XP operating system, have oscilloscope firmware version 5.1 or above, and are compatible with SignalVu version 2.3.0072. See upgrade nomenclature table above for ordering information. Option SVO (OFDM), Option SVA (AM/FM/PM Audio), and Options SV23, SV23, SV25, SV26, SV27, SV28, SV30 (WLAN, Bluetooth, WiGig, LTE and P25) are not available on instruments with Microsoft Windows XP.

Tektronix is registered to ISO 9001:2015 and ISO 14001:2015.

GPIB IEEE-488

Product(s) complies with IEEE Standard 488.1-1987, RS-232-C, and with Tektronix Standard Codes and Formats.

Bluetooth®

Bluetooth is a registered trademark of Bluetooth SIG, Inc.

LTE is a trademark of ETSI.

Contact Information:

Australia 1 800 709 465
Austria* 00800 2255 4835
Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777
Belgium* 00800 2255 4835
Brazil +55 (11) 3530-8901
Canada 1 800 833 9200
Central East Europe / Baltics +41 52 675 3777
Central Europe / Greece +41 52 675 3777
Denmark +45 80 88 1401
Finland +41 52 675 3777
France* 00800 2255 4835
Germany* 00800 2255 4835
Hong Kong 400 820 5835
India 000 800 650 1835
Indonesia 007 803 601 5249
Italy 00800 2255 4835
Japan 81 (3) 6714 3086
Luxembourg +41 52 675 3777
Malaysia 1 800 22 55835
Mexico, Central/South America and Caribbean 52 (55) 88 69 35 25
Middle East, Asia, and North Africa +41 52 675 3777
The Netherlands* 00800 2255 4835
New Zealand 0800 800 238
Norway 800 16098
People's Republic of China 400 820 5835
Philippines 1 800 1601 0077
Poland +41 52 675 3777
Portugal 80 08 12370
Republic of Korea +82 2 565 1455
Russia / CIS +7 (495) 6647564
Singapore 800 6011 473
South Africa +41 52 675 3777
Spain* 00800 2255 4835
Sweden* 00800 2255 4835
Switzerland* 00800 2255 4835
Taiwan 886 (2) 2656 6688
Thailand 1 800 011 931
United Kingdom / Ireland* 00800 2255 4835
USA 1 800 833 9200
Vietnam 12060128
*** European toll-free number. If not accessible, call:** +41 52 675 3777

Find more valuable resources at TEK.COM

Copyright © Tektronix. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks or registered trademarks of their respective companies.

37W-22314-26 9 Nov 2026