


Digital Storage Oscilloscopes

TDS1000B Series Data Sheet

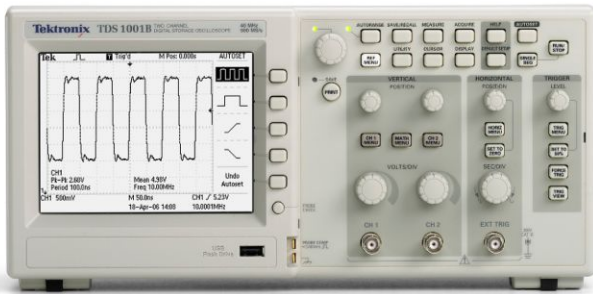

The TDS1000B Series digital storage oscilloscopes deliver an unbeatable combination of performance and ease of use, at a price you can afford.

Key performance specifications

- 40 MHz, 60 MHz, and 100 MHz bandwidths
- Sample rates up to 1 GS/s real time

Key features

- 2 channels
- Monochrome LCD display
- Advanced triggers including pulse width trigger and line-selectable video trigger
- FFT standard on all models
- 12 automatic measurements
- Multiple-language user interface and context-sensitive help
- Lifetime Warranty (Limitations apply. For terms and conditions, visit www.tek.com/lifetimewarranty)

Connectivity

- Removable data storage using the front-panel USB port
- Seamless PC connectivity through the USB device port, with OpenChoice® and NI SignalExpress® PC software
- Direct print to all PictBridge®-compatible printers through the USB device port

Applications

- Design and debug
- Education and training


- Manufacturing test and quality control
- Service and repair

Affordable digital precision

With up to 100 MHz bandwidth and 1 GS/s maximum sample rate, no other digital storage oscilloscope offers as much bandwidth and sample rate for the price. The TDS1000B Series oscilloscopes provide accurate real-time acquisition up to their full bandwidth, the same record length at all time base settings, advanced triggers to isolate signals of interest, and 12 standard automatic measurements on all models. Their Fast Fourier Transform (FFT) and waveform add, subtract, and multiply math functions allow you to analyze, characterize, and troubleshoot circuits.

Quick and easy waveform capture

The simple user interface with classic analog-style controls makes these instruments easy to use, reducing learning time and increasing efficiency. Innovative features such as the Autoset Menu, Probe Check Wizard, and Context-sensitive Help Menu optimize instrument setup and operation.

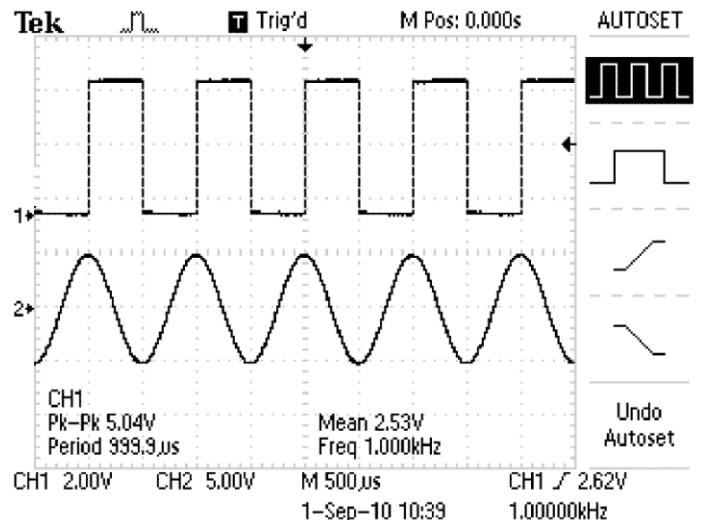

Quickly and easily capture waveforms.

Flexible data transfer


With USB host and device ports which enable removable data storage, seamless PC connectivity, and direct printing, no other digital storage oscilloscope offers as much flexibility and ease of data transfer for the price.



Conveniently use your USB flash drive to store screenshots and waveform data.

Simple documentation and analysis

Easily capture, save, and analyze measurement results with OpenChoice® PC Communications Software. Simply pull screen images and waveform data into the stand-alone desktop application or directly into Microsoft® Word and Excel. To complement OpenChoice®, National Instruments SignalExpress™ Tektronix Edition Software provides you with extended capabilities, including advanced analysis, remote oscilloscope control, and live waveform analysis. Alternatively, if you prefer not to use the PC, you can simply print your image directly to any PictBridge®-compatible printer using the USB device port.

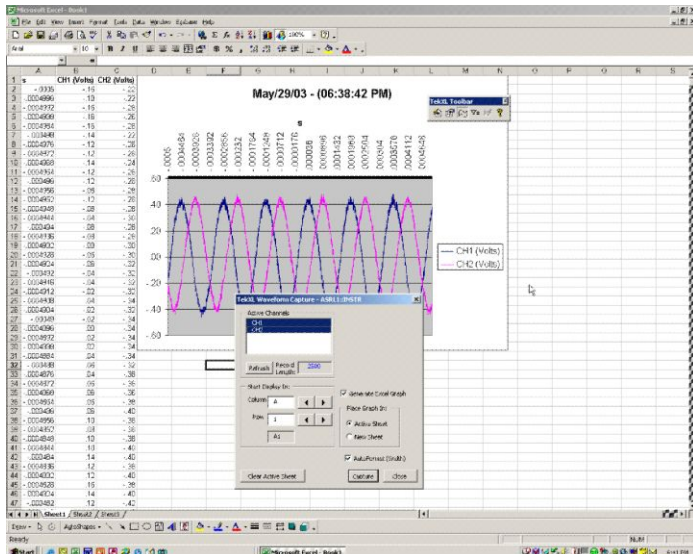

Easily capture, save, and analyze measurement results with OpenChoice® PC Communications Software.


Performance you can count on

Depend on Tektronix to provide you with performance you can count on. In addition to industry-leading service and support, every TDS1000B Series oscilloscope comes backed with a Lifetime Warranty as standard.

Limitations apply. For terms and conditions, visit www.tek.com/lifetimewarranty.

Complete measurement solution

The AFG3000 Series arbitrary function generator pairs with the TDS1000B Series digital storage oscilloscopes to deliver the two elements of a complete measurement solution – stimulus and acquisition. This instrument combines the capabilities of a function generator with the power of an arbitrary waveform generator, offering the performance needed to accurately verify, validate, and characterize designs with ease and confidence at a price you can afford.

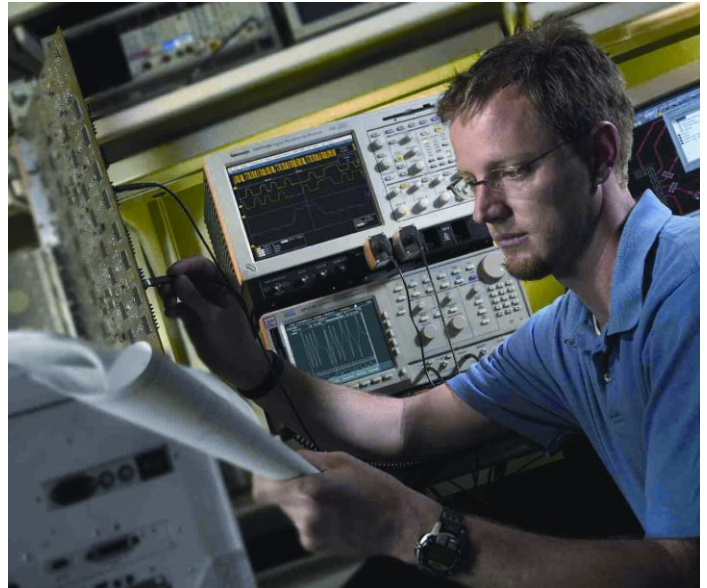

The Tektronix customer service advantage

You can trust Tektronix to offer unequaled engineering expertise and a customer-centric approach to ensure the optimal performance of your Tektronix products and maximize the lifetime value of your Tektronix investment. With service from Tektronix you get:

- Access to the source of product knowledge; unsurpassed technical expertise
- Your challenges solved by front-line technical experts, design engineering reinforcement, and online support tools
- Comprehensive and thorough support provided worldwide, including software and firmware updates, data reports, and adjustments
- Efficiency and convenience; no-hassle service from initial service call to turnaround and delivery
- Flexible repair and calibration service with access to the best on-call technical trouble shooting staff in the industry, with over 20 years of training per support engineer
- Customer-centric approach dedicated to serving your needs everyday with services designed to optimize your product performance, increase productivity and ROI by delivering a fixed cost of ownership, and efficient management of service

Specifications

All specifications are guaranteed unless noted otherwise. All specifications apply to all models unless noted otherwise.

Model overview

| | TDS1001B | TDS1002B | TDS1012B |
|--|-------------------------------|-------------------------------|-------------------------------|
| Analog channels | 2 | 2 | 2 |
| Bandwidth (20 MHz at 2 mV/div, all models) | 40 MHz | 60 MHz | 100 MHz |
| Sample rate (each channel) | 500 MS/s | 1.0 GS/s | 1.0 GS/s |
| Record length (all channels) | 2.5K points at all time bases | 2.5K points at all time bases | 2.5K points at all time bases |

Vertical system – Analog channels

| | |
|--------------------------------|---|
| Vertical resolution | 8 bits |
| Input sensitivity range | 2 mV to 5 V/div on all models with calibrated fine adjustment |
| DC gain accuracy | ±3%, from 10 mV/div to 5 V/div |
| Maximum input voltage | 300 V _{RMS} CAT II; derated at 20 dB/decade above 100 kHz to 13 V _{p-p} AC at 3 MHz |
| Offset range | 2 mV to 200 mV/div: ±1.8 V >200 mV to 5 V/div: ±45 V |
| Bandwidth limit | 20 MHz |
| Input coupling | AC, DC, GND |
| Input impedance | 1 MΩ in parallel with 20 pF |

Horizontal system – Analog channels

| | |
|---------------------------|------------------|
| Time base range | 5 ns to 50 s/div |
| Time base accuracy | 50 ppm |

Input/Output ports

| | |
|-----------------------|--|
| USB interface | USB host port on front panel supports USB flash drives USB device port on back of instrument supports connection to PC and all PictBridge®-compatible printers |
| GPIB interface | Optional |

Data storage

Nonvolatile storage

| | |
|---|---|
| Reference waveform display | 2.5K point reference waveforms |
| Waveform storage without USB flash drive | 2.5K point |
| Maximum USB flash drive size | 64 GB |
| Waveform storage with USB flash drive | 96 or more reference waveforms per 8 MB |
| Setups without USB flash drive | 10 front-panel setups |
| Setups with USB flash drive | 4000 or more front-panel setups per 8 MB |
| Screen images with USB flash drive | 128 or more screen images per 8 MB (the number of images depends on file format selected) |
| Save All with USB flash drive | 12 or more Save All operations per 8 MB A single Save All operation creates 3 to 9 files (setup, image, plus one file for each displayed waveform) |

Acquisition system

Acquisition modes

| | |
|------------------------|---|
| Peak Detect | High-frequency and random glitch capture. Captures glitches as narrow as 12 ns (typical) at all time base settings from 5 μ s/div to 50 s/div |
| Sample | Sample data only |
| Average | Waveform averaged, selectable: 4, 16, 64, 128 |
| Single Sequence | Use the Single Sequence button to capture a single triggered acquisition sequence |
| Roll | At acquisition time base settings of >100 ms/div |

Trigger system

| | |
|--------------------------------|---|
| External trigger input | Included on all models |
| Trigger modes | Auto, Normal, Single Sequence |
| Trigger types | |
| Edge (Rising/Falling) | Conventional level-driven trigger. Positive or negative slope on any channel. Coupling selections: AC, DC, Noise Reject, HF Reject, LF Reject |
| Video | Trigger on all lines or individual lines, odd/even or all fields from composite video, or broadcast standards (NTSC, PAL, SECAM) |
| Pulse Width (or Glitch) | Trigger on a pulse width less than, greater than, equal to, or not equal to, a selectable time limit ranging from 33 ns to 10 s |
| Trigger source | Four channel models: CH1, CH2, CH3, CH4, Ext, Ext/5, AC Line |

Waveform measurements**Cursors**

| | |
|---------------------|--|
| Types | Amplitude, Time |
| Measurements | ΔT , $1/\Delta T$, ΔV |

| | |
|-------------------------------|---|
| Automatic measurements | Period, Frequency, +Width, -Width, Rise Time, Fall Time, Max, Min, Peak-to-Peak, Mean, RMS, Cycle RMS, Cursor RMS, Duty Cycle, Phase, and Delay |
|-------------------------------|---|

Waveform math

| | |
|-------------------|-------------------------|
| Arithmetic | Add, Subtract, Multiply |
|-------------------|-------------------------|

| | |
|-----------------------|-----|
| Math functions | FFT |
|-----------------------|-----|

| | |
|------------|--|
| FFT | Windows: Hanning, Flat Top, Rectangular 2048 sample points |
|------------|--|

Display system

| | |
|---------------------|---|
| Display type | ¼ VGA backlit passive LCD with adjustable multilevel contrast and inverse video selectable from front panel |
|---------------------|---|

| | |
|---------------------|---|
| Autoset menu | Single-button, automatic setup of all channels for vertical, horizontal, and trigger systems, with undo Autoset |
|---------------------|---|

| | |
|--------------------|--|
| Square wave | Single Cycle, Multicycle, Rising or Falling Edge |
|--------------------|--|

| | |
|------------------|--|
| Sine wave | Single Cycle, Multicycle, FFT Spectrum |
|------------------|--|

| | |
|---------------------------------|--|
| Video (NTSC, PAL, SECAM) | Field: All, Odd, or Even Line: All or Selectable Line Number |
|---------------------------------|--|

| | |
|----------------------|-----------|
| Interpolation | Sin (x)/x |
|----------------------|-----------|

| | |
|------------------------|---------------|
| Waveform styles | Dots, vectors |
|------------------------|---------------|

| | |
|--------------------|------------------------------|
| Persistence | Off, 1 s, 2 s, 5 s, infinite |
|--------------------|------------------------------|

| | |
|---------------|-----------|
| Format | YT and XY |
|---------------|-----------|

| | |
|----------------------------|--|
| Languages available | English, French, German, Italian, Japanese, Korean, Portuguese, Russian (requires Russian firmware, indicated by "RUS" suffix), Simplified Chinese, Spanish, Traditional Chinese |
|----------------------------|--|

Environmental**Temperature**

| | |
|------------------|-------------|
| Operating | 0 to +50 °C |
|------------------|-------------|

| | |
|---------------------|---------------|
| Nonoperating | -40 to +71 °C |
|---------------------|---------------|

Humidity

| | |
|-----------------------------------|---------------------------------|
| Operating and nonoperating | Up to 85% RH at or below +40 °C |
|-----------------------------------|---------------------------------|

Up to 45% RH up to +50 °C

Altitude

| | |
|-----------------------------------|---------------------------|
| Operating and nonoperating | Up to 3,000 m (9,843 ft.) |
|-----------------------------------|---------------------------|

Regulatory

| | |
|--------------------------------------|---|
| Electromagnetic compatibility | Meets Directive 2004/108/EC, EN 61326-2-1 Class A; Australian EMC Framework |
|--------------------------------------|---|

| | |
|---------------|---|
| Safety | UL61010-1:2004, CSA22.2 No. 61010-1:2004, EN61010-1:2001, IEC61010-1:2001 |
|---------------|---|

Physical characteristics**Dimensions**

| | mm | in. |
|--------|-------|-------|
| Height | 158.0 | 6.22 |
| Width | 326.3 | 12.85 |
| Depth | 124.2 | 4.89 |

Shipping dimensions

| | mm | in. |
|--------|-------|-------|
| Height | 266.7 | 10.5 |
| Width | 476.2 | 18.75 |
| Depth | 228.6 | 9.0 |

Weight

| | kg | lb. |
|---------------------|-----|-----|
| Instrument only | 2.0 | 4.4 |
| ...with accessories | 2.2 | 4.9 |

Ordering Information

TDS1000 models

| | |
|----------|--|
| TDS1001B | 40 MHz, 2 Ch, 500 MS/s, Monochrome DSO |
| TDS1002B | 60 MHz, 2 Ch, 1 GS/s, Monochrome DSO |
| TDS1012B | 100 MHz, 2 Ch, 1 GS/s, Monochrome DSO |

Instrument options

Power plug options

| | |
|----------|--|
| Opt. A0 | North America power plug (115 V, 60 Hz) |
| Opt. A1 | Universal Euro power plug (220 V, 50 Hz) |
| Opt. A2 | United Kingdom power plug (240 V, 50 Hz) |
| Opt. A3 | Australia power plug (240 V, 50 Hz) |
| Opt. A5 | Switzerland power plug (220 V, 50 Hz) |
| Opt. A6 | Japan power plug (100 V, 50/60 Hz) |
| Opt. A10 | China power plug (50 Hz) |
| Opt. A11 | India power plug (50 Hz) |
| Opt. A99 | No power cord |

Language options

| | |
|----------|----------------------------|
| Opt. L0 | English manual |
| Opt. L1 | French manual |
| Opt. L2 | Italian manual |
| Opt. L3 | German manual |
| Opt. L4 | Spanish manual |
| Opt. L5 | Japanese manual |
| Opt. L6 | Portuguese manual |
| Opt. L7 | Simplified Chinese manual |
| Opt. L8 | Traditional Chinese manual |
| Opt. L9 | Korean manual |
| Opt. L10 | Russian manual |

Language options include translated front-panel overlay for the selected language(s).

Service options

| | |
|---|--|
| Opt. CA1 | Single Calibration or Functional Verification |
| Opt. D1 | Calibration Data Report |
| TDSxxxxB-CA1 (Available after purchase) | Provides a single calibration event or coverage for the designated calibration interval, whichever comes first |

Language options include translated front-panel overlay for the selected language(s). Probes and accessories are not covered by the oscilloscope warranty and Service Offerings. Refer to the datasheet of each probe and accessory model for its unique warranty and calibration terms.

Standard accessories

Probes

| | |
|---|--|
| — | 200 MHz Passive Probe (One per analog channel) |
|---|--|

Accessories

Please specify power plug and manual language version when ordering.

| | |
|---|---|
| — | Traceable Certificate of Calibration |
| — | Power Cord |
| — | User Manual |
| — | OpenChoice® Desktop Software |
| — | NI LabVIEW SignalExpress™ Tektronix Edition LE Software |

Recommended accessories

Probes

| | |
|------------------|---|
| P2220 | 10X to 1X Switchable Passive Probe (200 MHz when 10X is selected) |
| P6101B | 1X Passive Probe (15 MHz, 300 V _{RMS} CAT II rating) |
| P6015A | 1000X High-voltage Passive Probe (75 MHz) |
| P5100 | 100X High-voltage Passive Probe (250 MHz) |
| P5200 | High-voltage Active Differential Probe (25 MHz) |
| P6021 | 15 A, 60 MHz AC Current Probe |
| P6022 | 6 A, 120 MHz AC Current Probe |
| A621 | 2000 A, 5 to 50 kHz AC Current Probe |
| A622 | 100 A, 100 kHz AC/DC Current Probe/BNC |
| TCP303/TCPA300 | 150 A, 15 MHz AC/DC Current Probe/Amplifier |
| TCP305/TCPA300 | 50 A, 50 MHz AC/DC Current Probe/Amplifier |
| TCP312/TCPA300 | 30 A, 100 MHz AC/DC Current Probe/Amplifier |
| TCP404XL/TCPA400 | 500 A, 2 MHz AC/DC Current Probe/Amplifier |

Accessories

| | |
|--------------------|--|
| TEK-USB-488 | GPIO-to-USB Converter |
| SIGEXPTE | National Instruments SignalExpress Tektronix Edition Interactive Measurement Software – Professional Version |
| AC2100 | Soft Carrying Case for Instrument |
| HCTEK4321 | Hard Plastic Carrying Case for Instrument (requires AC2100) |
| RM2000B | Rackmount Kit |
| 071-1075-xx | Programmer's Manual – English Only |
| 071-1828-xx | Service Manual – English Only |
| 174-4401-xx | USB Host-to-Device Cable, 3 ft. long |

Lifetime Warranty

Covers labor and parts for defects in materials and workmanship for a minimum of 10 years, excluding probes and accessories. Lifetime is defined as 5 years after Tektronix discontinues manufacturing the product, but the warranty length shall be at least 10 years from date of original purchase. Lifetime warranty is nontransferable, proof of original purchase is required. Limitations apply. For terms and conditions visit www.tektronix.com/lifetimewarranty.



Tektronix is registered to ISO 9001 and ISO 14001 by SRI Quality System Registrar.



Product(s) complies with IEEE Standard 488.1-1987, RS-232-C, and with Tektronix Standard Codes and Formats.

ASEAN / Australasia (65) 6356 3900
Belgium 00800 2255 4835*
Central East Europe and the Baltics +41 52 675 3777
Finland +41 52 675 3777
Hong Kong 400 820 5835
Japan 81 (3) 6714 3010
Middle East, Asia, and North Africa +41 52 675 3777
People's Republic of China 400 820 5835
Republic of Korea +822 6917 5084, 822 6917 5080
Spain 00800 2255 4835*
Taiwan 886 (2) 2656 6688

Austria 00800 2255 4835*
Brazil +55 (11) 3759 7627
Central Europe & Greece +41 52 675 3777
France 00800 2255 4835*
India 000 800 650 1835
Luxembourg +41 52 675 3777
The Netherlands 00800 2255 4835*
Poland +41 52 675 3777
Russia & CIS +7 (495) 6647564
Sweden 00800 2255 4835*
United Kingdom & Ireland 00800 2255 4835*

Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777
Canada 1 800 833 9200
Denmark +45 80 88 1401
Germany 00800 2255 4835*
Italy 00800 2255 4835*
Mexico, Central/South America & Caribbean 52 (55) 56 04 50 90
Norway 800 16098
Portugal 80 08 12370
South Africa +41 52 675 3777
Switzerland 00800 2255 4835*
USA 1 800 833 9200

* European toll-free number. If not accessible, call: +41 52 675 3777

For Further Information. Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit www.tek.com.

Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.



08 Feb 2016 3GW-25644-4

