



## NEXT-GENERATION OSCILLOSCOPES

3 Series MD0 / 4 Series MS0 / 5 Series MS0 / 6 Series MS0

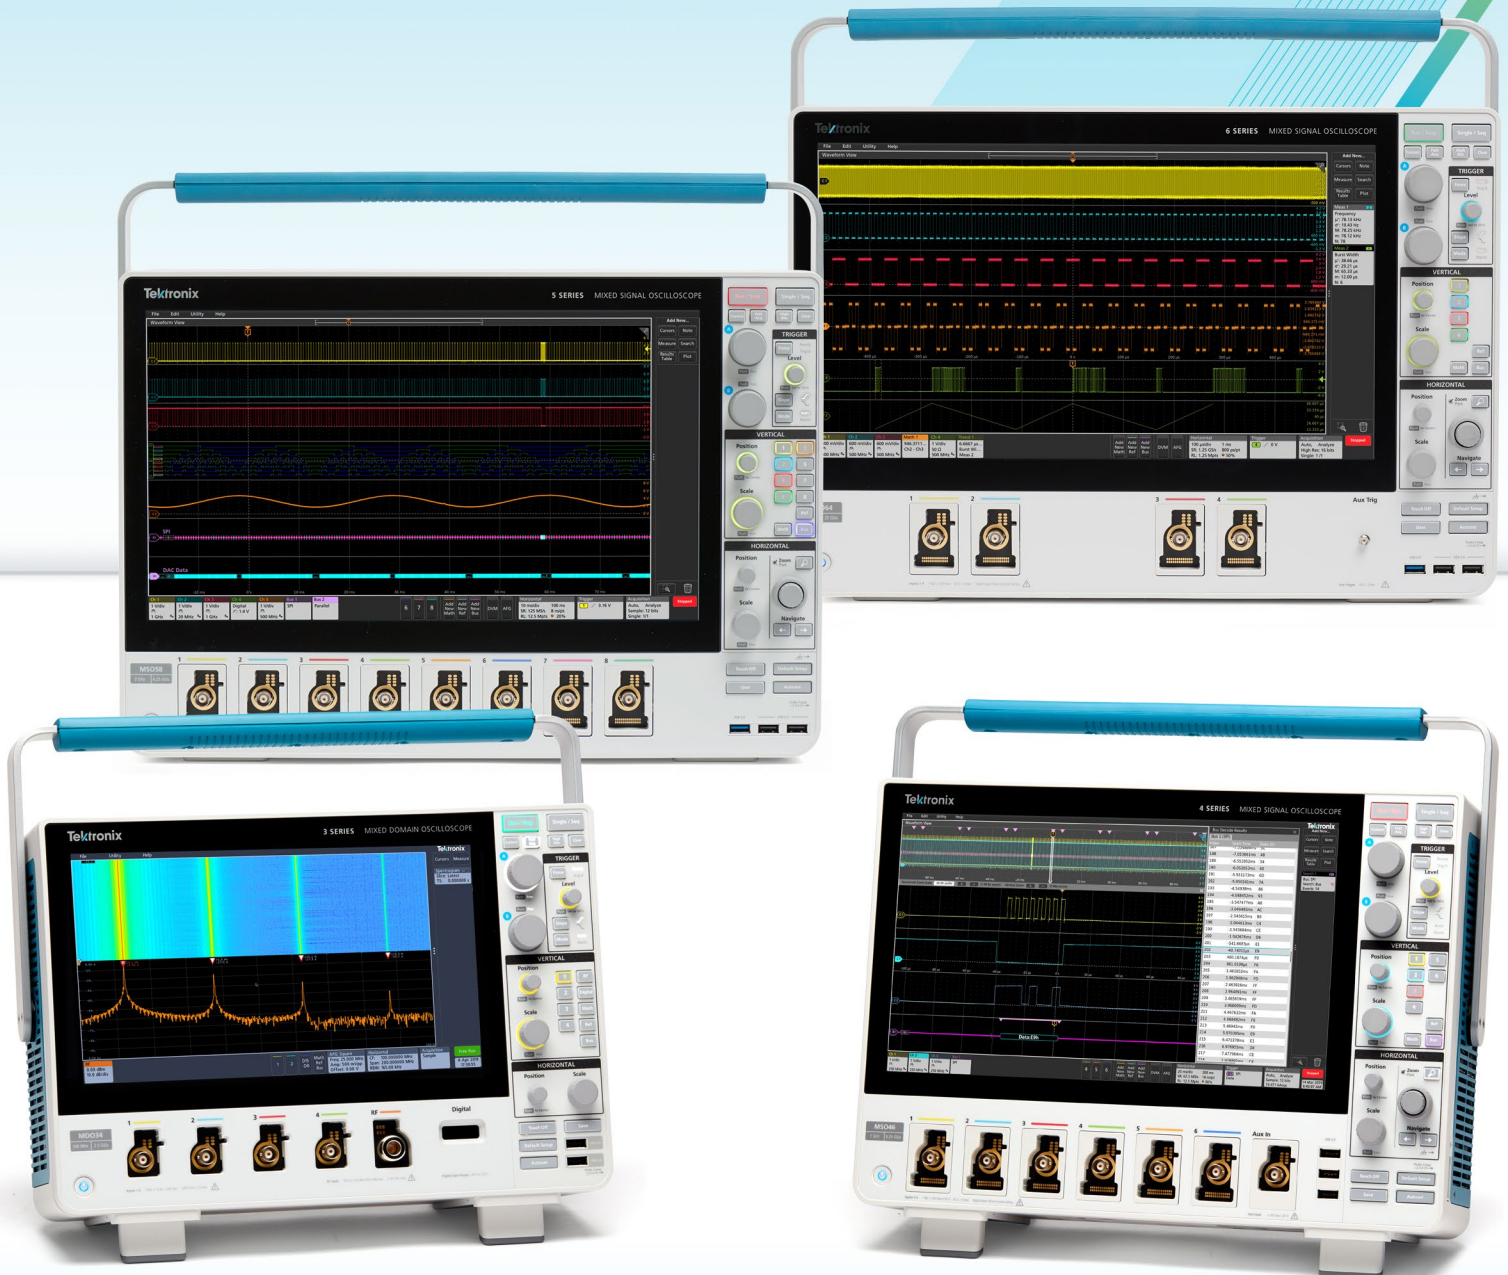

# Next-Generation Oscilloscopes

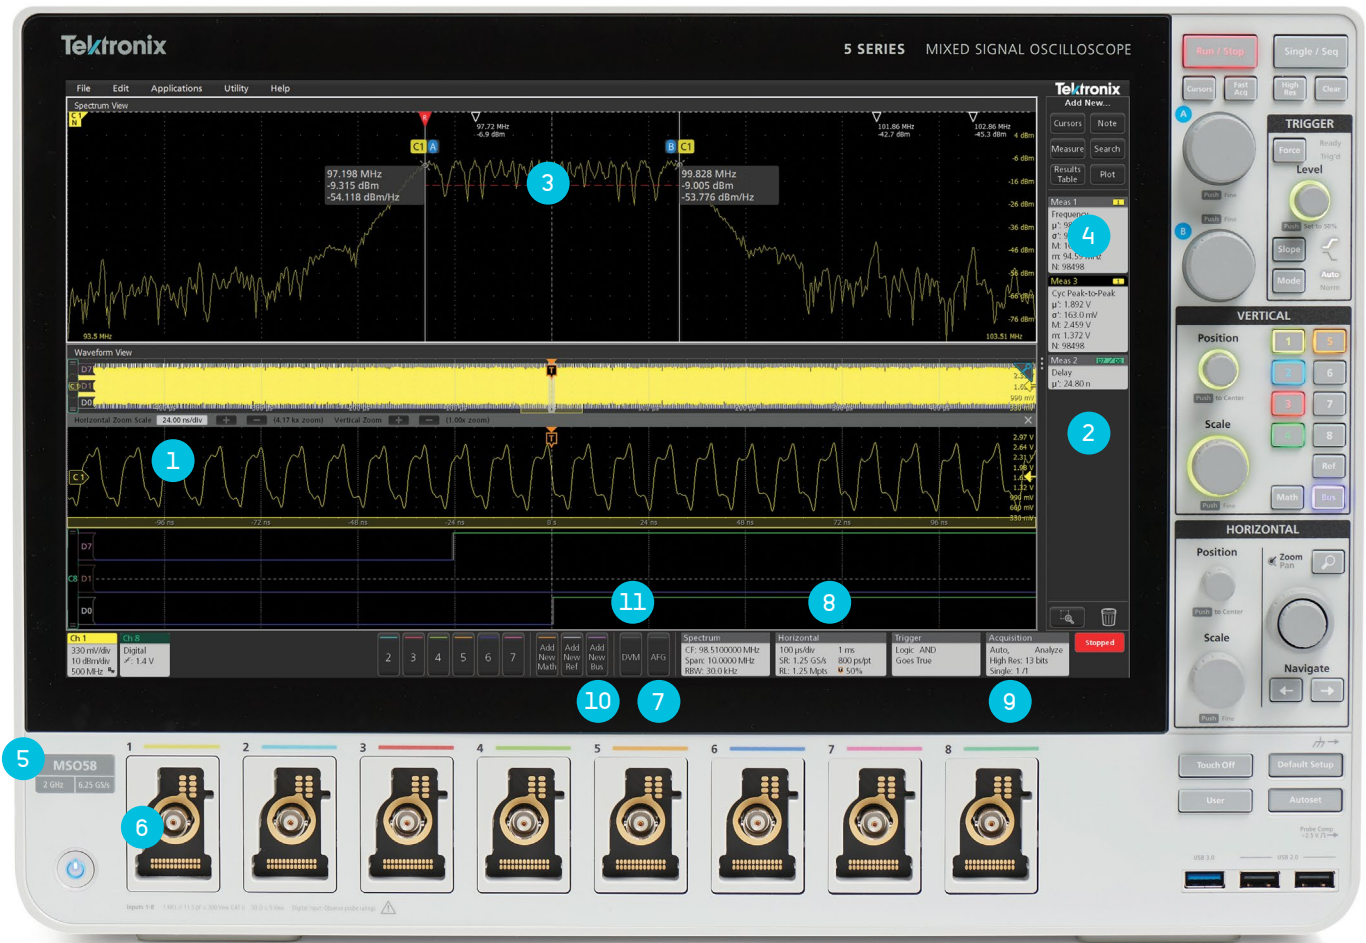

1) **User interface** designed for both touch and mouse

2) **Large touchscreen HD displays** (1,920 x 1,080)

3) **Integrated spectrum analysis**

- 4) **Powerful analysis**
- Automated measurements with trend, histogram, and spectrum plots
  - Optional jitter analysis
  - Power measurement options

- 5) **Bandwidth**
- Models from 100 MHz to 8 GHz
  - All models offer upgradeable bandwidth

6) **Input channels**

- 2 to 8 inputs depending on model

7) **Built in Arbitrary/Function Generator option**

8) **Record length**

- 10 Mpoints to 1 Gpoints depending on model

9) Up to 12-bit **vertical resolution** (up to 16 bits in High Res mode)

- 10) **Protocol options**
- Serial bus trigger and analysis
- I<sup>2</sup>C / SPI
  - SVID
  - I3C
  - MIL-STD-1533 / ARINC 429
  - RS-232 / UART
  - SpaceWire
  - SPMI
  - 8b10b
  - CAN / LIN / FlexRay
  - NRZ
  - USB 2.0
  - Automotive Ethernet
  - I2S Audio
  - SENT
  - eUSB2
  - PSI5
  - MDIO

11) **Integrated DVM and trigger frequency counter free with product registration**

Not all features shown are available on all oscilloscope models.

# Usability and Display



## Touch Interaction Done Right

These next-generation oscilloscopes feature the industry's first oscilloscope user interface truly designed for touch. The same intuitive gestures you use with your phone or tablet, work on the big HD displays and the gestures are common among the 3, 4, 5 and 6 Series.

- Control inputs, triggers and acquisitions by tapping badges in the settings bar at the bottom of the display
- Drag waveforms to adjust position or to pan
- Pinch to change horizontal or vertical scale

3 4 5 6


## Stunning HD Displays

The 15.6" displays on 5 and 6 Series MSOs have 1920 x 1080 HD resolution. You can see many signals at once, along with critical readouts and plots for an extensive view of your system.

Even with their bench-friendly footprints, the 3 and 4 Series offer the largest displays in their classes, with full 1920 x 1080 HD resolution.

3 4 5 6

1920 x 1080 pixels

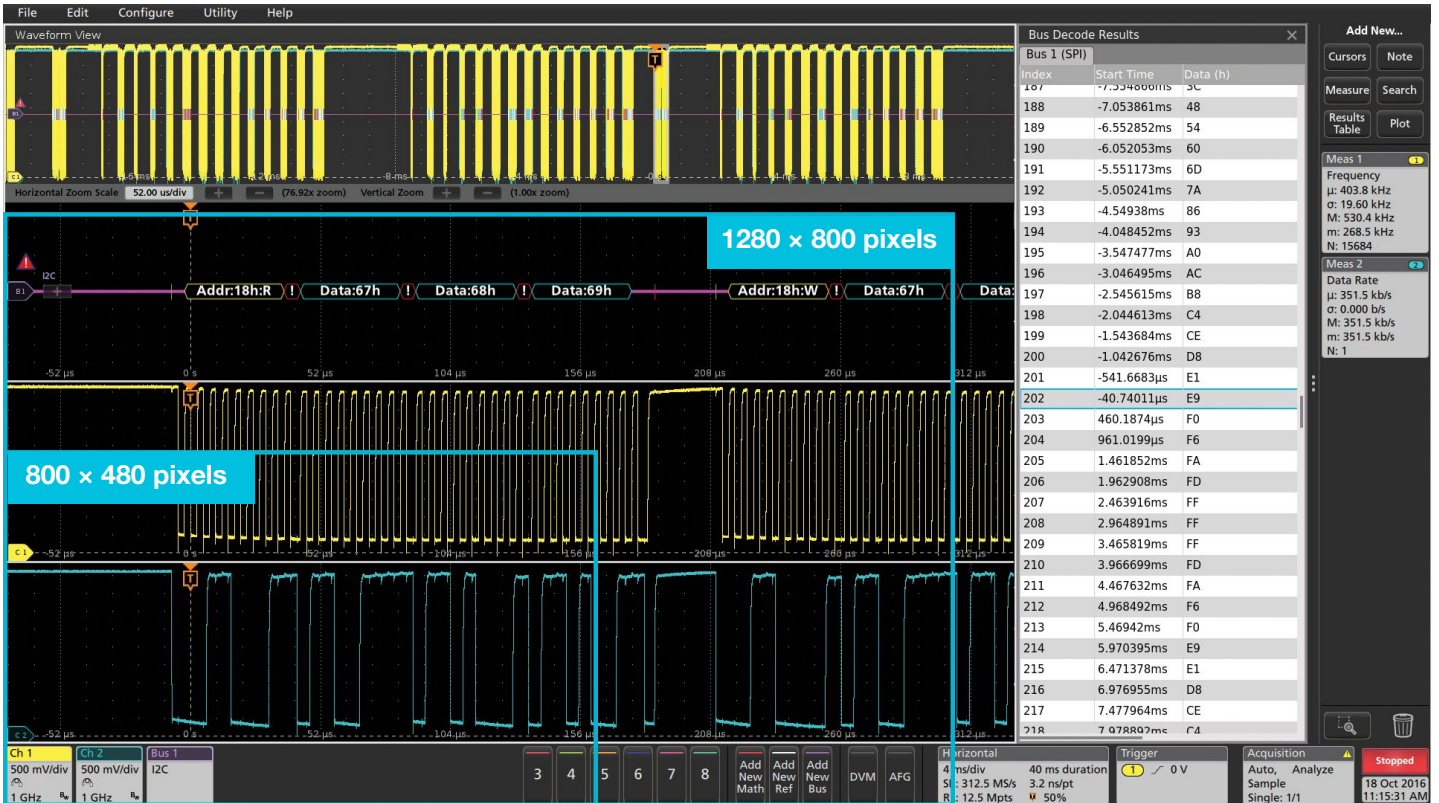

Display resolution on some competitors' products is as low as 800 x 480 pixels. That's less than 20% of the 1920 x 1080 pixel display resolution of the 3, 4, 5, and 6 Series products. Even larger 1280 x 800 pixels do not provide the same level of detail.

# Performance and Measurements

## More Inputs and Mixed Signal Analysis

The 4 and 5 Series MSOs let you see more signals by going beyond the traditional 4-channel limit, offering up to 8 analog input channels

FlexChannel® inputs on the 4, 5, and 6 Series MSOs expand your visibility even further. Whenever you need to see more signals, just plug a TLP058 logic probe into any input. The single analog channel converts to 8 digital channels. FlexChannel inputs are backward-compatible with TekVPI probes.


The 3 Series MDO offers 16 digital channels through a dedicated logic probe, included with the MSO option.



## Industry-leading Vertical Resolution

See more signal detail. The 4, 5, and 6 Series MSOs feature 12-bit analog-to-digital converters (ADCs) that provide 16 times more vertical resolution than common 8-bit ADCs.

A new High Res mode further boosts vertical resolution and uses smart filtering to limit noise. High Res mode always provides at least 12 bits and extends all the way to 16 bits of vertical resolution.

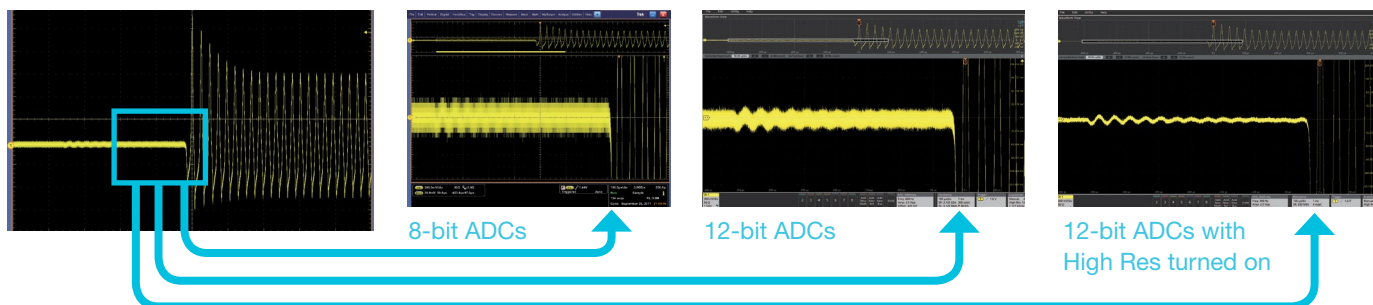


## Stacked Display Mode


Most scopes display all waveforms in the same graticule and rely on vertical scale controls to fit signals on the display. Each waveform uses a fraction of the available ADC range, leading to less accurate measurements.

New stacked display mode lets you view each waveform in its own “slice” of the display. Each slice represents the full ADC range for the waveform for more accurate measurements.

The more traditional overlay display mode is also available, for easy direct comparison of waveforms.

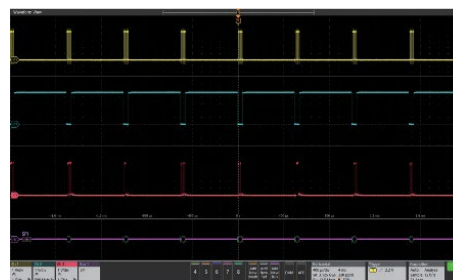

New stacked display mode

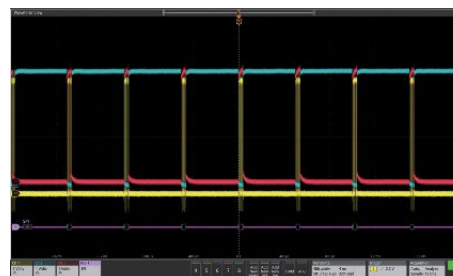

Traditional overlay display mode


## Powerful Measurements

The Results Bar on the right side of the display includes immediate, one tap access to the most common analytical tools such as:

- Cursors
- Automated measurements
- Measurement statistics
- Searches
- Bus decode tables

These scopes deliver rich insights by providing easy access to measurement statistics. Turn on statistics in the Results Bar to get a quick overview.

3 4 5 6

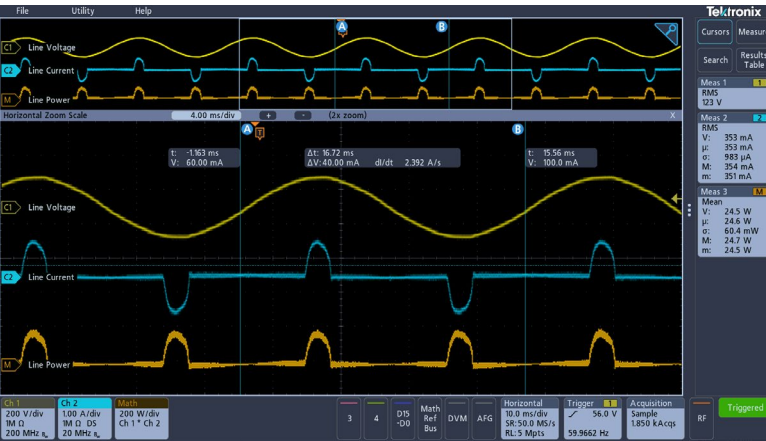


## Advanced Measurements and Analysis

Dive into measurements with Results Tables. Results Tables show statistics for the current acquisition and for all acquisitions. Get insight into one measurement, a hundred measurements, or millions of measurements at a glance.

Plots, such as measurement trends and histograms, deliver quick insight.


4 5 6

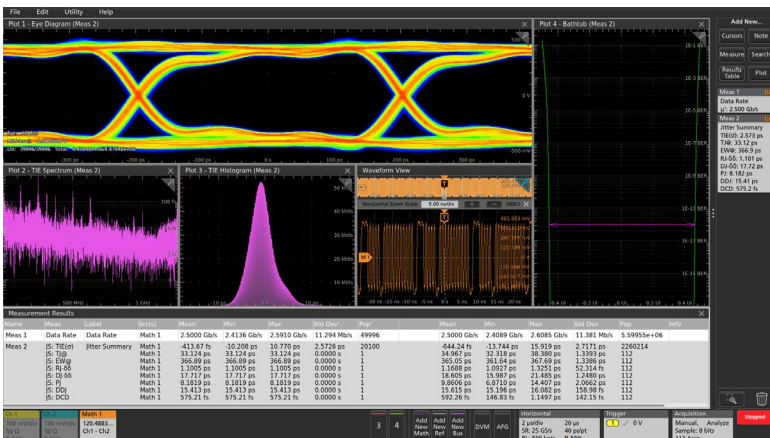

## FastAcq™ High Speed Waveform Capture

FastAcq captures at high speed to increase the probability of seeing infrequent problems such as runt pulses, glitches, timing issues, and more.

3 4 5 6

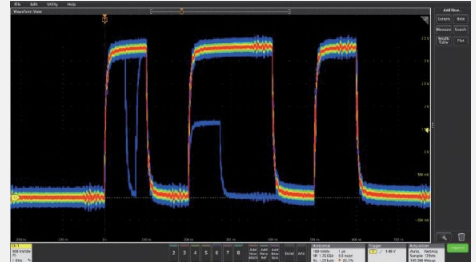

## FastFrame™ Segmented Memory

Make the most efficient use of acquisition memory by not storing deadtime between serial packets or bursts. Capture many triggered frames in a single record.

4 5 6




## Triggering and Search

A complete set of basic and advanced triggers and search criteria.

- Runt
- Logic
- Pulse width
- Timeout
- Rise/Fall time
- Setup and hold violations
- Serial and parallel bus activity
- Sequence
- Visual triggers\*
- RF vs Time
- Window\*

\* 4,5,6 Series only


3 4 5 6

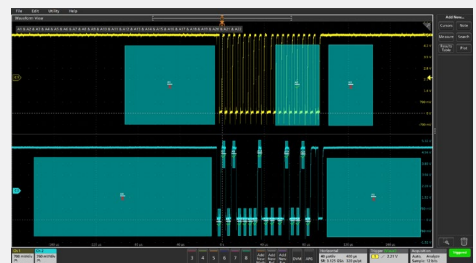

# An Oscilloscope for Every Engineer





## 3 SERIES MDO

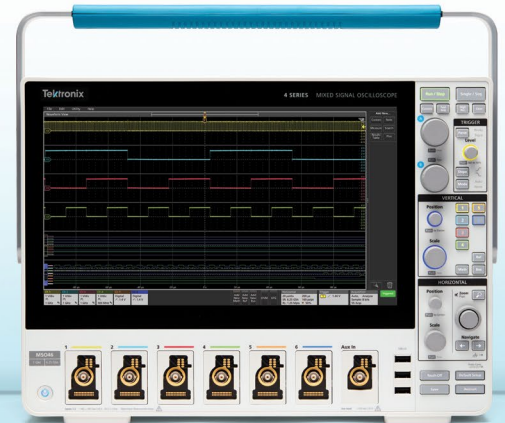

## 4 SERIES MSO

<b>Bandwidth</b>	100 MHz, 200 MHz, 350 MHz, 500 MHz, 1 GHz	200 MHz, 350 MHz, 500 MHz, 1 GHz, 1.5 GHz
<b>Max channels, analog</b>	4	6
<b>Max channels, digital</b>	16	48
<b>Inputs</b> (see page 4)	TekVPI inputs	FlexChannel inputs
<b>Max sample rate</b>	2.5 GS/s or 5 GS/s, all channels	6.25 GS/s, all channels
<b>Record length</b>	10 Mpoints	Up to 62.5 Mpoints
<b>Vertical resolution</b> (see page 4)	8 bits	12 bits
<b>Advanced analysis</b> (optional) (see page 9)	Serial bus Power	Serial bus Power
<b>Spectrum analysis</b> (see page 8)	Hardware Spectrum Analyzer (optional)	Spectrum View (optional)
<b>Operating system</b> (see page 8)	Embedded	Embedded
<b>Display</b> (see page 3)	11.6" HD, capacitive touch 1920 × 1080	13.3" HD, capacitive touch 1920 × 1080
<b>Starting price</b>	\$3,850	\$7,550

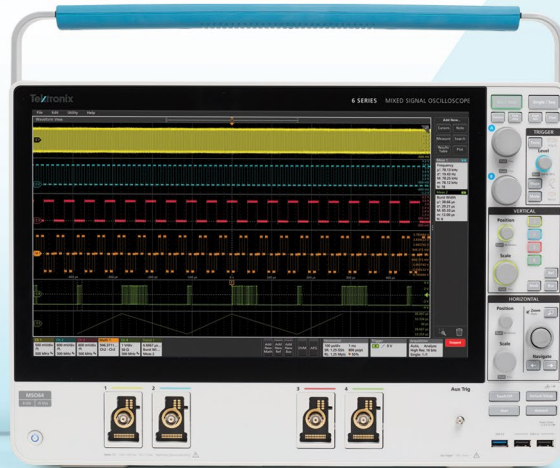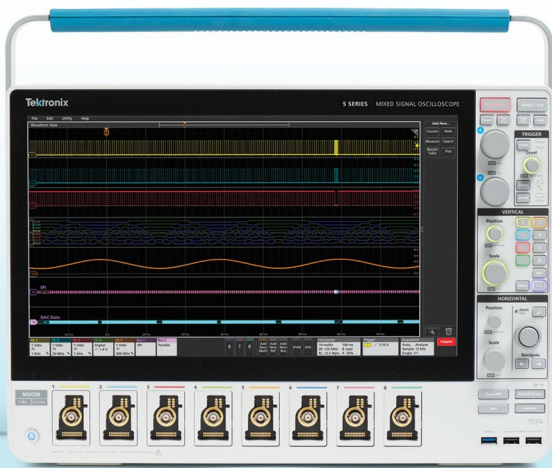

## 5 SERIES MSO

## 6 SERIES MSO

350 MHz, 500 MHz, 1 GHz, 2 GHz	1 GHz, 2.5 GHz, 4 GHz, 6 GHz, 8 GHz	<b>Bandwidth</b>
8	4	<b>Max channels, analog</b>
64	32	<b>Max channels, digital</b>
FlexChannel inputs	FlexChannel inputs	<b>Inputs</b> (see page 4)
6.25 GS/s, all channels	25 GS/s, all channels	<b>Max sample rate</b>
Up to 500 Mpoints	Up to 1 Gpoints	<b>Record length</b>
12 bits	12 bits	<b>Vertical resolution</b> (see page 4)
Serial bus Power Compliance Jitter Inverters, Motors and Drives	Serial bus Power Compliance Jitter DDR3	<b>Advanced analysis</b> (optional) (see page 9)
Spectrum View (standard)	Spectrum View (standard)	<b>Spectrum analysis</b> (see page 8)
Embedded Windows (optional)	Embedded Windows (optional)	<b>Operating system</b> (see page 8)
15.6" HD, capacitive touch 1920 × 1080	15.6" HD, capacitive touch 1920 × 1080	<b>Display</b> (see page 3)
\$14,500	\$26,500	<b>Starting price</b>

# Integrated Spectrum Analysis


## Spectrum View

Because traditional scope FFTs are driven by the same acquisition system that delivers the analog time-domain view, it is virtually impossible to get optimized views in both domains at once.

Spectrum View is different. It lets you independently adjust time- and frequency-domain views, by using patented technology behind each FlexChannel input. You can turn on a spectrum view for any analog channel, enabling multi-channel mixed domain analysis.

Intuitive spectrum analyzer controls like center frequency, span and resolution bandwidth (RBW) make setups easy, and RF vs time triggers make capturing anomalies straightforward.

4 5 6

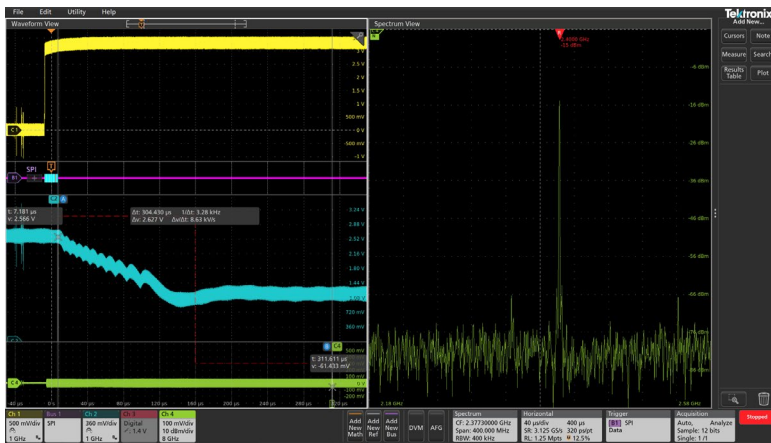


## Built-in Arbitrary/Function Generator (AFG)

An integrated function generator is perfect for testing frequency response, simulating sensor signals, and adding noise to signals for stress testing.

- 13 standard waveform functions
- 50 MHz Sine / 25 MHz Square and Pulse
- 128k, 250 MS/s arbitrary waveforms

3 4 5 6

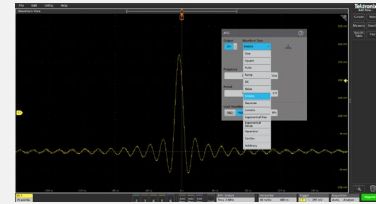

## Connectivity

Every instrument includes a USB port and LXI-compliant Ethernet port for remote control. A thoroughly documented programming interface supports custom programming.

With e\*Scope built-in, you can control the oscilloscope over a network through a standard web browser.


3 4 5 6



## Built-in Spectrum Analyzer

The Tektronix 3 Series MDO offers an integrated, hardware-based spectrum analyzer ranging from 9 kHz to 1 GHz or 3 GHz enabling spectral analysis on IoT and most consumer wireless standards.

3

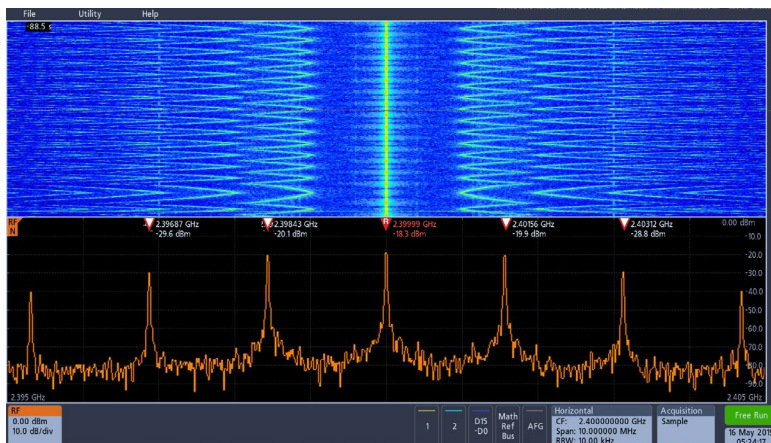

The Spectrogram display illustrates slowly moving RF phenomena. As the peaks change in both frequency and amplitude the changes are easy to see.

## Optional Windows OS

The 5 and 6 Series MSOs offer the option of including a Microsoft Windows™ operating system. The option provides a Windows desktop where you can install and run additional applications on the oscilloscope.

Upgrading to Windows is as simple as plugging in a pre-configured SSD.

5 6






# Applications and Advanced Analysis. Emphasis on Analysis.

Built-in features, available probes, and optional analysis packages support a wide range of applications.

3 4 5 6

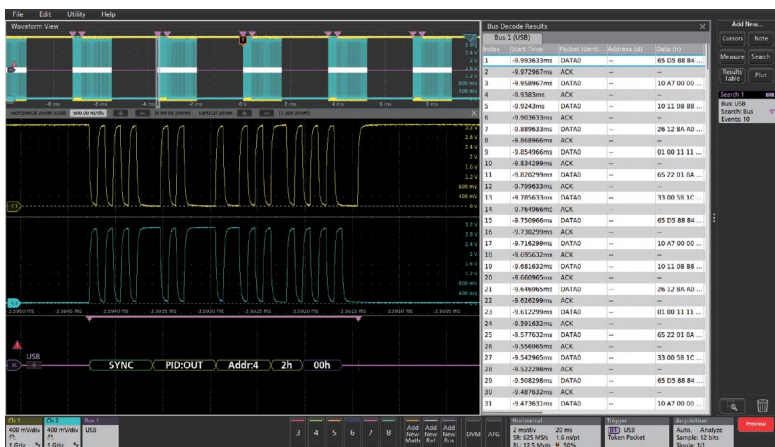

Serial protocol trigger / analysis (optional). Support is available for most common serial bus standards.




Power analysis packages enable automatic measurement of harmonics, switching loss and other key parameters.



EMI Troubleshooting. Spectrum analysis tools help find sources of unwanted emissions.




Power Integrity. Power rail probes and high channel count assist with power rail validation.

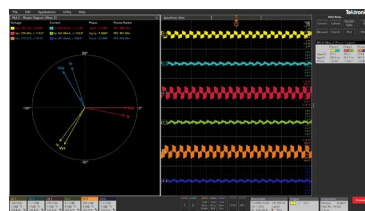


Debug motor drive designs by viewing the drive input/output voltage and current signals in the time domain simultaneously with the phasor diagram.

## Advanced Analysis

5 6

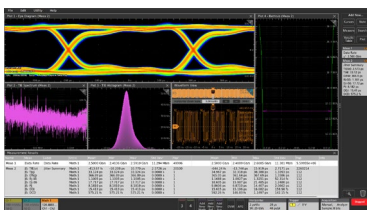

Jitter and timing analysis: Extended analysis functions such as eye diagrams and jitter analysis are optional.

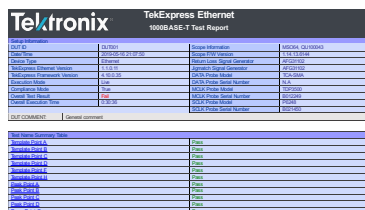

Automatic compliance test and debugging for popular serial standards.

## TLP058 Logic Probes

Have the right number of digital channels when you need them. Simply connect a TLP058 logic probe to any FlexChannel input and get 8 digital channels. Connect as many TLP058 probes you want.

4 5 6



### TLP058 Specifications

Number of input channels	8 digital
Input resistance	100 kΩ±1.0%
Input capacitance	3.0pF
Min. detectable pulse width	1ns
Max. input toggle rate	500 MHz
Cable length	1.0m

## Power Rail Probes

Probes designed especially for making accurate ripple measurements on power rails, with ± 60 V DC offset range, low noise contribution and bandwidth up to 4 GHz.

4 5 6



### TPR1000/TPR4000 Specifications

Bandwidth	TPR1000: 1 GHz TPR4000: 4 GHz
Attenuation	1.25X
Input impedance	50 kΩ DC - 10 kHz, 50 Ω AC > 100 kHz
Dynamic range	±1 V
Offset range	±60 V

For complete list of available probes visit [tek.com/probes](http://tek.com/probes)



TPP1000/TPP500B

### Passive Probes

Model	Bandwidth	Attenuation	Input Impedance	Maximum Voltage
TPP1000	1 GHz	10X	10 MΩ    3.9 pF	300 V <sub>rms</sub> (CAT II)
TPP0500B	500 MHz	10X	10 MΩ    3.9 pF	300 V <sub>rms</sub> (CAT II)
TPP0502	500 MHz	2X	2 MΩ    12.7 pF	300 V <sub>rms</sub> (CAT II)



TAP1500

### Active Probes

Model	Bandwidth	Attenuation	Input Impedance	Dynamic Range	Offset Range	Maximum Non-Destruct Voltage
TAP1500	1.5 GHz	10X	1 MΩ    ≤ 1 pF	±8 V	±10 V	±15 V
TAP2500	2.5 GHz	10X	40 kΩ    ≤ 0.8 pF	±4 V	±10 V	±30 V

### Differential Probes



TDP1500

Model	Bandwidth	Rise Time	Attenuation	Differential Operating Voltage	Ground Operating Voltage	Input resistance / Input capacitance
TDP0500	500 MHz	≤700ps	5X / 50X	±4.25 V (5X) ±42 V (50X)	±35 V	1MΩ/1pF differential
TDP1000	1 GHz	≤350ps	5X / 50X	±4.25 V (5X) ±42 V (50X)	±35 V	1MΩ/1pF differential
TDP1500	1.5 GHz	≤265ps	1X / 10X	±0.85 V (1X) ±8.5 V (10X)	±7.0 V	200KΩ/1pF differential
TDP3500	3.5 GHz	≤140ps	5X	±2 V	+ 5 to -4 V	100KΩ/0.3pF differential
TDP4000	4.0 GHz	≤126ps	5X	±2 V	+ 5 to -4 V	100KΩ/0.3pF differential

### High Voltage Probes



TPP0850

Model	Bandwidth	Max Voltage	Attenuation	Input Impedance	Compensation Range
P6015A	75 MHz	20 kV <sub>rms</sub> 40 kV peak	1000X	100 MΩ    ≤ 3 pF	7 pF – 49 pF
TPP0850	800 MHz	1000 V <sub>rms</sub> (CAT II) 2.5 kV peak	50X	40 MΩ    1.8 pF	Auto compensated by scope

### High Voltage Differential Probes



THDP0200

Model	Bandwidth	Rise Time	Attenuation	Maximum Differential Voltage	Maximum Voltage to Earth Ground	Differential Input Capacitance	Differential Input Resistance
TMDP0200	200 MHz	1.8 ns	25X / 250X	±750 V	550 V <sub>rms</sub> (CAT I)	2 pF	5 MΩ
THDP0200	200 MHz	1.8 ns	50X / 500X	±1500 V	1000 V <sub>rms</sub> (CAT II)	2 pF	10 MΩ
THDP0100	100 MHz	3.5 ns	100X / 1000X	±6000 V	2300 V <sub>rms</sub> (CAT I)	2.5 pF	40 MΩ

### Current Probes



TCP0030A

Model	Maximum Current	Minimum Current	Bandwidth	Rise Time
TCP0030A	30 A DC; 30 A <sub>rms</sub> ; 50 A peak	1 mA	DC - 120 MHz	≤ 2.92 ns
TCP0020	20 A DC; 20 A <sub>rms</sub> ; 100 A peak	10 mA	DC - 50 MHz	≤ 7 ns
TCP0150	150 A DC; 150 A <sub>rms</sub> ; 500 A peak	5 mA	DC - 20 MHz	≤ 17.5 ns

### High Bandwidth Differential Probes



TDP7708

Model	Bandwidth	Tekflex Accessory	Attenuation	Input Impedance	Differential Input Voltage	Operating Window	Offset Range
TDP7704	4 GHz	P77STFLXA, P77STLFXB, P77STCABL	4X	100kΩ    0.4 pF	5V	±5.25 V	±4 V
TDP7706	6 GHz						
TDP7708	8 GHz	P77BRWSR	10X	150kΩ    22 pF	12V	±10 V	±10 V
		P77C292MM	Variable	50Ω (SMA)	2V	±4 V	±4 V

# Options at a glance

For complete ordering details see the product datasheet or contact your local sales representative.

Base Models	3 Series MDO	4 Series MSO	5 Series MSO	6 Series MSO
2 TekVPI channels	MDO32			
4 TekVPI channels	MDO34			
4 FlexChannel Inputs		MSO44	MSO54	MSO64
6 FlexChannel Inputs		MSO46	MSO56	
8 FlexChannel Inputs			MSO58	
Bandwidth	3 Series MDO	4 Series MSO	5 Series MSO	6 Series MSO
	100 MHz, 200 MHz, 350 MHz, 500 MHz, 1 GHz	200 MHz, 350 MHz, 500 MHz, 1 GHz, 1.5 GHz	350 MHz, 500 MHz, 1 GHz, 2 GHz	1 GHz, 2.5 GHz, 4 GHz, 6 GHz, 8 GHz
Instrument Options	3 Series MDO	4 Series MSO	5 Series MSO	6 Series MSO
Digital channels	•	<i>simply order TLP058 probes to enable 8 digital signals per probe</i>		
Arbitrary function generator	•	•	•	•
Spectrum analyzer	1 GHz, 3 GHz	<i>see Spectrum View analysis below</i>		
Extend record length	(10 M standard)	62.5 M/ch max (31.25 M standard)	125 M/ch max 250 M/ch max 500 M/ch max (62.5 M standard)	125 M/ch max 250 M/ch max 500 M/ch max 1 G/ch max (62.5 M standard)
Analysis Options	3 Series MDO	4 Series MSO	5 Series MSO	6 Series MSO
Aerospace serial trig. and analysis (MIL-STD-1553, ARINC429)	•	•	•	•
Audio serial trig. and analysis (I2S, LJ, RJ, TDM)	•	•	•	•
Automotive serial trig. and analysis (CAN, CAN FD, LIN, FlexRay)	•	•	•	•
Automotive sensor serial triggering and analysis (SENT)	•	•	•	•
Computer serial triggering and analysis (RS-232/422/485/UART)	•	•	•	•
Embedded serial triggering and analysis (I <sup>2</sup> C, SPI)	•	•	•	•
SpaceWire serial decoding and analysis		•	•	•
eUSB2 serial decoding and analysis		•	•	•
PSI5 serial decoding and analysis		•	•	•
SVID serial decoding and analysis		•	•	•
MDIO serial decoding and analysis		•	•	•
Ethernet serial triggering and analysis (10BASE-T, 100BASE-TX)		•	•	•
I3C serial decoding and analysis		•	•	•
Power management serial triggering and analysis (SPMI)		•	•	•
USB serial triggering and analysis (USB 2.0 LS, FS, HS)	•	•	•	•
Automotive Ethernet (100BASE-T1, 1000BASE-T1, 10BASE-T1S) automated compliance test application			•	•
MIPI D-PHY 1.2 automated compliance solution				•
Ethernet (1000BASE-T, 100BASE-T, 10BASE-T, 10Base-T1L) automated compliance solution			•	•
Ethernet (2.5G and 5G BASE-T) automated compliance solution				•
Automotive ethernet (10BASE-T1S) compliance solution				•
USB2.0 automated compliance test solution			•	•
DDR3 and LPDDR3 automated compliance solution				•
Ethernet (10G BASE-T) automated compliance solution				•
Advanced jitter and eye analysis			•	•
Spectrum View analysis		•	<i>included standard</i>	
Basic power measurements and analysis	•	•		
Advanced power measurement and analysis		•	•	•
DDR3 and LPDDR3 analysis and debug				•
Enhanced security for instrument declassification	•	•	•	•
Inverter motor drive analysis			•	
Removable SSD with Windows license			•	•
Service Options	3 Series MDO	4 Series MSO	5 Series MSO	6 Series MSO
Calibration service 3 or 5 years	•	•	•	•
Standard warranty extended to 5 years	•	•	•	•
Total product protection 3 or 5 years	•	•	•	•

Serial Decode Options

Compliance Options

Analysis Options

# High Speed Digitizers

High channel density and measurement performance



## 5 Series MSO Low Profile

The 5 Series MSO is available in a 2U low-profile form factor. Eight channels and 12-bit ADCs set a new standard when extreme channel density and measurement performance are required.

- 1 GHz bandwidth
- 6.25 GS/s sample rate
- 8 FlexChannel inputs
- Record length from 125 M to 500 M



## 6 Series MSO Low Profile

The 6 Series Low Profile Digitizer sets a new standard for performance by not interleaving sample rate, bandwidth or record length. You get the fastest and most accurate performance from your digitizer – all in a 2U space.

- 1 GHz to 8 GHz bandwidth
- 25 GS/s sample rate
- 4 inputs
- Record length from 125 M to 1 G

Find more valuable resources at [TEK.COM](http://TEK.COM)

