



Fast, Efficient Solutions for HDMI 1.4 Compliance Measurement Challenges

- Introducing Tektronix' 1.4a Test Solutions

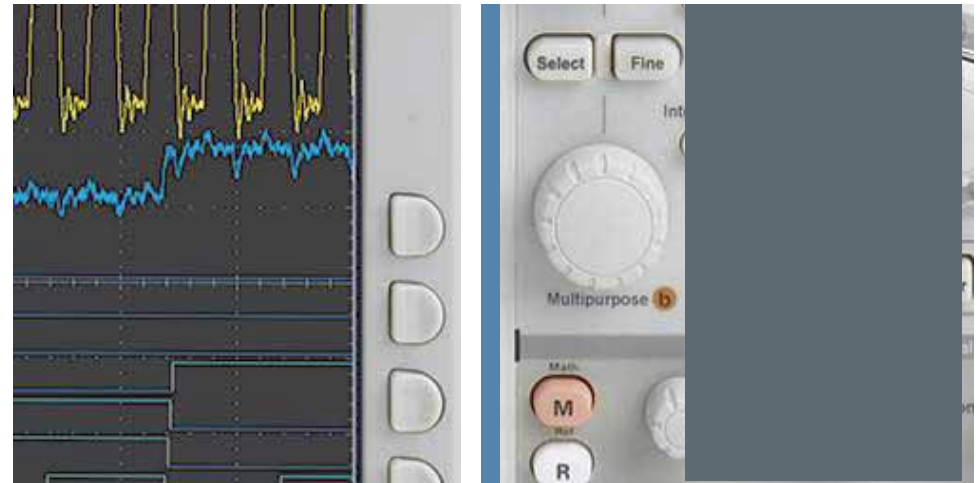

Tektronix[®]

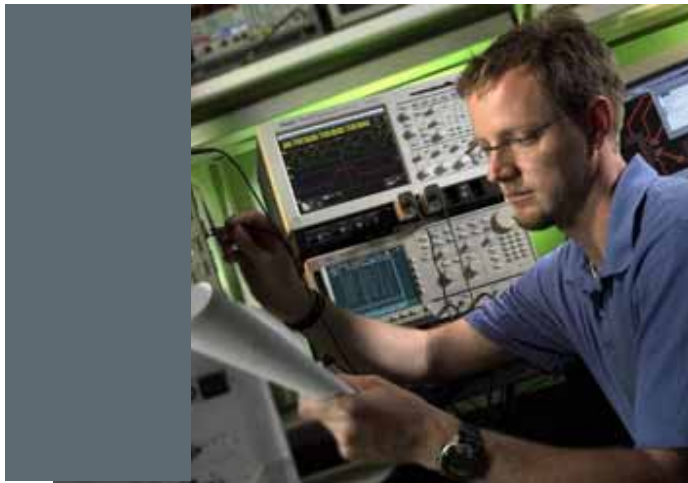

Agenda

- Introduction to HDMI 1.4a
- Tektronix HDMI 1.4a Direct Synthesis Solution
- Tektronix HDMI 1.4a Physical Layer Test Solution
 - Automotive HDMI (Type E)
 - Mobile HDMI (Type D)
 - **HDMI Ethernet Audio Back Channel**
 - 4k x 2K resolution support
 - 3-D HDMI patterns
 - Additional Deep Color patterns
- Additional resources



What's Changed? – HDMI 1.4a

- Specification released on March 4th 2010 under adopter agreement of HDMI standards body.
- Salient Features:
 - Automotive HDMI (Type E)- added new cable emulators
 - Mobile HDMI (Type D)
 - HEAC (HDMI Ethernet Audio Back Channel)
 - 4k x 2K resolution support
 - 3-D HDMI patterns- **updated**
 - Additional Deep Color patterns
- CTS1.4a announced on March 4th 2010.




Agenda

- Introduction to HDMI 1.4a
- Tektronix HDMI 1.4a Direct Synthesis Solution
- Tektronix HDMI 1.4a Physical Layer Test Solution
 - Automotive HDMI (Type E)
 - Mobile HDMI (Type D)
 - **HDMI Ethernet Audio Back Channel**
 - 4k x 2K resolution support
 - 3-D HDMI patterns
 - Additional Deep Color patterns
- Additional resources

AWG7000B with Direct Synthesis Significantly Reduces Test Time

Present Solution-HDMI Sink Jitter Tolerance setup

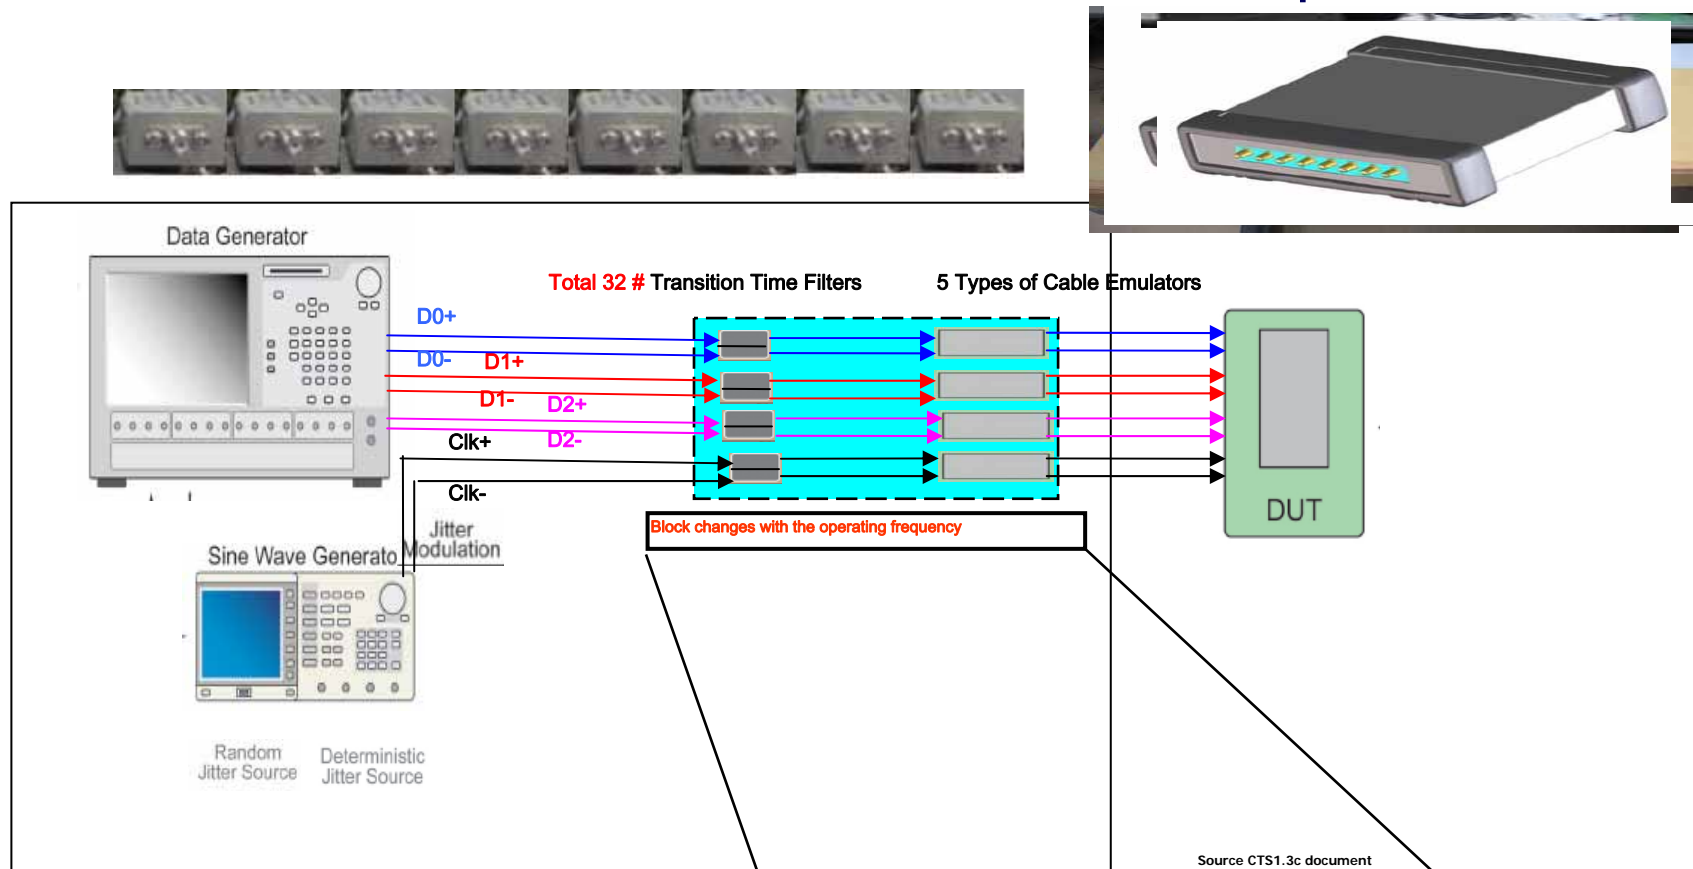

Can we reduce the **Complexity** ?

Can we save the **setup time** ?

Can we provide cost **effective** solution ?

Typical (MHz)	Low (MHz)	High (MHz)	TTC (MHz) ¹	1 st Cable Emulator	2 nd Cable Emulator
27	>= 25	<=27.1	74.25	Type 1 Cat1+Cat2 (Agilent) ²	Type 2 27MHz (JAE)
74.25	>= 27.1	<=74.25	74.25	Type 1 Cat1 (Agilent)	Type 2 75MHz (JAE)
148.5	>74.25	<=165	148.5	Type 1 Cat2 (Agilent)	Type 3 (Agilent)
222.75	>165	<=222.75	222.75	Type 1 Cat2 (Agilent)	Type 3 (Agilent)
340	>222.75	<=340	340	Type 1 Cat2 (Agilent)	Type 3 (Agilent)


Additional hardware Cable Emulators will be introduced for Automotive HDMI support!

AWG7000B with Direct Synthesis Significantly Reduces Test Time

HDMI Jitter Tolerance Test with Direct Synthesis

27 MHz to 340 MHz

NO Cable Emulator!!!

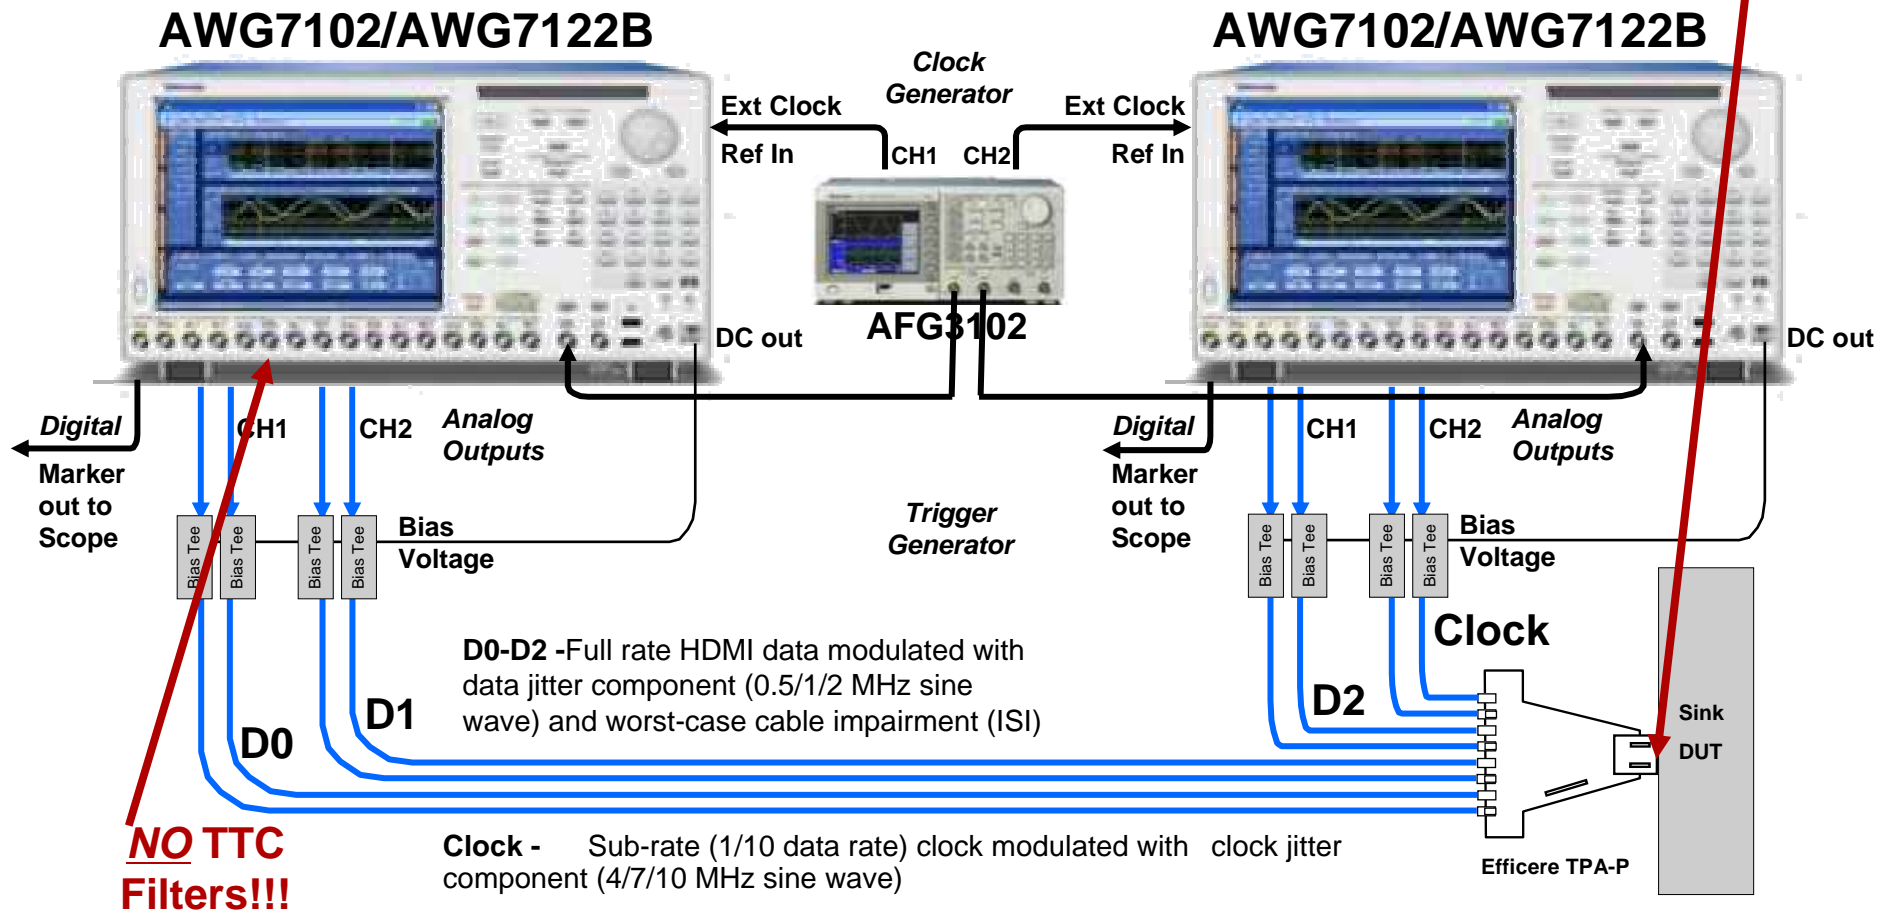

AWG7000B with Direct Synthesis Significantly Reduces Test Time

Tektronix HDMI Direct Synthesis Solution

- Type 2 Cable Emulator support using DS **already approved** and is available in CTS1.3c released on July 25th 2008.

- Automotive HDMI (Type E)
 - DS solution for automotive **approved in CTS1.4**
- Type 1 and Type 3 CE Support
 - DS solution for Type 1 and Type 3 CE **approved in CTS1.4**

	Resolution	Cable Emulators	
General	27 MHz	Type1 Cat1+Cat2	Type2 27MHz
	74.25 MHz	Type1 Cat1	Type2 75MHz
	148.5 MHz	Type1 Cat2	Type3
	222.75 MHz	Type1 Cat2	Type3
Automotive	27 MHz	Automotive 27MHz	NA
	74.25 MHz	Automotive 74MHz	NA

- Direct Synthesis solution **supports all Cable emulators** using the path breaking DS method which removes the need for hardware cable emulators thus enhancing the test method.

Benefits of Direct Synthesis

■ **Simplicity**

- **TEKTRONIX ONLY SOLUTION PROVIDER TO SUPPORT ALL CABLE EMULATORS REQUIRED** for HDMI Sink Jitter Tolerance test.
- Elimination Cable Emulators and TTC (Transition Time Converts)
 - Cable emulators (7 cable types)
 - ~40 transition time filters
- Greatly reduces the opportunity for operator error

■ **Performance**

- Generates a wide range of rise-times without different filters
- Supports both the Combined and the Separate clock/data jitter insertion methods
- Synthesizes any/all Cable Emulator with any requirements
- Enables customers to perform their own margin testing

■ **Flexibility**

- The test repeatability across multiple labs/locations
- Pre-compensates waveforms to produce signals at the DUT launch point
- Emulates any impairment the CTS requires in the future




Agenda


- Introduction to HDMI 1.4a
- Tektronix HDMI 1.4a Direct Synthesis Solution
- Tektronix HDMI 1.4a Physical Layer Test Solution
 - Automotive HDMI (Type E)
 - Mobile HDMI (Type D)
 - **HDMI Ethernet Audio Back Channel**
 - 4k x 2K resolution support
 - 3-D HDMI patterns
 - Additional Deep Color patterns
- Additional resources

Tektronix HDMI 1.4a Test Solutions

Automotive

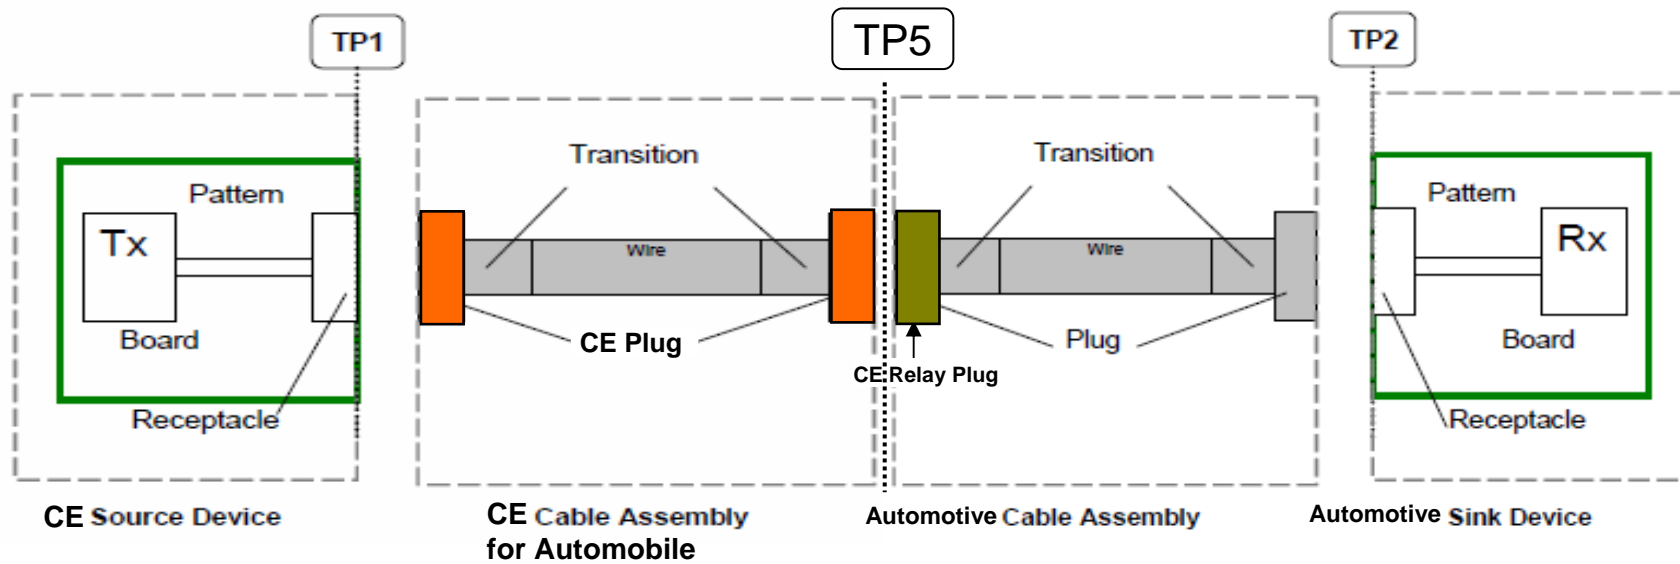

Eye Diagram Mask at TP5 and 2.3dB Equalizer

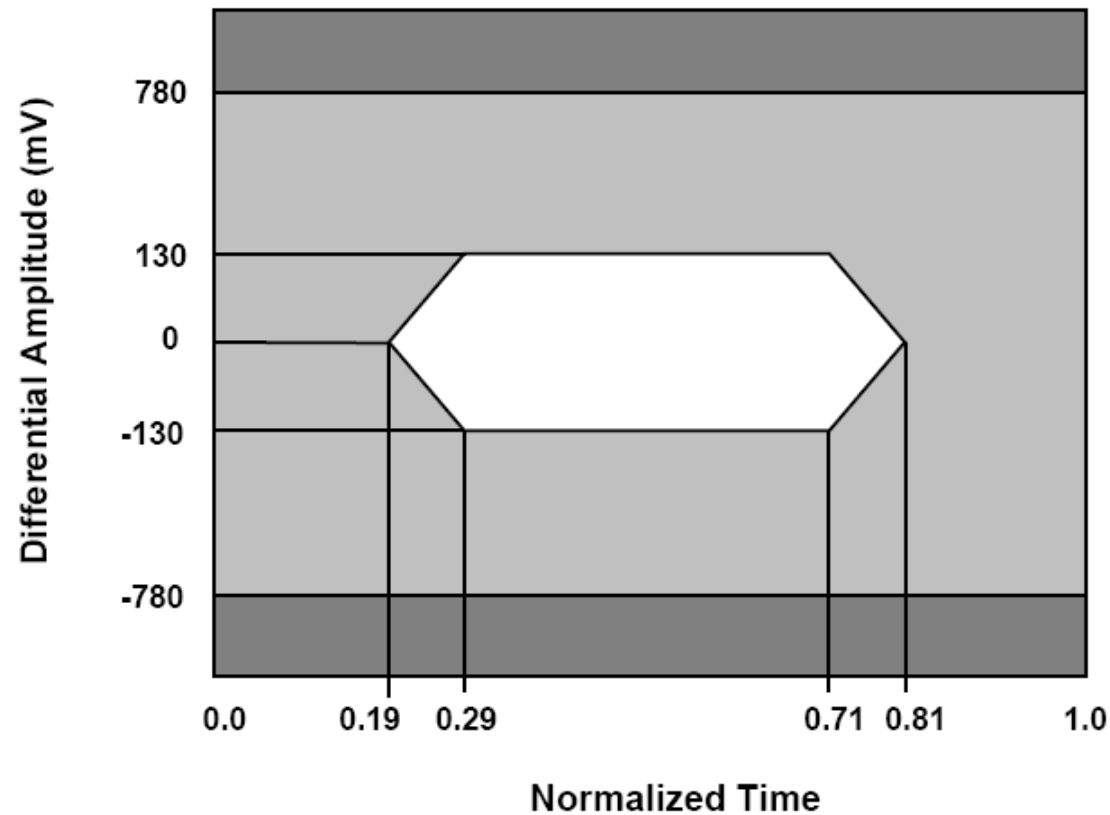

Automotive HDMI Testing needs

- Compliance Software for Type E (**approved in CTS1.4**)
 - Source test remains unchanged
 - Sink Jitter Tolerance Test for Type E
 - Cable Eye Diagram Test for type E

- Type E Fixture **approved in CTS1.4**

Automotive HDMI Solution from Tektronix

- Available in HT3 Software with Direct Synthesis capability approved by HDMI standards



- Type E Fixture from Tektronix approved by HDMI standards.


HDMI Mobile Solution – Type D

- Mobile companies will support HDMI new connectors.
- Type D Fixture will be required and **is approved by HDMI standards.**



What is HEAC?

- High Speed Network Capability
 - Provides bi-directional point-to-point communication
 - Enables building high performance home network
 - 1000 times faster than existing links using CEC
 - Utilizes widely accepted 100Base-TX Ethernet technology
- Digital Audio Stream Transfer
 - Provides SPDIF format digital audio channel
 - Enables versatile handling of digital sound by AV control center
 - Quality audio at 32k/44.1k/48k sampling rates
 - Backward transfer only (Sink to Source)
- Compatibility with Current HDMI
 - Enables inter-connection to existing HDMI devices (upward compatibility)
 - Automatic detection of HEAC enhancement
 - Utilize Hot Plug Detect & Reserve pins

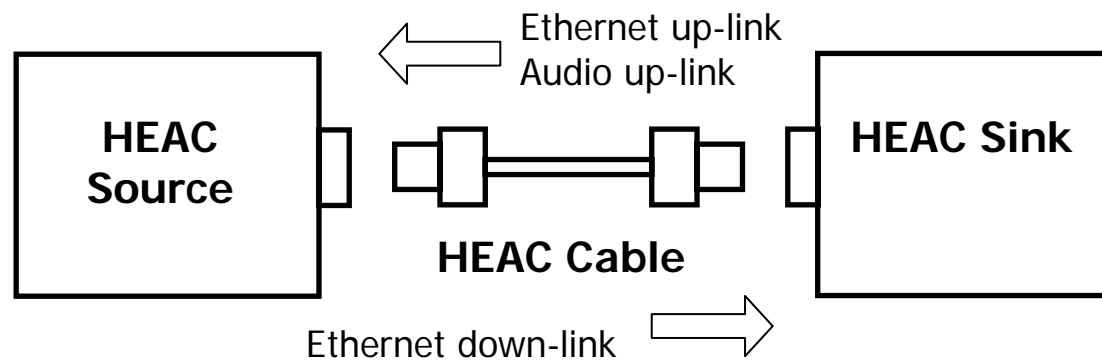

HEAC Specific Signals

- **Small Amplitude Ethernet Signal**
 - 200mVp-p in contrast to 1Vp-p of normal Ethernet
 - In differential mode, amplitude is 400mVp-p.
 - Except for amplitude, it's an Ethernet.
 - 125Mbps bit rate including overhead

- **Bi-Directional Ethernet Transfer**
 - Transmitting & receiving streams superposed
 - Embedded HYBRID circuit in TRX chip
 - Software HYBRID needed in measurement instrument

- **Common Mode Audio Stream**
 - Digital audio stream superposed in common mode
 - 400mVp-p amplitude
 - SPDIF format at 32k/44.1k/48k samples/s rate (up to 6.144Mbps bit rate)
 - Unidirectional transfer (Sink device → Source device)

- **High DC Offset**
 - Approx. 4V from ground

HEAC Physical Layer Test (1/2)

- **Ethernet Transmitter Test**
 - Similar to normal 100Base-TX test except for lower amplitude

- **Ethernet Receiver Test**
 - Generate test packets with stress using AWG(5K/7KB)
 - Capture and analyze response packets using oscilloscope
 - Confirm compliant packet error rate

- **Audio Transmitter Test**
 - SPDIF audio stream in common mode 400mVp-p amplitude
 - 32k/44.1k/48k samples/s rate (up to 6.144Mbps)
 - Measure typical pulse parameters using oscilloscope

- **Audio Receiver Test**
 - Generate test stream with stress using AWG
 - Listening test to regenerated audible sound


HEAC Physical Layer Test (2/2)

- **Device Impedance Test**
 - Measure impedance of HEAC lanes using TDR


- **Cable Test**
 - Measure impedance of HEAC lanes using TDR/TDT
 - Measure S-Parameters of HEAC lanes using TDT+S/W

Tektronix HDMI 1.4a Test Solutions

HEAC Solution Configuration

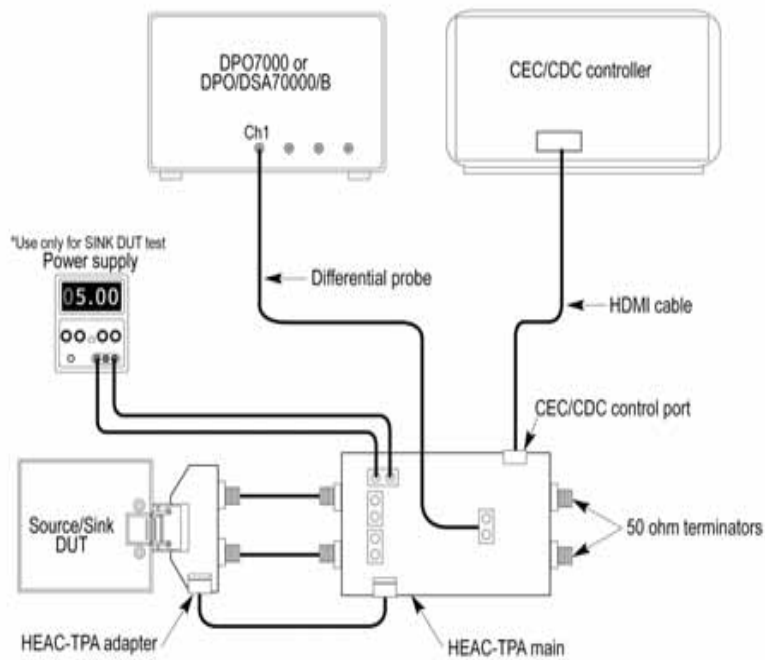

Tx Test Setup

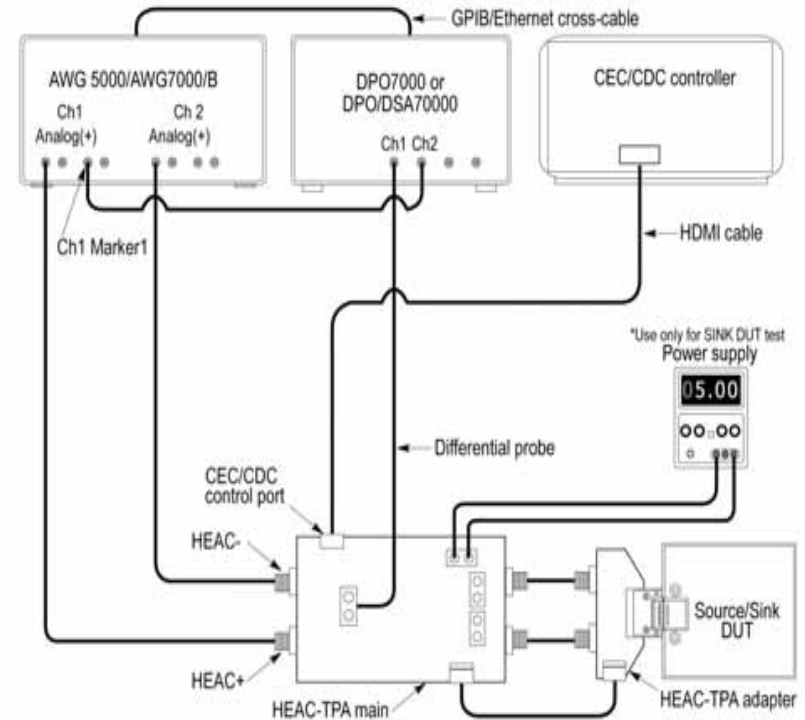

Rx Test Setup

HEAC Software

TekExpress HEAC Automated Solution (Evaluation Version) (Untitled)*

File View Tools Help

DUT ID: Run Stop

Select Acquire Analyze Report

Select Device Select Test Suite Version

HEAC-Transmitter
 HEAC-Receiver

Differential-Rx
 CommonMode-Rx
 SingleMode-Rx

CTS 1.4

DUT IP Address

 Auto Detect MAC Address

HEAC-Receiver : Differential-Rx CTS 1.4

Select	Test Name
<input checked="" type="checkbox"/>	Receiver Performance - Nominal Response
<input checked="" type="checkbox"/>	5.16 Receiver Performance - Amplitude
<input checked="" type="checkbox"/>	5.16 Receiver Performance - Clock Frequency
<input checked="" type="checkbox"/>	5.16 Receiver Performance - Common mode
<input checked="" type="checkbox"/>	5.16 Receiver Performance - Signal Source Impedance
<input checked="" type="checkbox"/>	5.16 Receiver Performance - Worst Case Cable

Test Description
This optional test verifies the receiver capability to respond to nominal amplitude, clock frequency and

Configure
Show Schematic
Select All
Deselect All

TekExpress launched successfully.

Tektronix

HEAC Test Report



TekExpress Automation Framework


HEAC Differential TX Signal Characteristics Test Report

DUT ID : DUT001 Device Type : HEAC-Transmitter CTS Version : CTS 1.4
 Date/Time : 3/2/2010 12:30 Execution Time : 13 Min Compliance Mode : Yes
Overall Test Result : Pass

Scope Model : DPO72004 Scope Serial Number : Q226 Scope FW Version : 5.1.0.BNSFBUILD 28 SPC, Factory Calibration : PASS/PASS
 Probe Model : P6248 Probe Serial Number : B011054 TekExpress Version : HEAC: 1.3.5.56, Framework: 1.3.4.135

Test Name	Measurement Details	Low Limit	Measured value	High Limit	Margin	Units	Test Result	Compliance Mode	Analysis Time	Comments
5.1 Operating DC Voltage	DC Voltage : HEAC + line	>= 3.6	4.1980	<= 4.4	0.202, 0.598	V	Pass	Yes	3 Min	
	DC Voltage : HEAC - line	>= 3.6	4.1539	<= 4.4	0.2461, 0.5539		Pass			
5.2 Jitter MAX	Jitter Max Positive	-	0.9456	< 1.4	0.4544	nS	Pass	Yes	1 Min	
	Jitter Max Negative	-	1.0403	< 1.4	0.3597		Pass			
5.3 Rise-Fall Time	Rise Time Positive Pulses	>= 3	4.9251	<= 5	1.9251, 0.0749	nS	Pass	Yes	3 Min	
	Fall Time Positive Pulses	>= 3	4.7602	<= 5	1.7602, 0.2398		Pass			
	Rise Time Negative Pulses	>= 3	4.9747	<= 5	1.9747, 0.0253		Pass			
	Fall Time Negative Pulses	>= 3	4.7572	<= 5	1.7572, 0.2428		Pass			
5.4 High-Low-Center Level	High Level Voltage	>= 180	199.4449	<= 220	19.4449, 20.5551	mV	Pass	Yes	3 Min	
	Low Level Voltage	>= -220	-194.4681	<= -180	25.5319, 14.4681		Pass			
	Center Level Voltage	>= -20	3.0732	<= 20	23.0732, 16.9268		Pass			
5.5 Cycle Time	Cycle Time Positive Pulses	>= 7.875	8.0581	<= 8.125	0.1831, 0.0669	nS	Pass	Yes	2 Min	
	Cycle Time Negative Pulses	>= 7.875	8.0584	<= 8.125	0.1834, 0.0666		Pass			

HEAC Fixtures

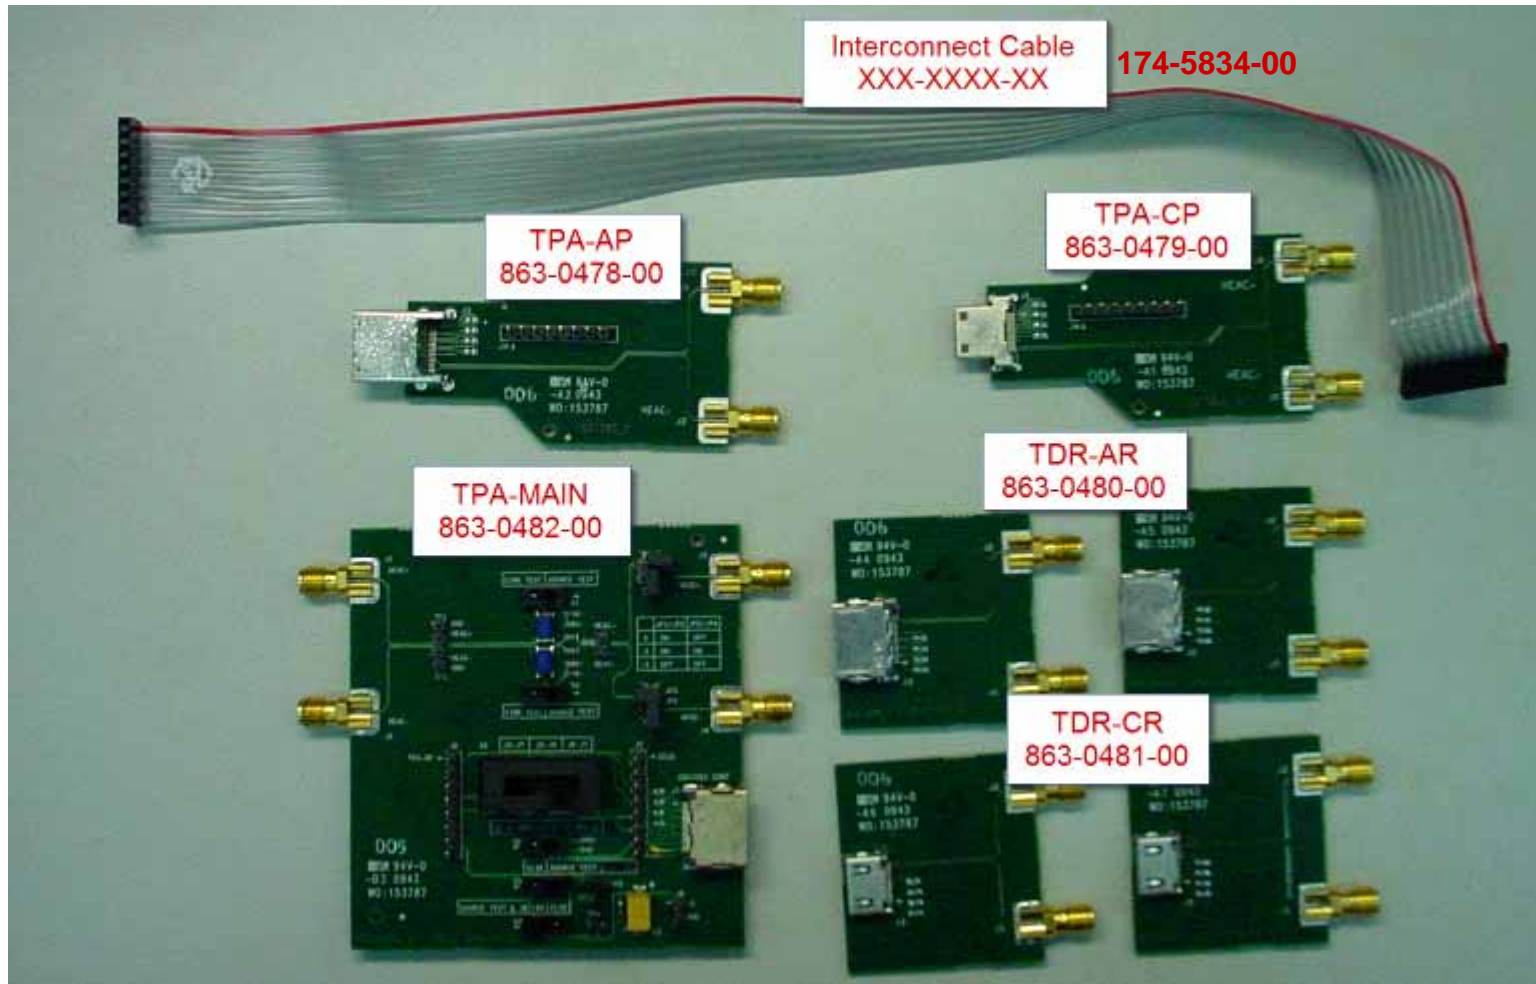

HEAC Solution

- Real Time Oscilloscope,AWG5KB/7KB, Probes
- Test Fixture Kit(TF-HEAC-TPA-KIT)
 - One MAIN , 2 Plug (AP/CP), 4#TDR (2#AR/2#CR),
- HEAC Software
 - Ethernet Transmitter Test Software
 - Ethernet Receiver Test Software
 - Control AWG & oscilloscope
 - Setup signal (sensitivity, clock frequency, modal rejection, error rate)
 - Extract & check response signal (software HYBRID & packet analysis)
 - Audio Transmitter Test Software
 - HEAC
 - Audio Receiver Test Pattern Suite
 - AWG files (format support, modal rejection, jitter tolerance)

HDMI 1.4 Pattern Support

- 4K x 2K Resolution patterns
- 3D HDMI mandatory Patterns (updated)
- New Deep Color Patterns
- 7 New tests will be added to HT3 Sink tests to make the tests automated by HT3.(8-28,8-29, 8-30,8-31, DVI Interoperability, Audio tests)



Test Patterns: Test ID 8-29: 3D Video Format Timing

Verify that Sink DUT supports:

1. 1920x1080p@23.98/24Hz.
2. 1280x720p@59.94/60Hz If Sink Supports 60HZ
3. 1280x720p@50Hz if Sink Supports 50Hz

NEW:

Tektronix Support for 8-29

Side-by-Side Horizontal


1080i @ 50 or 59.94/60Hz

Top-and-Bottom

720p @ 50 or 59.94/60Hz

1080p @ 23.97/24Hz

Test ID	DTG	AWG Marker	AWG DS
3D	○	○	○

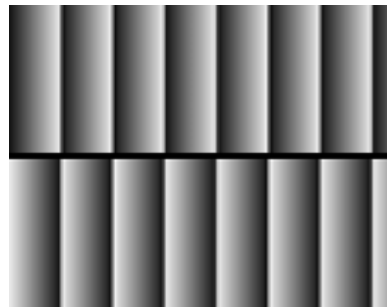

Test Patterns Test ID 8-30: 4K x 2K Video Format Timing

Verify that Sink DUT supports:

1. If tested HDMI_VIC_X indicates HDMI video formats 0x01 then test 4Kx2K 29.97/30Hz.
2. If tested HDMI_VIC_X indicates HDMI video formats 0x02 then test 4Kx2K 25Hz.
3. If tested HDMI_VIC_X indicates HDMI video formats 0x03 then test 4Kx2K 23.98/24Hz.
4. If tested HDMI_VIC_X indicates HDMI video formats 0x04 then test 4Kx2K24Hz (SMPTE)

Tektronix Support for 8-30

Test ID	DTG	AWG Marker	AWG DS
4K x 2K	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>

Tektronix HDMI 1.4a solution

Common Set of test equipment for HDMI and HEAC

HDMI Fixtures:


1. Type A
2. Type C
3. Type D
4. Type E
5. HEAC Fixtures

Probes and accessories

HDMI Probes
HEAC Probes
HDMI Accessory Kit

Tektronix Brings Domain Expertise to HDMI Test

- **Unequaled domain expertise**
 - Providing leading HDMI test solutions since original HDMI spec introduced
 - Approved direct synthesis method offers greater repeatability as dependency on hardware TTC filters and cable emulators is eliminated.
- **Portfolio of test equipment for all critical tests**
 - Signal generators, real-time oscilloscopes, compliance test software, sampling oscilloscopes & probing
- **Cost effectiveness & Flexibility**
 - More affordable upgrade path from previous HDMI test systems
 - Flexible test configuration
- **Reduction of test time**
 - One-button selection of multiple tests reduces the time needed for compliance testing from days to minutes

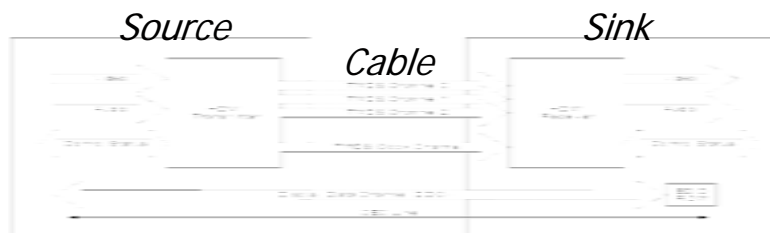

HDMI™
HIGH-DEFINITION MULTIMEDIA INTERFACE

High-Speed Serial Data Test Solutions


Design

Verification


Compliance Test



DiVA ...

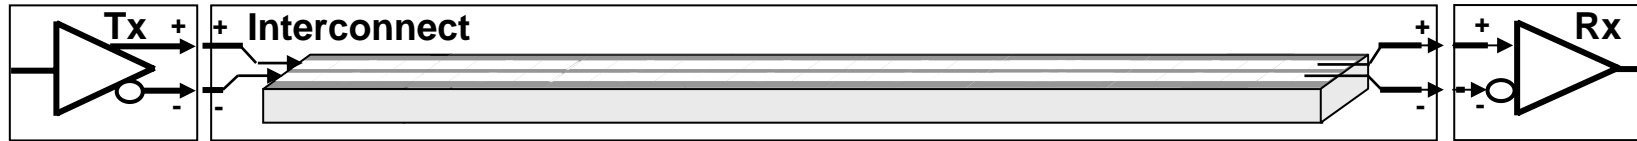

Real-time Scopes



System Integration
Digital Validation & Debug

Logic Analyzers



Transmitter Testing

Receiver Test
Margin Testing




Probing
Fixtures

Arbitrary Waveform Generator

Interconnect Test

Sampling Scopes

Compliance Test




Compliance Test Software




Additional Resources

- http://www.tektronix.com/serial_data

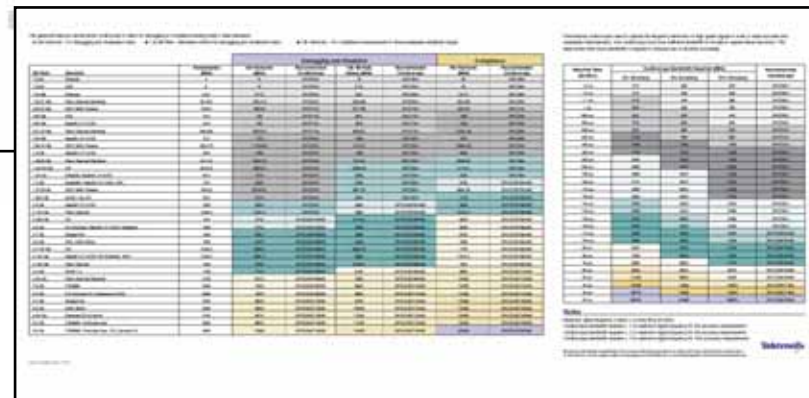

<http://www.hdmi.org>
<http://www.tektronix.com/hdmi>
High-bandwidth Digital Content Protection
<http://www.digital-cp.com/>
Video Electronics Standards Association
www.vesa.org

Enabling Innovation in the Digital Age

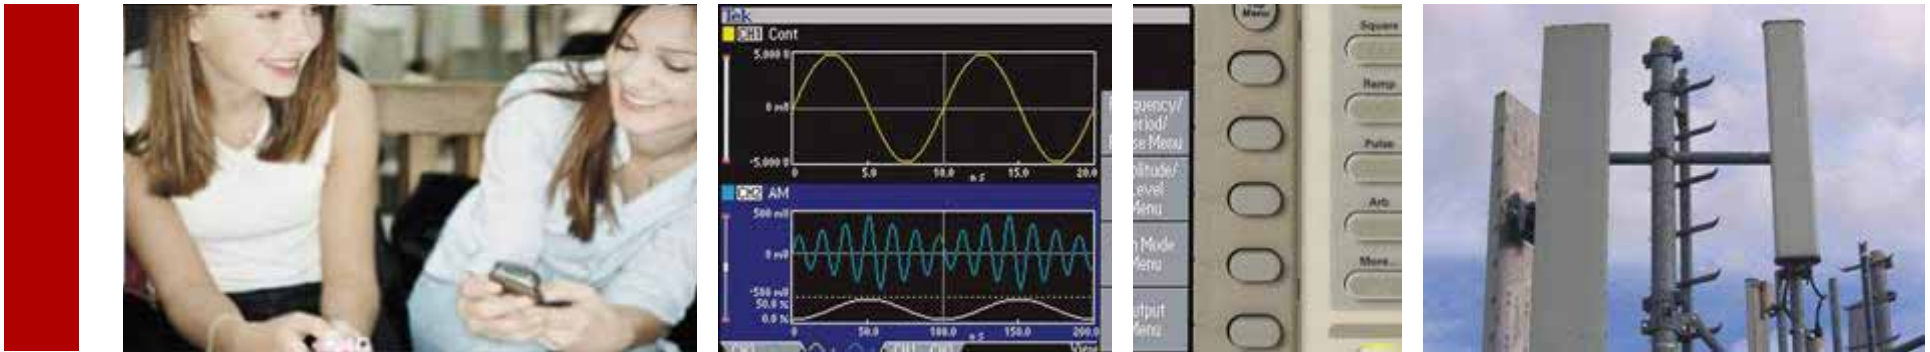

Accelerating Performance

Enabled by High-speed Serial Technologies