



6 Series B Mixed Signal Oscilloscopes (MS064B, MS066B, MS068B) Specification and Performance Verification

Register now!

Click the following link to protect your product.

www.tek.com/register



Copyright © 2026, Tektronix, Inc. All rights reserved. Licensed software products are owned by Tektronix or its subsidiaries or suppliers, and are protected by national copyright laws and international treaty provisions. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specifications and price change privileges reserved.

TEKTRONIX and TEK are registered trademarks of Tektronix, Inc.

These are the original instructions in English.

Go to tek.com/eula to read the Tektronix End User License Agreement.



Contacting Tektronix

Tektronix, Inc.
13725 SW Karl Braun Drive
P.O. Box 500
Beaverton, OR 97077
USA

For product information, sales, service, and technical support:

In North America, call 1-800-833-9200.

Worldwide, visit www.tek.com to find contacts in your area.

Contents

Important safety information	5
General safety summary.....	5
To avoid fire or personal injury.....	5
Probes and test leads.....	7
Service safety summary.....	8
Terms in this manual and on the product.....	8
Terms on the product.....	9
Symbols on the product.....	9
Specifications	9
Analog channel input and vertical.....	10
Timebase system.....	29
Trigger system.....	35
Analysis.....	41
Arbitrary function generator.....	42
Digital volt meter (DVM).....	45
Processor system.....	46
Input/Output port specifications.....	46
Display system.....	49
Data storage specifications.....	50
Power supply system.....	51
Safety characteristics.....	51
Environmental specifications.....	51
Dynamics.....	52
Comparison against MIL-PRF-28800F Environmental Requirements.....	52
Mechanical specifications.....	55
Environmental Compliance.....	56
Performance verification procedures	57
Test records.....	58
Instrument information, self test record.....	58
DC Offset Accuracy test record.....	58
Analog Bandwidth test record.....	67
Input impedance test record.....	72
DC Gain Accuracy test record.....	73
Random Noise, sample acquisition mode test record.....	78
Random Noise, High Res mode test record.....	130
High Offset AC RMS Noise, sample acquisition mode test record.....	219
High Offset AC RMS Noise, High Res mode test record.....	228
Long term sample rate through AFG DC offset accuracy test records.....	260
Performance tests.....	272

Prerequisites	272
Self test	273
Check input impedance	273
Check DC gain accuracy	274
Check DC offset accuracy	276
Check analog bandwidth	278
Check random noise, sample acquisition mode (10, 8, and 6 GHz options)	279
Check random noise, High Res mode	280
Check high offset AC RMS noise, sample acquisition mode (10, 8, and 6 GHz options)	282
Check high offset AC RMS noise, High Res mode	283
Check long term samples rate and delay time accuracy	284
Check digital threshold accuracy	284
Check AUX Out output voltage levels	286
Check DVM voltage accuracy (DC)	286
Check DVM voltage accuracy (AC)	287
Check trigger frequency accuracy and maximum input frequency	288
Check AFG sine and ramp frequency accuracy	289
Check AFG square and pulse frequency accuracy	290
Check AFG signal amplitude accuracy	291
Check AFG DC offset accuracy	293

Important safety information

This manual contains information and warnings that must be followed by the user for safe operation and to keep the product in a safe condition.

To safely perform service on this product, see the *Service safety summary* that follows the *General safety summary*.

General safety summary

Use the product only as specified. Review the following safety precautions to avoid injury and prevent damage to this product or any products connected to it. Carefully read all instructions. Retain these instructions for future reference.

This product shall be used in accordance with local and national codes.

For correct and safe operation of the product, it is essential that you follow generally accepted safety procedures in addition to the safety precautions specified in this manual.

The product is designed to be used by trained personnel only.

Only qualified personnel who are aware of the hazards involved should remove the cover for repair, maintenance, or adjustment.

Before use, always check the product with a known source to be sure it is operating correctly.

This product is not intended for detection of hazardous voltages.

Use personal protective equipment to prevent shock and arc blast injury where hazardous live conductors are exposed.

This product is intended for use in nonresidential areas only. Use in residential areas may cause electromagnetic interference.

While using this product, you may need to access other parts of a larger system. Read the safety sections of the other component manuals for warnings and cautions related to operating the system.

When incorporating this equipment into a system, the safety of that system is the responsibility of the assembler of the system.

To avoid fire or personal injury

Use proper power cord.

Use only the power cord specified for this product and certified for the country of use. Do not use the provided power cord for other products.

Use proper voltage setting

Before applying power, make sure that the line selector is in the proper position for the source being used.

Ground the product.

This product is grounded through the grounding conductor of the power cord. To avoid electric shock, the grounding conductor must be connected to earth ground. Before making connections to the input or output terminals of the product, ensure that the product is properly grounded. Do not disable the power cord grounding connection.

Power disconnect.

The power cord disconnects the product from the power source. See instructions for the location. Do not position the equipment so that it is difficult to operate the power cord; it must remain accessible to the user at all times to allow for quick disconnection if needed.

Connect and disconnect properly.

Do not connect or disconnect probes or test leads while they are connected to a voltage source.

Use only insulated voltage probes, test leads, and adapters supplied with the product, or indicated by Tektronix to be suitable for the product.

Connect the probe output to the measurement instrument before connecting the probe to the circuit under test. Connect the probe reference lead to the circuit under test before connecting the probe input. Disconnect the probe input and the probe reference lead from the circuit under test before disconnecting the probe from the measurement instrument.

Observe all terminal ratings.

To avoid fire or shock hazard, observe all rating and markings on the product. Consult the product manual for further ratings information before making connections to the product.

Do not exceed the Measurement Category (CAT) rating and voltage or current rating of the lowest rated individual component of a product, probe, or accessory. Use caution when using 1:1 test leads because the probe tip voltage is directly transmitted to the product.

Do not apply a potential to any terminal, including the common terminal, that exceeds the maximum rating of that terminal.

Do not float the common terminal above the rated voltage for that terminal.

Do not connect a current probe to any wire that carries voltages above the current probe voltage rating.

Do not operate without covers

Do not operate this product with covers or panels removed, or with the case open. Hazardous voltage exposure is possible.

Avoid exposed circuitry

Do not touch exposed connections and components when power is present.

Do not operate with suspected failures.

If you suspect that there is damage to this product, have it inspected by qualified service personnel.

Disable the product if it is damaged. Do not use the product if it is damaged or operates incorrectly. If in doubt about safety of the product, turn it off and disconnect the power cord. Clearly mark the product to prevent its further operation.

Before use, inspect voltage probes, test leads, and accessories for mechanical damage and replace when damaged. Do not use probes or test leads if they are damaged, if there is exposed metal, or if a wear indicator shows.

Examine the exterior of the product before you use it. Look for cracks or missing pieces.

Use only specified replacement parts.

Replace batteries properly

Replace batteries only with the specified type and rating.

Recharge batteries for the recommended charge cycle only.

Wear eye protection

Wear eye protection if exposure to high-intensity rays or laser radiation exists.

Do not operate in wet/damp conditions

Be aware that condensation may occur if a unit is moved from a cold to a warm environment.

Do not operate in an explosive atmosphere

Keep product surfaces clean and dry

Remove the input signals before you clean the product.

Provide proper ventilation.

Refer to the installation instructions in the manual for details on installing the product so it has proper ventilation.

Slots and openings are provided for ventilation and should never be covered or otherwise obstructed. Do not push objects into any of the openings.

Provide a safe working environment

Always place the product in a location convenient for viewing the display and indicators.

Avoid improper or prolonged use of keyboards, pointers, and button pads. Improper or prolonged keyboard or pointer use may result in serious injury.

Be sure your work area meets applicable ergonomic standards. Consult with an ergonomics professional to avoid stress injuries.

Use care when lifting and carrying the product. This product is provided with a handle or handles for lifting and carrying.

WARNING: The product is heavy. To reduce the risk of personal injury or damage to the device get help when lifting or carrying the product.

Use only the Tektronix rackmount hardware specified for this product.

Probes and test leads

Before connecting probes or test leads, connect the power cord from the power connector to a properly grounded power outlet.

Keep fingers behind the protective barrier, protective finger guard, or tactile indicator on the probes. Remove all probes, test leads and accessories that are not in use.

Use only correct Measurement Category (CAT), voltage, temperature, altitude, and amperage rated probes, test leads, and adapters for any measurement.

Beware of high voltages

Understand the voltage ratings for the probe you are using and do not exceed those ratings. Two ratings are important to know and understand:

- The maximum measurement voltage from the probe tip to the probe reference lead.
- The maximum floating voltage from the probe reference lead to earth ground.

These two voltage ratings depend on the probe and your application. Refer to the Specifications section of the manual for more information.

WARNING: To prevent electrical shock, do not exceed the maximum measurement or maximum floating voltage for the oscilloscope input BNC connector, probe tip, or probe reference lead.

Connect and disconnect properly.

Connect the probe output to the measurement product before connecting the probe to the circuit under test. Connect the probe reference lead to the circuit under test before connecting the probe input. Disconnect the probe input and the probe reference lead from the circuit under test before disconnecting the probe from the measurement product.

De-energize the circuit under test before connecting or disconnecting the current probe.

Connect the probe reference lead to earth ground only.

Do not connect a current probe to any wire that carries voltages or frequencies above the current probe voltage rating.

Inspect the probe and accessories

Before each use, inspect probe and accessories for damage (cuts, tears, or defects in the probe body, accessories, or cable jacket). Do not use if damaged.

Ground-referenced oscilloscope use

Do not float the reference lead of the probe when using with ground-referenced oscilloscopes. The reference lead must be connected to earth potential (0 V).

Floating measurement use

Do not float the reference lead of the probe above the rated float voltage.

Service safety summary

The *Service safety summary* section contains additional information required to safely perform service on the product. Only qualified personnel should perform service procedures. Read this *Service safety summary* and the *General safety summary* before performing any service procedures.

To avoid electric shock

Do not touch exposed connections.

Do not service alone

Do not perform internal service or adjustments of this product unless another person capable of rendering first aid and resuscitation is present.

Disconnect power

To avoid electric shock, switch off the product power and disconnect the power cord from the mains power before removing any covers or panels, or opening the case for servicing.

Use care when servicing with power on

Dangerous voltages or currents may exist in this product. Disconnect power, remove battery (if applicable), and disconnect test leads before removing protective panels, soldering, or replacing components.

Verify safety after repair

Always recheck ground continuity and mains dielectric strength after performing a repair.

Terms in this manual and on the product

These terms may appear in this manual:

WARNING: Warning statements identify conditions or practices that could result in injury or loss of life.

CAUTION: Caution statements identify conditions or practices that could result in damage to this product or other property.

These terms may appear on the product:

- DANGER indicates an injury hazard immediately accessible as you read the marking.
- WARNING indicates an injury hazard not immediately accessible as you read the marking.
- CAUTION indicates a hazard to property including the product.

Terms on the product

These terms may appear on the product:

- DANGER indicates an injury hazard immediately accessible as you read the marking.
- WARNING indicates an injury hazard not immediately accessible as you read the marking.
- CAUTION indicates a hazard to property including the product.

Symbols on the product



When this symbol is marked on the product, be sure to consult the manual to find out the nature of the potential hazards and any actions which have to be taken to avoid them. (This symbol may also be used to refer the user to ratings in the manual.)

The following symbols may appear on the product.



CAUTION: Refer to Manual



Protective Ground (Earth) Terminal



Functional Earth Terminal

Chassis Ground



Standby

Specifications

This chapter contains specifications for the instrument. All specifications are typical unless noted as guaranteed. Typical specifications are provided for your convenience but are not guaranteed. Specifications that are marked with the ✓ symbol are guaranteed and checked in Performance Verification.

To meet specifications, these conditions must first be met:

- The instrument must have been calibrated in an ambient temperature between 18 °C and 28 °C (64 °F and 82 °F).
- The instrument must be operating within the environmental limits described in this manual.
- The instrument must be powered from a source that meets the specifications.
- The instrument must have been operating continuously for at least 20 minutes within the specified operating temperature range.
- You must perform the Signal path compensation procedure after the warmup period. See the Signal path compensation procedure for how to perform signal path compensation. If the ambient temperature changes more than 5 °C (9 °F), repeat the procedure.

Analog channel input and vertical

Number of analog input channels

- MSO64B: 4
- MSO66B: 6
- MSO68B: 8

Input coupling

DC, AC

Input resistance selection

1 M Ω or 50 Ω

250 K Ω selectable for Performance Verification

✓ DC Input Resistance, 50 Ω , DC coupled

50 Ω \pm 3%

✓ DC Input Resistance, 1M Ω DC-Coupled

1 M Ω \pm 1%

Input VSWR, 50 Ω DC-coupled, typical

Input Frequency	VSWR <100 mV/div	VSWR \geq 100 mV/div
\leq 2.5 GHz	1.4	1.2
>2.5 GHz and \leq 6 GHz	1.5	1.3
>6 GHz and \leq 9.5 GHz	1.9	1.8
>9.5 GHz and \leq 10 GHz	2.1	1.9

Maximum input voltage, 50 Ω

- 2.3 V_{RMS}, at <100 mV/div, with peaks \leq \pm 20 V (Pulse Width \leq 1 μ s)
- 5.5 V_{RMS}, at \geq 100 mV/div, with peaks \leq \pm 20 V (Pulse Width \leq 200 μ s)

Maximum input voltage 1 M Ω DC-coupled

- 300 V_{RMS}, DC to 10 kHz
- Maximum peak input voltage at the BNC, \pm 425 V

Sensitivity range, coarse

1 M Ω

500 μ V/div to 10 V/div in a 1-2-5 sequence

50 Ω

1 mV/div to 1 V/div in a 1-2-5 sequence

Sensitivity range (Fine)

- **1 M Ω**
Allows continuous adjustment from 500 μ V/div to 10V/div
- **50 Ω**

Allows continuous adjustment from 1mV/div to 1V/div

Sensitivity Resolution (Fine)

≤1% of coarse sensitivity range setting

Input capacitance 1 MΩ DC coupled, typical

14.5 pF ±1.5 pF

Analog DC

Maximum offset ranges,

Input signal cannot exceed maximum input voltage for the 50 Ω input path.

Volts/div Setting	Maximum offset range, 50 Ω Input
1 mV/div - 99 mV/div	±1 V
100 mV/div - 1 V/div	±10 V
500 μV/div - 63 mV/div	±1 V
64 mV/div - 999 mV/div	±10 V
1 V/div - 10 V/div	±100 V

Input Signal cannot exceed max input voltage for the 50 Ω input path.

DC voltage measurement accuracy, Average acquisition mode

Measurement Type	DC Accuracy (In Volts)
Average of ≥16 waveforms	$\pm((\text{DC Gain Accuracy}) * \text{reading} - (\text{offset} - \text{position}) + \text{Offset Accuracy} + 0.05 * \text{V/div setting})$
Delta volts between any two averages of ≥16 waveforms acquired with the same oscilloscope setup and ambient conditions	$\pm(\text{DC Gain Accuracy} * \text{reading} + 0.1 \text{ div})$

DC voltage measurement accuracy, Sample acquisition mode, typical

Measurement Type	DC Accuracy (In Volts)
Any Sample	$\pm(\text{DC Gain Accuracy} * \text{reading} - (\text{offset} - \text{position}) + \text{Offset Accuracy} + 0.15 \text{ div} + 0.6 \text{ mV})$
Delta volts between any two samples acquired with the same scope setup and ambient conditions	$\pm(\text{DC Gain Accuracy} * \text{reading} + 0.15 \text{ div} + 1.2 \text{ mV})$

✓ Offset accuracy

- **50 Ω DC-coupled**

≥5 mV/div: $\pm (0.005 \times |\text{offset} - \text{position}| + 0.087 \text{ div})$

2 mV/div: $\pm (0.005 \times |\text{offset} - \text{position}| + 0.13 \text{ div})$

1 mV/div: $\pm (0.005 \times |\text{offset} - \text{position}| + 0.224 \text{ div})$

- **1 MΩ DC-coupled**

≥5 mV/div: $\pm (0.005 \times |\text{offset} - \text{position}| + 0.2 \text{ div})$

2 mV/div: $\pm (0.005 \times |\text{offset} - \text{position}| + 0.237 \text{ div})$

1 mV/div: $\pm (0.005 \times |\text{offset} - \text{position}| + 0.384 \text{ div})$

Offset and position in units of Volts

Position range

± 5 divisions

✓ DC gain accuracy

- **50 Ω**

$\pm 2.0\%$ at > 2 mV/div ($\pm 2.0\%$ at 2 mV/div, $\pm 4.0\%$ at 1 mV/div, typical). Immediately following SPC, add 2% for every 5 °C change in ambient.

$\pm 1.0\%$ of full scale at > 2 mV/div, ($\pm 1.0\%$ of full scale at 2 mV/div, $\pm 2.0\%$ at 1 mV/div, typical). Immediately following SPC, add 1% for every 5 °C change in ambient.

- **1 M Ω**

$\pm 2.0\%$ at > 2 mV/div ($\pm 2.0\%$ at 2 mV/div, $\pm 2.5\%$ at 1 mV/div and 500 $\mu\text{V}/\text{div}$, typical). Immediately following SPC, add 2% for every 5 °C change in ambient.

$\pm 1.0\%$ of full scale at > 2 mV/div, ($\pm 1.0\%$ of full scale at 2 mV/div, $\pm 1.25\%$ at 1 mV/div and 500 $\mu\text{V}/\text{div}$, typical). Immediately following SPC, add 1% for every 5 °C change in ambient.

✓ Digital nonlinearity, typical

- INL @ > 2 mV/div: ± 16 DL's (12-bit reference)
- INL @ ≤ 2 mV/div: ± 20 DL's (12-bit reference)
- DNL: ± 1.0 DL's (12-bit digitizing scale) when oscilloscope is in Hi-Res mode.

Analog AC

✓ Analog bandwidth 50 Ω DC coupled

Model	Volts/div Setting	Bandwidth
MSO6XB BW-10000	1 mV/div – 1V/div	DC - 10GHz
MSO6XB BW-8000	1 mV/div – 1V/div	DC – 8 GHz
MSO6XB BW-6000	1 mV/div – 1V/div	DC – 6 GHz
MSO6XB BW-4000	1 mV/div – 1V/div	DC – 4 GHz
MSO6XB BW-2500	1 mV/div – 1V/div	DC – 2.5 GHz
MSO6XB BW-1000	1 mV/div – 1V/div	DC – 1 GHz

✓ Analog Bandwidth, 1 MΩ

The limits are for ambient temperature of ≤ 30 °C and the bandwidth selection set to FULL. Reduce the upper bandwidth frequency by 1% for each °C above 30 °C.

MSO6XB, all models:

Volts/Div Setting	Bandwidth
1 mV/div – 10 V/div	DC – 500 MHz
500 μ V/div – 995 μ V/div	DC – 250 MHz

Analog bandwidth TPP1000 10X probe

The limits are for ambient temperature of ≤ 30 °C and the bandwidth selection set to FULL. Reduce the upper bandwidth frequency by 1% for each °C above 30 °C.

Model	Volts/Div Setting	Bandwidth
MSO6X, all models	5 mV/div - 100 V/div	DC - 1 GHz

Bandwidth selections

- **10 GHz model, 50 Ω:**
20 MHz, 200 MHz, 250 MHz, 350 MHz, 500 MHz, 1 GHz, 2 GHz, 2.5 GHz, 3 GHz, 4 GHz, 5 GHz, 6 GHz, 7 GHz, 8GHz, 9GHz, and 10 GHz.
- **8 GHz model, 50 Ω**
20 MHz, 200 MHz, 250 MHz, 350 MHz, 500 MHz, 1 GHz, 2 GHz, 2.5 GHz, 3 GHz, 4 GHz, 5 GHz, 6 GHz, 7 GHz, and 8 GHz.
- **6 GHz model, 50 Ω**
20 MHz, 200 MHz, 250 MHz, 350 MHz, 500 MHz, 1 GHz, 2 GHz, 2.5 GHz, 3 GHz, 4 GHz, 5 GHz, and 6 GHz
- **4 GHz model, 50 Ω**
20 MHz, 200 MHz, 250 MHz, 350 MHz, 500 MHz, 1 GHz, 2 GHz, 2.5 GHz, 3 GHz, and 4 GHz
- **2.5 GHz model, 50 Ω**

20 MHz, 200 MHz, 250 MHz, 350 MHz, 500 MHz, 1 GHz, 2 GHz, and 2.5 GHz

- **1 GHz model, 50 Ω**

20 MHz, 200 MHz, 250 MHz, 350 MHz, 500 MHz, and 1 GHz

- **1 M Ω**

20 MHz (HW), 200 MHz, 250 MHz (HW), 350 MHz, and Full (500 MHz)

Frequency response tolerance/flatness, 50 Ω

- ± 0.5 dB from DC to 80% of rated bandwidth up to 8 GHz instruments
- ± 0.5 dB from DC To 65% of rated bandwidth for 10 GHz instruments

Combined TDP7700 and 6 Series B MSO flatness, typical

- ± 0.6 dB from DC to 80% of nominal BW when used with P77C292MM (SMA Probe Tip)
- Not valid while using peak detect or envelope mode. Valid for probe modes A, B, and D

Phase accuracy

± 2.5 degrees, typical out to 9 GHz

Lower frequency limit, AC coupled, typical

<10 Hz when AC 1 M Ω coupled. The AC coupled lower frequency limits are reduced by a factor of 10 (<1 Hz) when 10X passive probes are used.

Upper frequency limit, 250 MHz bandwidth limited, typical

- **50 Ω , DC-coupled**

250 MHz, $\pm 5\%$

- **1 M Ω , DC-coupled**

250 MHz, $\pm 25\%$

Upper frequency limit, 20 MHz bandwidth limited, typical

- **50 Ω , DC-coupled**

20 MHz, $\pm 5\%$

- **1 M Ω , DC-coupled**

20 MHz, $\pm 25\%$

Calculated rise time

The formula used is $0.4/BW$ where BW is the measured -3 dB bandwidth of the oscilloscope. The formula accounts for the rise time contribution of the oscilloscope independent of the rise time of the signal source.

Calculated Rise Time (10% to 90%)

Below specification is independent of oscilloscope model and is dependent on bandwidth option only.

Model	50 Ω	TPP1000 Probe
	1 mV-1 V	5 mV-10 V
MSO6X BW-10000	40 ps	400 ps
MSO6X BW-8000	50 ps	400 ps
MSO6X BW-6000	66.67 ps	400 ps
MSO6X BW-4000	100 ps	400 ps

Model	50 Ω	TPP1000 Probe
	1 mV-1 V	5 mV-10 V
MSO6X BW-2500	160 ps	400 ps
MSO6X BW-1000	400 ps	400 ps

Effective bits (ENOB), typical

These limits apply to:

- Fastacq turned OFF
- 8 channel box: ch1, ch5
- 6 channel box: ch1, ch4
- 4 channel box: ch1, ch3

50 mV/div, 50 GS, Sample mode, 50 Ω , TYP							50 mV/div, 25 GS, HiRes mode, 50 Ω , TYP									
Frequency	Channel bandwidth															
	10 GHz	9 GHz	8 GHz	7 GHz	6 GHz	5 GHz	4 GHz	3 GHz	2.5 GHz	2 GHz	1GHz	500 MHz	350 MHz	250 MHz	200 MHz	20 MHz
10 MHz	6.6	6.75	6.85	7	7.15	7.4	7.6	7.85	7.95	8.05	8.45	8.65	8.8	8.85	8.9	9.85
250 MHz	6.6	6.75	6.85	7	7.15	7.35	7.5	7.75	7.85	7.95	8.3	8.65	8.8	8.85		
1 GHz	6.6	6.75	6.85	7	7.1	7.3	7.45	7.7	7.8	7.95	8.3					
2 GHz	6.55	6.65	6.75	6.85	7	7.2	7.35	7.55	7.65	7.75						
4 GHz	6.45	6.65	6.75	6.95	7.05	7.2	7.35									
7 GHz	6.55	6.65	6.75	6.9												

2 mV/div, 50 GS, Sample mode, 50 Ω , TYP							2 mV/div, 25 GS, HiRes mode, 50 Ω , TYP									
Frequency	Channel bandwidth															
	10 GHz	9 GHz	8 GHz	7 GHz	6 GHz	5 GHz	4 GHz	3 GHz	2.5 GHz	2 GHz	1GHz	500 MHz	350 MHz	250 MHz	200 MHz	20 MHz
10 MHz	4.95	5.1	5.2	5.35	5.55	5.7	5.9	6.1	6.2	6.35	6.8	7.25	7.5	7.65	7.85	9.25
250 MHz	4.95	5.1	5.2	5.35	5.55	5.7	5.85	6.1	6.2	6.35	6.8	7.25	7.5	7.65		
1 GHz	4.95	5.1	5.2	5.35	5.55	5.7	5.85	6.1	6.2	6.35	6.8					
2 GHz	4.95	5.1	5.2	5.35	5.55	5.65	5.85	6.05	6.2	6.35						
4 GHz	4.9	5.1	5.2	5.35	5.55	5.65	5.85									

2 mV/div, 50 GS, Sample mode, 50 Ω, TYP				2 mV/div, 25 GS, HiRes mode, 50 Ω, TYP												
Frequency	Channel bandwidth															
	10 GHz	9 GHz	8 GHz	7 GHz	6 GHz	5 GHz	4 GHz	3 GHz	2.5 GHz	2 GHz	1 GHz	500 MHz	350 MHz	250 MHz	200 MHz	20 MHz
7 GHz	4.9	5.1	5.2	5.35												

These limits apply to:

- 8 channel box: ch1, ch2, ch5, ch6
- 6 channel box: ch1, ch2, ch4, ch5
- 4 channel box: all channels

50 mV/div, 25 GS, Sample mode, 50 Ω, TYP				50 mV/div, 12.5 GS, HiRes mode, 50 Ω, TYP												
Frequency	Channel bandwidth															
	10 GHz	9 GHz	8 GHz	7 GHz	6 GHz	5 GHz	4 GHz	3 GHz	2.5 GHz	2 GHz	1 GHz	500 MHz	350 MHz	250 MHz	200 MHz	20 MHz
10 MHz	6.25	6.4	6.5	6.6	6.8	7.05	7.25	7.5	7.6	7.8	8.2	8.5	8.65	8.75	8.85	9.75
250 MHz	6.25	6.4	6.5	6.6	6.8	7	7.2	7.4	7.55	7.7	8.1	8.5	8.9	9		
1 GHz	6.25	6.4	6.5	6.6	6.8	7	7.15	7.4	7.5	7.65	8					
2 GHz	6.2	6.3	6.4	6.6	6.7	6.95	7.1	7.35	7.4	7.5						
4 GHz	6.2	6.3	6.4	6.5	6.7	6.95	7									
7 GHz	6.2	6.2	6.3	6.4												

2 mV/div, 25 GS, Sample mode, 50 Ω, TYP				2 mV/div, 12.5 GS, HiRes mode, 50 Ω, TYP												
Frequency	Channel bandwidth															
	10 GHz	9 GHz	8 GHz	7 GHz	6 GHz	5 GHz	4 GHz	3 GHz	2.5 GHz	2 GHz	1 GHz	500 MHz	350 MHz	250 MHz	200 MHz	20 MHz
10 MHz	4.8	5	5.1	5.3	5.5	5.65	5.9	6.1	6.2	6.35	6.8	7.2	7.4	7.5	7.75	8.8
250 MHz	4.8	5	5.1	5.3	5.5	5.65	5.9	6.1	6.2	6.35	6.8	7.2	7.4	7.5		
1 GHz	4.8	5	5.1	5.3	5.5	5.65	5.9	6.1	6.2	6.35	6.8					
2 GHz	4.8	5	5.1	5.3	5.5	5.6	5.85	6.1	6.2	6.35						
4 GHz	4.8	5	5.1	5.3	5.5	5.6	5.8									

2 mV/div, 25 GS, Sample mode, 50 Ω, TYP					2 mV/div, 12.5 GS, HiRes mode, 50 Ω, TYP											
Frequency	Channel bandwidth															
	10 GHz	9 GHz	8 GHz	7 GHz	6 GHz	5 GHz	4 GHz	3 GHz	2.5 GHz	2 GHz	1 GHz	500 MHz	350 MHz	250 MHz	200 MHz	20 MHz
7 GHz	4.8	5	5.1	5.3												

These limits apply to all channels

50 mV/div, 12.5 GS, Sample mode, 50 Ω, TYP									50 mV/div, 6.25 GS, HiRes mode, 50 Ω, TYP							
Frequency	Channel bandwidth															
	10 GHz	9 GHz	8 GHz	7 GHz	6 GHz	5 GHz	4 GHz	3 GHz	2.5 GHz	2 GHz	1 GHz	500 MHz	350 MHz	250 MHz	200 MHz	20 MHz
10 MHz						6.85	7.05	7.3	7.55	7.7	8.15	8.45	8.65	8.75	8.8	9.7
250 MHz						6.8	7.05	7.25	7.5	7.65	8.05	8.5	8.8	9.1		
1 GHz						6.8	7	7.25	7.45	7.65	8					
2 GHz						6.7	7	7.15	7.4	7.55						
4 GHz						6.7	7									
7 GHz																

2 mV/div, 12.5 GS, Sample mode, 50 Ω, TYP									2 mV/div, 6.25 GS, HiRes Mode, 50 Ω, TYP							
Frequency	Channel bandwidth															
	10 GHz	9 GHz	8 GHz	7 GHz	6 GHz	5 GHz	4 GHz	3 GHz	2.5 GHz	2 GHz	1 GHz	500 MHz	350 MHz	250 MHz	200 MHz	20 MHz
10 MHz						5.6	5.8	6	6.15	6.3	6.75	7.2	7.4	7.5	7.75	8.8
250 MHz						5.6	5.75	6	6.15	6.3	6.75	7.2	7.4	7.5		
1 GHz						5.55	5.75	6	6.15	6.3	6.75					
2 GHz						5.55	5.75	6	6.1	6.3						
4 GHz						5.55	5.75									
7 GHz																

Random Noise

50 Ω , 50 GS/s, Sample mode, RMS						50 Ω , 25 GS/s, HiRes mode, RMS										
V/div	10 GHz	9 GHz	8 GHz	7 GHz	6 GHz	5 GHz	4 GHz	3 GHz	2.5 GHz	2 GHz	1 GHz	500 MHz	350 MHz	250 MHz	200 MHz	20 MHz
1 mV	259 μ V	236 μ V	216 μ V	197 μ V	175 μ V	156 μ V	138 μ V	118 μ V	107 μ V	97.4 μ V	72.2 μ V	52.9 μ V	45 μ V	42 μ V	36.2 μ V	13 μ V
2 mV	266 μ V	242 μ V	221 μ V	199 μ V	180 μ V	158 μ V	139 μ V	120 μ V	108 μ V	98.7 μ V	73.2 μ V	53.6 μ V	45.7 μ V	42.6 μ V	36.7 μ V	13.2 μ V
5 mV	322 μ V	293 μ V	271 μ V	247 μ V	220 μ V	189 μ V	165 μ V	142 μ V	128 μ V	115 μ V	84.6 μ V	61.3 μ V	52.2 μ V	48.7 μ V	41.9 μ V	15 μ V
10 mV	488 μ V	445 μ V	406 μ V	370 μ V	330 μ V	278 μ V	242 μ V	203 μ V	181 μ V	163 μ V	117 μ V	84.8 μ V	70.5 μ V	65.8 μ V	56.7 μ V	20.6 μ V
20 mV	850 μ V	775 μ V	707 μ V	645 μ V	581 μ V	478 μ V	412 μ V	346 μ V	309 μ V	275 μ V	195 μ V	141 μ V	116 μ V	107 μ V	93.2 μ V	34.2 μ V
50 mV	1.96 mV	1.79 mV	1.63 mV	1.5 mV	1.34 mV	1.09 mV	949 μ V	790 μ V	704 μ V	627 μ V	444 μ V	325 μ V	261 μ V	241 μ V	210 μ V	79 μ V
100 mV	5.05 mV	4.55 mV	4.15 mV	3.79 mV	3.38 mV	2.81 mV	2.45 mV	2.06 mV	1.83 mV	1.65 mV	1.17 mV	858 μ V	705 μ V	658 μ V	573 μ V	203 μ V
1 V	38.8 mV	35.4 mV	32.6 mV	29.7 mV	26.8 mV	21.8 mV	18.8 mV	15.8 mV	13.9 mV	12.4 mV	8.78 mV	6.51 mV	5.11 mV	4.77 mV	4.15 mV	1.56 mV

50 Ω , 25 GS/s, Sample mode, RMS						50 Ω , 12.5 GS/s, HiRes mode, RMS										
V/div	10 GHz	9 GHz	8 GHz	7 GHz	6 GHz	5 GHz	4 GHz	3 GHz	2.5 GHz	2 GHz	1 GHz	500 MHz	350 MHz	250 MHz	200 MHz	20 MHz
1 mV	281 μ V	253 μ V	223 μ V	199 μ V	179 μ V	162 μ V	138 μ V	117 μ V	108 μ V	96.3 μ V	77.3 μ V	56 μ V	47.7 μ V	46.1 μ V	37.9 μ V	13 μ V
2 mV	288 μ V	260 μ V	224 μ V	202 μ V	180 μ V	164 μ V	139 μ V	119 μ V	110 μ V	97.6 μ V	72.4 μ V	56.2 μ V	47.3 μ V	46.7 μ V	38 μ V	13.3 μ V
5 mV	374 μ V	337 μ V	293 μ V	271 μ V	233 μ V	210 μ V	175 μ V	149 μ V	133 μ V	118 μ V	89.6 μ V	68 μ V	56.5 μ V	54 μ V	44.4 μ V	15.6 μ V

50 Ω, 25 GS/s, Sample mode, RMS						50 Ω, 12.5 GS/s, HiRes mode, RMS										
V/div	10 GHz	9 GHz	8 GHz	7 GHz	6 GHz	5 GHz	4 GHz	3 GHz	2.5 GHz	2 GHz	1 GHz	500 MHz	350 MHz	250 MHz	200 MHz	20 MHz
	600 uV	541 uV	482 uV	440 uV	388 uV	330 uV	271 uV	226 uV	203 uV	186 uV	128 uV	91.9 uV	77.3 uV	74.7 uV	65.8 uV	22.6 uV
20 mV	1.08 mV	976 uV	890 uV	793 uV	691 uV	595 uV	486 uV	398 uV	363 uV	320 uV	226 uV	162 uV	133 uV	120 uV	106 uV	41.2 uV
50 mV	2.53 mV	2.3 mV	2.1 mV	1.85 mV	1.67 mV	1.4 mV	1.15 mV	960 uV	856 uV	745 uV	534 uV	396 uV	307 uV	280 uV	247 uV	105 uV
100 mV	6.14 mV	5.54 mV	4.88 mV	4.4 mV	3.83 mV	3.38 mV	2.71 mV	2.28 mV	2.03 mV	1.81 mV	1.33 mV	941 uV	792 uV	722 uV	666 uV	236 uV
1 V	49.9 mV	46.1 mV	42 mV	37 mV	33.4 mV	28.1 mV	23.1 mV	19.2 mV	17.1 mV	14.9 mV	10.8 mV	7.92 mV	6.14 mV	5.6 mV	4.94 mV	2.11 mV

50 Ω , 12.5 GS/s, Sample mode, RMS				50 Ω , 6.25 GS/s, HiRes mode, RMS							
V/div	5 GHz	4 GHz	3 GHz	2.5 GHz	2 GHz	1 GHz	500 MHz	350 MHz	250 MHz	200 MHz	20 MHz
1 mV	162 μ V	142 μ V	123 μ V	109 μ V	99.6 μ V	73.9 μ V	54.8 μ V	46.6 μ V	43.5 μ V	38.8 μ V	14.7 μ V
2 mV	168 μ V	148 μ V	127 μ V	112 μ V	101 μ V	74.9 μ V	55.5 μ V	47.3 μ V	44.1 μ V	39.3 μ V	14.8 μ V
5 mV	233 μ V	203 μ V	173 μ V	142 μ V	128 μ V	92.8 μ V	68 μ V	56.5 μ V	52.8 μ V	47 μ V	17.7 μ V
10 mV	388 μ V	334 μ V	281 μ V	221 μ V	197 μ V	134 μ V	97.4 μ V	80.1 μ V	74.7 μ V	66.6 μ V	25.6 μ V
20 mV	715 μ V	609 μ V	518 μ V	398 μ V	350 μ V	237 μ V	174 μ V	138 μ V	129 μ V	115 μ V	44.6 μ V
50 mV	1.71 mV	1.47 mV	1.25 mV	938 μ V	836 μ V	559 μ V	410 μ V	322 μ V	300 μ V	271 μ V	105 μ V
100 mV	3.92 mV	3.38 mV	2.84 mV	2.23 mV	1.99 mV	1.36 mV	985 μ V	801 μ V	747 μ V	674 μ V	256 μ V
1 V	34.2 mV	29.4 mV	25 mV	19 mV	16.7 mV	11.1 mV	8.1 mV	6.36 mV	5.94 mV	5.35 mV	2.08 mV

1 M Ω , 25 GS/s, 12.5 GS/s, Sample mode, RMS					
V/div	500 MHz	350 MHz	250 MHz	200 MHz	20 MHz
1 mV	262 μ V	190 μ V	153 μ V	153 μ V	102 μ V
2 mV	285 μ V	195 μ V	156 μ V	153 μ V	111 μ V
5 mV	311 μ V	223 μ V	183 μ V	175 μ V	140 μ V
10 mV	370 μ V	281 μ V	259 μ V	242 μ V	226 μ V
20 mV	536 μ V	473 μ V	398 μ V	398 μ V	398 μ V
50 mV	1.1 mV	896 μ V	994 μ V	994 μ V	994 μ V
100 mV	2.39 mV	2.08 mV	1.99 mV	1.99 mV	1.99 mV
1 V	25.9 mV	22.3 mV	22.1 mV	21.8 mV	19.9 mV

1 M Ω , 12.5 GS/s, 6.25 GS/s, HiRes mode, RMS					
V/div	500 MHz	350 MHz	250 MHz	200 MHz	20 MHz
1 mV	262 μ V	190 μ V	153 μ V	149 μ V	103 μ V
2 mV	285 μ V	195 μ V	155 μ V	153 μ V	103 μ V

1 MΩ, 12.5 GS/s, 6.25 GS/s, HiRes mode, RMS					
V/div	500 MHz	350 MHz	250 MHz	200 MHz	20 MHz
5 mV	297 μ V	205 μ V	161 μ V	154 μ V	110 μ V
10 mV	334 μ V	231 μ V	186 μ V	165 μ V	141 μ V
20 mV	407 μ V	305 μ V	257 μ V	211 μ V	224 μ V
50 mV	737 μ V	553 μ V	528 μ V	387 μ V	510 μ V
100 mV	1.77 mV	1.38 mV	1.18 mV	952 μ V	1.13 mV
1 V	19 mV	14.9 mV	13.6 mV	11.3 mV	11.7 mV

Random Noise (Typical)

50 GS sample mode and 25 GS hires mode not available in Fastacq

TYP	50 Ω, 50 GS/s, Sample mode, RMS					50 Ω, 25 GS/s, HiRes mode, RMS										
	10 GHz	9 GHz	8 GHz	7 GHz	6 GHz	5 GHz	4 GHz	3 GHz	2.5 GHz	2 GHz	1 GHz	500 MHz	350 MHz	250 MHz	200 MHz	20 MHz
1 mV	183 μ V	167 μ V	153 μ V	139 μ V	124 μ V	111 μ V	97.4 μ V	83.8 μ V	75.6 μ V	68.9 μ V	51.1 μ V	37.5 μ V	31.9 μ V	28.1 μ V	24.2 μ V	8.68 μ V
2 mV	188 μ V	172 μ V	156 μ V	141 μ V	127 μ V	112 μ V	98.7 μ V	85 μ V	76.6 μ V	69.9 μ V	51.8 μ V	38 μ V	32.3 μ V	28.5 μ V	24.5 μ V	8.8 μ V
5 mV	228 μ V	208 μ V	192 μ V	175 μ V	156 μ V	134 μ V	117 μ V	101 μ V	90.7 μ V	81.7 μ V	59.9 μ V	43.4 μ V	36.9 μ V	32.5 μ V	28 μ V	10.1 μ V
10 mV	346 μ V	315 μ V	287 μ V	262 μ V	234 μ V	197 μ V	171 μ V	144 μ V	128 μ V	116 μ V	82.9 μ V	60 μ V	49.9 μ V	44 μ V	37.9 μ V	13.8 μ V
20 mV	602 μ V	549 μ V	501 μ V	457 μ V	412 μ V	338 μ V	291 μ V	245 μ V	219 μ V	195 μ V	138 μ V	99.9 μ V	82.1 μ V	71.5 μ V	62.3 μ V	22.9 μ V
50 mV	1.39 mV	1.27 mV	1.15 mV	1.07 mV	949 μ V	772 μ V	672 μ V	559 μ V	498 μ V	444 μ V	314 μ V	230 μ V	185 μ V	161 μ V	140 μ V	52.8 μ V
100 mV	3.58 mV	3.22 mV	2.94 mV	2.68 mV	2.39 mV	1.99 mV	1.73 mV	1.46 mV	1.3 mV	1.17 mV	829 μ V	607 μ V	499 μ V	440 μ V	383 μ V	136 μ V
1 V	27.4 mV	25 mV	23.1 mV	21.1 mV	19 mV	15.4 mV	13.3 mV	11.2 mV	9.85 mV	8.78 mV	6.22 mV	4.61 mV	3.62 mV	3.19 mV	2.78 mV	1.04 mV

TYP	50 Ω, 25 GS/s, Sample mode, RMS					50 Ω, 12.5 GS/s, HiRes mode, RMS										
	V/div	10 GHz	9 GHz	8 GHz	7 GHz	6 GHz	5 GHz	4 GHz	3 GHz	2.5 GHz	2 GHz	1 GHz	500 MHz	350 MHz	250 MHz	200 MHz
1 mV	199 uV	179 uV	158 uV	141 uV	127 uV	114 uV	97.4 uV	82.9 uV	76.5 uV	68.1 uV	54.8 uV	39.7 uV	33.8 uV	30.8 uV	25.3 uV	8.68 uV
2 mV	204 uV	184 uV	158 uV	143 uV	127 uV	116 uV	98.7 uV	84 uV	77.5 uV	69.1 uV	51.2 uV	39.8 uV	33.5 uV	31.2 uV	25.4 uV	8.9 uV
5 mV	264 uV	238 uV	208 uV	192 uV	165 uV	149 uV	124 uV	105 uV	93.8 uV	83.6 uV	63.4 uV	48.1 uV	40 uV	36.1 uV	29.7 uV	10.4 uV
10 mV	425 uV	383 uV	342 uV	311 uV	274 uV	234 uV	192 uV	160 uV	144 uV	131 uV	90.9 uV	65.1 uV	54.8 uV	49.9 uV	44 uV	15.1 uV
20 mV	766 uV	691 uV	630 uV	562 uV	489 uV	421 uV	344 uV	282 uV	257 uV	226 uV	160 uV	115 uV	94.3 uV	80.3 uV	70.7 uV	27.5 uV
50 mV	1.79 mV	1.63 mV	1.49 mV	1.31 mV	1.18 mV	994 uV	817 uV	680 uV	606 uV	528 uV	378 uV	280 uV	217 uV	187 uV	165 uV	70.4 uV
100 mV	4.35 mV	3.92 mV	3.46 mV	3.11 mV	2.71 mV	2.39 mV	1.92 mV	1.62 mV	1.44 mV	1.28 mV	941 uV	666 uV	560 uV	482 uV	445 uV	158 uV
1 V	35.4 mV	32.6 mV	29.7 mV	26.2 mV	23.6 mV	19.9 mV	16.3 mV	13.6 mV	12.1 mV	10.6 mV	7.65 mV	5.6 mV	4.35 mV	3.75 mV	3.3 mV	1.41 mV

TYP	50 Ω, 12.5 GS/s, Sample mode, RMS			50 Ω, 6.25 GS/s, HiRes mode, RMS								
	V/div	5 GHz	4 GHz	3 GHz	2.5 GHz	2 GHz	1 GHz	500 MHz	350 MHz	250 MHz	200 MHz	20 MHz
1 mV	114 uV	101 uV	86.8 uV	77.3 uV	70.5 uV	52.3 uV	38.8 uV	33 uV	29.1 uV	25.9 uV	9.85 uV	
2 mV	119 uV	105 uV	90.1 uV	79.3 uV	71.5 uV	53 uV	39.3 uV	33.5 uV	29.5 uV	26.3 uV	9.87 uV	
5 mV	165 uV	144 uV	122 uV	101 uV	90.7 uV	65.7 uV	48.1 uV	40 uV	35.3 uV	31.4 uV	11.8 uV	
10 mV	274 uV	236 uV	199 uV	156 uV	139 uV	95.2 uV	68.9 uV	56.7 uV	49.9 uV	44.5 uV	17.1 uV	
20 mV	506 uV	431 uV	367 uV	282 uV	248 uV	168 uV	123 uV	97.6 uV	86 uV	76.6 uV	29.8 uV	
50 mV	1.21 mV	1.04 mV	886 uV	664 uV	592 uV	396 uV	290 uV	228 uV	201 uV	181 uV	70.4 uV	

TYP	50 Ω , 12.5 GS/s, Sample mode, RMS			50 Ω , 6.25 GS/s, HiRes mode, RMS							
	5 GHz	4 GHz	3 GHz	2.5 GHz	2 GHz	1 GHz	500 MHz	350 MHz	250 MHz	200 MHz	20 MHz
100 mV	2.78 mV	2.39 mV	2.01 mV	1.58 mV	1.41 mV	963 μ V	697 μ V	567 μ V	499 μ V	450 μ V	171 μ V
1 V	24.2 mV	20.8 mV	17.7 mV	13.4 mV	11.8 mV	7.82 mV	5.73 mV	4.5 mV	3.97 mV	3.58 mV	1.39 mV

V/div	1 M Ω , 25 GS/s and 12.5 GS/s, Sample Mode, RMS				
	500 MHz	350 MHz	250 MHz	200 MHz	20 MHz
1 mV	186 μ V	134 μ V	108 μ V	108 μ V	72.2 μ V
2 mV	202 μ V	138 μ V	111 μ V	108 μ V	78.4 μ V
5 mV	220 μ V	158 μ V	130 μ V	124 μ V	99.4 μ V
10 mV	262 μ V	199 μ V	183 μ V	171 μ V	160 μ V
20 mV	380 μ V	335 μ V	282 μ V	282 μ V	282 μ V
50 mV	781 μ V	634 μ V	704 μ V	704 μ V	704 μ V
100 mV	1.69 mV	1.47 mV	1.41 mV	1.41 mV	1.41 mV
1 V	18.3 mV	15.8 mV	15.6 mV	15.4 mV	14.1 mV

V/div	1 M Ω , 12.5 GS/s and 6.25 GS/s, HiRes Mode, RMS				
	500 MHz	350 MHz	250 MHz	200 MHz	20 MHz
1 mV	186 μ V	134 μ V	108 μ V	106 μ V	73 μ V
2 mV	202 μ V	138 μ V	110 μ V	108 μ V	73.2 μ V
5 mV	210 μ V	145 μ V	114 μ V	109 μ V	78.1 μ V
10 mV	236 μ V	163 μ V	131 μ V	117 μ V	99.6 μ V
20 mV	288 μ V	216 μ V	182 μ V	149 μ V	158 μ V
50 mV	522 μ V	391 μ V	374 μ V	274 μ V	361 μ V
100 mV	1.25 mV	974 μ V	838 μ V	674 μ V	801 μ V
1 V	13.4 mV	10.6 mV	9.63 mV	8.01 mV	8.29 mV

✓ High offset AC RMS Noise

50 Ω

25 GS/s, Sample Mode, RMS

V/div	1 mV/div	2 mV/div	5 mV/div	10 mV/div	20 mV/div	50 mV/div	100 mV/div	1 V/div
8 GHz	223 μ V	224 μ V	293 μ V	482 μ V	890 μ V	2.1 mV	4.88 mV	42 mV
7 GHz	199 μ V	202 μ V	271 μ V	440 μ V	793 μ V	1.85 mV	4.4 mV	37 mV
6 GHz	179 μ V	180 μ V	233 μ V	388 μ V	691 μ V	1.67 mV	3.83 mV	33.4 mV

12.5 GS/s, HiRes Mode, RMS

V/div	1 mV/div	2 mV/div	5 mV/div	10 mV/div	20 mV/div	50 mV/div	100 mV/div	1 V/div
5 GHz	162 μ V	164 μ V	210 μ V	330 μ V	595 μ V	1.4 mV	3.38 mV	28.1 mV
4 GHz	138 μ V	139 μ V	175 μ V	271 μ V	486 μ V	1.15 mV	2.71 mV	23.1 mV
3 GHz	117 μ V	119 μ V	149 μ V	226 μ V	475 μ V	975 μ V	2.28 mV	21.4 mV
2 GHz	96.3 μ V	97.6 μ V	118 μ V	212 μ V	450 μ V	920 μ V	2.10 mV	21.0 mV
1 GHz	77.3 μ V	72.4 μ V	110 μ V	190 μ V	425 μ V	900 μ V	1.78 mV	19.2 mV
500 MHz	56 μ V	56.2 μ V	100 μ V	182 μ V	400 μ V	840 μ V	1.74 mV	16.8 mV
350 MHz	47.7 μ V	47.3 μ V	92.0 μ V	165 μ V	385 μ V	770 μ V	1.70 mV	16.1 mV
250 MHz	46.1 μ V	46.7 μ V	90.0 μ V	145 μ V	325 μ V	675 μ V	1.50 mV	15.8 mV
200 MHz	37.9 μ V	38.0 μ V	80.0 μ V	120 μ V	320 μ V	660 μ V	1.45 mV	15.2 mV
20 MHz	25.0 μ V	25.0 μ V	75.0 μ V	115 μ V	310 μ V	560 μ V	1.40 mV	13.0 mV

1 M Ω falls under the random noise specification at high offset levels.

Overdrive recovery time

500 ns pulse width

50 Ω	400% Overdrive			2000% Overdrive		
	Vertical scale	5%	1%	0.2%	5%	1%
2 mV / div	< 50 ns	50 ns	300 ns	—	—	—
10 mV / div	< 50 ns	50 ns	300 ns	50 ns	50 ns	400 ns
0.1 V / div	< 50 ns	50 ns	300 ns	—	—	—

100 μ s pulse width

50 Ω	400% Overdrive			2000% Overdrive		
	Vertical scale	5%	1%	0.2%	5%	1%
2 mV / div	< 50 ns	50 ns	1 μ s	—	—	—
10 mV / div	< 50 ns	50 ns	1 μ s	<50 ns	50 ns	150 μ s
0.1 V / div	< 50 ns	50 ns	1 μ s	—	—	—

TPP1000 Probe

Vertical scale	500% Overdrive			5000% Overdrive		
	5%	1%	0.2%	5%	1%	0.2%
10 mV / div	20 μ s	2.0 ms	2.0 ms	30 μ s	50 μ s	2.2 ms
20 mV / div	14 μ s	2.0 ms	2.0 ms	30 μ s	50 μ s	110 μ s
50 mV / div	12 μ s	60 μ s	2.0 ms	---	---	---
0.1 V / div	12 μ s	60 μ s	2.0 ms	---	---	---

Crosstalk (Channel Isolation) - 50 Ohm

- ≥ 50 dB up to 2 GHz
- ≥ 45 dB up to 5 GHz
- ≥ 40 dB up to 10 GHz
- With channels set to 200 mV/div

SFDR analog channels

SFDR analog channels, typical

A single input tone at -1 dBFS is swept from 10 MHz to bandwidth and the largest error spur is recorded.

Bandwidth	Sample rate	Acquisition mode	Vertical scale	SFDR
10 GHz	50 GS/s	Sample	50 mV/div	-45 dB
10 GHz	25 GS/s	Sample	50 mV/div	-45 dB
5 GHz	12.5 GS/s	Sample	50 mV/div	-45 dB
5 GHz	25 GS/s	Hi Res	50 mV/div	-51 dB
5 GHz	12.5 GS/s	Hi Res	50 mV/div	-51 dB
2 GHz	6.25 GS/s	Hi Res	50 mV/div	-52 dB
10 GHz	50 GS/s	Sample	2 mV/div	-42 dB
10 GHz	25 GS/s	Sample	2 mV/div	-42 dB
5 GHz	12.5 GS/s	Sample	2 mV/div	-42 dB
5 GHz	25 GS/s	Hi Res	2 mV/div	-51 dB
5 GHz	12.5 GS/s	Hi Res	2 mV/div	-51 dB
2 GHz	6.25 GS/s	Hi Res	2 mV/div	-52 dB

RF front-end

Two-tone third intercept point, typical

- +25 dBm <6 GHz
- +20 dBm 6 GHz to 8 GHz
- 12 dBm 8 GHz to 10 GHz

SFDR, typical

- -60 dBc for a 1 GHz input in a 5 GHz span with a 3 GHz CF
- -70 dBc at 2.35 GHz, 1.5 GHz span

EVM (256 QAM), typical

- 0.4% rms at 20 M Symbols/s
- 1.1% rms at 800 M Symbols/s
- 1.5% rms at 1.2 G Symbols/s
- 1.6% rms at 2 G Symbols/s

DANL

- -163 dBm/Hz 10 MHz to 6 GHz, 1 mV/div
- -160 dBm/Hz >6 GHz to 10 GHz, 1 mV/div

Harmonic Distortion

- 2nd harmonic distortion at -58 dBc with a 0 dBm 1 GHz signal.
- 3rd harmonic distortion at -55 dBc with a 0 dBm 1 GHz signal.

Sensitivity/Noise Density, typical

-157 dBm/Hz (1 mV/div, -38 dBm, 1.0001 GHz CF, 500 kHz span, 3 kHz RBW)

Phase noise at 1 GHz, typical

- -118 dBc/Hz 10 kHz offset
- -119 dBc/Hz 100 kHz offset
- -132 dBc/Hz 1 MHz offset
- -140 dBc/Hz 10 MHz offset

Absolute amplitude accuracy, typical

±1 dB (0-8 GHz) for max 10 GHz BW.

Noise figure, typical

1 mV/div, 11 dB 10 MHz to 6 GHz and 14 dB 6 GHz to 10 GHz

SNR/Dynamic Range, typical

112 dB with a 1 GHz signal in a 100 MHz span with 1 kHz RBW ± 20 MHz from the carrier.

Skew and delay**Digital skew, typical**

- **Digital-to-Analog skew**
1 ns
- **Digital-to-Digital skew**
± 320 ps from bit 0 of any TekVPI + channel to bit 0 of any TekVPI+ channel.
- **Digital skew within a FlexChannel**
< 200 ps within any TEKVPI + channel

Delay between analog channels, full bandwidth, typical

≤ 10 ps for any two channels with input impedance set to 50 Ω, DC coupling with equal Volts/div or above 10 mV/div

Deskew range and resolution

- -125 ns to +125 ns with a resolution of 40 ps (for Peak Detect and Envelope acquisition modes).
- -125 ns to +125 ns with a resolution of 1 ps (for all other acquisition modes).

Acquisition Modes

Sample, Peak Detect, High Res, Envelope, Average, Fast Frame

Number of digitized bits

	Sample Rate	Acquisition Mode	Digitized Bits	Channel Bandwidth
MSO64B channels 1 and 3 (2 and 4 off)	50 GS/s	Sample	8	10 GHz
MSO66B channels 1 and 4 (2, 3, 5, and 6 off)	25 GS/s	Hi Res	12	5 GHz
MSO68B channels 1 and 5 (2, 3, 4, 6, 7, and 8 off)	12.5 GS/s	Hi Res	12	5 GHz
	6.25 GS/s	Hi Res	13	2.5 GHz
	3.125 GS/s	Hi Res	14	1 GHz
	1.5625 GS/s	Hi Res	15	500 MHz
	625 MS/s	Hi Res	16	200 MHz
MSO64B all channels	25 GS/s	Sample	8	10 GHz
MSO66B channels 1, 2, 4, and 5 (3 and 6 off)	12.5 GS/s	Sample	12	10 GHz
MSO68B channels 1, 2, 5, and 6 (3, 4, 7, and 8 off)	12.5 GS/s	Hi Res	12	5 GHz
	6.25 GS/s	Hi Res	13	2.5 GHz
	3.125 GS/s	Hi Res	14	1 GHz
	1.5625 GS/s	Hi Res	15	500 MHz
	625 MS/s	Hi Res	16	200 MHz
MSO66B all channels	12.5 GS/s	Sample	8	5 GHz
MSO68B all channels	6.25 GS/s	Sample	12	5 GHz
	3.125 GS/s	Hi Res	13	1 GHz
	1.5625 GS/s	Hi Res	14	500 MHz
	1.25 GS/s	Hi Res	15	500 MHz
	312.5 MS/s	Hi Res	16	100 MHz

Peak Detect or Envelope Mode Minimum Detectable Pulse, typical

Channels	Sample Rate	Minimum Pulse Width
MSO64B channels 1 and 3 (2 and 4 off)	50 GS/s	160 ps
MSO66B channels 1 and 4 (2, 3, 5, and 6 off)		
MSO68B channels 1 and 5 (2,3, 4, 6, 7, and 8 off)		

Channels	Sample Rate	Minimum Pulse Width
MSO64B channels 2 and 4 MSO66B channels 2 and 5 (3 and 6 off) MSO68B channels 2 and 6 (3, 4, 7 and 8 off)	25 GS/s	160 ps
MSO66B channels 3 and 6 MSO68B channels 3, 4, 7, and 8	12.5 GS/s	320 ps

Number of waveforms for average acquisition mode

2 to 10,240 Waveforms, default 16 waveforms

TekVPI interface

TekVPI interconnect

All analog channel inputs on the front panel conform to the TekVPI+ specification defined in the TEKPROBE, TEKCONNECT, AND TEKVPI STANDARDS specification.

Total Probe Power

80 W maximum

- **MSO64B**
40 W maximum for channels 1 through 2 and 40 W maximum for channels 3 through 4.
- **MSO66B**
40 W maximum for channels 1 through 3 and 40 W maximum for channels 4 through 6.
- **MSO68B**
40 W maximum for channels 1 through 4 and 40 W maximum for channels 5 through 8.

Probe Power per Channel

- 5 V Supply: 300 mW (60 mA max)
- 12 V Supply: 20 W (1.67 A max)

Low-C Passive Probe Support

Supports TPP1000 and similar probes

Digital Probe Support

Supports TLP058 VPI+ digital probes

Probe User Interface

- Probe setup menu
- Probe menu button support (opens probe setup menu)
- Probe warning messages and indicators
- Dynamic range indication
- Probe bandwidth limiting

Timebase system

✓Timebase factory tolerance

Frequency tolerance at factory calibration is ± 12 ppb (parts per billion).

At Calibration, 25 °C ambient, over any ≥ 1 ms interval.

Timebase temperature stability

± 20 PPB across the full operating range of 0 °C to 50 °C, after a sufficient soak time at the temperature.

The instrument needs to soak at a fixed temperature for an extended period of time to insure the time-base frequency is stable. The following is a worst case estimation for the frequency error versus the amount of time the instrument has been soaking at a temperature.

Max error (in ppb) = $\pm 10^{\lceil \log[100/\text{soak time(in hours)}] \rceil}$

For example, a 1 hour soak will have a max frequency error of ± 100 ppb, but a 10 hour soak will have a max frequency error of 10 ppb.

± 300 PPB/Year, and will not exceed ± 2 PPM over 10 years without calibration.

Calibration will reduce this frequency error to under ± 12 PPB

Frequency tolerance change at 25 °C over a periods of 1 year and 10 years.

Sample rate

Sample rate range

Channels	Sample rate (real time)	Sample rate (interpolated)
2 channels	6.25 S/s to 50 GS/s	100 GS/s to 2.5 TS/s
4 channels	6.25 S/s to 25 GS/s	50 GS/s to 2.5 TS/s
8 channels	6.25 S/s to 12.5 GS/s	25 GS/s to 2.5 TS/s

- On 4-channel models, the 2 channels with 50 GS/s capability are 1 and 3 (channels 2 and 4 must be off).
- On 6-channel models, the 2 channels with 50 GS/s capability are 1 and 4 (channels 2, 3, 5, and 6 must be off).
- On 8-channel models, the 2 channels with 50 GS/s capability are 1 and 5 (channels 2, 3, 4, 6, 7, and 8 must be off).
- On 6-channel models, the 4 channels with 25 GS/s capability are 1, 2, 4 and 5 (channels 3 and 6 must be off).
- On 8-channel models, the 4 channels with 25 GS/s capability are 1, 2, 5, and 6 (channels 3, 4, 7, and 8 must be off).

High Res sample rate

Channels	Sample rate
2 channels	up to 25 GS/s
4 channels	up to 12.5 GS/s
8 channels	up to 6.25 GS/s

- On 4-channel models, the 2 channels with 25 GS/s capability are 1 and 3 (channels 2 and 4 must be off).
- On 6-channel models, the 2 channels with 25 GS/s capability are 1 and 4 (channels 2, 3, 5, and 6 must be off).
- On 8-channel models, the 2 channels with 25 GS/s capability are 1 and 5 (channels 2, 3, 4, 6, 7, and 8 must be off).
- On 6-channel models, the 4 channels with 12.5 GS/s capability are 1, 2, 4, and 5 (channels 3 and 6 must be off).
- On 8-channel models, the 4 channels with 12.5 GS/s capability are 1, 2, 5 and 6 (channels 3, 4, 7, and 8 must be off).

Interpolated waveform rate (Sample mode):

- 2.5 TS/s
- 1 TS/s
- 500 GS/s
- 250 GS/s
- 100 GS/s
- 50 GS/s (only with a 25 GS/s or 12.5 GS/s channel on)
- 25 GS/s (only with a 12.5 GS/s channel on)

Interpolated waveform rate (High Res mode):

- 2.5 TS/s
- 1 TS/s
- 500 GS/s
- 250 GS/s
- 100 GS/s
- 50 GS/s
- 25 GS/s (only with a 25 GS/s or 12.5 GS/s channel on)
- 12.5 GS/sec (only with a 12.5 GS/s channel on)

Record length range

Applies to analog and digital channels. All acquisition modes are 1 G maximum record length, down to 1 k minimum record length, adjustable in 1 sample increments.

Standard: 62.5 Mpoints

Option 6-RL-1: 125 Mpoints

Option 6-RL-2: 250 Mpoints

Option 6-RL-3: 500 Mpoints

Option 6-RL-4: 1 Gpoints

Horizontal scale range

40 ps/div to 1000 s/div

The minimum horizontal scale is determined by the record length by dividing the record length by 10 (because there are 10 divisions on-screen) and then dividing by the maximum sample rate (2.5 TS/s).

40 ps/div can only be achieved with a 2.5 TS/s sample rate (maximum) and a 1000 point record length (minimum).

The table below shows minimum horizontal scales for a collection of record lengths.

Record length	Minimum Horizontal Scale
1 kS	40 ps/div
10 kS	400 ps/div
100 kS	4 ns/div
1 MS	40 ns/div
10 MS	400 ns/div
62.5 MS	2.5 us/div

Record length	Minimum Horizontal Scale
125 MS with optional memory length	5 us/div
250 MS with optional memory length	10 us/div
500 MS with optional memory length	20 us/div
1 GS with optional memory length	40 us/div

1000 s/div is the maximum horizontal scale which limits the acquisition length to 10000 s (2 hours, 46 minutes and 40 seconds).

Below a record length of 62.5 kS, the horizontal scale is further limited. The maximum horizontal scale can be calculated by dividing the record length by 10 (because there are 10 division on-screen) and then dividing by the minimum sample rate (6.25 S/s).

The table below shows maximum horizontal scales for a collection of record length.

Record length	Maximum Horizontal Scale
1 kS	16 s/div
5 kS	80 s/div
10 kS	160 s/div
25 kS	400 s/div
50 kS	800 s/div
62.5 kS	1000 s/div

Sample jitter (Aperture uncertainty), typical

Time duration	Typical jitter
<1 μs	80 fs
<1 ms	130 fs

Delta-time measurement accuracy, typical

Delta-time measurement accuracy, typical

Formula for DTA:

SR_1 = Slew Rate (1st Edge) around 1st point in measurement

SR_2 = Slew Rate (2nd Edge) around 2nd point in measurement

N = RSS of input-referred noise (volts rms) and Dynamic noise estimate (volts rms).

$$\text{Dynamic noise estimate}^* = \sqrt{\frac{BW}{8GHz}} \times 19.9 \times 10^{-3} \times \text{volts/div}$$

NOTE: Dynamic noise is noise that appears with a signal applied (such as distortion or interleave errors).

t_j = aperture uncertainty (sec rms—80fs for short durations)

TBA = timebase accuracy or reference frequency error (which is 20ppb)

$$DTA_{rms} = \sqrt{\left(\frac{N}{SR_1}\right)^2 + \left(\frac{N}{SR_2}\right)^2} + t_j^2 + TBA \times t_p$$

t_p = delta-time measurement duration (sec)

Delta Time Measurement Accuracy (DTA), reference example

These limits apply to:

- MSO64B: Channels 1 and 3
- MSO66B: Channels 1 and 4
- MSO68B: Channels 1 and 5 are the only ones used

Volts/div	BW	Sample rate	Sample mode	Frequency	Amplitude pk-pk	DTA TYP
50 mV	10 GHz	50 GHz	Sample	5.65 GHz	400 mV	327.78 fs
50 mV	8 GHz	50 GHz	Sample	4.52 GHz	400 mV	346.08 fs
50 mV	6 GHz	50 GHz	Sample	3.39 GHz	400 mV	383.01 fs
50 mV	5 GHz	25 GHz	Hi-Res	2.825 GHz	400 mV	387.37 fs
50 mV	4 GHz	25 GHz	Hi-Res	2.26 GHz	400 mV	424.08 fs
50 mV	2.5 GHz	25 GHz	Hi-Res	1.4125 GHz	400 mV	512.12 fs
50 mV	2 GHz	25 GHz	Hi-Res	1.13 GHz	400 mV	569.94 fs
50 mV	1 GHz	25 GHz	Hi-Res	565 MHz	400 mV	802.6 fs
5 mV	10 GHz	50 GHz	Sample	5.65 GHz	40 mV	486.58 fs
5 mV	8 GHz	50 GHz	Sample	4.52 GHz	40 mV	514.54 fs
5 mV	6 GHz	50 GHz	Sample	3.39 GHz	40 mV	561 fs
5 mV	5 GHz	25 GHz	Hi-Res	2.825 GHz	40 mV	583.91 fs
5 mV	4 GHz	25 GHz	Hi-Res	2.26 GHz	40 mV	637.27 fs
5 mV	2.5 GHz	25 GHz	Hi-Res	1.4125 GHz	40 mV	791.51 fs
5 mV	2 GHz	25 GHz	Hi-Res	1.13 GHz	40 mV	889.92 fs
5 mV	1 GHz	25 GHz	Hi-Res	565 MHz	40 mV	1.29 ps

These limits apply to:

- MSO64B: All channels
- MSO66B: Channels 1, 2, 4, and 5
- MSO68B: Channels 1, 2, 5, and 6 are the only ones used

Volts/div	BW	Sample rate	Sample mode	Frequency	Amplitude pk-pk	DTA TYP
50 mV	10 GHz	25 GHz	Sample	5.65 GHz	400 mV	397.32 fs
50 mV	8 GHz	25 GHz	Sample	4.52 GHz	400 mV	417.47 fs
50 mV	6 GHz	25 GHz	Sample	3.39 GHz	400 mV	448.57 fs
50 mV	5 GHz	12.5 GHz	Hi-Res	2.825 GHz	400 mV	460.86 fs
50 mV	4 GHz	12.5 GHz	Hi-Res	2.26 GHz	400 mV	483.23 fs
50 mV	2.5 GHz	12.5 GHz	Hi-Res	1.4125 GHz	400 mV	581.18 fs
50 mV	2 GHz	12.5 GHz	Hi-Res	1.13 GHz	400 mV	636.8 fs
50 mV	1 GHz	12.5 GHz	Hi-Res	565 MHz	400 mV	904.88 fs
5 mV	10 GHz	25 GHz	Sample	5.65 GHz	40 mV	555.49 fs
5 mV	8 GHz	25 GHz	Sample	4.52 GHz	40 mV	551.87 fs
5 mV	6 GHz	25 GHz	Sample	3.39 GHz	40 mV	589.36 fs
5 mV	5 GHz	12.5 GHz	Hi-Res	2.825 GHz	40 mV	637.71 fs
5 mV	4 GHz	12.5 GHz	Hi-Res	2.26 GHz	40 mV	668.87 fs
5 mV	2.5 GHz	12.5 GHz	Hi-Res	1.4125 GHz	40 mV	814.74 fs
5 mV	2 GHz	12.5 GHz	Hi-Res	1.13 GHz	40 mV	907.3 fs
5 mV	1 GHz	12.5 GHz	Hi-Res	565 MHz	40 mV	1.36 ps

These limits apply to:

- MSO66B: All channels
- MSO68B: All channels are used

Volts/div	BW	Sample rate	Sample mode	Frequency	Amplitude pk-pk	DTA TYP
50 mV	5 GHz	12.5 GHz	Sample	2.825 GHz	400 mV	536.22 fs
50 mV	4 GHz	12.5 GHz	Sample	2.26 GHz	400 mV	580.12 fs
50 mV	2.5 GHz	6.25 GHz	Hi-Res	1.4125 GHz	400 mV	620.41 fs
50 mV	2 GHz	6.25 GHz	Hi-Res	1.13 GHz	400 mV	690.69 fs

Volts/div	BW	Sample rate	Sample mode	Frequency	Amplitude pk-pk	DTA TYP
50 mV	1 GHz	6.25 GHz	Hi-Res	565 MHz	400 mV	934.61 fs
5 mV	5 GHz	12.5 GHz	Sample	2.825 GHz	40 mV	698.23 fs
5 mV	4 GHz	12.5 GHz	Sample	2.26 GHz	40 mV	761.47 fs
5 mV	2.5 GHz	6.25 GHz	Hi-Res	1.4125 GHz	40 mV	864.09 fs
5 mV	2 GHz	6.25 GHz	Hi-Res	1.13 GHz	40 mV	971.89 fs
5 mV	1 GHz	6.25 GHz	Hi-Res	565 MHz	40 mV	1.4 ps

Trigger system

Trigger types

Edge, Dual Edge, Pulse Width, Timeout, Runt, Logic, Setup & Hold, Rise / Fall Time, Window, Bus, Parallel, I2C, SPI, RS-232, CAN, LIN, FlexRay, USB LS, USB FS, USB HS, Ethernet 10/100, Audio (I2S/LJ/RJ/TDM), CAN-FD, ARINC 429, MIL-STD-1553, SPMI, SENT

Trigger modes

Normal and Auto

Trigger coupling

DC, HF Reject, LF Reject, Noise Reject

Trigger holdoff range

0 ns minimum to 10 seconds maximum

Trigger level ranges, typical

Source	Range
Analog Inputs	±5 divs from center of screen
Line	N/A
AUX Input	±5 V

Time Range for Glitch, Pulse Width, Timeout, Time-qualified Runt or Time-qualified Window, Transition Time Trigger

40 ps to 20 s

Setup/Hold Violation Trigger, Setup and Hold Time Ranges

Feature	Min	Max
Setup Time	0 ns	20 s
Hold Time	0 ns	20 s
Setup + Hold Time	80 ps	22 s

Input coupling on clock and data channels must be the same.

For Setup Time, positive numbers mean a data transition before the clock.

For Hold Time, positive numbers mean a data transition after the clock edge.

Setup + Hold Time is the algebraic sum of the Setup Time and the Hold Time programmed by the user.

Oscilloscopes Trigger position is equal to the Hold Time value.

Trigger jitter, typical

Analog Inputs

- Trigger jitter ≤ 1.5 ps RMS for Sample mode, Edge-type trigger, FastAcq, and Pulse width modes
- Trigger jitter ≤ 40 ps RMS for non-Edge-type trigger modes

Trigger Bandwidth – Edge, Pulse, Logic, typical

Model	Instrument bandwidth	Edge trigger bandwidth	Pulse, Logic trigger bandwidth
MSO6XB	10 GHz	10 GHz	4 GHz
MSO6XB	8 GHz	8 GHz	4 GHz
MSO6XB	6 GHz	6 GHz	4 GHz
MSO6XB	4 GHz, 2.5 GHz, 1 GHz	Instrument bandwidth	Instrument bandwidth

Trigger level accuracy, DC-coupled, typical

For signals having rise and fall times ≥ 10 ns, the limits are as follows:

Source	Range
Any Input Channel	± 0.20 div
Line	N/A

This limit is checked by SPC at very low frequency (nearly DC).

This limit does not include frequency dependent effects, edge type trigger sensitivity not DC coupled, or trigger position error.

Set the trigger level to the desired value. Using an adjustable DC source, inject a voltage into the instrument. Adjust the voltage downward (if checking negative slope) or upward (if checking positive slope) until the scope triggers. The difference between the trigger level setting and the voltage that actually caused the trigger is the trigger level accuracy.

Edge-type Trigger Sensitivity, DC-coupled, typical

Trigger Source	Sensitivity
Any input channel, 1 M Ω path	0.5 mV/div to 0.99 mV/div – 5 mV from DC to instrument bandwidth. ≥ 1 mV/div – The greater of 5 mV or 0.7 div from DC to the less of 500 MHz or BW.
Any input channel, 50 Ω path	<ul style="list-style-type: none"> ▪ 1 mV/div to 1.99 mV/div – 3.5 divisions from DC to 80% of instrument bandwidth. ▪ 2 mV/div to 4.99 mV/div - 2 divisions from DC to 80% of instrument bandwidth. ▪ ≥ 5 mV/div - 1.5 divisions from DC to 80% of instrument bandwidth.

Trigger Source	Sensitivity
Line, 90 V to 264 V line voltage at 50-60 Hz line frequency	103.5 V to 126.5 V
AUX Trigger	250 mVpp (DC - 400 MHz)

Edge-type trigger sensitivity, not DC-coupled, typical

Trigger Coupling	Typical Sensitivity
NOISE REJ	2.5 times the DC Coupled limits
HF REJ	1.0 times the DC Coupled limits from DC to 50 kHz. Attenuates signals above 50 kHz.
LF REJ	1.5 times the DC Coupled limits for frequencies above 50 kHz. Attenuates signals below 50 kHz.

Logic-type, or Logic-qualified trigger, or Events-delay sensitivities, DC-coupled, typical

2.0 division, at vertical setting ≥ 5 mV/div

Logic-type triggering, Minimum logic or Re-arm time, typical

For all vertical settings, the minimums are:

Triggering Type	Pulse Width	Re-Arm Time	Time overlap needed for 100% & No Triggering ¹
Logic	120 ps + trise	120 ps + trise	≥ 160 ps / ≤ -40 ps
Time-qualified logic	240 ps + trise	240 ps + trise	≥ 280 ps / ≤ -40 ps

trise = calculated rise time

For Logic, time between channels refers to the length of time a logic state derived from more than one channel must exist to be recognized. For Events, the time is the minimum time between a main and delayed event that will be recognized if more than one channel is used.

Time accuracy for pulse width and timeout triggering

The limits are as follows:

Time Range	Accuracy
320 ps to 20 s	$\pm(40 \text{ ps} + (\text{Time-Base-Accuracy} * \text{Setting}))$

Time-Base-Accuracy when locked to an external source is equivalent to the accuracy of the external source.

Pulse-type Trigger, Minimum Pulse, Re-arm Time, Transition Time

The limits are as follows:

Pulse class	Minimum pulse width	Minimum rearm time
Runt	40 ps + trise	40 ps + trise
Time-qualified runt	40 ps + trise	40 ps + trise

Pulse class	Minimum pulse width	Minimum rearm time
Width	40 ps + trise	40 ps + trise

trise = calculated rise time

Trigger class	Minimum transition time	Minimum rearm time
Rise/Fall Time	40 ps + trise	40 ps + trise

trise = calculated rise time

Minimum clock pulse widths for Setup/Hold time violation trigger, typical

For all vertical settings, the minimums are:

Minimum Pulse Width, Clock Active	Minimum Pulse Width, Clock Inactive
User's Hold Time 80 ps + trise	80 ps + trise

Active pulse width is the width of the clock pulse from its active edge (as defined in the Clock Edge setting) to its inactive edge. Inactive pulse width is the width of the pulse from its inactive edge to its active edge.

User Hold Time is the number selected by the user in the "Setup & Hold Times" setting

trise = calculated rise time

For Setup/Hold trigger to work properly, Setup + Hold must be less than the clock period.

B Trigger after events, minimum pulse width, and maximum event frequency, typical

Minimum pulse width: 40 ps + trise (calculated rise time)

Maximum Event Frequency: Instrument BW

Pulse-type runt trigger sensitivities, typical

2.0 division, at vertical setting ≥ 5 mV/div

Pulse-type trigger width and glitch sensitivities, typical

2.0 division, at vertical setting ≥ 5 mV/div

B Trigger, minimum time arm, and trigger, typical

80 ps

For trigger after time, this is the time between the end of the time period and the B trigger event.

For trigger after events, this is the time between the last A trigger event and the first B trigger event.

B Trigger after time, time range

40 ps to 20 seconds.

Accuracy = $\pm(40 \text{ ps} + (\text{Time-Base-Error} * \text{Setting}))$

B Trigger after events, event range

1 to 65,471

Video-type trigger formats

NTSC, PAL, and SECAM

Lowest frequency for successful operation of "Set Level to 50%" function, typical

45 Hz

Maximum Triggered Acquisition Rate, typical

Analysis/measurement mode: Analog or Digital (single channel [Analog or Digital 8-bit channel] on screen, measurements and math turned off): >40/sec

FastAcq mode (Peak detect or Envelope acquisition mode, OneAnalog channel, with or without digital channel enabled): >500,000 /s

FastAcq Mode (All other acq modes, One analog channel, with or without digital channel enabled): 30,000 /s

Fast frame rate (50-point frames): 5,000,000/second in 25 GS/s and 2,500,00/second in 12.5 GS/s

Digital channels are not capable of acquiring at the FastAcq rate, but can still be enabled and acquiring (at a slower rate) while an analog channel is in FastAcq mode.

Maximum Number of Frames in FastFrame, typical

For system memory depths up to 250 M, and for record length $\geq 1,000$ points, maximum number of frames = system memory depth / record length setting.

For system memory depths of 500 M, and when only channels capable of a maximum sample rate of ≥ 25 GS/s are used, maximum number of frames = system memory depth / record length setting.

For system memory depths of 500 M, and when any channels capable of a maximum sample rate of 12.5 GS/s are used, maximum number of frames is $\geq 250,000$.

For system memory depths of 1 G, and when only channels capable of a maximum sample rate of ≥ 25 GS/s are used, maximum number of frames \geq system memory depth / record length setting / 2.

For system memory depths of 1 G, and when only channels capable of a maximum sample rate of 12.5 GS/s are used, maximum number of frames \geq system memory depth / record length setting / 4.

Optional Serial Bus Interface Triggering

- **I2C Bus**

Trigger on: Start, Repeated Start, Stop, Missing Ack, Data, Address, or Address & Data

Data Trigger: 1 – 5 Bytes of user-specified data

Address Triggering: 7 & 10 bits of user-specified addresses supported

Maximum Data Rate: 10 Mb/s

- **SPI Bus**

Trigger on: SS Active, Data

Data Trigger: 1 – 16 Bytes of user-specified data

Maximum Data Rate: 20 Mb/s

- **RS232 Bus**

Trigger on: Start, End of Packet, Data, Parity Error

Bit Rate: 50 bps – 10 Mbps

Data Bits: 7, 8, or 9

Parity: None, Odd, or Even

- **CAN Bus**

Trigger on: Start of Frame, Type of Frame, Identifier, Data, Identifier & Data, End of Frame, Missing Ack, or Bit Stuffing Error

Frame Type: Data, Remote, Error, Overload

Identifier: Standard (11 bit) and Extended (29 bit) identifiers

Data Trigger: 1 – 8 Bytes of user-specified data, including qualifiers of equal to (=), not equal to (\neq), less than (<), greater than (>), less than or equal to (\leq), greater than or equal to (\geq).

Maximum Data Rate: 1 Mb/s

- **CAN-FD Bus**

Trigger on Start of Frame, Type of Frame (Data, Remote, Error, or Overload), Identifier (Standard or Extended), Data (1-8 bytes), Identifier and Data, End Of Frame, Error (Missing Ack, Bit Stuffing Error, FD Form Error, Any Error) on CAN FD buses up to 16 Mb/s

- **LIN Bus**

Trigger on: Sync, Identifier, Data, Identifier & Data, Wakeup Frame, Sleep Frame, or Error.

Identifier Trigger: 6 bits of user-specified data, equal to (=).

Data Trigger: 1 – 8 Bytes of user-specified data, including qualifiers of equal to (=), not equal to (\neq), less than (<), greater than (>), less than or equal to (\leq), greater than or equal to (\geq), inside range, outside range.

Error Trigger: Sync, Identifier Parity, Checksum.

Maximum Data Rate: 100 kb/s

- **Flexray Bus**

Trigger on: Start of Frame, Indicator Bits, Frame ID, Cycle Count, Header Fields, Data, Frame ID & Data, End ofFrame, or Error.

Indicator Bits: Normal (01XX), Payload (11XX), Null (00XX), Sync (XX10), Startup (XX11).

Frame ID Trigger: 11 bits of user-specified data, including qualifiers of equal to (=), not equal to (\neq), less than (<), greater than (>), less than or equal to (\leq), greater than or equal to (\geq).

Cycle Count Trigger: 6 bits of user-specified data, including qualifiers of equal to (=), not equal to (\neq), less than (<), greater than (>), less than or equal to (\leq), greater than or equal to (\geq).

Header Fields Trigger: 40 bits of user-specified data comprising Indicator Bits, Identifier, Payload Length, Header CRC, and Cycle Count, equal to (=).

Data Trigger: 1 – 16 Bytes of user-specified data, with 0 to 253, or "don't care" bytes of data offset, including qualifiers of equal to (=), not equal to <>, less than (<), greater than (>), less than or equal to (\leq), greater than or equal to (\geq), Inside Range, Outside Range.

End Of Frame: User-chosen types Static, Dynamic (DTS), and All.

Error Trigger: Header CRC, Trailer CRC, Null Frame-Static, Null Frame-Dynamic, Sync Frame, Startup Frame (No Sync)

Maximum Data Rate: 40 Mb/s

- **SENT Bus**

Trigger on Start of Packet, Fast Channel Status and Data, Slow Channel Message ID and Data, and CRC Errors

- **SPMI Bus**

Trigger on Sequence Start Condition, Reset, Sleep, Shutdown, Wakeup, Authenticate, Master Read, Master Write, Register Read, Register Write, Extended Register Read, Extended Register Write, Extended Register Read Long, Extended Register Write Long, Device Descriptor Block Master Read, Device Descriptor Block Slave Read, Register 0 Write, Transfer Bus Ownership, and Parity Error

- **Ethernet Bus**

Trigger On: Start of Frame, MAC Addresses, MAC Length/Type, IP Header, TCP Header, Client Data, End of Packet, Idle, FCS (CRC) Error, MAC Q-Tag Control Information.

Bit rate: 10 BASE-T, 10 Mbps; 100 BASE-TX, 100 Mbps

- **USB Bus**

Trigger On: Sync, Handshake Packet, Special Packet, Error, Token Packet, Data Packet, Reset, Suspend, Resume, End of Packet.

Data rates supported: High: 480 Mbs, Full: 12 Mbs, Low: 1.5 Mbs

- **Audio I2S Bus**

Trigger on: Word Select, Data

Data Trigger: 32 bits of user-specified data in a left word, right word, or either, including qualifiers of equal to (=), not equal to (\neq), less than (<), greater than (>), less than or equal to (\leq), greater than or equal to (\geq), inside range, outside range.

Maximum Data Rate: 12.5Mb/s

Left Justified (LJ)

Trigger on: Word Select, Data

Data Trigger: 32 bits of user-specified data in a left word, right word, or either, including qualifiers of equal to (=), not equal to (\neq), less than (<), greater than (>), less than or equal to (\leq), greater than or equal to (\geq), inside range, outside range.

Maximum Data Rate: 12.5Mb/s

- **Audio (LJ) Bus**

Trigger on Word Select, Frame Sync, or Data

Maximum data rate for LJ is 12.5 Mb/s

- **Audio (RJ) Bus**

Trigger on: Word Select, Data

Data Trigger: 32 bits of user-specified data in a left word, right word, or either, including qualifiers of equal to (=), not equal to (\neq), less than (<), greater than (>), less than or equal to (\leq), greater than or equal to (\geq), inside range, outside range.

Maximum Data Rate: 12.5 Mb/s

- **Audio (TDM) Bus**

Trigger on: Frame Sync, Data

Data Trigger: 32 bits of user-specified data in a channel 1-64, including qualifiers of equal to (=), not equal to (\neq), less than (<), greater than (>), less than or equal to (\leq), greater than or equal to (\geq), inside range, outside range.

Maximum Data Rate: 25 Mb/s

- **MIL-STD-1553 Bus**

Trigger on Sync, Command (Transmit/Receive Bit, Parity, Subaddress / Mode, Word Count / Mode Count, RT Address), Status (Parity, Message Error, Instrumentation, Service Request, Broadcast Command Received, Busy, Subsystem Flag, Dynamic Bus Control Acceptance, Terminal Flag), Data, Time (RT/IMG), and Error (Parity Error, Sync Error, Manchester Error, Non-contiguous Data) on MIL-STD-1553 buses

- **ARINC 429 Bus**

Trigger on Word Start, Label, Data, Label and Data, Word End, and Error (Any Error, Parity Error, Word Error, Gap Error) on ARINC 429 buses up to 1 Mb/s

Analysis

Supported Buses

Parallel, I2C, SPI, RS-232, CAN, CAN-FD, LIN, FlexRay, USB LS, USB FS, USB HS, eUSB2, Ethernet 10/100, Audio (I²S/LJ/RJ/TDM), ARINC 429, MIL-STD-1553, SENT, PSI5, I³C, MDIO, SPMI, 8b/10b, NRZ, Automotive Ethernet (100Base-T1), Manchester, MIPI D-PHY, Spacewire, SVID

Available Amplitude Measurements

Amplitude, Peak-to-Peak, Mean, Top, Maximum, Positive Overshoot, RMS, Base, Minimum, Negative Overshoot, AC RMS, Area

Available Time Measurements

Period, Data Rate, Skew, Fall Time, Falling Slew Rate, Negative Duty Cycle, Hold Time, Low Time, Frequency, Positive Pulse Width, Delay, Phase, Burst Width, Time Outside Level, Duration N-Periods, Unit Interval, Negative Pulse Width, Rise Time, Rising Slew Rate Positive Duty Cycle, Setup Time, High Time

Available Jitter Measurements

TIE, Phase Noise

Measurements Available with DJA

AC Common Mode, DC Common Mode, Differential Crossover, T/nT Ratio, Bit High, Bit Low, Bit Amplitude, SSC Profile, SSC Freq Deviation, SSC Modulation Rate, Jitter Summary, RJ, RJ-sigmasigma, TJ@BER, DJ, DJ-sigmasigma, PJ, DDJ, DCD, J2, J9, Clock NPJ, SRJ, F/N, Eye Width, Eye Width@BER, Eye Height, Eye Height@BER, Eye High, Eye Low, Q-Factor

Math Waveform Sources

Analog Channels, Math Waveforms, Reference Waveforms, Measurements

Math Waveform Operators

+, -, *, /, <, >, ≥, ≤, =, !=, AND, OR, NAND, NOR, XOR, EQV, square root, absolute value, integral, derivative, log10, ln, exponential, ceiling, floor, invert, minimum, maximum, sine, cosine, tangent, arcsin, arccos, arctan, radians, degrees, spectral magnitude, spectral phase, spectral real, spectral imaginary

Available Cursor Types

Waveform, V Bars, H Bars, V&H Bars

Cursor Waveform Sources

Analog channels, Digital channels, Math Waveforms, Reference Waveforms. Cursors can apply to the same waveform ("Same") or to different waveforms ("Split")

Available Plot Types

Plot menu: XY, XYZ, Eye Diagram

Measurement menu: Histogram, Time Trend, Spectrum

Measurement Statistics

Mean, standard deviation, maximum, minimum, waveform count

Arbitrary function generator

Function types

Arbitrary, sine, square, pulse, ramp, triangle, DC level, Gaussian, Lorentz, exponential rise/fall, sin(x)/x, random noise, Haversine, Cardiac

Amplitude range

Values are peak-to-peak voltages

Waveform	50Ω	1MΩ
Arbitrary	10 mV to 2.5 V	20 mV to 5 V
Sine	10 mV to 2.5 V	20 mV to 5 V
Square	10 mV to 2.5 V	20 mV to 5 V
Pulse	10 mV to 2.5 V	20 mV to 5 V
Ramp	10 mV to 2.5 V	20 mV to 5 V
Triangle	10 mV to 2.5 V	20 mV to 5 V
Gaussian	10 mV to 1.25 V	20 mV to 2.5 V
Lorentz	10 mV to 1.2 V	20 mV to 2.4 V

Waveform	50Ω	1MΩ
Exponential Rise	10 mV to 1.25 V	20 mV to 2.5 V
Exponential Fall	10 mV to 1.25 V	20 mV to 2.5 V
Sine(x)/x	10 mV to 1.5 V	20 mV to 3.0 V
Random Noise	10 mV to 2.5 V	20 mV to 5 V
Haversine	10 mV to 1.25 V	20 mV to 2.5 V
Cardiac	10 mV to 2.5 V	20 mV to 5 V

Maximum sample rate

250 MS/s

Arbitrary function length

128 K Samples

Sine waveform

- **Sine Frequency range**
0.1 Hz to 50 MHz
- **Sine Frequency setting resolution**
0.1 Hz
- **Sine and Ramp Frequency accuracy**
130 ppm (frequency ≤ 10 kHz)
50 ppm (frequency > 10 kHz)
- **Sine amplitude flatness, typical**
±0.5 dB (relative to 1 kHz level) at 30 MHz
±1.0 dB (relative to 1 kHz level) at 50 MHz
- **Sine total harmonic distortion, typical**
1% for amplitude ≥ 200 mV_{pp} into 50 ohm load
2.5% for amplitude > 50 mV and < 200 mV_{pp} into 50 ohm load
- **Sine spurious-free dynamic range, typical**
40 dB (V_{pp} ≥ 0.1 V); 30 dB (V_{pp} ≥ 0.02 V), 50 Ohm Load

Square and pulse waveform

- **Frequency range**
0.1 Hz to 25 MHz
- **Frequency setting resolution**
0.1 Hz
- **Square and Pulse Frequency Accuracy**
130 ppm (frequency ≤ 10 KHz)
50 ppm (frequency > 10 KHz)
- **Duty cycle range**
10% - 90% or 10 ns minimum pulse, whichever is larger
Minimum pulse time applies to both on and off time, so maximum duty cycle will reduce at higher frequencies to maintain 10 ns off time

- **Square and Pulse Duty cycle resolution**
0.1%
- **Minimum pulse width, typical**
10 ns. This is the minimum time for either on or off duration.
- **Rise/Fall time, typical**
5 ns, 10% - 90%
- **Square and Pulse Pulse width resolution**
100 ps
- **Square and Pulse Overshoot, typical**
< 6% for signal steps greater than 100 mV_{pp}
This applies to overshoot of the positive-going transition (+overshoot) and of the negative-going (-overshoot) transition
- **Square and Pulse Asymmetry, typical**
±1% ±5 ns, at 50% duty cycle
- **Square and Pulse Jitter, typical**
< 60 ps TIE_{RMS}, ≥ 100 mV_{pp} amplitude, 40%-60% duty cycle

Ramp and triangle waveform

- **Frequency range**
0.1 Hz to 500 kHz
- **Frequency setting resolution**
0.1 Hz
- **Variable symmetry**
0% - 100%
- **Symmetry resolution**
0.1%

DC level range

±2.5 V into Hi-Z
±1.25 V into 50 Ω

Gaussian pulse, Haversine, and Lorentz pulse Maximum frequency

5 MHz

Exponential rise fall maximum frequency

5 MHz

Sin(x)/x maximum frequency

2 MHz

Random noise amplitude range

20 mV_{pp} to 5 V_{pp} into Hi-Z
10 mV_{pp} to 2.5 V_{pp} into 50 Ω

Signal amplitude resolution

1 mV (Hi-Z)
500 μV (50 Ω)

Signal amplitude accuracy

±[(1.5% of peak-to-peak amplitude setting) + (1.5% of absolute DC offset setting) + 1 mV] (frequency = 1 kHz)

DC offset range

±2.5 V into Hi-Z

±1.25 V into 50 Ω

DC offset resolution

1 mV (Hi-Z)

500 μV (50 Ω)

DC offset accuracy

±[(1.5% of absolute offset voltage setting) + 1 mV]

Add 3 mV of uncertainty per 10 °C change from 25 °C ambient

Cardiac maximum frequency

500 kHz

Digital volt meter (DVM)

Measurement types

DC, AC_{RMS}+DC, AC_{RMS}, Trigger frequency Count

Voltage resolution

4 digits

Voltage accuracy

DC: ±((1.5% * |reading - offset - position|) + (0.5% * |(offset - position)|) + (0.1 * Volts/div))

De-rated at 0.100% / °C of |reading - offset - position| above 30 °C Signal

± 5 divisions from screen center

AC: ±3% (40 Hz to 1 kHz) with no harmonic content outside 40 Hz to 1 kHz

P-TYP: AC: ±2% (20 Hz to 10 kHz)

For AC measurements, the input channel vertical settings must allow the V_{pp} input signal to cover between 4 and 10 divisions and must be fully visible on the screen.

Resolution

8-digits

Accuracy

For Slew rates ≥ 3 mv/ns

±(1 count + time base accuracy * input frequency)

The signal must be at least 8 mV_{pp} or 2 div, whichever is greater.

Trigger frequency counter source

Any analog input channel.

AC line

Trigger frequency counter max input frequency

10 Hz to maximum bandwidth of the analog channel

The signal must be at least 8 mV_{pp} or 3 div, whichever is greater.

Processor system

Host processor

Intel Core i5-8400H @ 2.5 GHz (CoffeeLake 4-core), 16 GB System RAM

Windows operating system

Option 6-WIN: Microsoft Windows 10 Enterprise IoT 2016 LTSB (64 bit)

The Windows operating system is available on an optional, customer-installable mass storage device.

Security options

6-SEC Option: USB and Ethernet communication ports, firmware upgrades and BIOS password protected.

Password protected I/O ports

6-SEC option enables password protection of USB and Ethernet ports from oscilloscope application.

6-SEC option has password-protected BIOS

Input/Output port specifications

Ethernet interface

An 8-pin RJ-45 connector that supports 10/100/1000 Mb/s

Oscilloscope is intended for use with unshielded twisted-pair ethernet cables (UTP).

DVI connector

A 29-pin connector; connect to show the oscilloscope display on an external monitor or projector.

Maximum supported resolution, Windows: 1920 x 1200 at 60 Hz.

Maximum supported resolution, Linux: 1920 x 1080 at 60 Hz.

Only a single TMDS link is provided by the interface.

Analog VGA signaling is not provided by the interface.

VGA Connector

A 15-pin, 3-row, D-sub VGA connector

Recommended resolution: 1920x1080 at 60 Hz

DisplayPort connector

A 20-pin DisplayPort connector

Maximum supported resolution:

Windows: 2560x1440 @ 60Hz

Linux: 1920 x 1080 @ 60Hz

DP++ Adapter: Maximum supported resolution: 2560x1440 @ 60Hz

Simultaneous displays

Up to 3 displays (including the internal display) with a maximum of 1 display per port.

USB interface

Three USB host ports on the front of the instrument: two USB 2.0 High Speed ports and one USB 3.0 SuperSpeed port.

Four USB host ports on the rear of the instruments: two USB 2.0 High Speed ports and two USB 3.0 SuperSpeed ports.

One USB 3.0 SuperSpeed device port on the rear of the instrument providing USBTMC support.

Probe compensator

Output Voltage and Frequency

Output Voltage Amplitude: 2.5 V \pm 2% (nominally 0-2.5 V)

Output Frequency: 1 kHz \pm 25%

Output Source Impedance is nominally 1 k Ω

Auxiliary output, Trigger out, or Reference clock out

AUX OUT Connector and Functional Modes

A single BNC connector.

Acquisition Trigger Out, Reference Clock Out, and AFG Trigger Out.

AUX OUT Output Voltage

Voltage thresholds are listed in the following table:

Characteristic	Limits
Vout (HI)	\geq 2.5 V open circuit; \geq 1.0 V into a 50 W load to ground.
Vout (LO)	\leq 0.7 V into a load of \leq 4 mA; \leq 0.25 V into a 50 W load to ground.

AUX OUT Acquisition Trigger Jitter

Acquisition Trigger Out Jitter: < 50 ps standard deviation

AUX OUT Acquisition Trigger Polarity

A leading edge, which is user selectable transition from HIGH to LOW or from LOW to HIGH, marks the trigger event.

The pulse width is approximately 100 ns.

AUX OUT Reference Clock

Reference clock output can be referenced from either the internal clock reference or the external clock reference.

AUX OUT AFG Trigger

The output frequency is dependent the frequency of the AFG signal using the table below:

AFG Signal Frequency	AFG Trigger Frequency
\leq 4.9 MHz	Signal frequency
>4.9 MHz to 14.7 MHz	Signal frequency / 3
>14.7 MHz to 24.5 MHz	Signal frequency / 5
>24.5 MHz to 34.3 MHz	Signal frequency / 7
>34.3 MHz to 44.1 MHz	Signal frequency / 9
>44.1 MHz to 50 MHz	Signal frequency / 11

External reference input

BNC interface

External reference input

- **Nominal input frequency**

10 MHz

User must select either 10 MHz external (± 1 kppm), 10 MHz external (± 1 ppm), or the internal reference (default) from the UI.

- **Frequency Variation Tolerance**

Low Phase Noise Mode: 9.99999 MHz to 10.00001 MHz (± 1 ppm)

Tracking Mode: 9.99 MHz to 10.01 MHz (± 1000 ppm)*

Loop Bandwidth of external tracking mode is a function of the PLL loop maximum slew rate capability, and is not linear. The modulation deviation frequency (\pm Hz) is dependent upon the maximum modulation rate (Hz). For example, a deviation of ± 50 Hz or less can tolerate any modulation rate. A deviation of the maximum amount specified for this mode (± 10 kHz or 1 kppm) will tolerate up to 80 Hz of modulation rate. A deviation of ± 500 Hz will tolerate up to about 1240 Hz of modulation rate. This is based on a measured instrument response to the reference clock being modulated. Example measurement is in the below table.

Deviation (+/-Hz)	Modulation Rate (Hz)	Notes
10000	80	
5000	190	
2500	320	
1000	760	
500	1240	
250	1720	
100	2150	
50		Won't lose lock at 50Hz and below

- **Sensitivity, typical**

V_{in} is 200 mV_{p-p} up to 7 V_{p-p}, using an external 50 Ω termination on the input BNC.

- **Maximum input signal**

7 V_{pp}

- **Impedance**

745 Ω \pm 20% with 18 pf \pm 20% to ground at 10 MHz

AUX IN trigger input impedance

- **Interface**

SMA

- **Input Impedance**

50 Ω

- **Maximum Input Voltage**

5 V_{RMS}

- **Trigger Skew**

Trigger skew variation improves for pulse input voltages ≥ 1 V_{p-p}.

When sample rate is ≥ 25 GS/s and no channels with a maximum sample rate of 12.5 GS/s (channels 3 or 6 on an MSO66B, or channels 3, 4, 7, or 8 on MSO68B) are used: 200 ps \pm 200 ps

When sample rate is 12.5 GS/s and at least one channel with a maximum sample rate of 12.5 GS/s (channels 3 or 6 on an MSO66B, or channels 3, 4, 7, or 8 on MSO68B) is used: 7.87 ns \pm 200 ps

- **Trigger Jitter**

Trigger Jitter \leq 40 ps RMS for Sample Mode and Edge-Type Trigger

Trigger Jitter \leq 40 ps RMS for Edge-Type Trigger and FastAcq Mode

- **Front panel knob**

Multipurpose Knob A, Multipurpose Knob B, Trigger Level, Vertical Position, Vertical Scale, Horizontal Position, Horizontal Scale, Wave Inspector (two-tier knob)

- **Front Panel Buttons**

Run/Stop, Single/Seq, Cursors, Fast Acq, High Res, Clear, Force Trigger, Trigger Slope, Trigger Mode, Vertical Input Selection (one for each analog input), Reference Waveform, Math Waveform, Bus Waveform, Zoom, Navigate Previous, Navigate Next, Touchscreen Off, Default Setup (recessed), Save, Autoset (recessed)

- **Waveform Save Options**

Analog Waveforms can be saved as: Reference Waveforms, .wfm files, .csv files, .h5 files, .mat files

Digital Waveforms can be saved as: Reference Waveforms, .wfm files, .csv files

Math Waveforms can be saved as: .wfm files, .csv files

- **Waveform Recall Options**

Analog Waveforms can be recalled to reference waveforms from: .wfm files, .csv files, .bin (keysight format) files, .trc (LeCroy format) files, .h5 files

Digital Waveforms can be recalled to reference waveforms from: .wfm files, .csv files

Math Waveforms can be recalled to reference waveforms from: .wfm files, .csv files

Reference files can be imported from .tr0 binary files.

Display system

Display type

Display size: 15.6 inches diagonal

Display type: TFT liquid crystal display (LCD)

Display resolution

1,920 horizontal \times 1,080 vertical pixels (High Definition)

Luminance, typical

500 cd/m², (Minimum: 400 cd/m²), Display luminance is specified for a new display set at full brightness.

Color Support

16.2M colors (6-bit RGB+FRC)

Display Options

- **Persistence**

Off, Infinite, Variable (Persistence Time is variable) or Auto

- **Waveform styles**

Vectors, dots

- **Graticule**

Grid, Time, Full or None

- **Graticule Intensity**

variable

- **Display Mode**
Overlay or Stacked
- **Interpolation**
Sin(x)/x or Linear
- **Waveform Intensity**
variable

Data storage specifications

Nonvolatile memory retention time, typical

No time limit for front panel settings, saved waveforms, setups, product licensing, and calibration constants.

Real-time clock

A programmable clock maintaining and reporting the current time in the units of years, months, days, hours, minutes, and seconds.

Nonvolatile memory capacity

Instrument S/N

A 2 kbit EEPROM on the main board that stores the instrument serial number, instrument start up count, total uptime and administration passwords.

Companion CvP

A pair of 16 Mbit flash memory devices that stores a portion of the Companion FPGA image data. One device serves as a backup for the other device.

AFG S/N

A 2 kbit EEPROM on the AFG riser card that stores a copy of the instrument serial number which is used to validate the AFG calibration.

Front Panel ID

A 64 kbit EEPROM on the LED board that stores the USB vendor ID and device ID for the internal front panel controller.

Front Panel Memory

A 4 GB EEPROM on the LED board stores licence options and calibration data

BIOS

A 128 Mbit flash memory device that stores the firmware image and device configuration for the host processor and chipset sub-processors. This includes the Basic Input Output System (BIOS), Management Engine (ME), Embedded Controller (EC) and Network Interface Controller (NIC). The Ethernet MAC address is stored in this device.

CMOS Memory

The host processor chipset includes an integrated memory device, powered by the real-time clock (RTC) battery, which stores BIOS configuration settings. A customer accessible switch disconnects the RTC battery from the chipset which clears the contents of the integrated CMOS memory device.

Memory SPD

Each SODIMM (memory module) contains a serial presence detect (SPD) memory device implemented using an unspecified memory technology. Each SPD device contains the parameter data specific to its memory module. All SPD devices are treated by the instrument as read only. The size of a given SPD is unspecified. The 4 channel instrument includes 4 SPD devices.

UCD9248

The instrument includes 3 UCD9248 power supply controllers. Each controller contains an *unspecified* quantity of nonvolatile memory that stores various power supply configuration settings.

PMU

A power management unit (PMU) microcontroller is used to manage instrument power supplies and hardware initialization. The PMU includes 32 KB of nonvolatile memory for storage of its own binary executable and redundant storage of UCD9248 device settings.

Analog Board Controller

A microcontroller is used to manage analog board operation. The PMU includes 64 KB of nonvolatile memory for storage of its own binary executable.

Carrier FPGA

The carrier FPGA stores its own configuration in its own internal 0.33 Mbit nonvolatile memory. The carrier FPGA implements simple "glue logic" for the instrument.

Mass storage device capacity

Linux

≥ 250 GB. Form factor is a 2.5 inch SSD with a SATA-3 interface. Waveforms and setups are stored on the solid state drive. Provides storage for saved customer data and the Linux operating system.

Windows (optional)

≥ 500 GB. Form factor is a 2.5 inch SSD with a SATA-3 interface. This drive is customer installable and provides storage for the Windows operating system option, and saved customer data.

Power supply system

Power consumption

500 Watts maximum

Fuse rating

12.5 A / 250 VAC

The fuse is not customer replaceable. The line lead is fused, but the neutral lead is not fused.

Safety characteristics

Safety certification

US NRTL Listed - UL61010-1 and UL61010-2-030.

Canadian Certification - CAN/CSA-C22.2 No. 61010-1 and CAN/CSA C22.2 No. 61010-2-030.

EU Compliance - Low Voltage Directive 2014-35-EU and EN61010-1 and EN61010-2-030.

International Compliance - IEC 61010-1 and IEC 61010-2-030.

Pollution degree

Pollution degree 2, indoor, dry location use only

Environmental specifications

Temperature

- **Operating**
+0 °C to +50 °C (32 °F to 122 °F)
- **Non-operating**

-20 °C to +60 °C (-4 °F to 140 °F)

Humidity

- **Operating**
5% to 90% relative humidity (% RH) at up to +40 °C
5% to 55% RH above +40 °C up to +50 °C, noncondensing
- **Non-operating**
5% to 90% relative humidity (% RH) at up to +60 °C, noncondensing and as limited by a maximum wet-bulb temperature of +39°C.

Altitude

- **Operating**
Up to 3,000 meters (9,843 feet)
- **Non-operating**
Up to 12,000 meters (39,370 feet)

Dynamics

Random Vibration: Operating

0.31 GRMS, 5-500 Hz, 10 minutes per axis, 3 axes (30 minutes total).

Mechanical Shock: Operating

Half-sine mechanical shocks, 40 g peak amplitude, 11 ms duration, 3 drops in each direction of each axis (18 total).

Comparison against MIL-PRF-28800F Environmental Requirements

Comparison against MIL-PRF28800F Environmental Requirements

YES/NO indicates whether the instrument meets the minimum requirement for each combination of Class and Environmental Condition. The spec's here are those found in the MIL-PRF-28800F. The corresponding instrument spec's (if any) are listed above. If the instrument has no corresponding spec an N/A is used. If the MIL-PRF-28800F lists the spec as "invoked by the purchase description", an IPD is used

Environmental Condition	Class			
	1	2	3	4
Temperature Non-operating	No	No	No	No
	-51 °C/71 °C	-51 °C/71 °C	-40 °C/71 °C	-40 °C/71 °C
Temperature Operating	No	No	Yes	Yes
	-40 °C/55 °C	-10 °C/55 °C	0 °C/50 °C	+10 °C/40 °C

Environmental Condition	Class			
	1	2	3	4
Relative Humidity	No	No	No	No
	5% to 95%, 30 °C to 40 °C	5% to 80%, 30 °C to 40 °C	5% to 80%, 30 °C to 40 °C	5% to 80%, 30 °C to 40 °C
	5% to 65%, > 40 °C	5% to 50% > 40 °C	5% to 50%, > 40 °C	5% to 50%, > 40 °C
Altitude non-operating	Yes	Yes	Yes	Yes
	4600 m	4600 m	4600 m	4600 m
Altitude operating	No	No	No	No
	4600 m	4600 m	4600 m	4600 m
Vibration Non-Operating	No	No	Yes	Yes
	Random	Random	Random	Random
	10-500 Hz 0.03 g ² /Hz Overall GRMS: 3.83 Time/Axis: 30 minutes	10-500 Hz 0.03 g ² /Hz Overall GRMS: 3.83 Time/Axis: 30 minutes	5-100 Hz 0.015 g ² /Hz 100-137Hz -6dB/octave 137-350 Hz 0.0075 g ² /Hz 350-500 Hz -6 dB/octave 500 Hz 0.0039 g ² /Hz Overall GRMS: 2.09 Time/Axis: 10 minute	5-100 Hz 0.015 g ² /Hz 100-137 Hz -6dB/octave 137-350 Hz 0.0075 g ² /Hz 350-500 Hz -6 dB/octave 500 Hz 0.0039 g ² /Hz Overall GRMS: 2.09 Time/Axis: 10 minutes
Bounce	N/A	N/A	N/A	N/A
	IPD	IPD	IPD	IPD
Shock, Functional	Yes	Yes	Yes	Yes
	30 G Half-sine, 11 ms pulse duration, 3 shocks in each direction of each axis for 18 total shocks.	30 G Half-sine, 11 ms pulse duration, 3 shocks in each direction of each axis for 18 total shocks.	30 G Half-sine, 11ms pulse duration, 3 shocks in each direction of each axis for 18 total shocks.	30 G Half-sine, 11ms pulse duration, 3 shocks in each direction of each axis for 18 total shocks.

Environmental Condition	Class			
	1	2	3	4
Transit Drop	No	No	Yes	Yes
	46 cm 10 impacts 4 bottom corners and 6 faces	30 cm 10 impacts 4 bottom corners and 6 faces	20 cm 10 impacts 4 bottom corners and 6 faces	20 cm 10 impacts 4 bottom corners and 6 faces
Bench Handling	Yes	Yes	Yes	Yes
	Lift edge of chassis 45°, 10.16 cm, or point of balance and drop	Lift edge of chassis 45°, 10.16 cm, or point of balance and drop	Lift edge of chassis 45°, 10.16 cm, or point of balance and drop	Lift edge of chassis 45°, 10.16 cm, or point of balance and drop
Shock High Impact	N/A	N/A	N/A	N/A
	IPD	IPD	IPD	IPD
Watertight	N/A	N/A	N/A	N/A
	IPD	IPD	IPD	IPD
Splash Proof	N/A	N/A	N/A	N/A
	IPD	IPD	IPD	IPD
Drip Proof	N/A	N/A	N/A	N/A
	IPD	IPD	IPD	IPD
Fungus Resistance	N/A	N/A	N/A	N/A
	28 days	28 days	28 days	28 days
Salt Exposure Enclosure	N/A	N/A	N/A	N/A
	48 hours	48 hours	48 hours	48 hours
Salt Exposure Structural	N/A	N/A	N/A	N/A
	48 hours	48 hours	48 hours	48 hours
Explosive Atmosphere	N/A	N/A	N/A	N/A
	3000m			

Environmental Condition	Class			
	1	2	3	4
Dust Resistance	N/A	N/A	N/A	N/A
	10.7±7.1 g/m ³			
Solar Radiation	N/A	N/A	N/A	N/A
	IPD	IPD	IPD	IPD

Mechanical specifications

Weight

- MSO68B 29.8 lbs
- MSO66B 29.6 lbs
- MSO64B 29.2 lbs
- MSO68B Instrument when packaged for shipping: 42.95 lbs
- MSO66B Instrument when packaged for shipping: 42.75 lbs
- MSO64B Instrument when packaged for shipping: 42.35 lbs

Weight corrections of standard accessories:

- Instrument with protective front cover: + 1.8 lbs
- Instrument with front cover and soft pouch: + 3.4 lbs
- Instrument when configured for rack mount: -2.2 lbs
- Rack Mount: 15 lbs

Dimensions

- Requirements that follow are nominal and unboxed:
- Unit fits into rackmount configuration (7U)

Height

- 371 mm (14.6 in) feet folded in, handle folded up
- 309 mm (12.2in) feet folded in, handle folded to the backside of the instrument

Width

- 454 mm (17.9 in) from handle hub to handle hub

Depth

- 205 mm (8.0 in) from back of feet to front of knobs
- 297.2 mm (11.7in) feet folded in, handle folded to the backside of the instrument

Clearance Requirements

The clearance requirement for adequate cooling is 2.0 in (50.8 mm) on the right side (when looking at the front of the instrument) and on the rear of the instrument

Audible Noise

Audible noise (fan noise) produced by the instrument at ambient temperature ($\leq 28^{\circ}\text{C}$): $\leq 45\text{dB}$

Kensington Lock

Oscilloscope includes a Kensington Lock.

Environmental Compliance

Material Selection - RoHS Compliance

EU Directive 2011/65/EU Less than 0.1% by mass (1000 ppm) in homogeneous material for lead, mercury, hexavalent chromium, polybrominated biphenyls (PBB) and polybrominated diphenyl ethers (PBDE), and less than 0.01% by mass (100 ppm) of homogeneous material for cadmium, unless used in an application that is specifically exempted by the EU RoHS Directive or its amendments.

Performance verification procedures

This chapter contains performance verification procedures for the specifications marked with the ✓ symbol. The following equipment, or a suitable equivalent, is required to complete these procedures.

Required equipment

Required equipment	Minimum requirements	Examples
DC voltage source	3 mV to 4 V, $\pm 0.1\%$ accuracy	Fluke 9500B Oscilloscope Calibrator with a 9530 Output Module
Leveled sine wave generator	50 kHz to 10 GHz, $\pm 4\%$ amplitude accuracy	
Time mark generator	80 ms period, $\pm 1.0 \times 10^{-6}$ accuracy, rise time <50 ns	
Logic probe	Low capacitance digital probe, 8 channels.	TLP058 probe
BNC-to-0.1 inch pin adapter to connect the logic probe to the signal source.	BNC-to-0.1 inch pin adapter; female BNC to 2x16 .01 inch pin headers.	Tektronix adapter part number 878-1429-00; to connect the Fluke 9500B to the TLP058 probe.
Digital multimeter (DMM)	0.1% accuracy or better	Tektronix DMM4020
One 50 Ω terminator	Impedance 50 Ω ; connectors: female BNC input, male BNC output	Tektronix part number 011-0049-02
One 50 Ω BNC cable	Male-to-male connectors	Tektronix part number 012-0057-01
Optical mouse	USB, PS2	Tektronix part number 119-7054-00
Frequency counter	Parts per billion accuracy	Tektronix FCA3000 Timer/Counter/Analyzer

You might need additional cables and adapters, depending on the actual test equipment you use.

These procedures cover all MSO64B, MSO66B, and MSO68B models. Disregard checks that do not apply to the specific model you are testing.

Print the test record on the following pages and use it to record the performance test results for your oscilloscope.

NOTE: Completion of the performance verification procedure does not update the stored time and date of the latest successful adjustment. The date and time are updated only when the adjustment procedures in the service manual are successfully completed.

The performance verification procedures verify the performance of your instrument. They do not adjust your instrument. If your instrument fails any of the performance verification tests, you should return the instrument to Tektronix for adjustment or repair.

Test records

Instrument information, self test record

Model	Serial #	Procedure performed by	Date

Test	Passed	Failed
Self Test		

DC Offset Accuracy test record

Offset Accuracy					
Performance checks	Vertical scale	Vertical offset	Low limit	Test result	High limit
All models					
Channel 1 DC Offset Accuracy, 20 MHz BW, 50 Ω	1 mV/div	900 mV	895.3 mV		904.7 mV
	1 mV/div	-900 mV	-904.7 mV		-895.3 mV
	100 mV/div	5.0 V	4.9663 V		5.0337 V
	100 mV/div	-5.0 V	-5.0337 V		-4.9663 V

Offset Accuracy					
Performance checks	Vertical scale	Vertical offset	Low limit	Test result	High limit
All models					
Channel 1 DC Offset Accuracy, 20 MHz BW, 1 M Ω	1 mV/div	900 mV	895.12 mV		904.88 mV
	1 mV/div	-900 mV	-904.88 mV		-895.12 mV
	100 mV/div	1.0 V	0.975 V		1.025 V
	100 mV/div	- 1.0 V	-1.025 V		-0.975 V
	500 mV/div	9.0 V	8.855 V		9.145 V
	500 mV/div	- 9.0 V	-9.145 V		-8.855 V
	1.01 V/div	10.0 V	9.75 V		10.25 V
	1.01 V/div	-10.0 V	-10.25 V		-9.75 V
	5 V/div	10.0 V	8.95 V		11.05 V
	5 V/div	-10.0 V	-11.05 V		-8.95 V
Channel 2 DC Offset Accuracy, 20 MHz BW, 50 Ω	1 mV/div	900 mV	895.3 mV		904.7 mV
	1 mV/div	-900 mV	-904.7 mV		-895.3 mV
	100 mV/div	5.0 V	4.965 V		5.035 V
	100 mV/div	-5.0 V	-5.035 V		-4.965 V

Offset Accuracy					
Performance checks	Vertical scale	Vertical offset	Low limit	Test result	High limit
All models					
Channel 2 DC Offset Accuracy, 20 MHz BW, 1 M Ω	1 mV/div	900 mV	895.3 mV		904.7 mV
	1 mV/div	-900 mV	-904.7 mV		-895.3 mV
	100 mV/div	1.0 V	0.935 V		1.065 V
	100 mV/div	- 1.0 V	-1.065 V		-0.935 V
	500 mV/div	9.0 V	8.855 V		9.145 V
	500 mV/div	- 9.0 V	-9.145 V		-8.855 V
	1.01 V/div	10.0 V	9.3 V		10.7 V
	1.01 V/div	-10.0 V	-10.7 V		-9.3 V
	5 V/div	10.0 V	8.5 V		11.5 V
	5 V/div	-10.0 V	-11.5 V		-8.5 V
Channel 3 DC Offset Accuracy, 20 MHz BW, 50 Ω	1 mV/div	900 mV	895.3 mV		904.7 mV
	1 mV/div	-900 mV	-904.7 mV		-895.3 mV
	100 mV/div	5.0 V	4.965 V		5.035 V
	100 mV/div	-5.0 V	-5.035 V		-4.965 V

Offset Accuracy					
Performance checks	Vertical scale	Vertical offset	Low limit	Test result	High limit
All models					
Channel 3 DC Offset Accuracy, 20 MHz BW, 1 M Ω	1 mV/div	900 mV	895.3 mV		904.7 mV
	1 mV/div	-900 mV	-904.7 mV		-895.3 mV
	100 mV/div	1.0 V	0.935 V		1.065 V
	100 mV/div	- 1.0 V	-1.065 V		-0.935 V
	500 mV/div	9.0 V	8.855 V		9.145 V
	500 mV/div	- 9.0 V	-9.145 V		-8.855 V
	1.01 V/div	10.0 V	9.3 V		10.7 V
	1.01 V/div	-10.0 V	-10.7 V		-9.3 V
	5 V/div	10.0 V	8.5 V		11.5 V
	5 V/div	-10.0 V	-11.5 V		-8.5 V
Channel 4 DC Offset Accuracy, 20 MHz BW, 50 Ω	1 mV/div	900 mV	895.3 mV		904.7 mV
	1 mV/div	-900 mV	-904.7 mV		-895.3 mV
	100 mV/div	5.0 V	4.965 V		5.035 V
	100 mV/div	-5.0 V	-5.035 V		-4.965 V

Offset Accuracy					
Performance checks	Vertical scale	Vertical offset	Low limit	Test result	High limit
All models					
Channel 4 DC Offset Accuracy, 20 MHz BW, 1 M Ω	1 mV/div	900 mV	895.3 mV		904.7 mV
	1 mV/div	-900 mV	-904.7 mV		-895.3 mV
	100 mV/div	1.0 V	0.935 V		1.065 V
	100 mV/div	- 1.0 V	-1.065 V		-0.935 V
	500 mV/div	9.0 V	8.855 V		9.145 V
	500 mV/div	- 9.0 V	-9.145 V		-8.855 V
	1.01 V/div	10.0 V	9.3 V		10.7 V
	1.01 V/div	-10.0 V	-10.7 V		-9.3 V
	5 V/div	10.0 V	8.5 V		11.5 V
	5 V/div	-10.0 V	-11.5 V		-8.5 V
Channel 5 DC Offset Accuracy, 20 MHz BW, 50 Ω	1 mV/div	900 mV	895.3 mV		904.7 mV
	1 mV/div	-900 mV	-904.7 mV		-895.3 mV
	100 mV/div	5.0 V	4.965 V		5.035 V
	100 mV/div	-5.0 V	-5.035 V		-4.965 V

Offset Accuracy					
Performance checks	Vertical scale	Vertical offset	Low limit	Test result	High limit
All models					
Channel 5 DC Offset Accuracy, 20 MHz BW, 1 M Ω	1 mV/div	900 mV	895.3 mV		904.7 mV
	1 mV/div	-900 mV	-904.7 mV		-895.3 mV
	100 mV/div	1.0 V	0.975 V		1.025 V
	100 mV/div	- 1.0 V	-1.025 V		-0.975 V
	500 mV/div	9.0 V	8.855 V		9.145 V
	500 mV/div	- 9.0 V	-9.145 V		-8.855 V
	1.01 V/div	10.0 V	9.75 V		10.25 V
	1.01 V/div	-10.0 V	-10.25 V		-9.75 V
	5 V/div	10.0 V	8.95 V		11.05 V
	5 V/div	-10.0 V	-11.05 V		-8.95 V
Channel 6 DC Offset Accuracy, 20 MHz BW, 50 Ω	1 mV/div	900 mV	895.3 mV		904.7 mV
	1 mV/div	-900 mV	-904.7 mV		-895.3 mV
	100 mV/div	5.0 V	4.965 V		5.035 V
	100 mV/div	-5.0 V	-5.035 V		-4.965 V

Offset Accuracy					
Performance checks	Vertical scale	Vertical offset	Low limit	Test result	High limit
All models					
Channel 6 DC Offset Accuracy, 20 MHz BW, 1 M Ω	1 mV/div	900 mV	895.3 mV		904.7 mV
	1 mV/div	-900 mV	-904.7 mV		-895.3 mV
	100 mV/div	1.0 V	0.975 V		1.025 V
	100 mV/div	- 1.0 V	-1.025 V		-0.975 V
	500 mV/div	9.0 V	8.855 V		9.145 V
	500 mV/div	- 9.0 V	-9.145 V		-8.855 V
	1.01 V/div	10.0 V	9.75 V		10.25 V
	1.01 V/div	-10.0 V	-10.25 V		-9.75 V
	5 V/div	10.0 V	8.95 V		11.05 V
	5 V/div	-10.0 V	-11.05 V		-8.95 V
Channel 7 DC Offset Accuracy, 20 MHz BW, 50 Ω	1 mV/div	900 mV	895.3 mV		904.7 mV
	1 mV/div	-900 mV	-904.7 mV		-895.3 mV
	100 mV/div	5.0 V	4.965 V		5.035 V
	100 mV/div	-5.0 V	-5.035 V		-4.965 V

Offset Accuracy					
Performance checks	Vertical scale	Vertical offset	Low limit	Test result	High limit
All models					
Channel 7 DC Offset Accuracy, 20 MHz BW, 1 M Ω	1 mV/div	900 mV	895.3 mV		904.7 mV
	1 mV/div	-900 mV	-904.7 mV		-895.3 mV
	100 mV/div	1.0 V	0.975 V		1.025 V
	100 mV/div	- 1.0 V	-1.025 V		-0.975 V
	500 mV/div	9.0 V	8.855 V		9.145 V
	500 mV/div	- 9.0 V	-9.145 V		-8.855 V
	1.01 V/div	10.0 V	9.75 V		10.25 V
	1.01 V/div	-10.0 V	-10.25 V		-9.75 V
	5 V/div	10.0 V	8.95 V		11.05 V
	5 V/div	-10.0 V	-11.05 V		-8.95 V
Channel 8 DC Offset Accuracy, 20 MHz BW, 50 Ω	1 mV/div	900 mV	895.3 mV		904.7 mV
	1 mV/div	-900 mV	-904.7 mV		-895.3 mV
	100 mV/div	5.0 V	4.965 V		5.035 V
	100 mV/div	-5.0 V	-5.035 V		-4.965 V

Offset Accuracy					
Performance checks	Vertical scale	Vertical offset	Low limit	Test result	High limit
All models					
Channel 8 DC Offset Accuracy, 20 MHz BW, 1 M Ω	1 mV/div	900 mV	895.3 mV		904.7 mV
	1 mV/div	-900 mV	-904.7 mV		-895.3 mV
	100 mV/div	1.0 V	0.975 V		1.025 V
	100 mV/div	- 1.0 V	-1.025 V		-0.975 V
	500 mV/div	9.0 V	8.855 V		9.145 V
	500 mV/div	- 9.0 V	-9.145 V		-8.855 V
	1.01 V/div	10.0 V	9.75 V		10.25 V
	1.01 V/div	-10.0 V	-10.25 V		-9.75 V
	5 V/div	10.0 V	8.95 V		11.05 V
	5 V/div	-10.0 V	-11.05 V		-8.95 V

NOTE: Use the Vertical offset value for both the calibrator output and the oscilloscope offset setting.

Analog Bandwidth test record

Analog Bandwidth							
Performance checks							
Bandwidth at Channel	Impedance	Vertical scale	Horizontal scale	V_{in-pp}	V_{bw-pp}	Limit	Test result Gain = V_{bw-pp}/V_{in-pp}
All models							
Channel 1	50 Ω	1 mV/div	1 ns/div			≥ 0.707	
		2 mV/div	1 ns/div			≥ 0.707	
		4 mV/div	1 ns/div			≥ 0.707	
		10 mV/div	1 ns/div			≥ 0.707	
		25 mV/div	1 ns/div			≥ 0.707	
		50 mV/div	1 ns/div			≥ 0.707	
		100 mV/div	1 ns/div			≥ 0.707	
Channel 1	1 M Ω , typical	1 mV/div	1 ns/div			≥ 0.707	
		2 mV/div	1 ns/div			≥ 0.707	
		4 mV/div	1 ns/div			≥ 0.707	
		10 mV/div	1 ns/div			≥ 0.707	
		25 mV/div	1 ns/div			≥ 0.707	
		50 mV/div	1 ns/div			≥ 0.707	
		100 mV/div	1 ns/div			≥ 0.707	
Channel 2	50 Ω	1 mV/div	1 ns/div			≥ 0.707	
		2 mV/div	1 ns/div			≥ 0.707	
		4 mV/div	1 ns/div			≥ 0.707	
		10 mV/div	1 ns/div			≥ 0.707	
		25 mV/div	1 ns/div			≥ 0.707	
		50 mV/div	1 ns/div			≥ 0.707	
		100 mV/div	1 ns/div			≥ 0.707	

Analog Bandwidth							
Performance checks							
Bandwidth at Channel	Impedance	Vertical scale	Horizontal scale	V_{in-pp}	V_{bw-pp}	Limit	Test result $Gain = V_{bw-pp}/V_{in-pp}$
All models							
Channel 2	1 M Ω , typical	1 mV/div	1 ns/div			≥ 0.707	
		2 mV/div	1 ns/div			≥ 0.707	
		4 mV/div	1 ns/div			≥ 0.707	
		10 mV/div	1 ns/div			≥ 0.707	
		25 mV/div	1 ns/div			≥ 0.707	
		50 mV/div	1 ns/div			≥ 0.707	
		100 mV/div	1 ns/div			≥ 0.707	
Channel 3	50 Ω	1 mV/div	1 ns/div			≥ 0.707	
		2 mV/div	1 ns/div			≥ 0.707	
		4 mV/div	1 ns/div			≥ 0.707	
		10 mV/div	1 ns/div			≥ 0.707	
		25 mV/div	1 ns/div			≥ 0.707	
		50 mV/div	1 ns/div			≥ 0.707	
		100 mV/div	1 ns/div			≥ 0.707	
Channel 3	1 M Ω , typical	1 mV/div	1 ns/div			≥ 0.707	
		2 mV/div	1 ns/div			≥ 0.707	
		4 mV/div	1 ns/div			≥ 0.707	
		10 mV/div	1 ns/div			≥ 0.707	
		25 mV/div	1 ns/div			≥ 0.707	
		50 mV/div	1 ns/div			≥ 0.707	
		100 mV/div	1 ns/div			≥ 0.707	

Analog Bandwidth							
Performance checks							
Bandwidth at Channel	Impedance	Vertical scale	Horizontal scale	V_{in-pp}	V_{bw-pp}	Limit	Test result Gain = V_{bw-pp}/V_{in-pp}
All models							
Channel 4	50 Ω	1 mV/div	1 ns/div			≥ 0.707	
		2 mV/div	1 ns/div			≥ 0.707	
		4 mV/div	1 ns/div			≥ 0.707	
		10 mV/div	1 ns/div			≥ 0.707	
		25 mV/div	1 ns/div			≥ 0.707	
		50 mV/div	1 ns/div			≥ 0.707	
		100 mV/div	1 ns/div			≥ 0.707	
Channel 4	1 M Ω , typical	1 mV/div	1 ns/div			≥ 0.707	
		2 mV/div	1 ns/div			≥ 0.707	
		4 mV/div	1 ns/div			≥ 0.707	
		10 mV/div	1 ns/div			≥ 0.707	
		25 mV/div	1 ns/div			≥ 0.707	
		50 mV/div	1 ns/div			≥ 0.707	
		100 mV/div	1 ns/div			≥ 0.707	
Channel 5	50 Ω	1 mV/div	1 ns/div			≥ 0.707	
		2 mV/div	1 ns/div			≥ 0.707	
		4 mV/div	1 ns/div			≥ 0.707	
		10 mV/div	1 ns/div			≥ 0.707	
		25 mV/div	1 ns/div			≥ 0.707	
		50 mV/div	1 ns/div			≥ 0.707	
		100 mV/div	1 ns/div			≥ 0.707	

Analog Bandwidth							
Performance checks							
Bandwidth at Channel	Impedance	Vertical scale	Horizontal scale	V_{in-pp}	V_{bw-pp}	Limit	Test result $Gain = V_{bw-pp}/V_{in-pp}$
All models							
Channel 5	1 M Ω , typical	1 mV/div	1 ns/div			≥ 0.707	
		2 mV/div	1 ns/div			≥ 0.707	
		4 mV/div	1 ns/div			≥ 0.707	
		10 mV/div	1 ns/div			≥ 0.707	
		25 mV/div	1 ns/div			≥ 0.707	
		50 mV/div	1 ns/div			≥ 0.707	
		100 mV/div	1 ns/div			≥ 0.707	
Channel 6	50 Ω	1 mV/div	1 ns/div			≥ 0.707	
		2 mV/div	1 ns/div			≥ 0.707	
		4 mV/div	1 ns/div			≥ 0.707	
		10 mV/div	1 ns/div			≥ 0.707	
		25 mV/div	1 ns/div			≥ 0.707	
		50 mV/div	1 ns/div			≥ 0.707	
		100 mV/div	1 ns/div			≥ 0.707	
Channel 6	1 M Ω , typical	1 mV/div	1 ns/div			≥ 0.707	
		2 mV/div	1 ns/div			≥ 0.707	
		4 mV/div	1 ns/div			≥ 0.707	
		10 mV/div	1 ns/div			≥ 0.707	
		25 mV/div	1 ns/div			≥ 0.707	
		50 mV/div	1 ns/div			≥ 0.707	
		100 mV/div	1 ns/div			≥ 0.707	

Analog Bandwidth							
Performance checks							
Bandwidth at Channel	Impedance	Vertical scale	Horizontal scale	V_{in-pp}	V_{bw-pp}	Limit	Test result Gain = V_{bw-pp}/V_{in-pp}
All models							
Channel 7	50 Ω	1 mV/div	1 ns/div			≥ 0.707	
		2 mV/div	1 ns/div			≥ 0.707	
		4 mV/div	1 ns/div			≥ 0.707	
		10 mV/div	1 ns/div			≥ 0.707	
		25 mV/div	1 ns/div			≥ 0.707	
		50 mV/div	1 ns/div			≥ 0.707	
		100 mV/div	1 ns/div			≥ 0.707	
Channel 7	1 M Ω , typical	1 mV/div	1 ns/div			≥ 0.707	
		2 mV/div	1 ns/div			≥ 0.707	
		4 mV/div	1 ns/div			≥ 0.707	
		10 mV/div	1 ns/div			≥ 0.707	
		25 mV/div	1 ns/div			≥ 0.707	
		50 mV/div	1 ns/div			≥ 0.707	
		100 mV/div	1 ns/div			≥ 0.707	
Channel 8	50 Ω	1 mV/div	1 ns/div			≥ 0.707	
		2 mV/div	1 ns/div			≥ 0.707	
		4 mV/div	1 ns/div			≥ 0.707	
		10 mV/div	1 ns/div			≥ 0.707	
		25 mV/div	1 ns/div			≥ 0.707	
		50 mV/div	1 ns/div			≥ 0.707	
		100 mV/div	1 ns/div			≥ 0.707	

Analog Bandwidth							
Performance checks							
Bandwidth at Channel	Impedance	Vertical scale	Horizontal scale	V_{in-pp}	V_{bw-pp}	Limit	Test result $Gain = V_{bw-pp}/V_{in-pp}$
All models							
Channel 8	1 M Ω , typical	1 mV/div	1 ns/div			≥ 0.707	
		2 mV/div	1 ns/div			≥ 0.707	
		4 mV/div	1 ns/div			≥ 0.707	
		10 mV/div	1 ns/div			≥ 0.707	
		25 mV/div	1 ns/div			≥ 0.707	
		50 mV/div	1 ns/div			≥ 0.707	
		100 mV/div	1 ns/div			≥ 0.707	

Input impedance test record

Input Impedance				
Performance checks	Vertical scale	Low limit	Test result	High limit
All models				
Channel 1 Input Impedance, 1 M Ω	100 mV/div	990 k Ω		1.01 M Ω
Channel 1 Input Impedance, 50 Ω	10 mV/div	48.5 Ω		51.5 Ω
	100 mV/div	48.5 Ω		51.5 Ω
Channel 2 Input Impedance, 1 M Ω	100 mV/div	990 k Ω		1.01 M Ω
Channel 2 Input Impedance, 50 Ω	10 mV/div	48.5 Ω		51.5 Ω
	100 mV/div	48.5 Ω		51.5 Ω
Channel 3 Input Impedance, 1 M Ω	100 mV/div	990 k Ω		1.01 M Ω
Channel 3 Input Impedance, 50 Ω	10 mV/div	48.5 Ω		51.5 Ω
	100 mV/div	48.5 Ω		51.5 Ω
Channel 4 Input Impedance, 1 M Ω	100 mV/div	990 k Ω		1.01 M Ω

Input Impedance				
Performance checks	Vertical scale	Low limit	Test result	High limit
All models				
Channel 4, Input Impedance, 50 Ω	10 mV/div	48.5 Ω		51.5 Ω
	100 mV/div	48.5 Ω		51.5 Ω

DC Gain Accuracy test record

DC Gain Accuracy					
Performance checks	Bandwidth	Vertical scale	Low limit	Test result	High limit
Channel 1 DC Gain Accuracy, 0 V offset, 0 V vertical position, 50 Ω	20 MHz	1 mV/div	-4%		4%
		2 mV/div	-2%		2%
		5 mV/div	-2%		2%
		10 mV/div	-2%		2%
		20 mV/div	-2%		2%
		50 mV/div	-2%		2%
		100 mV/div	-2%		2%
		200 mV/div	-2%		2%
		500 mV/div	-2%		2%
		1 V/div	-2%		2%
		250 MHz	20 mV/div	-2%	
	FULL	20 mV/div	-2%		2%
Channel 1 DC Gain Accuracy, 0 V offset, 0 V vertical position, 1 M Ω	20 MHz	1 mV/div	-2.5%		2.5%
		2 mV/div	-2%		2%
		5 mV/div	-2%		2%
		10 mV/div	-2%		2%
		20 mV/div	-2%		2%
		50 mV/div	-2%		2%

DC Gain Accuracy					
Performance checks	Bandwidth	Vertical scale	Low limit	Test result	High limit
		100 mV/div	-2%		2%
		200 mV/div	-2%		2%
		500 mV/div	-2%		2%
		1 V/div	-2%		2%
	250 MHz	20 mV/div	-2%		2%
	FULL	20 mV/div	-2%		2%
Channel 2 DC Gain Accuracy, 0 V offset, 0 V vertical position, 50 Ω	20 MHz	1 mV/div	-4%		4%
		2 mV/div	-2%		2%
		5 mV/div	-2%		2%
		10 mV/div	-2%		2%
		20 mV/div	-2%		2%
		50 mV/div	-2%		2%
		100 mV/div	-2%		2%
		200 mV/div	-2%		2%
		500 mV/div	-2%		2%
	1 V/div	-2%		2%	
	250 MHz	20 mV/div	-2%		2%
	FULL	20 mV/div	-2%		2%
	Channel 2 DC Gain Accuracy, 0 V offset, 0 V vertical position, 1 M Ω	20 MHz	1 mV/div	-2.5%	
2 mV/div			-2%		2%
5 mV/div			-2%		2%
10 mV/div			-2%		2%
20 mV/div			-2%		2%
50 mV/div			-2%		2%

DC Gain Accuracy					
Performance checks	Bandwidth	Vertical scale	Low limit	Test result	High limit
		100 mV/div	-2%		2%
		200 mV/div	-2%		2%
		500 mV/div	-2%		2%
		1 V/div	-2%		2%
	250 MHz	20 mV/div	-2%		2%
	FULL	20 mV/div	-2%		2%
Channel 3 DC Gain Accuracy, 0 V offset, 0 V vertical position, 50 Ω	20 MHz	1 mV/div	-4%		4%
		2 mV/div	-2%		2%
		5 mV/div	-2%		2%
		10 mV/div	-2%		2%
		20 mV/div	-2%		2%
		50 mV/div	-2%		2%
		100 mV/div	-2%		2%
		200 mV/div	-2%		2%
		500 mV/div	-2%		2%
	1 V/div	-2%		2%	
	250 MHz	20 mV/div	-2%		2%
	FULL	20 mV/div	-2%		2%
	Channel 3 DC Gain Accuracy, 0 V offset, 0 V vertical position, 1 M Ω	20 MHz	1 mV/div	-2.5%	
2 mV/div			-2%		2%
5 mV/div			-2%		2%
10 mV/div			-2%		2%
20 mV/div			-2%		2%
50 mV/div			-2%		2%

DC Gain Accuracy					
Performance checks	Bandwidth	Vertical scale	Low limit	Test result	High limit
		100 mV/div	-2%		2%
		200 mV/div	-2%		2%
		500 mV/div	-2%		2%
		1 V/div	-2%		2%
	250 MHz	20 mV/div	-2%		2%
	FULL	20 mV/div	-2%		2%
Channel 4 DC Gain Accuracy, 0 V offset, 0 V vertical position, 50 Ω	20 MHz	1 mV/div	-4%		4%
		2 mV/div	-2%		2%
		5 mV/div	-2%		2%
		10 mV/div	-2%		2%
		20 mV/div	-2%		2%
		50 mV/div	-2%		2%
		100 mV/div	-2%		2%
		200 mV/div	-2%		2%
		500 mV/div	-2%		2%
	1 V/div	-2%		2%	
	250 MHz	20 mV/div	-2%		2%
	FULL	20 mV/div	-2%		2%
Channel 4 DC Gain Accuracy, 0 V offset, 0 V vertical position, 1 M Ω	20 MHz	1 mV/div	-2.5%		2.5%
		2 mV/div	-2%		2%
		5 mV/div	-2%		2%
		10 mV/div	-2%		2%
		20 mV/div	-2%		2%
		50 mV/div	-2%		2%

DC Gain Accuracy					
Performance checks	Bandwidth	Vertical scale	Low limit	Test result	High limit
		100 mV/div	-2%		2%
		200 mV/div	-2%		2%
		500 mV/div	-2%		2%
		1 V/div	-2%		2%
	250 MHz	20 mV/div	-2%		2%
	FULL	20 mV/div	-2%		2%

Random Noise, sample acquisition mode test record

Channel 1

Start with the highest bandwidth setting you can select.

Random Noise, sample acquisition mode:				
MSO64B: Enable CH1 and CH3				
MSO66B: Enable CH1 and CH4				
MSO68B: Enable CH1 and CH5				
Performance checks	50 Ω , 50 GS/s			
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 1	1 mV/div	10 GHz limit		0.259
		9 GHz limit		0.236
		8 GHz limit		0.216
		7 GHz limit		0.197
		6 GHz limit		0.175
Channel 1	2 mV/div	10 GHz limit		0.266
		9 GHz limit		0.242
		8 GHz limit		0.221
		7 GHz limit		0.199
		6 GHz limit		0.180
Channel 1	5 mV/div	10 GHz limit		0.322
		9 GHz limit		0.293
		8 GHz limit		0.271
		7 GHz limit		0.247
		6 GHz limit		0.220

Random Noise, sample acquisition mode:				
MSO64B: Enable CH1 and CH3				
MSO66B: Enable CH1 and CH4				
MSO68B: Enable CH1 and CH5				
Performance checks	50 Ω, 50 GS/s			
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 1	10 mV/div	10 GHz limit		0.488
		9 GHz limit		0.445
		8 GHz limit		0.406
		7 GHz limit		0.370
		6 GHz limit		0.330
Channel 1	20 mV/div	10 GHz limit		0.850
		9 GHz limit		0.775
		8 GHz limit		0.707
		7 GHz limit		0.645
		6 GHz limit		0.581
Channel 1	50 mV/div	10 GHz limit		1.96
		9 GHz limit		1.79
		8 GHz limit		1.63
		7 GHz limit		1.5
		6 GHz limit		1.34
Channel 1	100 mV/div	10 GHz limit		5.05
		9 GHz limit		4.55
		8 GHz limit		4.15
		7 GHz limit		3.79
		6 GHz limit		3.38

Random Noise, sample acquisition mode:				
MSO64B: Enable CH1 and CH3				
MSO66B: Enable CH1 and CH4				
MSO68B: Enable CH1 and CH5				
Performance checks	50 Ω, 50 GS/s			
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 1	1 V/div	10 GHz limit		38.8
		9 GHz limit		35.4
		8 GHz limit		32.6
		7 GHz limit		29.7
		6 GHz limit		26.8

Random Noise, sample acquisition mode:				
MSO64B: Enable all Channels				
MSO66B: Enable CH1, CH2, CH4, and CH5				
MSO68B: Enable CH1, CH2, CH5, and CH6				
Performance checks	50 Ω, 25 GS/s			
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 1	1 mV/div	10 GHz limit		0.281
		9 GHz limit		0.253
		8 GHz limit		0.223
		7 GHz limit		0.199
		6 GHz limit		0.179
Channel 1	2 mV/div	10 GHz limit		0.288
		9 GHz limit		0.260
		8 GHz limit		0.224
		7 GHz limit		0.202
		6 GHz limit		0.180
Channel 1	5 mV/div	10 GHz limit		0.374
		9 GHz limit		0.337
		8 GHz limit		0.293
		7 GHz limit		0.271
		6 GHz limit		0.233
Channel 1	10 mV/div	10 GHz limit		0.600
		9 GHz limit		0.541
		8 GHz limit		0.482
		7 GHz limit		0.440
		6 GHz limit		0.388

Random Noise, sample acquisition mode:				
MSO64B: Enable all Channels				
MSO66B: Enable CH1, CH2, CH4, and CH5				
MSO68B: Enable CH1, CH2, CH5, and CH6				
Performance checks	50 Ω, 25 GS/s			
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 1	20 mV/div	10 GHz limit		1.08
		9 GHz limit		0.976
		8 GHz limit		0.890
		7 GHz limit		0.793
		6 GHz limit		0.691
Channel 1	50 mV/div	10 GHz limit		2.53
		9 GHz limit		2.3
		8 GHz limit		2.1
		7 GHz limit		1.85
		6 GHz limit		1.67
Channel 1	100 mV/div	10 GHz limit		6.14
		9 GHz limit		5.54
		8 GHz limit		4.88
		7 GHz limit		4.4
		6 GHz limit		3.83
Channel 1	1 V/div	10 GHz limit		49.9
		9 GHz limit		46.1
		8 GHz limit		42
		7 GHz limit		37
		6 GHz limit		33.4

Random Noise, sample acquisition mode:				
MSO64B: Enable all channels				
MSO66B: Enable all channels				
MSO68B: Not applicable				
Performance checks	50 Ω, 12.5 GS/s			
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 1	1 mV/div	5 GHz		0.162
		4 GHz		0.142
		3 GHz		0.123
Channel 1	2 mV/div	5 GHz		0.168
		4 GHz		0.148
		3 GHz		0.127
Channel 1	5 mV/div	5 GHz		0.233
		4 GHz		0.203
		3 GHz		0.173
Channel 1	10 mV/div	5 GHz		0.388
		4 GHz		0.334
		3 GHz		0.281
Channel 1	20 mV/div	5 GHz		0.715
		4 GHz		0.609
		3 GHz		0.518
Channel 1	50 mV/div	5 GHz		1.71
		4 GHz		1.47
		3 GHz		1.25

Random Noise, sample acquisition mode:				
MSO64B: Enable all channels				
MSO66B: Enable all channels				
MSO68B: Not applicable				
Performance checks	50 Ω, 12.5 GS/s			
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 1	100 mV/div	5 GHz		3.92
		4 GHz		3.38
		3 GHz		2.84
Channel 1	1 V/div	5 GHz		34.2
		4 GHz		29.4
		3 GHz		25

Random Noise, High Res mode: All models				
Performance checks			1 M Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 1	1 mV/div	500 MHz limit		0.262
		350 MHz limit		0.190
		250 MHz limit		0.153
		200 MHz limit		0.153
		20 MHz limit		0.102
Channel 1	2 mV/div	500 MHz limit		0.285
		350 MHz limit		0.195
		250 MHz limit		0.156
		200 MHz limit		0.153
		20 MHz limit		0.111
Channel 1	5 mV/div	500 MHz limit		0.311
		350 MHz limit		0.223
		250 MHz limit		0.183
		200 MHz limit		0.175
		20 MHz limit		0.140
Channel 1	10 mV/div	500 MHz limit		0.370
		350 MHz limit		0.281
		250 MHz limit		0.259
		200 MHz limit		0.242
		20 MHz limit		0.226

Random Noise, High Res mode: All models				
Performance checks			1 MΩ, 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 1	20 mV/div	500 MHz limit		0.536
		350 MHz limit		0.473
		250 MHz limit		0.398
		200 MHz limit		0.398
		20 MHz limit		0.398
Channel 1	50 mV/div	500 MHz limit		1.1
		350 MHz limit		0.896
		250 MHz limit		0.994
		200 MHz limit		0.994
		20 MHz limit		0.994
Channel 1	100 mV/div	500 MHz limit		2.39
		350 MHz limit		2.08
		250 MHz limit		1.99
		200 MHz limit		1.99
		20 MHz limit		1.99
Channel 1	1 V/div	500 MHz limit		25.9
		350 MHz limit		22.3
		250 MHz limit		22.1
		200 MHz limit		21.8
		20 MHz limit		19.9

Channel 2

Start with the highest bandwidth setting you can select.

Random Noise, sample acquisition mode:				
MSO64B: Enable all channels				
MSO66B: Enable CH1, CH2, CH4, and CH5				
MSO68B: Enable CH1, CH2, CH5, and CH6				
Performance checks	50 Ω, 25 GS/s			
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 2	1 mV/div	10 GHz limit		0.281
		9 GHz limit		0.253
		8 GHz limit		0.223
		7 GHz limit		0.199
		6 GHz limit		0.179
Channel 2	2 mV/div	10 GHz limit		0.288
		9 GHz limit		0.260
		8 GHz limit		0.224
		7 GHz limit		0.202
		6 GHz limit		0.180
Channel 2	5 mV/div	10 GHz limit		0.374
		9 GHz limit		0.337
		8 GHz limit		0.293
		7 GHz limit		0.271
		6 GHz limit		0.233

Random Noise, sample acquisition mode:				
MSO64B: Enable all channels				
MSO66B: Enable CH1, CH2, CH4, and CH5				
MSO68B: Enable CH1, CH2, CH5, and CH6				
Performance checks	50 Ω, 25 GS/s			
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 2	10 mV/div	10 GHz limit		0.600
		9 GHz limit		0.541
		8 GHz limit		0.482
		7 GHz limit		0.440
		6 GHz limit		0.388
Channel 2	20 mV/div	10 GHz limit		1.08
		9 GHz limit		0.976
		8 GHz limit		0.890
		7 GHz limit		0.793
		6 GHz limit		0.691
Channel 2	50 mV/div	10 GHz limit		2.53
		9 GHz limit		2.3
		8 GHz limit		2.1
		7 GHz limit		1.85
		6 GHz limit		1.67
Channel 2	100 mV/div	10 GHz limit		6.14
		9 GHz limit		5.54
		8 GHz limit		4.88
		7 GHz limit		4.4
		6 GHz limit		3.83

Random Noise, sample acquisition mode:				
MSO64B: Enable all channels				
MSO66B: Enable CH1, CH2, CH4, and CH5				
MSO68B: Enable CH1, CH2, CH5, and CH6				
Performance checks	50 Ω, 25 GS/s			
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 2	1 V/div	10 GHz limit		49.9
		9 GHz limit		46.1
		8 GHz limit		42
		7 GHz limit		37
		6 GHz limit		33.4

Random Noise, sample acquisition mode:				
MSO64B: Enable all channels				
MSO66B: Enable CH1, CH2, CH4, and CH5				
MSO68B: Enable CH1, CH2, CH5, and CH6				
Performance checks	50 Ω, 12.5 GS/s			
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 2	1 mV/div	5 GHz		0.162
		4 GHz		0.142
		3 GHz		0.123
Channel 2	2 mV/div	5 GHz		0.168
		4 GHz		0.148
		3 GHz		0.127
Channel 2	5 mV/div	5 GHz		0.233
		4 GHz		0.203
		3 GHz		0.173
Channel 2	10 mV/div	5 GHz		0.388
		4 GHz		0.334
		3 GHz		0.281
Channel 2	20 mV/div	5 GHz		0.715
		4 GHz		0.609
		3 GHz		0.518
Channel 2	50 mV/div	5 GHz		1.71
		4 GHz		1.47
		3 GHz		1.25

Random Noise, sample acquisition mode:				
MSO64B: Enable all channels				
MSO66B: Enable CH1, CH2, CH4, and CH5				
MSO68B: Enable CH1, CH2, CH5, and CH6				
Performance checks	50 Ω, 12.5 GS/s			
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 2	100 mV/div	5 GHz		3.92
		4 GHz		3.38
		3 GHz		2.84
Channel 2	1 V/div	5 GHz		34.2
		4 GHz		29.4
		3 GHz		25

Random Noise, High Res mode: All models				
Performance checks			1 MΩ, 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 2	1 mV/div	500 MHz limit		0.262
		350 MHz limit		0.190
		250 MHz limit		0.153
		200 MHz limit		0.153
		20 MHz limit		0.102
Channel 2	2 mV/div	500 MHz limit		0.285
		350 MHz limit		0.195
		250 MHz limit		0.156
		200 MHz limit		0.153
		20 MHz limit		0.111

Random Noise, High Res mode: All models				
Performance checks			1 MΩ, 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 2	5 mV/div	500 MHz limit		0.311
		350 MHz limit		0.223
		250 MHz limit		0.183
		200 MHz limit		0.175
		20 MHz limit		0.140
Channel 2	10 mV/div	500 MHz limit		0.370
		350 MHz limit		0.281
		250 MHz limit		0.259
		200 MHz limit		0.242
		20 MHz limit		0.226
Channel 2	20 mV/div	500 MHz limit		0.536
		350 MHz limit		0.473
		250 MHz limit		0.398
		200 MHz limit		0.398
		20 MHz limit		0.398
Channel 2	50 mV/div	500 MHz limit		1.1
		350 MHz limit		0.896
		250 MHz limit		0.994
		200 MHz limit		0.994
		20 MHz limit		0.994

Random Noise, High Res mode: All models				
Performance checks			1 MΩ, 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 2	100 mV/div	500 MHz limit		2.39
		350 MHz limit		2.08
		250 MHz limit		1.99
		200 MHz limit		1.99
		20 MHz limit		1.99
Channel 2	1 V/div	500 MHz limit		25.9
		350 MHz limit		22.3
		250 MHz limit		22.1
		200 MHz limit		21.8
		20 MHz limit		19.9

Channel 3

Start with the highest bandwidth setting you can select.

Random Noise, sample acquisition mode: MSO64B only				
MSO64B: Enable CH1 and CH3				
Performance checks	50 Ω, 50 GS/s			
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 3	1 mV/div	10 GHz limit		0.259
		9 GHz limit		0.236
		8 GHz limit		0.216
		7 GHz limit		0.197
		6 GHz limit		0.175
Channel 3	2 mV/div	10 GHz limit		0.266
		9 GHz limit		0.242
		8 GHz limit		0.221
		7 GHz limit		0.199
		6 GHz limit		0.180
Channel 3	5 mV/div	10 GHz limit		0.322
		9 GHz limit		0.293
		8 GHz limit		0.271
		7 GHz limit		0.247
		6 GHz limit		0.220
Channel 3	10 mV/div	10 GHz limit		0.488
		9 GHz limit		0.445
		8 GHz limit		0.406
		7 GHz limit		0.370
		6 GHz limit		0.330

Random Noise, sample acquisition mode: MSO64B only				
MSO64B: Enable CH1 and CH3				
Performance checks	50 Ω, 50 GS/s			
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 3	20 mV/div	10 GHz limit		0.850
		9 GHz limit		0.775
		8 GHz limit		0.707
		7 GHz limit		0.645
		6 GHz limit		0.581
Channel 3	50 mV/div	10 GHz limit		1.96
		9 GHz limit		1.79
		8 GHz limit		1.63
		7 GHz limit		1.5
		6 GHz limit		1.34
Channel 3	100 mV/div	10 GHz limit		5.05
		9 GHz limit		4.55
		8 GHz limit		4.15
		7 GHz limit		3.79
		6 GHz limit		3.38
Channel 3	1 V/div	10 GHz limit		38.8
		9 GHz limit		35.4
		8 GHz limit		32.6
		7 GHz limit		29.7
		6 GHz limit		26.8

Random Noise, sample acquisition mode: MSO64B only				
Performance checks	50 Ω, 25 GS/s			
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 3	1 mV/div	10 GHz limit		0.281
		9 GHz limit		0.253
		8 GHz limit		0.223
		7 GHz limit		0.199
		6 GHz limit		0.179
Channel 3	2 mV/div	10 GHz limit		0.288
		9 GHz limit		0.260
		8 GHz limit		0.224
		7 GHz limit		0.202
		6 GHz limit		0.180
Channel 3	5 mV/div	10 GHz limit		0.374
		9 GHz limit		0.337
		8 GHz limit		0.293
		7 GHz limit		0.271
		6 GHz limit		0.233
Channel 3	10 mV/div	10 GHz limit		0.600
		9 GHz limit		0.541
		8 GHz limit		0.482
		7 GHz limit		0.440
		6 GHz limit		0.388

Random Noise, sample acquisition mode: MSO64B only				
Performance checks	50 Ω, 25 GS/s			
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 3	20 mV/div	10 GHz limit		1.08
		9 GHz limit		0.976
		8 GHz limit		0.890
		7 GHz limit		0.793
		6 GHz limit		0.691
Channel 3	50 mV/div	10 GHz limit		2.53
		9 GHz limit		2.3
		8 GHz limit		2.1
		7 GHz limit		1.85
		6 GHz limit		1.67
Channel 3	100 mV/div	10 GHz limit		6.14
		9 GHz limit		5.54
		8 GHz limit		4.88
		7 GHz limit		4.4
		6 GHz limit		3.83
Channel 3	1 V/div	10 GHz limit		49.9
		9 GHz limit		46.1
		8 GHz limit		42
		7 GHz limit		37
		6 GHz limit		33.4

Random Noise, sample acquisition mode: MSO64B only				
Performance checks	50 Ω , 12.5 GS/s			
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 3	1 mV/div	5 GHz		0.162
		4 GHz		0.142
		3 GHz		0.123
Channel 3	2 mV/div	5 GHz		0.168
		4 GHz		0.148
		3 GHz		0.127
Channel 3	5 mV/div	5 GHz		0.233
		4 GHz		0.203
		3 GHz		0.173
Channel 3	10 mV/div	5 GHz		0.388
		4 GHz		0.334
		3 GHz		0.281
Channel 3	20 mV/div	5 GHz		0.715
		4 GHz		0.609
		3 GHz		0.518
Channel 3	50 mV/div	5 GHz		1.71
		4 GHz		1.47
		3 GHz		1.25
Channel 3	100 mV/div	5 GHz		3.92
		4 GHz		3.38
		3 GHz		2.84

Random Noise, sample acquisition mode: MSO64B only				
Performance checks	50 Ω , 12.5 GS/s			
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 3	1 V/div	5 GHz		34.2
		4 GHz		29.4
		3 GHz		25

Random Noise, High Res mode: All models				
Performance checks			1 M Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 3	1 mV/div	500 MHz limit		0.262
		350 MHz limit		0.190
		250 MHz limit		0.153
		200 MHz limit		0.153
		20 MHz limit		0.102
Channel 3	2 mV/div	500 MHz limit		0.285
		350 MHz limit		0.195
		250 MHz limit		0.156
		200 MHz limit		0.153
		20 MHz limit		0.111
Channel 3	5 mV/div	500 MHz limit		0.311
		350 MHz limit		0.223
		250 MHz limit		0.183
		200 MHz limit		0.175
		20 MHz limit		0.140

Random Noise, High Res mode: All models				
Performance checks			1 MΩ, 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 3	10 mV/div	500 MHz limit		0.370
		350 MHz limit		0.281
		250 MHz limit		0.259
		200 MHz limit		0.242
		20 MHz limit		0.226
Channel 3	20 mV/div	500 MHz limit		0.536
		350 MHz limit		0.473
		250 MHz limit		0.398
		200 MHz limit		0.398
		20 MHz limit		0.398
Channel 3	50 mV/div	500 MHz limit		1.1
		350 MHz limit		0.896
		250 MHz limit		0.994
		200 MHz limit		0.994
		20 MHz limit		0.994
Channel 3	100 mV/div	500 MHz limit		2.39
		350 MHz limit		2.08
		250 MHz limit		1.99
		200 MHz limit		1.99
		20 MHz limit		1.99

Random Noise, High Res mode: All models				
Performance checks			1 MΩ, 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 3	1 V/div	500 MHz limit		25.9
		350 MHz limit		22.3
		250 MHz limit		22.1
		200 MHz limit		21.8
		20 MHz limit		19.9

Channel 4

Start with the highest bandwidth setting you can select.

Random Noise, sample acquisition mode: MSO66B only				
MSO66B: Enable CH1 and CH4				
Performance checks	50 Ω, 50 GS/s			
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 4	1 mV/div	10 GHz limit		0.259
		9 GHz limit		0.236
		8 GHz limit		0.216
		7 GHz limit		0.197
		6 GHz limit		0.175
Channel 4	2 mV/div	10 GHz limit		0.266
		9 GHz limit		0.242
		8 GHz limit		0.221
		7 GHz limit		0.199
		6 GHz limit		0.180
Channel 4	5 mV/div	10 GHz limit		0.322
		9 GHz limit		0.293
		8 GHz limit		0.271
		7 GHz limit		0.247
		6 GHz limit		0.220
Channel 4	10 mV/div	10 GHz limit		0.488
		9 GHz limit		0.445
		8 GHz limit		0.406
		7 GHz limit		0.370
		6 GHz limit		0.330

Random Noise, sample acquisition mode: MSO66B only				
MSO66B: Enable CH1 and CH4				
Performance checks	50 Ω, 50 GS/s			
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 4	20 mV/div	10 GHz limit		0.850
		9 GHz limit		0.775
		8 GHz limit		0.707
		7 GHz limit		0.645
		6 GHz limit		0.581
Channel 4	50 mV/div	10 GHz limit		1.96
		9 GHz limit		1.79
		8 GHz limit		1.63
		7 GHz limit		1.5
		6 GHz limit		1.34
Channel 4	100 mV/div	10 GHz limit		5.05
		9 GHz limit		4.55
		8 GHz limit		4.15
		7 GHz limit		3.79
		6 GHz limit		3.38
Channel 4	1 V/div	10 GHz limit		38.8
		9 GHz limit		35.4
		8 GHz limit		32.6
		7 GHz limit		29.7
		6 GHz limit		26.8

Random Noise, sample acquisition mode: MSO64B and MSO66B only				
MSO64B: Enable all channels				
MSO66B: Enable CH1, CH2, CH4, and CH5				
Performance checks	50 Ω, 25 GS/s			
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 4	1 mV/div	10 GHz limit		0.281
		9 GHz limit		0.253
		8 GHz limit		0.223
		7 GHz limit		0.199
		6 GHz limit		0.179
Channel 4	2 mV/div	10 GHz limit		0.288
		9 GHz limit		0.260
		8 GHz limit		0.224
		7 GHz limit		0.202
		6 GHz limit		0.180
Channel 4	5 mV/div	10 GHz limit		0.374
		9 GHz limit		0.337
		8 GHz limit		0.293
		7 GHz limit		0.271
		6 GHz limit		0.233
Channel 4	10 mV/div	10 GHz limit		0.600
		9 GHz limit		0.541
		8 GHz limit		0.482
		7 GHz limit		0.440
		6 GHz limit		0.388

Random Noise, sample acquisition mode: MSO64B and MSO66B only				
MSO64B: Enable all channels				
MSO66B: Enable CH1, CH2, CH4, and CH5				
Performance checks	50 Ω, 25 GS/s			
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 4	20 mV/div	10 GHz limit		1.08
		9 GHz limit		0.976
		8 GHz limit		0.890
		7 GHz limit		0.793
		6 GHz limit		0.691
Channel 4	50 mV/div	10 GHz limit		2.53
		9 GHz limit		2.3
		8 GHz limit		2.1
		7 GHz limit		1.85
		6 GHz limit		1.67
Channel 4	100 mV/div	10 GHz limit		6.14
		9 GHz limit		5.54
		8 GHz limit		4.88
		7 GHz limit		4.4
		6 GHz limit		3.83
Channel 4	1 V/div	10 GHz limit		49.9
		9 GHz limit		46.1
		8 GHz limit		42
		7 GHz limit		37
		6 GHz limit		33.4

Random Noise, sample acquisition mode: All models				
Performance checks	50 Ω, 12.5 GS/s			
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 4	1 mV/div	5 GHz		0.162
		4 GHz		0.142
		3 GHz		0.123
Channel 4	2 mV/div	5 GHz		0.168
		4 GHz		0.148
		3 GHz		0.127
Channel 4	5 mV/div	5 GHz		0.233
		4 GHz		0.203
		3 GHz		0.173
Channel 4	10 mV/div	5 GHz		0.388
		4 GHz		0.334
		3 GHz		0.281
Channel 4	20 mV/div	5 GHz		0.715
		4 GHz		0.609
		3 GHz		0.518
Channel 4	50 mV/div	5 GHz		1.71
		4 GHz		1.47
		3 GHz		1.25
Channel 4	100 mV/div	5 GHz		3.92
		4 GHz		3.38
		3 GHz		2.84

Random Noise, sample acquisition mode: All models				
Performance checks		50 Ω , 12.5 GS/s		
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 4	1 V/div	5 GHz		34.2
		4 GHz		29.4
		3 GHz		25

Random Noise, High Res mode: All models				
Performance checks			1 M Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 4	1 mV/div	500 MHz limit		0.262
		350 MHz limit		0.190
		250 MHz limit		0.153
		200 MHz limit		0.153
		20 MHz limit		0.102
Channel 4	2 mV/div	500 MHz limit		0.285
		350 MHz limit		0.195
		250 MHz limit		0.156
		200 MHz limit		0.153
		20 MHz limit		0.111
Channel 4	5 mV/div	500 MHz limit		0.311
		350 MHz limit		0.223
		250 MHz limit		0.183
		200 MHz limit		0.175
		20 MHz limit		0.140

Random Noise, High Res mode: All models				
Performance checks			1 MΩ, 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 4	10 mV/div	500 MHz limit		0.370
		350 MHz limit		0.281
		250 MHz limit		0.259
		200 MHz limit		0.242
		20 MHz limit		0.226
Channel 4	20 mV/div	500 MHz limit		0.536
		350 MHz limit		0.473
		250 MHz limit		0.398
		200 MHz limit		0.398
		20 MHz limit		0.398
Channel 4	50 mV/div	500 MHz limit		1.1
		350 MHz limit		0.896
		250 MHz limit		0.994
		200 MHz limit		0.994
		20 MHz limit		0.994
Channel 4	100 mV/div	500 MHz limit		2.39
		350 MHz limit		2.08
		250 MHz limit		1.99
		200 MHz limit		1.99
		20 MHz limit		1.99

Random Noise, High Res mode: All models				
Performance checks			1 MΩ, 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 4	1 V/div	500 MHz limit		25.9
		350 MHz limit		22.3
		250 MHz limit		22.1
		200 MHz limit		21.8
		20 MHz limit		19.9

Channel 5

Start with the highest bandwidth setting you can select.

Random Noise, sample acquisition mode: MSO68B only				
MSO68B: Enable CH1 and CH5				
Performance checks	50 Ω, 50 GS/s			
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 5	1 mV/div	10 GHz limit		0.259
		9 GHz limit		0.236
		8 GHz limit		0.216
		7 GHz limit		0.197
		6 GHz limit		0.175
Channel 5	2 mV/div	10 GHz limit		0.266
		9 GHz limit		0.242
		8 GHz limit		0.221
		7 GHz limit		0.199
		6 GHz limit		0.180
Channel 5	5 mV/div	10 GHz limit		0.322
		9 GHz limit		0.293
		8 GHz limit		0.271
		7 GHz limit		0.247
		6 GHz limit		0.220
Channel 5	10 mV/div	10 GHz limit		0.488
		9 GHz limit		0.445
		8 GHz limit		0.406
		7 GHz limit		0.370
		6 GHz limit		0.330

Random Noise, sample acquisition mode: MSO68B only				
MSO68B: Enable CH1 and CH5				
Performance checks	50 Ω, 50 GS/s			
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 5	20 mV/div	10 GHz limit		0.850
		9 GHz limit		0.775
		8 GHz limit		0.707
		7 GHz limit		0.645
		6 GHz limit		0.581
Channel 5	50 mV/div	10 GHz limit		1.96
		9 GHz limit		1.79
		8 GHz limit		1.63
		7 GHz limit		1.5
		6 GHz limit		1.34
Channel 5	100 mV/div	10 GHz limit		5.05
		9 GHz limit		4.55
		8 GHz limit		4.15
		7 GHz limit		3.79
		6 GHz limit		3.38
Channel 5	1 V/div	10 GHz limit		38.8
		9 GHz limit		35.4
		8 GHz limit		32.6
		7 GHz limit		29.7
		6 GHz limit		26.8

Random Noise, sample acquisition mode: MSO66B and MSO68B only				
MSO66B: Enable CH1, CH2, CH4, and CH5				
MSO68B: Enable CH1, CH2, CH5, and CH6				
Performance checks	50 Ω, 25 GS/s			
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 5	1 mV/div	10 GHz limit		0.281
		9 GHz limit		0.253
		8 GHz limit		0.223
		7 GHz limit		0.199
		6 GHz limit		0.179
Channel 5	2 mV/div	10 GHz limit		0.288
		9 GHz limit		0.260
		8 GHz limit		0.224
		7 GHz limit		0.202
		6 GHz limit		0.180
Channel 5	5 mV/div	10 GHz limit		0.374
		9 GHz limit		0.337
		8 GHz limit		0.293
		7 GHz limit		0.271
		6 GHz limit		0.233
Channel 5	10 mV/div	10 GHz limit		0.600
		9 GHz limit		0.541
		8 GHz limit		0.482
		7 GHz limit		0.440
		6 GHz limit		0.388

Random Noise, sample acquisition mode: MSO66B and MSO68B only				
MSO66B: Enable CH1, CH2, CH4, and CH5				
MSO68B: Enable CH1, CH2, CH5, and CH6				
Performance checks	50 Ω, 25 GS/s			
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 5	20 mV/div	10 GHz limit		1.08
		9 GHz limit		0.976
		8 GHz limit		0.890
		7 GHz limit		0.793
		6 GHz limit		0.691
Channel 5	50 mV/div	10 GHz limit		2.53
		9 GHz limit		2.3
		8 GHz limit		2.1
		7 GHz limit		1.85
		6 GHz limit		1.67
Channel 5	100 mV/div	10 GHz limit		6.14
		9 GHz limit		5.54
		8 GHz limit		4.88
		7 GHz limit		4.4
		6 GHz limit		3.83
Channel 5	1 V/div	10 GHz limit		49.9
		9 GHz limit		46.1
		8 GHz limit		42
		7 GHz limit		37
		6 GHz limit		33.4

Random Noise, sample acquisition mode: 6 and 8 channel models				
Performance checks	50 Ω, 12.5 GS/s			
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 5	1 mV/div	5 GHz		0.162
		4 GHz		0.142
		3 GHz		0.123
Channel 5	2 mV/div	5 GHz		0.168
		4 GHz		0.148
		3 GHz		0.127
Channel 5	5 mV/div	5 GHz		0.233
		4 GHz		0.203
		3 GHz		0.173
Channel 5	10 mV/div	5 GHz		0.388
		4 GHz		0.334
		3 GHz		0.281
Channel 5	20 mV/div	5 GHz		0.715
		4 GHz		0.609
		3 GHz		0.518
Channel 5	50 mV/div	5 GHz		1.71
		4 GHz		1.47
		3 GHz		1.25
Channel 5	100 mV/div	5 GHz		3.92
		4 GHz		3.38
		3 GHz		2.84

Random Noise, sample acquisition mode: 6 and 8 channel models				
Performance checks	50 Ω , 12.5 GS/s			
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 5	1 V/div	5 GHz		34.2
		4 GHz		29.4
		3 GHz		25

Random Noise, High Res mode: 6 and 8 channel models				
Performance checks			1 M Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 5	1 mV/div	500 MHz limit		0.262
		350 MHz limit		0.190
		250 MHz limit		0.153
		200 MHz limit		0.153
		20 MHz limit		0.102
Channel 5	2 mV/div	500 MHz limit		0.285
		350 MHz limit		0.195
		250 MHz limit		0.156
		200 MHz limit		0.153
		20 MHz limit		0.111
Channel 5	5 mV/div	500 MHz limit		0.311
		350 MHz limit		0.223
		250 MHz limit		0.183
		200 MHz limit		0.175
		20 MHz limit		0.140

Random Noise, High Res mode: 6 and 8 channel models				
Performance checks			1 MΩ, 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 5	10 mV/div	500 MHz limit		0.370
		350 MHz limit		0.281
		250 MHz limit		0.259
		200 MHz limit		0.242
		20 MHz limit		0.226
Channel 5	20 mV/div	500 MHz limit		0.536
		350 MHz limit		0.473
		250 MHz limit		0.398
		200 MHz limit		0.398
		20 MHz limit		0.398
Channel 5	50 mV/div	500 MHz limit		1.1
		350 MHz limit		0.896
		250 MHz limit		0.994
		200 MHz limit		0.994
		20 MHz limit		0.994
Channel 5	100 mV/div	500 MHz limit		2.39
		350 MHz limit		2.08
		250 MHz limit		1.99
		200 MHz limit		1.99
		20 MHz limit		1.99

Random Noise, High Res mode: 6 and 8 channel models				
Performance checks			1 MΩ, 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 5	1 V/div	500 MHz limit		25.9
		350 MHz limit		22.3
		250 MHz limit		22.1
		200 MHz limit		21.8
		20 MHz limit		19.9

Channel 6

Start with the highest bandwidth setting you can select.

Random Noise, sample acquisition mode: MSO68B only				
MSO68B: Enable CH1, CH2, CH5 and CH6				
Performance checks	50 Ω, 25 GS/s			
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 6	1 mV/div	10 GHz limit		0.281
		9 GHz limit		0.253
		8 GHz limit		0.223
		7 GHz limit		0.199
		6 GHz limit		0.179
Channel 6	2 mV/div	10 GHz limit		0.288
		9 GHz limit		0.260
		8 GHz limit		0.224
		7 GHz limit		0.202
		6 GHz limit		0.180
Channel 6	5 mV/div	10 GHz limit		0.374
		9 GHz limit		0.337
		8 GHz limit		0.293
		7 GHz limit		0.271
		6 GHz limit		0.233
Channel 6	10 mV/div	10 GHz limit		0.600
		9 GHz limit		0.541
		8 GHz limit		0.482
		7 GHz limit		0.440
		6 GHz limit		0.388

Random Noise, sample acquisition mode: MSO68B only				
MSO68B: Enable CH1, CH2, CH5 and CH6				
Performance checks	50 Ω, 25 GS/s			
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 6	20 mV/div	10 GHz limit		1.08
		9 GHz limit		0.976
		8 GHz limit		0.890
		7 GHz limit		0.793
		6 GHz limit		0.691
Channel 6	50 mV/div	10 GHz limit		2.53
		9 GHz limit		2.3
		8 GHz limit		2.1
		7 GHz limit		1.85
		6 GHz limit		1.67
Channel 6	100 mV/div	10 GHz limit		6.14
		9 GHz limit		5.54
		8 GHz limit		4.88
		7 GHz limit		4.4
		6 GHz limit		3.83
Channel 6	1 V/div	10 GHz limit		49.9
		9 GHz limit		46.1
		8 GHz limit		42
		7 GHz limit		37
		6 GHz limit		33.4

Random Noise, sample acquisition mode: 6 and 8 channel models				
Performance checks	50 Ω , 12.5 GS/s			
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 6	1 mV/div	5 GHz		0.162
		4 GHz		0.142
		3 GHz		0.123
Channel 6	2 mV/div	5 GHz		0.168
		4 GHz		0.148
		3 GHz		0.127
Channel 6	5 mV/div	5 GHz		0.233
		4 GHz		0.203
		3 GHz		0.173
Channel 6	10 mV/div	5 GHz		0.388
		4 GHz		0.334
		3 GHz		0.281
Channel 6	20 mV/div	5 GHz		0.715
		4 GHz		0.609
		3 GHz		0.518
Channel 6	50 mV/div	5 GHz		1.71
		4 GHz		1.47
		3 GHz		1.25
Channel 6	100 mV/div	5 GHz		3.92
		4 GHz		3.38
		3 GHz		2.84

Random Noise, sample acquisition mode: 6 and 8 channel models				
Performance checks		50 Ω , 12.5 GS/s		
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 6	1 V/div	5 GHz		34.2
		4 GHz		29.4
		3 GHz		25

Random Noise, High Res mode: 6 and 8 channel models				
Performance checks			1 M Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 6	1 mV/div	500 MHz limit		0.262
		350 MHz limit		0.190
		250 MHz limit		0.153
		200 MHz limit		0.153
		20 MHz limit		0.102
Channel 6	2 mV/div	500 MHz limit		0.285
		350 MHz limit		0.195
		250 MHz limit		0.156
		200 MHz limit		0.153
		20 MHz limit		0.111
Channel 6	5 mV/div	500 MHz limit		0.311
		350 MHz limit		0.223
		250 MHz limit		0.183
		200 MHz limit		0.175
		20 MHz limit		0.140

Random Noise, High Res mode: 6 and 8 channel models				
Performance checks			1 MΩ, 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 6	10 mV/div	500 MHz limit		0.370
		350 MHz limit		0.281
		250 MHz limit		0.259
		200 MHz limit		0.242
		20 MHz limit		0.226
Channel 6	20 mV/div	500 MHz limit		0.536
		350 MHz limit		0.473
		250 MHz limit		0.398
		200 MHz limit		0.398
		20 MHz limit		0.398
Channel 6	50 mV/div	500 MHz limit		1.1
		350 MHz limit		0.896
		250 MHz limit		0.994
		200 MHz limit		0.994
		20 MHz limit		0.994
Channel 6	100 mV/div	500 MHz limit		2.39
		350 MHz limit		2.08
		250 MHz limit		1.99
		200 MHz limit		1.99
		20 MHz limit		1.99

Random Noise, High Res mode: 6 and 8 channel models				
Performance checks			1 M Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 6	1 V/div	500 MHz limit		25.9
		350 MHz limit		22.3
		250 MHz limit		22.1
		200 MHz limit		21.8
		20 MHz limit		19.9

Channel 7

Start with the highest bandwidth setting you can select.

Random Noise, sample acquisition mode: 8 channel models				
Performance checks	50 Ω , 12.5 GS/s			
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 7	1 mV/div	5 GHz		0.162
		4 GHz		0.142
		3 GHz		0.123
Channel 7	2 mV/div	5 GHz		0.168
		4 GHz		0.148
		3 GHz		0.127
Channel 7	5 mV/div	5 GHz		0.233
		4 GHz		0.203
		3 GHz		0.173
Channel 7	10 mV/div	5 GHz		0.388
		4 GHz		0.334
		3 GHz		0.281

Random Noise, sample acquisition mode: 8 channel models				
Performance checks		50 Ω , 12.5 GS/s		
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 7	20 mV/div	5 GHz		0.715
		4 GHz		0.609
		3 GHz		0.518
Channel 7	50 mV/div	5 GHz		1.71
		4 GHz		1.47
		3 GHz		1.25
Channel 7	100 mV/div	5 GHz		3.92
		4 GHz		3.38
		3 GHz		2.84
Channel 7	1 V/div	5 GHz		34.2
		4 GHz		29.4
		3 GHz		25

Random Noise, High Res mode: 8 channel models				
Performance checks			1 M Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 7	1 mV/div	500 MHz limit		0.262
		350 MHz limit		0.190
		250 MHz limit		0.153
		200 MHz limit		0.153
		20 MHz limit		0.102

Random Noise, High Res mode: 8 channel models				
Performance checks			1 MΩ, 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 7	2 mV/div	500 MHz limit		0.285
		350 MHz limit		0.195
		250 MHz limit		0.156
		200 MHz limit		0.153
		20 MHz limit		0.111
Channel 7	5 mV/div	500 MHz limit		0.311
		350 MHz limit		0.223
		250 MHz limit		0.183
		200 MHz limit		0.175
		20 MHz limit		0.140
Channel 7	10 mV/div	500 MHz limit		0.370
		350 MHz limit		0.281
		250 MHz limit		0.259
		200 MHz limit		0.242
		20 MHz limit		0.226
Channel 7	20 mV/div	500 MHz limit		0.536
		350 MHz limit		0.473
		250 MHz limit		0.398
		200 MHz limit		0.398
		20 MHz limit		0.398

Random Noise, High Res mode: 8 channel models				
Performance checks			1 MΩ, 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 7	50 mV/div	500 MHz limit		1.1
		350 MHz limit		0.896
		250 MHz limit		0.994
		200 MHz limit		0.994
		20 MHz limit		0.994
Channel 7	100 mV/div	500 MHz limit		2.39
		350 MHz limit		2.08
		250 MHz limit		1.99
		200 MHz limit		1.99
		20 MHz limit		1.99
Channel 7	1 V/div	500 MHz limit		25.9
		350 MHz limit		22.3
		250 MHz limit		22.1
		200 MHz limit		21.8
		20 MHz limit		19.9

Channel 8

Start with the highest bandwidth setting you can select.

Random Noise, sample acquisition mode: 8 channel models				
Performance checks	50 Ω, 12.5 GS/s			
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 8	1 mV/div	5 GHz		0.162
		4 GHz		0.142
		3 GHz		0.123
Channel 8	2 mV/div	5 GHz		0.168
		4 GHz		0.148
		3 GHz		0.127
Channel 8	5 mV/div	5 GHz		0.233
		4 GHz		0.203
		3 GHz		0.173
Channel 8	10 mV/div	5 GHz		0.388
		4 GHz		0.334
		3 GHz		0.281
Channel 8	20 mV/div	5 GHz		0.715
		4 GHz		0.609
		3 GHz		0.518
Channel 8	50 mV/div	5 GHz		1.71
		4 GHz		1.47
		3 GHz		1.25
Channel 8	100 mV/div	5 GHz		3.92
		4 GHz		3.38
		3 GHz		2.84

Random Noise, sample acquisition mode: 8 channel models				
Performance checks	50 Ω , 12.5 GS/s			
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 8	1 V/div	5 GHz		34.2
		4 GHz		29.4
		3 GHz		25

Random Noise, High Res mode: 8 channel models				
Performance checks			1 M Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 8	1 mV/div	500 MHz limit		0.262
		350 MHz limit		0.190
		250 MHz limit		0.153
		200 MHz limit		0.153
		20 MHz limit		0.102
Channel 8	2 mV/div	500 MHz limit		0.285
		350 MHz limit		0.195
		250 MHz limit		0.156
		200 MHz limit		0.153
		20 MHz limit		0.111
Channel 8	5 mV/div	500 MHz limit		0.311
		350 MHz limit		0.223
		250 MHz limit		0.183
		200 MHz limit		0.175
		20 MHz limit		0.140

Random Noise, High Res mode: 8 channel models				
Performance checks			1 MΩ, 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 8	10 mV/div	500 MHz limit		0.370
		350 MHz limit		0.281
		250 MHz limit		0.259
		200 MHz limit		0.242
		20 MHz limit		0.226
Channel 8	20 mV/div	500 MHz limit		0.536
		350 MHz limit		0.473
		250 MHz limit		0.398
		200 MHz limit		0.398
		20 MHz limit		0.398
Channel 8	50 mV/div	500 MHz limit		1.1
		350 MHz limit		0.896
		250 MHz limit		0.994
		200 MHz limit		0.994
		20 MHz limit		0.994
Channel 8	100 mV/div	500 MHz limit		2.39
		350 MHz limit		2.08
		250 MHz limit		1.99
		200 MHz limit		1.99
		20 MHz limit		1.99

Random Noise, High Res mode: 8 channel models				
Performance checks			1 M Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 8	1 V/div	500 MHz limit		25.9
		350 MHz limit		22.3
		250 MHz limit		22.1
		200 MHz limit		21.8
		20 MHz limit		19.9

Random Noise, High Res mode test record

Channel 1

Start with the highest bandwidth setting you can select.

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 1	1 mV/div	5 GHz				0.156
		4 GHz limit				0.138
		3 GHz limit				0.118
		2.5 GHz limit				0.107
		2 GHz limit				0.0974
		1 GHz limit				0.0722
		500 MHz limit				0.0529
		350 MHz limit				0.045
		250 MHz limit				0.042
		200 MHz limit				0.0362
		20 MHz limit				0.013

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 1	2 mV/div	5 GHz				0.158
		4 GHz limit				0.139
		3 GHz limit				0.120
		2.5 GHz limit				0.108
		2 GHz limit				0.0987
		1 GHz limit				0.0732
		500 MHz limit				0.0536
		350 MHz limit				0.0457
		250 MHz limit				0.0426
		200 MHz limit				0.0367
		20 MHz limit				0.0132
Channel 1	5 mV/div	5 GHz				0.189
		4 GHz limit				0.165
		3 GHz limit				0.142
		2.5 GHz limit				0.128
		2 GHz limit				0.115
		1 GHz limit				0.0846
		500 MHz limit				0.0613
		350 MHz limit				0.0522
		250 MHz limit				0.0487
		200 MHz limit				0.0419
		20 MHz limit				0.015

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 1	10 mV/div	5 GHz				0.278
		4 GHz limit				0.242
		3 GHz limit				0.203
		2.5 GHz limit				0.181
		2 GHz limit				0.163
		1 GHz limit				0.117
		500 MHz limit				0.0848
		350 MHz limit				0.0705
		250 MHz limit				0.0658
		200 MHz limit				0.0567
		20 MHz limit				0.0206
Channel 1	20 mV/div	5 GHz				0.478
		4 GHz limit				0.412
		3 GHz limit				0.346
		2.5 GHz limit				0.309
		2 GHz limit				0.275
		1 GHz limit				0.195
		500 MHz limit				0.141
		350 MHz limit				0.116
		250 MHz limit				0.107
		200 MHz limit				0.0932
		20 MHz limit				0.0342

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 1	50 mV/div	5 GHz				1.09
		4 GHz limit				0.949
		3 GHz limit				0.790
		2.5 GHz limit				0.704
		2 GHz limit				0.627
		1 GHz limit				0.444
		500 MHz limit				0.325
		350 MHz limit				0.261
		250 MHz limit				0.241
		200 MHz limit				0.210
		20 MHz limit				0.079
Channel 1	100 mV/div	5 GHz				2.81
		4 GHz limit				2.45
		3 GHz limit				2.06
		2.5 GHz limit				1.83
		2 GHz limit				1.65
		1 GHz limit				1.17
		500 MHz limit				0.858
		350 MHz limit				0.705
		250 MHz limit				0.658
		200 MHz limit				0.573
		20 MHz limit				0.203

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 1	1 V/div	5 GHz				21.8
		4 GHz limit				18.8
		3 GHz limit				15.8
		2.5 GHz limit				13.9
		2 GHz limit				12.4
		1 GHz limit				8.78
		500 MHz limit				6.51
		350 MHz limit				5.11
		250 MHz limit				4.77
		200 MHz limit				4.15
		20 MHz limit				1.56

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 1	1 mV/div	5 GHz				0.162
		4 GHz limit				0.138
		3 GHz limit				0.117
		2.5 GHz limit				0.108
		2 GHz limit				0.0963
		1 GHz limit				0.0773
		500 MHz limit		0.262		0.056
		350 MHz limit		0.190		0.0477
		250 MHz limit		0.153		0.0461
		200 MHz limit		0.149		0.0379
		20 MHz limit		0.103		0.013
Channel 1	2 mV/div	5 GHz				0.164
		4 GHz limit				0.139
		3 GHz limit				0.119
		2.5 GHz limit				0.110
		2 GHz limit				0.0976
		1 GHz limit				0.0724
		500 MHz limit		0.285		0.0562
		350 MHz limit		0.195		0.0473
		250 MHz limit		0.155		0.0467
		200 MHz limit		0.153		0.038
		20 MHz limit		0.103		0.0133

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 1	5 mV/div	5 GHz				0.210
		4 GHz limit				0.175
		3 GHz limit				0.149
		2.5 GHz limit				0.133
		2 GHz limit				0.118
		1 GHz limit				0.0896
		500 MHz limit		0.297		0.068
		350 MHz limit		0.205		0.0565
		250 MHz limit		0.161		0.054
		200 MHz limit		0.154		0.0444
		20 MHz limit		0.110		0.0156
Channel 1	10 mV/div	5 GHz				0.330
		4 GHz limit				0.271
		3 GHz limit				0.226
		2.5 GHz limit				0.203
		2 GHz limit				0.186
		1 GHz limit				0.128
		500 MHz limit		0.334		0.0919
		350 MHz limit		0.231		0.0773
		250 MHz limit		0.186		0.0747
		200 MHz limit		0.165		0.0658
		20 MHz limit		0.141		0.0226

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 1	20 mV/div	5 GHz				0.595
		4 GHz limit				0.486
		3 GHz limit				0.398
		2.5 GHz limit				0.363
		2 GHz limit				0.320
		1 GHz limit				0.226
		500 MHz limit		0.407		0.162
		350 MHz limit		0.305		0.133
		250 MHz limit		0.257		0.120
		200 MHz limit		0.211		0.106
		20 MHz limit		0.224		0.0412
Channel 1	50 mV/div	5 GHz				1.4
		4 GHz limit				1.15
		3 GHz limit				0.960
		2.5 GHz limit				0.856
		2 GHz limit				0.745
		1 GHz limit				0.534
		500 MHz limit		0.737		0.396
		350 MHz limit		0.553		0.307
		250 MHz limit		0.528		0.280
		200 MHz limit		0.387		0.247
		20 MHz limit		0.510		0.105

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 1	100 mV/div	5 GHz				3.38
		4 GHz limit				2.71
		3 GHz limit				2.28
		2.5 GHz limit				2.03
		2 GHz limit				1.81
		1 GHz limit				1.33
		500 MHz limit		1.77		0.941
		350 MHz limit		1.38		0.792
		250 MHz limit		1.18		0.722
		200 MHz limit		0.952		0.666
		20 MHz limit		1.13		0.236
Channel 1	1 V/div	5 GHz				28.1
		4 GHz limit				23.1
		3 GHz limit				19.2
		2.5 GHz limit				17.1
		2 GHz limit				14.9
		1 GHz limit				10.8
		500 MHz limit		19		7.92
		350 MHz limit		14.9		6.14
		250 MHz limit		13.6		5.6
		200 MHz limit		11.3		4.94
		20 MHz limit		11.7		2.11

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 6.25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit
Channel 1	1 mV/div	2.5 GHz limit				0.109
		2 GHz limit				0.0996
		1 GHz limit				0.0739
		500 MHz limit				0.0548
		350 MHz limit				0.0466
		250 MHz limit				0.0435
		200 MHz limit				0.0388
		20 MHz limit				0.0147
Channel 1	2 mV/div	2.5 GHz limit				0.112
		2 GHz limit				0.101
		1 GHz limit				0.0749
		500 MHz limit				0.0555
		350 MHz limit				0.0473
		250 MHz limit				0.0441
		200 MHz limit				0.0393
		20 MHz limit				0.0148

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 6.25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit
Channel 1	5 mV/div	2.5 GHz limit				0.142
		2 GHz limit				0.128
		1 GHz limit				0.0928
		500 MHz limit				0.068
		350 MHz limit				0.0565
		250 MHz limit				0.0528
		200 MHz limit				0.047
		20 MHz limit				0.0177
Channel 1	10 mV/div	2.5 GHz limit				0.221
		2 GHz limit				0.197
		1 GHz limit				0.134
		500 MHz limit				0.0974
		350 MHz limit				0.0801
		250 MHz limit				0.0747
		200 MHz limit				0.0666
		20 MHz limit				0.0256

Random Noise, High Res mode: All models						
Performance checks			1 MΩ		50 Ω, 6.25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit
Channel 1	20 mV/div	2.5 GHz limit				0.398
		2 GHz limit				0.350
		1 GHz limit				0.237
		500 MHz limit				0.174
		350 MHz limit				0.138
		250 MHz limit				0.129
		200 MHz limit				0.115
		20 MHz limit				0.0446
Channel 1	50 mV/div	2.5 GHz limit				0.938
		2 GHz limit				0.836
		1 GHz limit				0.559
		500 MHz limit				0.410
		350 MHz limit				0.322
		250 MHz limit				0.300
		200 MHz limit				0.271
		20 MHz limit				0.105

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 6.25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit
Channel 1	100 mV/div	2.5 GHz limit				2.23
		2 GHz limit				1.99
		1 GHz limit				1.36
		500 MHz limit				0.985
		350 MHz limit				0.801
		250 MHz limit				0.747
		200 MHz limit				0.674
		20 MHz limit				0.256
Channel 1	1 V/div	2.5 GHz limit				19
		2 GHz limit				16.7
		1 GHz limit				11.1
		500 MHz limit				8.1
		350 MHz limit				6.36
		250 MHz limit				5.94
		200 MHz limit				5.35
		20 MHz limit				2.08

Channel 2

Start with the highest bandwidth setting you can select.

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 2	1 mV/div	5 GHz				0.156
		4 GHz limit				0.138
		3 GHz limit				0.118
		2.5 GHz limit				0.107
		2 GHz limit				0.0974
		1 GHz limit				0.0722
		500 MHz limit				0.0529
		350 MHz limit				0.045
		250 MHz limit				0.042
		200 MHz limit				0.0362
		20 MHz limit				0.013
Channel 2	2 mV/div	5 GHz				0.158
		4 GHz limit				0.139
		3 GHz limit				0.120
		2.5 GHz limit				0.108
		2 GHz limit				0.0987
		1 GHz limit				0.0732
		500 MHz limit				0.0536
		350 MHz limit				0.0457
		250 MHz limit				0.0426
		200 MHz limit				0.0367
		20 MHz limit				0.0132

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 2	5 mV/div	5 GHz				0.189
		4 GHz limit				0.165
		3 GHz limit				0.142
		2.5 GHz limit				0.128
		2 GHz limit				0.115
		1 GHz limit				0.0846
		500 MHz limit				0.0613
		350 MHz limit				0.0522
		250 MHz limit				0.0487
		200 MHz limit				0.0419
		20 MHz limit				0.015
Channel 2	10 mV/div	5 GHz				0.278
		4 GHz limit				0.242
		3 GHz limit				0.203
		2.5 GHz limit				0.181
		2 GHz limit				0.163
		1 GHz limit				0.117
		500 MHz limit				0.0848
		350 MHz limit				0.0705
		250 MHz limit				0.0658
		200 MHz limit				0.0567
		20 MHz limit				0.0206

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 2	20 mV/div	5 GHz				0.478
		4 GHz limit				0.412
		3 GHz limit				0.346
		2.5 GHz limit				0.309
		2 GHz limit				0.275
		1 GHz limit				0.195
		500 MHz limit				0.141
		350 MHz limit				0.116
		250 MHz limit				0.107
		200 MHz limit				0.0932
		20 MHz limit				0.0342
Channel 2	50 mV/div	5 GHz				1.09
		4 GHz limit				0.949
		3 GHz limit				0.790
		2.5 GHz limit				0.704
		2 GHz limit				0.627
		1 GHz limit				0.444
		500 MHz limit				0.325
		350 MHz limit				0.261
		250 MHz limit				0.241
		200 MHz limit				0.210
		20 MHz limit				0.079

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 2	100 mV/div	5 GHz				2.81
		4 GHz limit				2.45
		3 GHz limit				2.06
		2.5 GHz limit				1.83
		2 GHz limit				1.65
		1 GHz limit				1.17
		500 MHz limit				0.858
		350 MHz limit				0.705
		250 MHz limit				0.658
		200 MHz limit				0.573
		20 MHz limit				0.203
Channel 2	1 V/div	5 GHz				21.8
		4 GHz limit				18.8
		3 GHz limit				15.8
		2.5 GHz limit				13.9
		2 GHz limit				12.4
		1 GHz limit				8.78
		500 MHz limit				6.51
		350 MHz limit				5.11
		250 MHz limit				4.77
		200 MHz limit				4.15
		20 MHz limit				1.56

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 2	1 mV/div	5 GHz				0.162
		4 GHz limit				0.138
		3 GHz limit				0.117
		2.5 GHz limit				0.108
		2 GHz limit				0.0963
		1 GHz limit				0.0773
		500 MHz limit		0.262		0.056
		350 MHz limit		0.190		0.0477
		250 MHz limit		0.153		0.0461
		200 MHz limit		0.149		0.0379
		20 MHz limit		0.103		0.013
Channel 2	2 mV/div	5 GHz				0.164
		4 GHz limit				0.139
		3 GHz limit				0.119
		2.5 GHz limit				0.110
		2 GHz limit				0.0976
		1 GHz limit				0.0724
		500 MHz limit		0.285		0.0562
		350 MHz limit		0.195		0.0473
		250 MHz limit		0.155		0.0467
		200 MHz limit		0.153		0.038
		20 MHz limit		0.103		0.0133
Channel 2	5 mV/div	5 GHz				0.210

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 2	5 mV/div	4 GHz limit				0.175
		3 GHz limit				0.149
		2.5 GHz limit				0.133
		2 GHz limit				0.118
		1 GHz limit				0.0896
		500 MHz limit		0.297		0.068
		350 MHz limit		0.205		0.0565
		250 MHz limit		0.161		0.054
		200 MHz limit		0.154		0.0444
		20 MHz limit		0.110		0.0156
Channel 2	10 mV/div	5 GHz				0.330
		4 GHz limit				0.271
		3 GHz limit				0.226
		2.5 GHz limit				0.203
		2 GHz limit				0.186
		1 GHz limit				0.128
		500 MHz limit		0.334		0.0919
		350 MHz limit		0.231		0.0773
		250 MHz limit		0.186		0.0747
		200 MHz limit		0.165		0.0658
20 MHz limit		0.141		0.0226		

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 2	20 mV/div	5 GHz				0.595
		4 GHz limit				0.486
		3 GHz limit				0.398
		2.5 GHz limit				0.363
		2 GHz limit				0.320
		1 GHz limit				0.226
		500 MHz limit		0.407		0.162
		350 MHz limit		0.305		0.133
		250 MHz limit		0.257		0.120
		200 MHz limit		0.211		0.106
		20 MHz limit		0.224		0.0412
Channel 2	50 mV/div	5 GHz				1.4
		4 GHz limit				1.15
		3 GHz limit				0.960
		2.5 GHz limit				0.856
		2 GHz limit				0.745
		1 GHz limit				0.534
		500 MHz limit		0.737		0.396
		350 MHz limit		0.553		0.307
		250 MHz limit		0.528		0.280
		200 MHz limit		0.387		0.247
		20 MHz limit		0.510		0.105
Channel 2	100 mV/div	5 GHz				3.38

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 2	100 mV/div	4 GHz limit				2.71
		3 GHz limit				2.28
		2.5 GHz limit				2.03
		2 GHz limit				1.81
		1 GHz limit				1.33
		500 MHz limit		1.77		0.941
		350 MHz limit		1.38		0.792
		250 MHz limit		1.18		0.722
		200 MHz limit		0.952		0.666
		20 MHz limit		1.13		0.236
Channel 2	1 V/div	5 GHz				28.1
		4 GHz limit				23.1
		3 GHz limit				19.2
		2.5 GHz limit				17.1
		2 GHz limit				14.9
		1 GHz limit				10.8
		500 MHz limit		19		7.92
		350 MHz limit		14.9		6.14
		250 MHz limit		13.6		5.6
		200 MHz limit		11.3		4.94
		20 MHz limit		11.7		2.11

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 6.25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit
Channel 2	1 mV/div	2.5 GHz limit				0.109
		2 GHz limit				0.0996
		1 GHz limit				0.0739
		500 MHz limit				0.0548
		350 MHz limit				0.0466
		250 MHz limit				0.0435
		200 MHz limit				0.0388
		20 MHz limit				0.0147
Channel 2	2 mV/div	2.5 GHz limit				0.112
		2 GHz limit				0.101
		1 GHz limit				0.0749
		500 MHz limit				0.0555
		350 MHz limit				0.0473
		250 MHz limit				0.0441
		200 MHz limit				0.0393
		20 MHz limit				0.0148
Channel 2	5 mV/div	2.5 GHz limit				0.142
		2 GHz limit				0.128
		1 GHz limit				0.0928
		500 MHz limit				0.068
		350 MHz limit				0.0565
		250 MHz limit				0.0528
		200 MHz limit				0.047

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 6.25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit
Channel 2	5 mV/div	20 MHz limit				0.0177
Channel 2	10 mV/div	2.5 GHz limit				0.221
		2 GHz limit				0.197
		1 GHz limit				0.134
		500 MHz limit				0.0974
		350 MHz limit				0.0801
		250 MHz limit				0.0747
		200 MHz limit				0.0666
		20 MHz limit				0.0256
Channel 2	20 mV/div	2.5 GHz limit				0.398
		2 GHz limit				0.350
		1 GHz limit				0.237
		500 MHz limit				0.174
		350 MHz limit				0.138
		250 MHz limit				0.129
		200 MHz limit				0.115
		20 MHz limit				0.0446
Channel 2	50 mV/div	2.5 GHz limit				0.938
		2 GHz limit				0.836
		1 GHz limit				0.559
		500 MHz limit				0.410
		350 MHz limit				0.322
		250 MHz limit				0.300

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 6.25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit
Channel 2	50 mV/div	200 MHz limit				0.271
		20 MHz limit				0.105
Channel 2	100 mV/div	2.5 GHz limit				2.23
		2 GHz limit				1.99
		1 GHz limit				1.36
		500 MHz limit				0.985
		350 MHz limit				0.801
		250 MHz limit				0.747
		200 MHz limit				0.674
		20 MHz limit				0.256
Channel 2	1 V/div	2.5 GHz limit				19
		2 GHz limit				16.7
		1 GHz limit				11.1
		500 MHz limit				8.1
		350 MHz limit				6.36
		250 MHz limit				5.94
		200 MHz limit				5.35
		20 MHz limit				2.08

Channel 3

Start with the highest bandwidth setting you can select.

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 3	1 mV/div	5 GHz				0.156
		4 GHz limit				0.138
		3 GHz limit				0.118
		2.5 GHz limit				0.107
		2 GHz limit				0.0974
		1 GHz limit				0.0722
		500 MHz limit				0.0529
		350 MHz limit				0.045
		250 MHz limit				0.042
		200 MHz limit				0.0362
		20 MHz limit				0.013
Channel 3	2 mV/div	5 GHz				0.158
		4 GHz limit				0.139
		3 GHz limit				0.120
		2.5 GHz limit				0.108
		2 GHz limit				0.0987
		1 GHz limit				0.0732
		500 MHz limit				0.0536
		350 MHz limit				0.0457
		250 MHz limit				0.0426
		200 MHz limit				0.0367

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
		20 MHz limit				0.0132
Channel 3	5 mV/div	5 GHz				0.189
		4 GHz limit				0.165
		3 GHz limit				0.142
		2.5 GHz limit				0.128
		2 GHz limit				0.115
		1 GHz limit				0.0846
		500 MHz limit				0.0613
		350 MHz limit				0.0522
		250 MHz limit				0.0487
		200 MHz limit				0.0419
		20 MHz limit				0.015
Channel 3	10 mV/div	5 GHz				0.278
		4 GHz limit				0.242
		3 GHz limit				0.203
		2.5 GHz limit				0.181
		2 GHz limit				0.163
		1 GHz limit				0.117
		500 MHz limit				0.0848
		350 MHz limit				0.0705
		250 MHz limit				0.0658
		200 MHz limit				0.0567
		20 MHz limit				0.0206

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 3	20 mV/div	5 GHz				0.478
		4 GHz limit				0.412
		3 GHz limit				0.346
		2.5 GHz limit				0.309
		2 GHz limit				0.275
		1 GHz limit				0.195
		500 MHz limit				0.141
		350 MHz limit				0.116
		250 MHz limit				0.107
		200 MHz limit				0.0932
		20 MHz limit				0.0342
Channel 3	50 mV/div	5 GHz				1.09
		4 GHz limit				0.949
		3 GHz limit				0.790
		2.5 GHz limit				0.704
		2 GHz limit				0.627
		1 GHz limit				0.444
		500 MHz limit				0.325
		350 MHz limit				0.261
		250 MHz limit				0.241
		200 MHz limit				0.210
		20 MHz limit				0.079
Channel 3	100 mV/div	5 GHz				2.81

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 3	100 mV/div	4 GHz limit				2.45
		3 GHz limit				2.06
		2.5 GHz limit				1.83
		2 GHz limit				1.65
		1 GHz limit				1.17
		500 MHz limit				0.858
		350 MHz limit				0.705
		250 MHz limit				0.658
		200 MHz limit				0.573
		20 MHz limit				0.203
Channel 3	1 V/div	5 GHz				21.8
		4 GHz limit				18.8
		3 GHz limit				15.8
		2.5 GHz limit				13.9
		2 GHz limit				12.4
		1 GHz limit				8.78
		500 MHz limit				6.51
		350 MHz limit				5.11
		250 MHz limit				4.77
		200 MHz limit				4.15
20 MHz limit				1.56		

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 3	1 mV/div	5 GHz				0.162
		4 GHz limit				0.138
		3 GHz limit				0.117
		2.5 GHz limit				0.108
		2 GHz limit				0.0963
		1 GHz limit				0.0773
		500 MHz limit		0.262		0.056
		350 MHz limit		0.190		0.0477
		250 MHz limit		0.153		0.0461
		200 MHz limit		0.149		0.0379
		20 MHz limit		0.103		0.013
Channel 3	2 mV/div	5 GHz				0.164
		4 GHz limit				0.139
		3 GHz limit				0.119
		2.5 GHz limit				0.110
		2 GHz limit				0.0976
		1 GHz limit				0.0724
		500 MHz limit		0.285		0.0562
		350 MHz limit		0.195		0.0473
		250 MHz limit		0.155		0.0467
		200 MHz limit		0.153		0.038
		20 MHz limit		0.103		0.0133
Channel 3	5 mV/div	5 GHz				0.210

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 3	5 mV/div	4 GHz limit				0.175
		3 GHz limit				0.149
		2.5 GHz limit				0.133
		2 GHz limit				0.118
		1 GHz limit				0.0896
		500 MHz limit		0.297		0.068
		350 MHz limit		0.205		0.0565
		250 MHz limit		0.161		0.054
		200 MHz limit		0.154		0.0444
		20 MHz limit		0.110		0.0156
Channel 3	10 mV/div	5 GHz				0.330
		4 GHz limit				0.271
		3 GHz limit				0.226
		2.5 GHz limit				0.203
		2 GHz limit				0.186
		1 GHz limit				0.128
		500 MHz limit		0.334		0.0919
		350 MHz limit		0.231		0.0773
		250 MHz limit		0.186		0.0747
		200 MHz limit		0.165		0.0658
		20 MHz limit		0.141		0.0226
Channel 3	20 mV/div	5 GHz				0.595
		4 GHz limit				0.486

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 3	20 mV/div	3 GHz limit				0.398
		2.5 GHz limit				0.363
		2 GHz limit				0.320
		1 GHz limit				0.226
		500 MHz limit		0.407		0.162
		350 MHz limit		0.305		0.133
		250 MHz limit		0.257		0.120
		200 MHz limit		0.211		0.106
		20 MHz limit		0.224		0.0412
Channel 3	50 mV/div	5 GHz				1.4
		4 GHz limit				1.15
		3 GHz limit				0.960
		2.5 GHz limit				0.856
		2 GHz limit				0.745
		1 GHz limit				0.534
		500 MHz limit		0.737		0.396
		350 MHz limit		0.553		0.307
		250 MHz limit		0.528		0.280
		200 MHz limit		0.387		0.247
		20 MHz limit		0.510		0.105
Channel 3	100 mV/div	5 GHz				3.38
		4 GHz limit				2.71
		3 GHz limit				2.28

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 3	100 mV/div	2.5 GHz limit				2.03
		2 GHz limit				1.81
		1 GHz limit				1.33
		500 MHz limit		1.77		0.941
		350 MHz limit		1.38		0.792
		250 MHz limit		1.18		0.722
		200 MHz limit		0.952		0.666
		20 MHz limit		1.13		0.236
Channel 3	1 V/div	5 GHz				28.1
		4 GHz limit				23.1
		3 GHz limit				19.2
		2.5 GHz limit				17.1
		2 GHz limit				14.9
		1 GHz limit				10.8
		500 MHz limit		19		7.92
		350 MHz limit		14.9		6.14
		250 MHz limit		13.6		5.6
		200 MHz limit		11.3		4.94
		20 MHz limit		11.7		2.11

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 6.25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit
Channel 3	1 mV/div	2.5 GHz limit				0.109
		2 GHz limit				0.0996
		1 GHz limit				0.0739
		500 MHz limit				0.0548
		350 MHz limit				0.0466
		250 MHz limit				0.0435
		200 MHz limit				0.0388
		20 MHz limit				0.0147
Channel 3	2 mV/div	2.5 GHz limit				0.112
		2 GHz limit				0.101
		1 GHz limit				0.0749
		500 MHz limit				0.0555
		350 MHz limit				0.0473
		250 MHz limit				0.0441
		200 MHz limit				0.0393
		20 MHz limit				0.0148
Channel 3	5 mV/div	2.5 GHz limit				0.142
		2 GHz limit				0.128
		1 GHz limit				0.0928
		500 MHz limit				0.068
		350 MHz limit				0.0565
		250 MHz limit				0.0528
		200 MHz limit				0.047

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 6.25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit
		20 MHz limit				0.0177
Channel 3	10 mV/div	2.5 GHz limit				0.221
		2 GHz limit				0.197
		1 GHz limit				0.134
		500 MHz limit				0.0974
		350 MHz limit				0.0801
		250 MHz limit				0.0747
		200 MHz limit				0.0666
		20 MHz limit				0.0256
Channel 3	20 mV/div	2.5 GHz limit				0.398
		2 GHz limit				0.350
		1 GHz limit				0.237
		500 MHz limit				0.174
		350 MHz limit				0.138
		250 MHz limit				0.129
		200 MHz limit				0.115
		20 MHz limit				0.0446
Channel 3	50 mV/div	2.5 GHz limit				0.938
		2 GHz limit				0.836
		1 GHz limit				0.559
		500 MHz limit				0.410
		350 MHz limit				0.322
		250 MHz limit				0.300

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 6.25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit
		200 MHz limit				0.271
		20 MHz limit				0.105
Channel 3	100 mV/div	2.5 GHz limit				2.23
		2 GHz limit				1.99
		1 GHz limit				1.36
		500 MHz limit				0.985
		350 MHz limit				0.801
		250 MHz limit				0.747
		200 MHz limit				0.674
		20 MHz limit				0.256
Channel 3	1 V/div	2.5 GHz limit				19
		2 GHz limit				16.7
		1 GHz limit				11.1
		500 MHz limit				8.1
		350 MHz limit				6.36
		250 MHz limit				5.94
		200 MHz limit				5.35
		20 MHz limit				2.08

Channel 4

Start with the highest bandwidth setting you can select.

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 4	1 mV/div	5 GHz				0.156
		4 GHz limit				0.138
		3 GHz limit				0.118
		2.5 GHz limit				0.107
		2 GHz limit				0.0974
		1 GHz limit				0.0722
		500 MHz limit				0.0529
		350 MHz limit				0.045
		250 MHz limit				0.042
		200 MHz limit				0.0362
		20 MHz limit				0.013
Channel 4	2 mV/div	5 GHz				0.158
		4 GHz limit				0.139
		3 GHz limit				0.120
		2.5 GHz limit				0.108
		2 GHz limit				0.0987
		1 GHz limit				0.0732
		500 MHz limit				0.0536
		350 MHz limit				0.0457
		250 MHz limit				0.0426
		200 MHz limit				0.0367

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
		20 MHz limit				0.0132
Channel 4	5 mV/div	5 GHz				0.189
		4 GHz limit				0.165
		3 GHz limit				0.142
		2.5 GHz limit				0.128
		2 GHz limit				0.115
		1 GHz limit				0.0846
		500 MHz limit				0.0613
		350 MHz limit				0.0522
		250 MHz limit				0.0487
		200 MHz limit				0.0419
		20 MHz limit				0.015
Channel 4	10 mV/div	5 GHz				0.278
		4 GHz limit				0.242
		3 GHz limit				0.203
		2.5 GHz limit				0.181
		2 GHz limit				0.163
		1 GHz limit				0.117
		500 MHz limit				0.0848
		350 MHz limit				0.0705
		250 MHz limit				0.0658
		200 MHz limit				0.0567
		20 MHz limit				0.0206

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 4	20 mV/div	5 GHz				0.478
		4 GHz limit				0.412
		3 GHz limit				0.346
		2.5 GHz limit				0.309
		2 GHz limit				0.275
		1 GHz limit				0.195
		500 MHz limit				0.141
		350 MHz limit				0.116
		250 MHz limit				0.107
		200 MHz limit				0.0932
		20 MHz limit				0.0342
Channel 4	50 mV/div	5 GHz				1.09
		4 GHz limit				0.949
		3 GHz limit				0.790
		2.5 GHz limit				0.704
		2 GHz limit				0.627
		1 GHz limit				0.444
		500 MHz limit				0.325
		350 MHz limit				0.261
		250 MHz limit				0.241
		200 MHz limit				0.210
		20 MHz limit				0.079
Channel 4	100 mV/div	5 GHz				2.81

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 3	100 mV/div	4 GHz limit				2.45
		3 GHz limit				2.06
		2.5 GHz limit				1.83
		2 GHz limit				1.65
		1 GHz limit				1.17
		500 MHz limit				0.858
		350 MHz limit				0.705
		250 MHz limit				0.658
		200 MHz limit				0.573
		20 MHz limit				0.203
Channel 4	1 V/div	5 GHz				21.8
		4 GHz limit				18.8
		3 GHz limit				15.8
		2.5 GHz limit				13.9
		2 GHz limit				12.4
		1 GHz limit				8.78
		500 MHz limit				6.51
		350 MHz limit				5.11
		250 MHz limit				4.77
		200 MHz limit				4.15
20 MHz limit				1.56		

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 4	1 mV/div	5 GHz				0.162
		4 GHz limit				0.138
		3 GHz limit				0.117
		2.5 GHz limit				0.108
		2 GHz limit				0.0963
		1 GHz limit				0.0773
		500 MHz limit		0.262		0.056
		350 MHz limit		0.190		0.0477
		250 MHz limit		0.153		0.0461
		200 MHz limit		0.149		0.0379
		20 MHz limit		0.103		0.013
Channel 4	2 mV/div	5 GHz				0.164
		4 GHz limit				0.139
		3 GHz limit				0.119
		2.5 GHz limit				0.110
		2 GHz limit				0.0976
		1 GHz limit				0.0724
		500 MHz limit		0.285		0.0562
		350 MHz limit		0.195		0.0473
		250 MHz limit		0.155		0.0467
		200 MHz limit		0.153		0.038
		20 MHz limit		0.103		0.0133
Channel 4	5 mV/div	5 GHz				0.210

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 4	5 mV/div	4 GHz limit				0.175
		3 GHz limit				0.149
		2.5 GHz limit				0.133
		2 GHz limit				0.118
		1 GHz limit				0.0896
		500 MHz limit		0.297		0.068
		350 MHz limit		0.205		0.0565
		250 MHz limit		0.161		0.054
		200 MHz limit		0.154		0.0444
		20 MHz limit		0.110		0.0156
Channel 4	10 mV/div	5 GHz				0.330
		4 GHz limit				0.271
		3 GHz limit				0.226
		2.5 GHz limit				0.203
		2 GHz limit				0.186
		1 GHz limit				0.128
		500 MHz limit		0.334		0.0919
		350 MHz limit		0.231		0.0773
		250 MHz limit		0.186		0.0747
		200 MHz limit		0.165		0.0658
		20 MHz limit		0.141		0.0226
Channel 4	20 mV/div	5 GHz				0.595
		4 GHz limit				0.486

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 4	20 mV/div	3 GHz limit				0.398
		2.5 GHz limit				0.363
		2 GHz limit				0.320
		1 GHz limit				0.226
		500 MHz limit		0.407		0.162
		350 MHz limit		0.305		0.133
		250 MHz limit		0.257		0.120
		200 MHz limit		0.211		0.106
		20 MHz limit		0.224		0.0412
Channel 4	50 mV/div	5 GHz				1.4
		4 GHz limit				1.15
		3 GHz limit				0.960
		2.5 GHz limit				0.856
		2 GHz limit				0.745
		1 GHz limit				0.534
		500 MHz limit		0.737		0.396
		350 MHz limit		0.553		0.307
		250 MHz limit		0.528		0.280
		200 MHz limit		0.387		0.247
		20 MHz limit		0.510		0.105
Channel 4	100 mV/div	5 GHz				3.38
		4 GHz limit				2.71
		3 GHz limit				2.28

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 4	100 mV/div	2.5 GHz limit				2.03
		2 GHz limit				1.81
		1 GHz limit				1.33
		500 MHz limit		1.77		0.941
		350 MHz limit		1.38		0.792
		250 MHz limit		1.18		0.722
		200 MHz limit		0.952		0.666
		20 MHz limit		1.13		0.236
Channel 4	1 V/div	5 GHz				28.1
		4 GHz limit				23.1
		3 GHz limit				19.2
		2.5 GHz limit				17.1
		2 GHz limit				14.9
		1 GHz limit				10.8
		500 MHz limit		19		7.92
		350 MHz limit		14.9		6.14
		250 MHz limit		13.6		5.6
		200 MHz limit		11.3		4.94
		20 MHz limit		11.7		2.11

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 6.25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit
Channel 4	1 mV/div	2.5 GHz limit				0.109
		2 GHz limit				0.0996
		1 GHz limit				0.0739
		500 MHz limit				0.0548
		350 MHz limit				0.0466
		250 MHz limit				0.0435
		200 MHz limit				0.0388
		20 MHz limit				0.0147
Channel 4	2 mV/div	2.5 GHz limit				0.112
		2 GHz limit				0.101
		1 GHz limit				0.0749
		500 MHz limit				0.0555
		350 MHz limit				0.0473
		250 MHz limit				0.0441
		200 MHz limit				0.0393
		20 MHz limit				0.0148
Channel 4	5 mV/div	2.5 GHz limit				0.142
		2 GHz limit				0.128
		1 GHz limit				0.0928
		500 MHz limit				0.068
		350 MHz limit				0.0565
		250 MHz limit				0.0528
		200 MHz limit				0.047

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 6.25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit
		20 MHz limit				0.0177
Channel 4	10 mV/div	2.5 GHz limit				0.221
		2 GHz limit				0.197
		1 GHz limit				0.134
		500 MHz limit				0.0974
		350 MHz limit				0.0801
		250 MHz limit				0.0747
		200 MHz limit				0.0666
		20 MHz limit				0.0256
Channel 4	20 mV/div	2.5 GHz limit				0.398
		2 GHz limit				0.350
		1 GHz limit				0.237
		500 MHz limit				0.174
		350 MHz limit				0.138
		250 MHz limit				0.129
		200 MHz limit				0.115
		20 MHz limit				0.0446
Channel 4	50 mV/div	2.5 GHz limit				0.938
		2 GHz limit				0.836
		1 GHz limit				0.559
		500 MHz limit				0.410
		350 MHz limit				0.322
		250 MHz limit				0.300

Random Noise, High Res mode: All models						
Performance checks			1 M Ω		50 Ω , 6.25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit
		200 MHz limit				0.271
		20 MHz limit				0.105
Channel 4	100 mV/div	2.5 GHz limit				2.23
		2 GHz limit				1.99
		1 GHz limit				1.36
		500 MHz limit				0.985
		350 MHz limit				0.801
		250 MHz limit				0.747
		200 MHz limit				0.674
		20 MHz limit				0.256
Channel 4	1 V/div	2.5 GHz limit				19
		2 GHz limit				16.7
		1 GHz limit				11.1
		500 MHz limit				8.1
		350 MHz limit				6.36
		250 MHz limit				5.94
		200 MHz limit				5.35
		20 MHz limit				2.08

Channel 5

Start with the highest bandwidth setting you can select.

Random Noise, High Res mode: 6 and 8 channel models						
Performance checks			1 M Ω		50 Ω , 25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 5	1 mV/div	5 GHz				0.156
		4 GHz limit				0.138
		3 GHz limit				0.118
		2.5 GHz limit				0.107
		2 GHz limit				0.0974
		1 GHz limit				0.0722
		500 MHz limit				0.0529
		350 MHz limit				0.045
		250 MHz limit				0.042
		200 MHz limit				0.0362
		20 MHz limit				0.013
Channel 5	2 mV/div	5 GHz				0.158
		4 GHz limit				0.139
		3 GHz limit				0.120
		2.5 GHz limit				0.108
		2 GHz limit				0.0987
		1 GHz limit				0.0732
		500 MHz limit				0.0536
		350 MHz limit				0.0457
		250 MHz limit				0.0426
		200 MHz limit				0.0367
		20 MHz limit				0.0132

Random Noise, High Res mode: 6 and 8 channel models						
Performance checks			1 M Ω		50 Ω , 25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 5	5 mV/div	5 GHz				0.189
		4 GHz limit				0.165
		3 GHz limit				0.142
		2.5 GHz limit				0.128
		2 GHz limit				0.115
		1 GHz limit				0.0846
		500 MHz limit				0.0613
		350 MHz limit				0.0522
		250 MHz limit				0.0487
		200 MHz limit				0.0419
		20 MHz limit				0.015
Channel 5	10 mV/div	5 GHz				0.278
		4 GHz limit				0.242
		3 GHz limit				0.203
		2.5 GHz limit				0.181
		2 GHz limit				0.163
		1 GHz limit				0.117
		500 MHz limit				0.0848
		350 MHz limit				0.0705
		250 MHz limit				0.0658
		200 MHz limit				0.0567
		20 MHz limit				0.0206
Channel 5	20 mV/div	5 GHz				0.478

Random Noise, High Res mode: 6 and 8 channel models						
Performance checks			1 M Ω		50 Ω , 25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 5	20 mV/div	4 GHz limit				0.412
		3 GHz limit				0.346
		2.5 GHz limit				0.309
		2 GHz limit				0.275
		1 GHz limit				0.195
		500 MHz limit				0.141
		350 MHz limit				0.116
		250 MHz limit				0.107
		200 MHz limit				0.0932
		20 MHz limit				0.0342
Channel 5	50 mV/div	5 GHz				1.09
		4 GHz limit				0.949
		3 GHz limit				0.790
		2.5 GHz limit				0.704
		2 GHz limit				0.627
		1 GHz limit				0.444
		500 MHz limit				0.325
		350 MHz limit				0.261
		250 MHz limit				0.241
		200 MHz limit				0.210
		20 MHz limit				0.079
Channel 5	100 mV/div	5 GHz				2.81
		4 GHz limit				2.45

Random Noise, High Res mode: 6 and 8 channel models						
Performance checks			1 M Ω		50 Ω , 25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 5	100 mV/div	3 GHz limit				2.06
		2.5 GHz limit				1.83
		2 GHz limit				1.65
		1 GHz limit				1.17
		500 MHz limit				0.858
		350 MHz limit				0.705
		250 MHz limit				0.658
		200 MHz limit				0.573
		20 MHz limit				0.203
Channel 5	1 V/div	5 GHz				21.8
		4 GHz limit				18.8
		3 GHz limit				15.8
		2.5 GHz limit				13.9
		2 GHz limit				12.4
		1 GHz limit				8.78
		500 MHz limit				6.51
		350 MHz limit				5.11
		250 MHz limit				4.77
		200 MHz limit				4.15
		20 MHz limit				1.56

Random Noise, High Res mode: 6 and 8 channel models						
Performance checks			1 M Ω		50 Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 5	1 mV/div	5 GHz				0.162
		4 GHz limit				0.138
		3 GHz limit				0.117
		2.5 GHz limit				0.108
		2 GHz limit				0.0963
		1 GHz limit				0.0773
		500 MHz limit		0.262		0.056
		350 MHz limit		0.190		0.0477
		250 MHz limit		0.153		0.0461
		200 MHz limit		0.149		0.0379
		20 MHz limit		0.103		0.013
Channel 5	2 mV/div	5 GHz				0.164
		4 GHz limit				0.139
		3 GHz limit				0.119
		2.5 GHz limit				0.110
		2 GHz limit				0.0976
		1 GHz limit				0.0724
		500 MHz limit		0.285		0.0562
		350 MHz limit		0.195		0.0473
		250 MHz limit		0.155		0.0467
		200 MHz limit		0.153		0.038
		20 MHz limit		0.103		0.0133
Channel 5	5 mV/div	5 GHz				0.210

Random Noise, High Res mode: 6 and 8 channel models						
Performance checks			1 M Ω		50 Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 5	5 mV/div	4 GHz limit				0.175
		3 GHz limit				0.149
		2.5 GHz limit				0.133
		2 GHz limit				0.118
		1 GHz limit				0.0896
		500 MHz limit		0.297		0.068
		350 MHz limit		0.205		0.0565
		250 MHz limit		0.161		0.054
		200 MHz limit		0.154		0.0444
		20 MHz limit		0.110		0.0156
Channel 5	10 mV/div	5 GHz				0.330
		4 GHz limit				0.271
		3 GHz limit				0.226
		2.5 GHz limit				0.203
		2 GHz limit				0.186
		1 GHz limit				0.128
		500 MHz limit		0.334		0.0919
		350 MHz limit		0.231		0.0773
		250 MHz limit		0.186		0.0747
		200 MHz limit		0.165		0.0658
		20 MHz limit		0.141		0.0226
Channel 5	20 mV/div	5 GHz				0.595
		4 GHz limit				0.486

Random Noise, High Res mode: 6 and 8 channel models						
Performance checks			1 M Ω		50 Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 5	20 mV/div	3 GHz limit				0.398
		2.5 GHz limit				0.363
		2 GHz limit				0.320
		1 GHz limit				0.226
		500 MHz limit		0.407		0.162
		350 MHz limit		0.305		0.133
		250 MHz limit		0.257		0.120
		200 MHz limit		0.211		0.106
		20 MHz limit		0.224		0.0412
Channel 5	50 mV/div	5 GHz				1.4
		4 GHz limit				1.15
		3 GHz limit				0.960
		2.5 GHz limit				0.856
		2 GHz limit				0.745
		1 GHz limit				0.534
		500 MHz limit		0.737		0.396
		350 MHz limit		0.553		0.307
		250 MHz limit		0.528		0.280
		200 MHz limit		0.387		0.247
		20 MHz limit		0.510		0.105
Channel 5	100 mV/div	5 GHz				3.38
		4 GHz limit				2.71
		3 GHz limit				2.28

Random Noise, High Res mode: 6 and 8 channel models						
Performance checks			1 M Ω		50 Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 5	100 mV/div	2.5 GHz limit				2.03
		2 GHz limit				1.81
		1 GHz limit				1.33
		500 MHz limit		1.77		0.941
		350 MHz limit		1.38		0.792
		250 MHz limit		1.18		0.722
		200 MHz limit		0.952		0.666
		20 MHz limit		1.13		0.236
Channel 5	1 V/div	5 GHz				28.1
		4 GHz limit				23.1
		3 GHz limit				19.2
		2.5 GHz limit				17.1
		2 GHz limit				14.9
		1 GHz limit				10.8
		500 MHz limit		19		7.92
		350 MHz limit		14.9		6.14
		250 MHz limit		13.6		5.6
		200 MHz limit		11.3		4.94
		20 MHz limit		11.7		2.11

Random Noise, High Res mode: 6 and 8 channel models						
Performance checks			1 M Ω		50 Ω , 6.25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit
Channel 5	1 mV/div	2.5 GHz limit				0.109
		2 GHz limit				0.0996
		1 GHz limit				0.0739
		500 MHz limit				0.0548
		350 MHz limit				0.0466
		250 MHz limit				0.0435
		200 MHz limit				0.0388
		20 MHz limit				0.0147
Channel 5	2 mV/div	2.5 GHz limit				0.112
		2 GHz limit				0.101
		1 GHz limit				0.0749
		500 MHz limit				0.0555
		350 MHz limit				0.0473
		250 MHz limit				0.0441
		200 MHz limit				0.0393
		20 MHz limit				0.0148
Channel 5	5 mV/div	2.5 GHz limit				0.142
		2 GHz limit				0.128
		1 GHz limit				0.0928
		500 MHz limit				0.068
		350 MHz limit				0.0565
		250 MHz limit				0.0528
		200 MHz limit				0.047

Random Noise, High Res mode: 6 and 8 channel models						
Performance checks			1 M Ω		50 Ω , 6.25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit
		20 MHz limit				0.0177
Channel 5	10 mV/div	2.5 GHz limit				0.221
		2 GHz limit				0.197
		1 GHz limit				0.134
		500 MHz limit				0.0974
		350 MHz limit				0.0801
		250 MHz limit				0.0747
		200 MHz limit				0.0666
		20 MHz limit				0.0256
Channel 5	20 mV/div	2.5 GHz limit				0.398
		2 GHz limit				0.350
		1 GHz limit				0.237
		500 MHz limit				0.174
		350 MHz limit				0.138
		250 MHz limit				0.129
		200 MHz limit				0.115
		20 MHz limit				0.0446
Channel 5	50 mV/div	2.5 GHz limit				0.938
		2 GHz limit				0.836
		1 GHz limit				0.559
		500 MHz limit				0.410
		350 MHz limit				0.322
		250 MHz limit				0.300

Random Noise, High Res mode: 6 and 8 channel models						
Performance checks			1 MΩ		50 Ω, 6.25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit
		200 MHz limit				0.271
		20 MHz limit				0.105
Channel 5	100 mV/div	2.5 GHz limit				2.23
		2 GHz limit				1.99
		1 GHz limit				1.36
		500 MHz limit				0.985
		350 MHz limit				0.801
		250 MHz limit				0.747
		200 MHz limit				0.674
		20 MHz limit				0.256
Channel 5	1 V/div	2.5 GHz limit				19
		2 GHz limit				16.7
		1 GHz limit				11.1
		500 MHz limit				8.1
		350 MHz limit				6.36
		250 MHz limit				5.94
		200 MHz limit				5.35
		20 MHz limit				2.08

Channel 6

Start with the highest bandwidth setting you can select.

Random Noise, High Res mode: 6 and 8 channel models						
Performance checks			1 M Ω		50 Ω , 25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 6	1 mV/div	5 GHz				0.156
		4 GHz limit				0.138
		3 GHz limit				0.118
		2.5 GHz limit				0.107
		2 GHz limit				0.0974
		1 GHz limit				0.0722
		500 MHz limit				0.0529
		350 MHz limit				0.045
		250 MHz limit				0.042
		200 MHz limit				0.0362
		20 MHz limit				0.013
Channel 6	2 mV/div	5 GHz				0.158
		4 GHz limit				0.139
		3 GHz limit				0.120
		2.5 GHz limit				0.108
		2 GHz limit				0.0987
		1 GHz limit				0.0732
		500 MHz limit				0.0536
		350 MHz limit				0.0457
		250 MHz limit				0.0426
		200 MHz limit				0.0367

Random Noise, High Res mode: 6 and 8 channel models						
Performance checks			1 M Ω		50 Ω , 25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
		20 MHz limit				0.0132
Channel 6	5 mV/div	5 GHz				0.189
		4 GHz limit				0.165
		3 GHz limit				0.142
		2.5 GHz limit				0.128
		2 GHz limit				0.115
		1 GHz limit				0.0846
		500 MHz limit				0.0613
		350 MHz limit				0.0522
		250 MHz limit				0.0487
		200 MHz limit				0.0419
		20 MHz limit				0.015
Channel 6	10 mV/div	5 GHz				0.278
		4 GHz limit				0.242
		3 GHz limit				0.203
		2.5 GHz limit				0.181
		2 GHz limit				0.163
		1 GHz limit				0.117
		500 MHz limit				0.0848
		350 MHz limit				0.0705
		250 MHz limit				0.0658
		200 MHz limit				0.0567
		20 MHz limit				0.0206

Random Noise, High Res mode: 6 and 8 channel models						
Performance checks			1 M Ω		50 Ω , 25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 6	20 mV/div	5 GHz				0.478
		4 GHz limit				0.412
		3 GHz limit				0.346
		2.5 GHz limit				0.309
		2 GHz limit				0.275
		1 GHz limit				0.195
		500 MHz limit				0.141
		350 MHz limit				0.116
		250 MHz limit				0.107
		200 MHz limit				0.0932
		20 MHz limit				0.0342
Channel 6	50 mV/div	5 GHz				1.09
		4 GHz limit				0.949
		3 GHz limit				0.790
		2.5 GHz limit				0.704
		2 GHz limit				0.627
		1 GHz limit				0.444
		500 MHz limit				0.325
		350 MHz limit				0.261
		250 MHz limit				0.241
		200 MHz limit				0.210
		20 MHz limit				0.079
Channel 6	100 mV/div	5 GHz				2.81

Random Noise, High Res mode: 6 and 8 channel models						
Performance checks			1 M Ω		50 Ω , 25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 6	100 mV/div	4 GHz limit				2.45
		3 GHz limit				2.06
		2.5 GHz limit				1.83
		2 GHz limit				1.65
		1 GHz limit				1.17
		500 MHz limit				0.858
		350 MHz limit				0.705
		250 MHz limit				0.658
		200 MHz limit				0.573
		20 MHz limit				0.203
Channel 6	1 V/div	5 GHz				21.8
		4 GHz limit				18.8
		3 GHz limit				15.8
		2.5 GHz limit				13.9
		2 GHz limit				12.4
		1 GHz limit				8.78
		500 MHz limit				6.51
		350 MHz limit				5.11
		250 MHz limit				4.77
		200 MHz limit				4.15
20 MHz limit				1.56		

Random Noise, High Res mode: 6 and 8 channel models						
Performance checks			1 M Ω		50 Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 6	1 mV/div	5 GHz				0.162
		4 GHz limit				0.138
		3 GHz limit				0.117
		2.5 GHz limit				0.108
		2 GHz limit				0.0963
		1 GHz limit				0.0773
		500 MHz limit		0.262		0.056
		350 MHz limit		0.190		0.0477
		250 MHz limit		0.153		0.0461
		200 MHz limit		0.149		0.0379
		20 MHz limit		0.103		0.013
Channel 6	2 mV/div	5 GHz				0.164
		4 GHz limit				0.139
		3 GHz limit				0.119
		2.5 GHz limit				0.110
		2 GHz limit				0.0976
		1 GHz limit				0.0724
		500 MHz limit		0.285		0.0562
		350 MHz limit		0.195		0.0473
		250 MHz limit		0.155		0.0467
		200 MHz limit		0.153		0.038
		20 MHz limit		0.103		0.0133
Channel 6	5 mV/div	5 GHz				0.210

Random Noise, High Res mode: 6 and 8 channel models						
Performance checks			1 M Ω		50 Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 6	5 mV/div	4 GHz limit				0.175
		3 GHz limit				0.149
		2.5 GHz limit				0.133
		2 GHz limit				0.118
		1 GHz limit				0.0896
		500 MHz limit		0.297		0.068
		350 MHz limit		0.205		0.0565
		250 MHz limit		0.161		0.054
		200 MHz limit		0.154		0.0444
		20 MHz limit		0.110		0.0156
Channel 6	10 mV/div	5 GHz				0.330
		4 GHz limit				0.271
		3 GHz limit				0.226
		2.5 GHz limit				0.203
		2 GHz limit				0.186
		1 GHz limit				0.128
		500 MHz limit		0.334		0.0919
		350 MHz limit		0.231		0.0773
		250 MHz limit		0.186		0.0747
		200 MHz limit		0.165		0.0658
		20 MHz limit		0.141		0.0226
Channel 6	20 mV/div	5 GHz				0.595
		4 GHz limit				0.486

Random Noise, High Res mode: 6 and 8 channel models						
Performance checks			1 M Ω		50 Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 6	20 mV/div	3 GHz limit				0.398
		2.5 GHz limit				0.363
		2 GHz limit				0.320
		1 GHz limit				0.226
		500 MHz limit		0.407		0.162
		350 MHz limit		0.305		0.133
		250 MHz limit		0.257		0.120
		200 MHz limit		0.211		0.106
		20 MHz limit		0.224		0.0412
Channel 6	50 mV/div	5 GHz				1.4
		4 GHz limit				1.15
		3 GHz limit				0.960
		2.5 GHz limit				0.856
		2 GHz limit				0.745
		1 GHz limit				0.534
		500 MHz limit		0.737		0.396
		350 MHz limit		0.553		0.307
		250 MHz limit		0.528		0.280
		200 MHz limit		0.387		0.247
		20 MHz limit		0.510		0.105
Channel 6	100 mV/div	5 GHz				3.38
		4 GHz limit				2.71
		3 GHz limit				2.28

Random Noise, High Res mode: 6 and 8 channel models						
Performance checks			1 M Ω		50 Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 6	100 mV/div	2.5 GHz limit				2.03
		2 GHz limit				1.81
		1 GHz limit				1.33
		500 MHz limit		1.77		0.941
		350 MHz limit		1.38		0.792
		250 MHz limit		1.18		0.722
		200 MHz limit		0.952		0.666
		20 MHz limit		1.13		0.236
Channel 6	1 V/div	5 GHz				28.1
		4 GHz limit				23.1
		3 GHz limit				19.2
		2.5 GHz limit				17.1
		2 GHz limit				14.9
		1 GHz limit				10.8
		500 MHz limit		19		7.92
		350 MHz limit		14.9		6.14
		250 MHz limit		13.6		5.6
		200 MHz limit		11.3		4.94
		20 MHz limit		11.7		2.11

Random Noise, High Res mode: 6 and 8 channel models						
Performance checks			1 M Ω		50 Ω , 6.25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit
Channel 6	1 mV/div	2.5 GHz limit				0.109
		2 GHz limit				0.0996
		1 GHz limit				0.0739
		500 MHz limit				0.0548
		350 MHz limit				0.0466
		250 MHz limit				0.0435
		200 MHz limit				0.0388
		20 MHz limit				0.0147
Channel 6	2 mV/div	2.5 GHz limit				0.112
		2 GHz limit				0.101
		1 GHz limit				0.0749
		500 MHz limit				0.0555
		350 MHz limit				0.0473
		250 MHz limit				0.0441
		200 MHz limit				0.0393
		20 MHz limit				0.0148
Channel 6	5 mV/div	2.5 GHz limit				0.142
		2 GHz limit				0.128
		1 GHz limit				0.0928
		500 MHz limit				0.068
		350 MHz limit				0.0565
		250 MHz limit				0.0528
		200 MHz limit				0.047

Random Noise, High Res mode: 6 and 8 channel models						
Performance checks			1 M Ω		50 Ω , 6.25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit
		20 MHz limit				0.0177
Channel 6	10 mV/div	2.5 GHz limit				0.221
		2 GHz limit				0.197
		1 GHz limit				0.134
		500 MHz limit				0.0974
		350 MHz limit				0.0801
		250 MHz limit				0.0747
		200 MHz limit				0.0666
		20 MHz limit				0.0256
Channel 6	20 mV/div	2.5 GHz limit				0.398
		2 GHz limit				0.350
		1 GHz limit				0.237
		500 MHz limit				0.174
		350 MHz limit				0.138
		250 MHz limit				0.129
		200 MHz limit				0.115
		20 MHz limit				0.0446
Channel 6	50 mV/div	2.5 GHz limit				0.938
		2 GHz limit				0.836
		1 GHz limit				0.559
		500 MHz limit				0.410
		350 MHz limit				0.322
		250 MHz limit				0.300

Random Noise, High Res mode: 6 and 8 channel models						
Performance checks			1 M Ω		50 Ω , 6.25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit
		200 MHz limit				0.271
		20 MHz limit				0.105
Channel 6	100 mV/div	2.5 GHz limit				2.23
		2 GHz limit				1.99
		1 GHz limit				1.36
		500 MHz limit				0.985
		350 MHz limit				0.801
		250 MHz limit				0.747
		200 MHz limit				0.674
		20 MHz limit				0.256
Channel 6	1 V/div	2.5 GHz limit				19
		2 GHz limit				16.7
		1 GHz limit				11.1
		500 MHz limit				8.1
		350 MHz limit				6.36
		250 MHz limit				5.94
		200 MHz limit				5.35
		20 MHz limit				2.08

Channel 7

Start with the highest bandwidth setting you can select.

Random Noise, High Res mode: 8 channel models						
Performance checks			1 M Ω		50 Ω , 25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 7	1 mV/div	5 GHz				0.156
		4 GHz limit				0.138
		3 GHz limit				0.118
		2.5 GHz limit				0.107
		2 GHz limit				0.0974
		1 GHz limit				0.0722
		500 MHz limit				0.0529
		350 MHz limit				0.045
		250 MHz limit				0.042
		200 MHz limit				0.0362
		20 MHz limit				0.013
Channel 7	2 mV/div	5 GHz				0.158
		4 GHz limit				0.139
		3 GHz limit				0.120
		2.5 GHz limit				0.108
		2 GHz limit				0.0987
		1 GHz limit				0.0732
		500 MHz limit				0.0536
		350 MHz limit				0.0457
		250 MHz limit				0.0426
		200 MHz limit				0.0367

Random Noise, High Res mode: 8 channel models						
Performance checks			1 M Ω		50 Ω , 25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
		20 MHz limit				0.0132
Channel 7	5 mV/div	5 GHz				0.189
		4 GHz limit				0.165
		3 GHz limit				0.142
		2.5 GHz limit				0.128
		2 GHz limit				0.115
		1 GHz limit				0.0846
		500 MHz limit				0.0613
		350 MHz limit				0.0522
		250 MHz limit				0.0487
		200 MHz limit				0.0419
		20 MHz limit				0.015
Channel 7	10 mV/div	5 GHz				0.278
		4 GHz limit				0.242
		3 GHz limit				0.203
		2.5 GHz limit				0.181
		2 GHz limit				0.163
		1 GHz limit				0.117
		500 MHz limit				0.0848
		350 MHz limit				0.0705
		250 MHz limit				0.0658
		200 MHz limit				0.0567
		20 MHz limit				0.0206

Random Noise, High Res mode: 8 channel models						
Performance checks			1 M Ω		50 Ω , 25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 7	20 mV/div	5 GHz				0.478
		4 GHz limit				0.412
		3 GHz limit				0.346
		2.5 GHz limit				0.309
		2 GHz limit				0.275
		1 GHz limit				0.195
		500 MHz limit				0.141
		350 MHz limit				0.116
		250 MHz limit				0.107
		200 MHz limit				0.0932
		20 MHz limit				0.0342
Channel 7	50 mV/div	5 GHz				1.09
		4 GHz limit				0.949
		3 GHz limit				0.790
		2.5 GHz limit				0.704
		2 GHz limit				0.627
		1 GHz limit				0.444
		500 MHz limit				0.325
		350 MHz limit				0.261
		250 MHz limit				0.241
		200 MHz limit				0.210
		20 MHz limit				0.079
Channel 7	100 mV/div	5 GHz				2.81

Random Noise, High Res mode: 8 channel models						
Performance checks			1 M Ω		50 Ω , 25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 7	100 mV/div	4 GHz limit				2.45
		3 GHz limit				2.06
		2.5 GHz limit				1.83
		2 GHz limit				1.65
		1 GHz limit				1.17
		500 MHz limit				0.858
		350 MHz limit				0.705
		250 MHz limit				0.658
		200 MHz limit				0.573
		20 MHz limit				0.203
Channel 7	1 V/div	5 GHz				21.8
		4 GHz limit				18.8
		3 GHz limit				15.8
		2.5 GHz limit				13.9
		2 GHz limit				12.4
		1 GHz limit				8.78
		500 MHz limit				6.51
		350 MHz limit				5.11
		250 MHz limit				4.77
		200 MHz limit				4.15
		20 MHz limit				1.56

Random Noise, High Res mode: 8 channel models						
Performance checks			1 M Ω		50 Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 7	1 mV/div	5 GHz				0.162
		4 GHz limit				0.138
		3 GHz limit				0.117
		2.5 GHz limit				0.108
		2 GHz limit				0.0963
		1 GHz limit				0.0773
		500 MHz limit		0.262		0.056
		350 MHz limit		0.190		0.0477
		250 MHz limit		0.153		0.0461
		200 MHz limit		0.149		0.0379
		20 MHz limit		0.103		0.013
Channel 7	2 mV/div	5 GHz				0.164
		4 GHz limit				0.139
		3 GHz limit				0.119
		2.5 GHz limit				0.110
		2 GHz limit				0.0976
		1 GHz limit				0.0724
		500 MHz limit		0.285		0.0562
		350 MHz limit		0.195		0.0473
		250 MHz limit		0.155		0.0467
		200 MHz limit		0.153		0.038
		20 MHz limit		0.103		0.0133
Channel 7	5 mV/div	5 GHz				0.210

Random Noise, High Res mode: 8 channel models						
Performance checks			1 M Ω		50 Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 7	5 mV/div	4 GHz limit				0.175
		3 GHz limit				0.149
		2.5 GHz limit				0.133
		2 GHz limit				0.118
		1 GHz limit				0.0896
		500 MHz limit		0.297		0.068
		350 MHz limit		0.205		0.0565
		250 MHz limit		0.161		0.054
		200 MHz limit		0.154		0.0444
		20 MHz limit		0.110		0.0156
Channel 7	10 mV/div	5 GHz				0.330
		4 GHz limit				0.271
		3 GHz limit				0.226
		2.5 GHz limit				0.203
		2 GHz limit				0.186
		1 GHz limit				0.128
		500 MHz limit		0.334		0.0919
		350 MHz limit		0.231		0.0773
		250 MHz limit		0.186		0.0747
		200 MHz limit		0.165		0.0658
		20 MHz limit		0.141		0.0226
Channel 7	20 mV/div	5 GHz				0.595
		4 GHz limit				0.486

Random Noise, High Res mode: 8 channel models						
Performance checks			1 M Ω		50 Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 7	20 mV/div	3 GHz limit				0.398
		2.5 GHz limit				0.363
		2 GHz limit				0.320
		1 GHz limit				0.226
		500 MHz limit		0.407		0.162
		350 MHz limit		0.305		0.133
		250 MHz limit		0.257		0.120
		200 MHz limit		0.211		0.106
		20 MHz limit		0.224		0.0412
Channel 7	50 mV/div	5 GHz				1.4
		4 GHz limit				1.15
		3 GHz limit				0.960
		2.5 GHz limit				0.856
		2 GHz limit				0.745
		1 GHz limit				0.534
		500 MHz limit		0.737		0.396
		350 MHz limit		0.553		0.307
		250 MHz limit		0.528		0.280
		200 MHz limit		0.387		0.247
		20 MHz limit		0.510		0.105
Channel 7	100 mV/div	5 GHz				3.38
		4 GHz limit				2.71
		3 GHz limit				2.28

Random Noise, High Res mode: 8 channel models						
Performance checks			1 M Ω		50 Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 7	100 mV/div	2.5 GHz limit				2.03
		2 GHz limit				1.81
		1 GHz limit				1.33
		500 MHz limit		1.77		0.941
		350 MHz limit		1.38		0.792
		250 MHz limit		1.18		0.722
		200 MHz limit		0.952		0.666
		20 MHz limit		1.13		0.236
Channel 7	1 V/div	5 GHz				28.1
		4 GHz limit				23.1
		3 GHz limit				19.2
		2.5 GHz limit				17.1
		2 GHz limit				14.9
		1 GHz limit				10.8
		500 MHz limit		19		7.92
		350 MHz limit		14.9		6.14
		250 MHz limit		13.6		5.6
		200 MHz limit		11.3		4.94
		20 MHz limit		11.7		2.11

Random Noise, High Res mode: 8 channel models						
Performance checks			1 M Ω		50 Ω , 6.25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit
Channel 7	1 mV/div	2.5 GHz limit				0.109
		2 GHz limit				0.0996
		1 GHz limit				0.0739
		500 MHz limit				0.0548
		350 MHz limit				0.0466
		250 MHz limit				0.0435
		200 MHz limit				0.0388
		20 MHz limit				0.0147
Channel 7	2 mV/div	2.5 GHz limit				0.112
		2 GHz limit				0.101
		1 GHz limit				0.0749
		500 MHz limit				0.0555
		350 MHz limit				0.0473
		250 MHz limit				0.0441
		200 MHz limit				0.0393
		20 MHz limit				0.0148
Channel 7	5 mV/div	2.5 GHz limit				0.142
		2 GHz limit				0.128
		1 GHz limit				0.0928
		500 MHz limit				0.068
		350 MHz limit				0.0565
		250 MHz limit				0.0528
		200 MHz limit				0.047

Random Noise, High Res mode: 8 channel models						
Performance checks			1 M Ω		50 Ω , 6.25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit
		20 MHz limit				0.0177
Channel 7	10 mV/div	2.5 GHz limit				0.221
		2 GHz limit				0.197
		1 GHz limit				0.134
		500 MHz limit				0.0974
		350 MHz limit				0.0801
		250 MHz limit				0.0747
		200 MHz limit				0.0666
		20 MHz limit				0.0256
Channel 7	20 mV/div	2.5 GHz limit				0.398
		2 GHz limit				0.350
		1 GHz limit				0.237
		500 MHz limit				0.174
		350 MHz limit				0.138
		250 MHz limit				0.129
		200 MHz limit				0.115
		20 MHz limit				0.0446
Channel 7	50 mV/div	2.5 GHz limit				0.938
		2 GHz limit				0.836
		1 GHz limit				0.559
		500 MHz limit				0.410
		350 MHz limit				0.322
		250 MHz limit				0.300

Random Noise, High Res mode: 8 channel models						
Performance checks			1 MΩ		50 Ω, 6.25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit
		200 MHz limit				0.271
		20 MHz limit				0.105
Channel 7	100 mV/div	2.5 GHz limit				2.23
		2 GHz limit				1.99
		1 GHz limit				1.36
		500 MHz limit				0.985
		350 MHz limit				0.801
		250 MHz limit				0.747
		200 MHz limit				0.674
		20 MHz limit				0.256
Channel 7	1 V/div	2.5 GHz limit				19
		2 GHz limit				16.7
		1 GHz limit				11.1
		500 MHz limit				8.1
		350 MHz limit				6.36
		250 MHz limit				5.94
		200 MHz limit				5.35
		20 MHz limit				2.08

Channel 8

Start with the highest bandwidth setting you can select.

Random Noise, High Res mode: 8 channel models						
Performance checks			1 M Ω		50 Ω , 25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 8	1 mV/div	5 GHz				0.156
		4 GHz limit				0.138
		3 GHz limit				0.118
		2.5 GHz limit				0.107
		2 GHz limit				0.0974
		1 GHz limit				0.0722
		500 MHz limit				0.0529
		350 MHz limit				0.045
		250 MHz limit				0.042
		200 MHz limit				0.0362
		20 MHz limit				0.013
Channel 8	2 mV/div	5 GHz				0.158
		4 GHz limit				0.139
		3 GHz limit				0.120
		2.5 GHz limit				0.108
		2 GHz limit				0.0987
		1 GHz limit				0.0732
		500 MHz limit				0.0536
		350 MHz limit				0.0457
		250 MHz limit				0.0426
		200 MHz limit				0.0367
		20 MHz limit				0.0132

Random Noise, High Res mode: 8 channel models						
Performance checks			1 M Ω		50 Ω , 25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 8	5 mV/div	5 GHz				0.189
		4 GHz limit				0.165
		3 GHz limit				0.142
		2.5 GHz limit				0.128
		2 GHz limit				0.115
		1 GHz limit				0.0846
		500 MHz limit				0.0613
		350 MHz limit				0.0522
		250 MHz limit				0.0487
		200 MHz limit				0.0419
		20 MHz limit				0.015
Channel 8	10 mV/div	5 GHz				0.278
		4 GHz limit				0.242
		3 GHz limit				0.203
		2.5 GHz limit				0.181
		2 GHz limit				0.163
		1 GHz limit				0.117
		500 MHz limit				0.0848
		350 MHz limit				0.0705
		250 MHz limit				0.0658
		200 MHz limit				0.0567
		20 MHz limit				0.0206
Channel 8	20 mV/div	5 GHz				0.478

Random Noise, High Res mode: 8 channel models						
Performance checks			1 M Ω		50 Ω , 25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 8	20 mV/div	4 GHz limit				0.412
		3 GHz limit				0.346
		2.5 GHz limit				0.309
		2 GHz limit				0.275
		1 GHz limit				0.195
		500 MHz limit				0.141
		350 MHz limit				0.116
		250 MHz limit				0.107
		200 MHz limit				0.0932
		20 MHz limit				0.0342
Channel 8	50 mV/div	5 GHz				1.09
		4 GHz limit				0.949
		3 GHz limit				0.790
		2.5 GHz limit				0.704
		2 GHz limit				0.627
		1 GHz limit				0.444
		500 MHz limit				0.325
		350 MHz limit				0.261
		250 MHz limit				0.241
		200 MHz limit				0.210
		20 MHz limit				0.079
Channel 8	100 mV/div	5 GHz				2.81
		4 GHz limit				2.45

Random Noise, High Res mode: 8 channel models						
Performance checks			1 M Ω		50 Ω , 25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 8	100 mV/div	3 GHz limit				2.06
		2.5 GHz limit				1.83
		2 GHz limit				1.65
		1 GHz limit				1.17
		500 MHz limit				0.858
		350 MHz limit				0.705
		250 MHz limit				0.658
		200 MHz limit				0.573
		20 MHz limit				0.203
Channel 8	1 V/div	5 GHz				21.8
		4 GHz limit				18.8
		3 GHz limit				15.8
		2.5 GHz limit				13.9
		2 GHz limit				12.4
		1 GHz limit				8.78
		500 MHz limit				6.51
		350 MHz limit				5.11
		250 MHz limit				4.77
		200 MHz limit				4.15
		20 MHz limit				1.56

Random Noise, High Res mode: 8 channel models						
Performance checks			1 M Ω		50 Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 8	1 mV/div	5 GHz				0.162
		4 GHz limit				0.138
		3 GHz limit				0.117
		2.5 GHz limit				0.108
		2 GHz limit				0.0963
		1 GHz limit				0.0773
		500 MHz limit		0.262		0.056
		350 MHz limit		0.190		0.0477
		250 MHz limit		0.153		0.0461
		200 MHz limit		0.149		0.0379
		20 MHz limit		0.103		0.013
Channel 8	2 mV/div	5 GHz				0.164
		4 GHz limit				0.139
		3 GHz limit				0.119
		2.5 GHz limit				0.110
		2 GHz limit				0.0976
		1 GHz limit				0.0724
		500 MHz limit		0.285		0.0562
		350 MHz limit		0.195		0.0473
		250 MHz limit		0.155		0.0467
		200 MHz limit		0.153		0.038
		20 MHz limit		0.103		0.0133
Channel 8	5 mV/div	5 GHz				0.210

Random Noise, High Res mode: 8 channel models						
Performance checks			1 M Ω		50 Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 8	5 mV/div	4 GHz limit				0.175
		3 GHz limit				0.149
		2.5 GHz limit				0.133
		2 GHz limit				0.118
		1 GHz limit				0.0896
		500 MHz limit		0.297		0.068
		350 MHz limit		0.205		0.0565
		250 MHz limit		0.161		0.054
		200 MHz limit		0.154		0.0444
		20 MHz limit		0.110		0.0156
Channel 8	10 mV/div	5 GHz				0.330
		4 GHz limit				0.271
		3 GHz limit				0.226
		2.5 GHz limit				0.203
		2 GHz limit				0.186
		1 GHz limit				0.128
		500 MHz limit		0.334		0.0919
		350 MHz limit		0.231		0.0773
		250 MHz limit		0.186		0.0747
		200 MHz limit		0.165		0.0658
20 MHz limit		0.141		0.0226		
Channel 8	20 mV/div	5 GHz				0.595
		4 GHz limit				0.486

Random Noise, High Res mode: 8 channel models						
Performance checks			1 M Ω		50 Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
Channel 8	20 mV/div	3 GHz limit				0.398
		2.5 GHz limit				0.363
		2 GHz limit				0.320
		1 GHz limit				0.226
		500 MHz limit		0.407		0.162
		350 MHz limit		0.305		0.133
		250 MHz limit		0.257		0.120
		200 MHz limit		0.211		0.106
		20 MHz limit		0.224		0.0412
Channel 8	50 mV/div	5 GHz				1.4
		4 GHz limit				1.15
		3 GHz limit				0.960
		2.5 GHz limit				0.856
		2 GHz limit				0.745
		1 GHz limit				0.534
		500 MHz limit		0.737		0.396
		350 MHz limit		0.553		0.307
		250 MHz limit		0.528		0.280
		200 MHz limit		0.387		0.247
		20 MHz limit		0.510		0.105
Channel 8	100 mV/div	5 GHz				3.38
		4 GHz limit				2.71
		3 GHz limit				2.28

Random Noise, High Res mode: 8 channel models						
Performance checks			1 M Ω		50 Ω , 12.5 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit (mV)
		2.5 GHz limit				2.03
		2 GHz limit				1.81
		1 GHz limit				1.33
		500 MHz limit		1.77		0.941
		350 MHz limit		1.38		0.792
		250 MHz limit		1.18		0.722
		200 MHz limit		0.952		0.666
		20 MHz limit		1.13		0.236
Channel 8	1 V/div	5 GHz				28.1
		4 GHz limit				23.1
		3 GHz limit				19.2
		2.5 GHz limit				17.1
		2 GHz limit				14.9
		1 GHz limit				10.8
		500 MHz limit		19		7.92
		350 MHz limit		14.9		6.14
		250 MHz limit		13.6		5.6
		200 MHz limit		11.3		4.94
20 MHz limit		11.7		2.11		

Random Noise, High Res mode: 8 channel models						
Performance checks			1 M Ω		50 Ω , 6.25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit
Channel 8	1 mV/div	2.5 GHz limit				0.109
		2 GHz limit				0.0996

Random Noise, High Res mode: 8 channel models						
Performance checks			1 M Ω		50 Ω , 6.25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit
Channel 8	1 mV/div	1 GHz limit				0.0739
		500 MHz limit				0.0548
		350 MHz limit				0.0466
		250 MHz limit				0.0435
		200 MHz limit				0.0388
		20 MHz limit				0.0147
Channel 8	2 mV/div	2.5 GHz limit				0.112
		2 GHz limit				0.101
		1 GHz limit				0.0749
		500 MHz limit				0.0555
		350 MHz limit				0.0473
		250 MHz limit				0.0441
		200 MHz limit				0.0393
		20 MHz limit				0.0148
Channel 8	5 mV/div	2.5 GHz limit				0.142
		2 GHz limit				0.128
		1 GHz limit				0.0928
		500 MHz limit				0.068
		350 MHz limit				0.0565
		250 MHz limit				0.0528
		200 MHz limit				0.047
		20 MHz limit				0.0177
Channel 8	10 mV/div	2.5 GHz limit				0.221

Random Noise, High Res mode: 8 channel models						
Performance checks			1 M Ω		50 Ω , 6.25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit
Channel 8	10 mV/div	2 GHz limit				0.197
		1 GHz limit				0.134
		500 MHz limit				0.0974
		350 MHz limit				0.0801
		250 MHz limit				0.0747
		200 MHz limit				0.0666
		20 MHz limit				0.0256
Channel 8	20 mV/div	2.5 GHz limit				0.398
		2 GHz limit				0.350
		1 GHz limit				0.237
		500 MHz limit				0.174
		350 MHz limit				0.138
		250 MHz limit				0.129
		200 MHz limit				0.115
		20 MHz limit				0.0446
Channel 8	50 mV/div	2.5 GHz limit				0.938
		2 GHz limit				0.836
		1 GHz limit				0.559
		500 MHz limit				0.410
		350 MHz limit				0.322
		250 MHz limit				0.300
		200 MHz limit				0.271
		20 MHz limit				0.105

Random Noise, High Res mode: 8 channel models						
Performance checks			1 M Ω		50 Ω , 6.25 GS/s	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)	Test result (mV)	High limit
Channel 8	100 mV/div	2.5 GHz limit				2.23
		2 GHz limit				1.99
		1 GHz limit				1.36
		500 MHz limit				0.985
		350 MHz limit				0.801
		250 MHz limit				0.747
		200 MHz limit				0.674
		20 MHz limit				0.256
Channel 8	1 V/div	2.5 GHz limit				19
		2 GHz limit				16.7
		1 GHz limit				11.1
		500 MHz limit				8.1
		350 MHz limit				6.36
		250 MHz limit				5.94
		200 MHz limit				5.35
		20 MHz limit				2.08

High Offset AC RMS Noise, sample acquisition mode test record

Start with the highest bandwidth setting you can select.

High Offset AC RMS Noise, sample acquisition mode: All models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 1	1 mV/div	8 GHz		0.223
		7 GHz limit		0.199
		6 GHz limit		0.179

High Offset AC RMS Noise, sample acquisition mode: All models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 1	2 mV/div	8 GHz		0.224
		7 GHz limit		0.202
		6 GHz limit		0.180
	5 mV/div	8 GHz		0.293
		7 GHz limit		0.271
		6 GHz limit		0.233
	10 mV/div	8 GHz		0.482
		7 GHz limit		0.440
		6 GHz limit		0.388
	20 mV/div	8 GHz		0.890
		7 GHz limit		0.793
		6 GHz limit		0.691
	50 mV/div	8 GHz		2.10
		7 GHz limit		1.85
		6 GHz limit		1.67
	100 mV/div	8 GHz		4.88
		7 GHz limit		4.4
		6 GHz limit		3.83
1 V/div	8 GHz		42.0	
	7 GHz limit		37.0	
	6 GHz limit		33.4	

High Offset AC RMS Noise, sample acquisition mode: All models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 2	1 mV/div	8 GHz		0.223
		7 GHz limit		0.199
		6 GHz limit		0.179
	2 mV/div	8 GHz		0.224
		7 GHz limit		0.202
		6 GHz limit		0.180
	5 mV/div	8 GHz		0.293
		7 GHz limit		0.271
		6 GHz limit		0.233
	10 mV/div	8 GHz		0.482
		7 GHz limit		0.440
		6 GHz limit		0.388
	20 mV/div	8 GHz		0.890
		7 GHz limit		0.793
		6 GHz limit		0.691
	50 mV/div	8 GHz		2.10
		7 GHz limit		1.85
		6 GHz limit		1.67
100 mV/div	8 GHz		4.88	
	7 GHz limit		4.4	
	6 GHz limit		3.83	

High Offset AC RMS Noise, sample acquisition mode: All models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 2	1 V/div	8 GHz		42.0
		7 GHz limit		37.0
		6 GHz limit		33.4

High Offset AC RMS Noise, sample acquisition mode: All models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 3	1 mV/div	8 GHz		0.223
		7 GHz limit		0.199
		6 GHz limit		0.179
	2 mV/div	8 GHz		0.224
		7 GHz limit		0.202
		6 GHz limit		0.180
	5 mV/div	8 GHz		0.293
		7 GHz limit		0.271
		6 GHz limit		0.233
	10 mV/div	8 GHz		0.482
		7 GHz limit		0.440
		6 GHz limit		0.388
	20 mV/div	8 GHz		0.890
		7 GHz limit		0.793
		6 GHz limit		0.691
	50 mV/div	8 GHz		2.10
		7 GHz limit		1.85
		6 GHz limit		1.67

High Offset AC RMS Noise, sample acquisition mode: All models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 3	100 mV/div	8 GHz		4.88
		7 GHz limit		4.4
		6 GHz limit		3.83
	1 V/div	8 GHz		42.0
		7 GHz limit		37.0
		6 GHz limit		33.4

High Offset AC RMS Noise, sample acquisition mode: All models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 4	1 mV/div	8 GHz		0.223
		7 GHz limit		0.199
		6 GHz limit		0.179
	2 mV/div	8 GHz		0.224
		7 GHz limit		0.202
		6 GHz limit		0.180
	5 mV/div	8 GHz		0.293
		7 GHz limit		0.271
		6 GHz limit		0.233
	10 mV/div	8 GHz		0.482
		7 GHz limit		0.440
		6 GHz limit		0.388
	20 mV/div	8 GHz		0.890
		7 GHz limit		0.793
		6 GHz limit		0.691

High Offset AC RMS Noise, sample acquisition mode: All models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 4	50 mV/div	8 GHz		2.10
		7 GHz limit		1.85
		6 GHz limit		1.67
	100 mV/div	8 GHz		4.88
		7 GHz limit		4.4
		6 GHz limit		3.83
	1 V/div	8 GHz		42.0
		7 GHz limit		37.0
		6 GHz limit		33.4

High Offset AC RMS Noise, sample acquisition mode: 6 and 8 channel models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 5	1 mV/div	8 GHz		0.223
		7 GHz limit		0.199
		6 GHz limit		0.179
	2 mV/div	8 GHz		0.224
		7 GHz limit		0.202
		6 GHz limit		0.180
	5 mV/div	8 GHz		0.293
		7 GHz limit		0.271
		6 GHz limit		0.233
	10 mV/div	8 GHz		0.482
		7 GHz limit		0.440
		6 GHz limit		0.388

High Offset AC RMS Noise, sample acquisition mode: 6 and 8 channel models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 5	20 mV/div	8 GHz		0.890
		7 GHz limit		0.793
		6 GHz limit		0.691
	50 mV/div	8 GHz		2.10
		7 GHz limit		1.85
		6 GHz limit		1.67
	100 mV/div	8 GHz		4.88
		7 GHz limit		4.4
		6 GHz limit		3.83
	1 V/div	8 GHz		42.0
		7 GHz limit		37.0
		6 GHz limit		33.4

High Offset AC RMS Noise, sample acquisition mode: 6 and 8 channel models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 6	1 mV/div	8 GHz		0.223
		7 GHz limit		0.199
		6 GHz limit		0.179
	2 mV/div	8 GHz		0.224
		7 GHz limit		0.202
		6 GHz limit		0.180
	5 mV/div	8 GHz		0.293
		7 GHz limit		0.271
		6 GHz limit		0.233

High Offset AC RMS Noise, sample acquisition mode: 6 and 8 channel models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 6	10 mV/div	8 GHz		0.482
		7 GHz limit		0.440
		6 GHz limit		0.388
	20 mV/div	8 GHz		0.890
		7 GHz limit		0.793
		6 GHz limit		0.691
	50 mV/div	8 GHz		2.10
		7 GHz limit		1.85
		6 GHz limit		1.67
	100 mV/div	8 GHz		4.88
		7 GHz limit		4.4
		6 GHz limit		3.83
1 V/div	8 GHz		42.0	
	7 GHz limit		37.0	
	6 GHz limit		33.4	

High Offset AC RMS Noise, sample acquisition mode: 8 channel models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 7	1 mV/div	8 GHz		0.223
		7 GHz limit		0.199
		6 GHz limit		0.179
	2 mV/div	8 GHz		0.224
		7 GHz limit		0.202
		6 GHz limit		0.180

High Offset AC RMS Noise, sample acquisition mode: 8 channel models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 7	5 mV/div	8 GHz		0.293
		7 GHz limit		0.271
		6 GHz limit		0.233
	10 mV/div	8 GHz		0.482
		7 GHz limit		0.440
		6 GHz limit		0.388
	20 mV/div	8 GHz		0.890
		7 GHz limit		0.793
		6 GHz limit		0.691
	50 mV/div	8 GHz		2.10
		7 GHz limit		1.85
		6 GHz limit		1.67
	100 mV/div	8 GHz		4.88
		7 GHz limit		4.4
		6 GHz limit		3.83
1 V/div	8 GHz		42.0	
	7 GHz limit		37.0	
	6 GHz limit		33.4	

High Offset AC RMS Noise, sample acquisition mode: 8 channel models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 8	1 mV/div	8 GHz		0.223
		7 GHz limit		0.199
		6 GHz limit		0.179

High Offset AC RMS Noise, sample acquisition mode: 8 channel models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 8	2 mV/div	8 GHz		0.224
		7 GHz limit		0.202
		6 GHz limit		0.180
	5 mV/div	8 GHz		0.293
		7 GHz limit		0.271
		6 GHz limit		0.233
	10 mV/div	8 GHz		0.482
		7 GHz limit		0.440
		6 GHz limit		0.388
	20 mV/div	8 GHz		0.890
		7 GHz limit		0.793
		6 GHz limit		0.691
	50 mV/div	8 GHz		2.10
		7 GHz limit		1.85
		6 GHz limit		1.67
	100 mV/div	8 GHz		4.88
		7 GHz limit		4.4
		6 GHz limit		3.83
1 V/div	8 GHz		42.0	
	7 GHz limit		37.0	
	6 GHz limit		33.4	

High Offset AC RMS Noise, High Res mode test record

Channel 1

Random Noise, High Res mode: All models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 1	1 mV/div	5 GHz		0.162
		4 GHz limit		0.138
		3 GHz limit		0.117
		2 GHz limit		0.0963
		1 GHz limit		0.0773
		500 MHz limit		0.056
		350 MHz limit		0.0477
		250 M GHz limit		0.0461
		200 MHz limit		0.0379
		20 MHz limit		0.025
	2 mV/div	5 GHz		0.164
		4 GHz limit		0.139
		3 GHz limit		0.119
		2 GHz limit		0.0976
		1 GHz limit		0.0724
		500 MHz limit		0.562
		350 MHz limit		0.0473
		250 M GHz limit		0.0467
		200 MHz limit		0.038
		20 MHz limit		0.025

Random Noise, High Res mode: All models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 1	5 mV/div	5 GHz		0.210
		4 GHz limit		0.175
		3 GHz limit		0.149
		2 GHz limit		0.118
		1 GHz limit		0.110
		500 MHz limit		0.100
		350 MHz limit		0.092
		250 M GHz limit		0.090
		200 MHz limit		0.080
		20 MHz limit		0.075

Random Noise, High Res mode: All models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 1	10 mV/div	5 GHz		0.330
		4 GHz limit		0.271
		3 GHz limit		0.226
		2 GHz limit		0.212
		1 GHz limit		0.190
		500 MHz limit		0.182
		350 MHz limit		0.165
		250 M GHz limit		0.145
		200 MHz limit		0.120
		20 MHz limit		0.115

Random Noise, High Res mode: All models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 1	20 mV/div	5 GHz		0.595
		4 GHz limit		0.486
		3 GHz limit		0.475
		2 GHz limit		0.450
		1 GHz limit		0.425
		500 MHz limit		0.400
		350 MHz limit		0.385
		250 M GHz limit		0.325
		200 MHz limit		0.320
		20 MHz limit		0.310
	50 mV/div	5 GHz		1.4
		4 GHz limit		1.15
		3 GHz limit		0.975
		2 GHz limit		0.920
		1 GHz limit		0.900
		500 MHz limit		0.840
		350 MHz limit		0.770
		250 M GHz limit		0.675
		200 MHz limit		0.660
		20 MHz limit		0.560

Random Noise, High Res mode: All models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 1	100 mV/div	5 GHz		3.38

Random Noise, High Res mode: All models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 1		4 GHz limit		2.71
		3 GHz limit		2.28
		2 GHz limit		2.10
		1 GHz limit		1.78
		500 MHz limit		1.74
		350 MHz limit		1.70
		250 M GHz limit		1.50
		200 MHz limit		1.45
		20 MHz limit		1.40
	1 V/div	5 GHz		28.1
		4 GHz limit		23.1
		3 GHz limit		21.4
		2 GHz limit		21.0
		1 GHz limit		19.2
		500 MHz limit		16.8
		350 MHz limit		16.1
		250 M GHz limit		15.8
		200 MHz limit		15.2
		20 MHz limit		13.0

Channel 2

Random Noise, High Res mode: All models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 2	1 mV/div	5 GHz		0.162
		4 GHz limit		0.138
		3 GHz limit		0.117
		2 GHz limit		0.0963
		1 GHz limit		0.0773
		500 MHz limit		0.056
		350 MHz limit		0.0477
		250 M GHz limit		0.0461
		200 MHz limit		0.0379
		20 MHz limit		0.025
	2 mV/div	5 GHz		0.164
		4 GHz limit		0.139
		3 GHz limit		0.119
		2 GHz limit		0.0976
		1 GHz limit		0.0724
		500 MHz limit		0.562
		350 MHz limit		0.0473
		250 M GHz limit		0.0467
		200 MHz limit		0.038
		20 MHz limit		0.025

Random Noise, High Res mode: All models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 2	5 mV/div	5 GHz		0.210
		4 GHz limit		0.175
		3 GHz limit		0.149
		2 GHz limit		0.118
		1 GHz limit		0.110
		500 MHz limit		0.100
		350 MHz limit		0.092
		250 M GHz limit		0.090
		200 MHz limit		0.080
		20 MHz limit		0.075

Random Noise, High Res mode: All models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 2	10 mV/div	5 GHz		0.330
		4 GHz limit		0.271
		3 GHz limit		0.226
		2 GHz limit		0.212
		1 GHz limit		0.190
		500 MHz limit		0.182
		350 MHz limit		0.165
		250 M GHz limit		0.145
		200 MHz limit		0.120
		20 MHz limit		0.115

Random Noise, High Res mode: All models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 2	20 mV/div	5 GHz		0.595
		4 GHz limit		0.486
		3 GHz limit		0.475
		2 GHz limit		0.450
		1 GHz limit		0.425
		500 MHz limit		0.400
		350 MHz limit		0.385
		250 M GHz limit		0.325
		200 MHz limit		0.320
		20 MHz limit		0.310
	50 mV/div	5 GHz		1.4
		4 GHz limit		1.15
		3 GHz limit		0.975
		2 GHz limit		0.920
		1 GHz limit		0.900
		500 MHz limit		0.840
		350 MHz limit		0.770
		250 M GHz limit		0.675
		200 MHz limit		0.660
20 MHz limit		0.560		

Random Noise, High Res mode: All models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 2	100 mV/div	5 GHz		3.38

Random Noise, High Res mode: All models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 2		4 GHz limit		2.71
		3 GHz limit		2.28
		2 GHz limit		2.10
		1 GHz limit		1.78
		500 MHz limit		1.74
		350 MHz limit		1.70
		250 M GHz limit		1.50
		200 MHz limit		1.45
		20 MHz limit		1.40
	1 V/div	5 GHz		28.1
		4 GHz limit		23.1
		3 GHz limit		21.4
		2 GHz limit		21.0
		1 GHz limit		19.2
		500 MHz limit		16.8
		350 MHz limit		16.1
		250 M GHz limit		15.8
		200 MHz limit		15.2
		20 MHz limit		13.0

Channel 3

Random Noise, High Res mode: All models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 3	1 mV/div	5 GHz		0.162
		4 GHz limit		0.138
		3 GHz limit		0.117
		2 GHz limit		0.0963
		1 GHz limit		0.0773
		500 MHz limit		0.056
		350 MHz limit		0.0477
		250 M GHz limit		0.0461
		200 MHz limit		0.0379
		20 MHz limit		0.025
	2 mV/div	5 GHz		0.164
		4 GHz limit		0.139
		3 GHz limit		0.119
		2 GHz limit		0.0976
		1 GHz limit		0.0724
		500 MHz limit		0.562
		350 MHz limit		0.0473
		250 M GHz limit		0.0467
		200 MHz limit		0.038
		20 MHz limit		0.025

Random Noise, High Res mode: All models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 3	5 mV/div	5 GHz		0.210
		4 GHz limit		0.175
		3 GHz limit		0.149
		2 GHz limit		0.118
		1 GHz limit		0.110
		500 MHz limit		0.100
		350 MHz limit		0.092
		250 M GHz limit		0.090
		200 MHz limit		0.080
		20 MHz limit		0.075

Random Noise, High Res mode: All models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 3	10 mV/div	5 GHz		0.330
		4 GHz limit		0.271
		3 GHz limit		0.226
		2 GHz limit		0.212
		1 GHz limit		0.190
		500 MHz limit		0.182
		350 MHz limit		0.165
		250 M GHz limit		0.145
		200 MHz limit		0.120
		20 MHz limit		0.115

Random Noise, High Res mode: All models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 3	20 mV/div	5 GHz		0.595
		4 GHz limit		0.486
		3 GHz limit		0.475
		2 GHz limit		0.450
		1 GHz limit		0.425
		500 MHz limit		0.400
		350 MHz limit		0.385
		250 M GHz limit		0.325
		200 MHz limit		0.320
		20 MHz limit		0.310
	50 mV/div	5 GHz		1.4
		4 GHz limit		1.15
		3 GHz limit		0.975
		2 GHz limit		0.920
		1 GHz limit		0.900
		500 MHz limit		0.840
		350 MHz limit		0.770
		250 M GHz limit		0.675
		200 MHz limit		0.660
20 MHz limit		0.560		

Random Noise, High Res mode: All models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 3	100 mV/div	5 GHz		3.38

Random Noise, High Res mode: All models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 3		4 GHz limit		2.71
		3 GHz limit		2.28
		2 GHz limit		2.10
		1 GHz limit		1.78
		500 MHz limit		1.74
		350 MHz limit		1.70
		250 M GHz limit		1.50
		200 MHz limit		1.45
		20 MHz limit		1.40
	1 V/div	5 GHz		28.1
		4 GHz limit		23.1
		3 GHz limit		21.4
		2 GHz limit		21.0
		1 GHz limit		19.2
		500 MHz limit		16.8
		350 MHz limit		16.1
		250 M GHz limit		15.8
		200 MHz limit		15.2
		20 MHz limit		13.0

Channel 4

Random Noise, High Res mode: All models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 4	1 mV/div	5 GHz		0.162
		4 GHz limit		0.138
		3 GHz limit		0.117
		2 GHz limit		0.0963
		1 GHz limit		0.0773
		500 MHz limit		0.056
		350 MHz limit		0.0477
		250 M GHz limit		0.0461
		200 MHz limit		0.0379
		20 MHz limit		0.025
	2 mV/div	5 GHz		0.164
		4 GHz limit		0.139
		3 GHz limit		0.119
		2 GHz limit		0.0976
		1 GHz limit		0.0724
		500 MHz limit		0.562
		350 MHz limit		0.0473
		250 M GHz limit		0.0467
		200 MHz limit		0.038
		20 MHz limit		0.025

Random Noise, High Res mode: All models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 4	5 mV/div	5 GHz		0.210
		4 GHz limit		0.175
		3 GHz limit		0.149
		2 GHz limit		0.118
		1 GHz limit		0.110
		500 MHz limit		0.100
		350 MHz limit		0.092
		250 M GHz limit		0.090
		200 MHz limit		0.080
		20 MHz limit		0.075

Random Noise, High Res mode: All models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 4	10 mV/div	5 GHz		0.330
		4 GHz limit		0.271
		3 GHz limit		0.226
		2 GHz limit		0.212
		1 GHz limit		0.190
		500 MHz limit		0.182
		350 MHz limit		0.165
		250 M GHz limit		0.145
		200 MHz limit		0.120
		20 MHz limit		0.115

Random Noise, High Res mode: All models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 4	20 mV/div	5 GHz		0.595
		4 GHz limit		0.486
		3 GHz limit		0.475
		2 GHz limit		0.450
		1 GHz limit		0.425
		500 MHz limit		0.400
		350 MHz limit		0.385
		250 M GHz limit		0.325
		200 MHz limit		0.320
		20 MHz limit		0.310
	50 mV/div	5 GHz		1.4
		4 GHz limit		1.15
		3 GHz limit		0.975
		2 GHz limit		0.920
		1 GHz limit		0.900
		500 MHz limit		0.840
		350 MHz limit		0.770
		250 M GHz limit		0.675
		200 MHz limit		0.660
20 MHz limit		0.560		

Random Noise, High Res mode: All models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 4	100 mV/div	5 GHz		3.38

Random Noise, High Res mode: All models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 4		4 GHz limit		2.71
		3 GHz limit		2.28
		2 GHz limit		2.10
		1 GHz limit		1.78
		500 MHz limit		1.74
		350 MHz limit		1.70
		250 M GHz limit		1.50
		200 MHz limit		1.45
		20 MHz limit		1.40
	1 V/div	5 GHz		28.1
		4 GHz limit		23.1
		3 GHz limit		21.4
		2 GHz limit		21.0
		1 GHz limit		19.2
		500 MHz limit		16.8
		350 MHz limit		16.1
		250 M GHz limit		15.8
		200 MHz limit		15.2
		20 MHz limit		13.0

Channel 5

Random Noise, High Res mode: 6 and 8 channel models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 5	1 mV/div	5 GHz		0.162
		4 GHz limit		0.138
		3 GHz limit		0.117
		2 GHz limit		0.0963
		1 GHz limit		0.0773
		500 MHz limit		0.056
		350 MHz limit		0.0477
		250 M GHz limit		0.0461
		200 MHz limit		0.0379
		20 MHz limit		0.025
	2 mV/div	5 GHz		0.164
		4 GHz limit		0.139
		3 GHz limit		0.119
		2 GHz limit		0.0976
		1 GHz limit		0.0724
		500 MHz limit		0.562
		350 MHz limit		0.0473
		250 M GHz limit		0.0467
		200 MHz limit		0.038
		20 MHz limit		0.025

Random Noise, High Res mode: 6 and 8 channel models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 5	5 mV/div	5 GHz		0.210
		4 GHz limit		0.175
		3 GHz limit		0.149
		2 GHz limit		0.118
		1 GHz limit		0.110
		500 MHz limit		0.100
		350 MHz limit		0.092
		250 M GHz limit		0.090
		200 MHz limit		0.080
		20 MHz limit		0.075

Random Noise, High Res mode: 6 and 8 channel models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 5	10 mV/div	5 GHz		0.330
		4 GHz limit		0.271
		3 GHz limit		0.226
		2 GHz limit		0.212
		1 GHz limit		0.190
		500 MHz limit		0.182
		350 MHz limit		0.165
		250 M GHz limit		0.145
		200 MHz limit		0.120
		20 MHz limit		0.115

Random Noise, High Res mode: 6 and 8 channel models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 5	20 mV/div	5 GHz		0.595
		4 GHz limit		0.486
		3 GHz limit		0.475
		2 GHz limit		0.450
		1 GHz limit		0.425
		500 MHz limit		0.400
		350 MHz limit		0.385
		250 M GHz limit		0.325
		200 MHz limit		0.320
		20 MHz limit		0.310
	50 mV/div	5 GHz		1.4
		4 GHz limit		1.15
		3 GHz limit		0.975
		2 GHz limit		0.920
		1 GHz limit		0.900
		500 MHz limit		0.840
		350 MHz limit		0.770
		250 M GHz limit		0.675
		200 MHz limit		0.660
20 MHz limit		0.560		

Random Noise, High Res mode: 6 and 8 channel models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 5	100 mV/div	5 GHz		3.38

Random Noise, High Res mode: 6 and 8 channel models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 5	100 mV/div	4 GHz limit		2.71
		3 GHz limit		2.28
		2 GHz limit		2.10
		1 GHz limit		1.78
		500 MHz limit		1.74
		350 MHz limit		1.70
		250 M GHz limit		1.50
		200 MHz limit		1.45
		20 MHz limit		1.40
	1 V/div	5 GHz		28.1
		4 GHz limit		23.1
		3 GHz limit		21.4
		2 GHz limit		21.0
		1 GHz limit		19.2
		500 MHz limit		16.8
		350 MHz limit		16.1
		250 M GHz limit		15.8
		200 MHz limit		15.2
		20 MHz limit		13.0

Channel 6

Random Noise, High Res mode: 6 and 8 channel models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 6	1 mV/div	5 GHz		0.162
		4 GHz limit		0.138
		3 GHz limit		0.117
		2 GHz limit		0.0963
		1 GHz limit		0.0773
		500 MHz limit		0.056
		350 MHz limit		0.0477
		250 M GHz limit		0.0461
		200 MHz limit		0.0379
		20 MHz limit		0.025
	2 mV/div	5 GHz		0.164
		4 GHz limit		0.139
		3 GHz limit		0.119
		2 GHz limit		0.0976
		1 GHz limit		0.0724
		500 MHz limit		0.562
		350 MHz limit		0.0473
		250 M GHz limit		0.0467
		200 MHz limit		0.038
		20 MHz limit		0.025

Random Noise, High Res mode: 6 and 8 channel models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 6	5 mV/div	5 GHz		0.210
		4 GHz limit		0.175
		3 GHz limit		0.149
		2 GHz limit		0.118
		1 GHz limit		0.110
		500 MHz limit		0.100
		350 MHz limit		0.092
		250 M GHz limit		0.090
		200 MHz limit		0.080
		20 MHz limit		0.075

Random Noise, High Res mode: 6 and 8 channel models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 6	10 mV/div	5 GHz		0.330
		4 GHz limit		0.271
		3 GHz limit		0.226
		2 GHz limit		0.212
		1 GHz limit		0.190
		500 MHz limit		0.182
		350 MHz limit		0.165
		250 M GHz limit		0.145
		200 MHz limit		0.120
		20 MHz limit		0.115

Random Noise, High Res mode: 6 and 8 channel models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 6	20 mV/div	5 GHz		0.595
		4 GHz limit		0.486
		3 GHz limit		0.475
		2 GHz limit		0.450
		1 GHz limit		0.425
		500 MHz limit		0.400
		350 MHz limit		0.385
		250 M GHz limit		0.325
		200 MHz limit		0.320
		20 MHz limit		0.310
	50 mV/div	5 GHz		1.4
		4 GHz limit		1.15
		3 GHz limit		0.975
		2 GHz limit		0.920
		1 GHz limit		0.900
		500 MHz limit		0.840
		350 MHz limit		0.770
		250 M GHz limit		0.675
		200 MHz limit		0.660
		20 MHz limit		0.560

Random Noise, High Res mode: 6 and 8 channel models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 6	100 mV/div	5 GHz		3.38

Random Noise, High Res mode: 6 and 8 channel models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 6	100 mV/div	4 GHz limit		2.71
		3 GHz limit		2.28
		2 GHz limit		2.10
		1 GHz limit		1.78
		500 MHz limit		1.74
		350 MHz limit		1.70
		250 M GHz limit		1.50
		200 MHz limit		1.45
		20 MHz limit		1.40
	1 V/div	5 GHz		28.1
		4 GHz limit		23.1
		3 GHz limit		21.4
		2 GHz limit		21.0
		1 GHz limit		19.2
		500 MHz limit		16.8
		350 MHz limit		16.1
		250 M GHz limit		15.8
		200 MHz limit		15.2
		20 MHz limit		13.0

Channel 7

Random Noise, High Res mode: 8 channel models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 7	1 mV/div	5 GHz		0.162
		4 GHz limit		0.138
		3 GHz limit		0.117
		2 GHz limit		0.0963
		1 GHz limit		0.0773
		500 MHz limit		0.056
		350 MHz limit		0.0477
		250 M GHz limit		0.0461
		200 MHz limit		0.0379
		20 MHz limit		0.025
	2 mV/div	5 GHz		0.164
		4 GHz limit		0.139
		3 GHz limit		0.119
		2 GHz limit		0.0976
		1 GHz limit		0.0724
		500 MHz limit		0.562
		350 MHz limit		0.0473
		250 M GHz limit		0.0467
		200 MHz limit		0.038
		20 MHz limit		0.025

Random Noise, High Res mode: 8 channel models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 7	5 mV/div	5 GHz		0.210
		4 GHz limit		0.175
		3 GHz limit		0.149
		2 GHz limit		0.118
		1 GHz limit		0.110
		500 MHz limit		0.100
		350 MHz limit		0.092
		250 M GHz limit		0.090
		200 MHz limit		0.080
		20 MHz limit		0.075

Random Noise, High Res mode: 8 channel models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 7	10 mV/div	5 GHz		0.330
		4 GHz limit		0.271
		3 GHz limit		0.226
		2 GHz limit		0.212
		1 GHz limit		0.190
		500 MHz limit		0.182
		350 MHz limit		0.165
		250 M GHz limit		0.145
		200 MHz limit		0.120
		20 MHz limit		0.115

Random Noise, High Res mode: 8 channel models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 7	20 mV/div	5 GHz		0.595
		4 GHz limit		0.486
		3 GHz limit		0.475
		2 GHz limit		0.450
		1 GHz limit		0.425
		500 MHz limit		0.400
		350 MHz limit		0.385
		250 M GHz limit		0.325
		200 MHz limit		0.320
		20 MHz limit		0.310
	50 mV/div	5 GHz		1.4
		4 GHz limit		1.15
		3 GHz limit		0.975
		2 GHz limit		0.920
		1 GHz limit		0.900
		500 MHz limit		0.840
		350 MHz limit		0.770
		250 M GHz limit		0.675
		200 MHz limit		0.660
		20 MHz limit		0.560

Random Noise, High Res mode: 8 channel models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 7	100 mV/div	5 GHz		3.38

Random Noise, High Res mode: 8 channel models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 7	100 mV/div	4 GHz limit		2.71
		3 GHz limit		2.28
		2 GHz limit		2.10
		1 GHz limit		1.78
		500 MHz limit		1.74
		350 MHz limit		1.70
		250 M GHz limit		1.50
		200 MHz limit		1.45
		20 MHz limit		1.40
	1 V/div	5 GHz		28.1
		4 GHz limit		23.1
		3 GHz limit		21.4
		2 GHz limit		21.0
		1 GHz limit		19.2
		500 MHz limit		16.8
		350 MHz limit		16.1
		250 M GHz limit		15.8
		200 MHz limit		15.2
		20 MHz limit		13.0

Channel 8

Random Noise, High Res mode: 8 channel models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 8	1 mV/div	5 GHz		0.162
		4 GHz limit		0.138
		3 GHz limit		0.117
		2 GHz limit		0.0963
		1 GHz limit		0.0773
		500 MHz limit		0.056
		350 MHz limit		0.0477
		250 M GHz limit		0.0461
		200 MHz limit		0.0379
		20 MHz limit		0.025
	2 mV/div	5 GHz		0.164
		4 GHz limit		0.139
		3 GHz limit		0.119
		2 GHz limit		0.0976
		1 GHz limit		0.0724
		500 MHz limit		0.562
		350 MHz limit		0.0473
		250 M GHz limit		0.0467
		200 MHz limit		0.038
		20 MHz limit		0.025

Random Noise, High Res mode: 8 channel models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 8	5 mV/div	5 GHz		0.210
		4 GHz limit		0.175
		3 GHz limit		0.149
		2 GHz limit		0.118
		1 GHz limit		0.110
		500 MHz limit		0.100
		350 MHz limit		0.092
		250 M GHz limit		0.090
		200 MHz limit		0.080
		20 MHz limit		0.075

Random Noise, High Res mode: 8 channel models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 8	10 mV/div	5 GHz		0.330
		4 GHz limit		0.271
		3 GHz limit		0.226
		2 GHz limit		0.212
		1 GHz limit		0.190
		500 MHz limit		0.182
		350 MHz limit		0.165
		250 M GHz limit		0.145
		200 MHz limit		0.120
		20 MHz limit		0.115

Random Noise, High Res mode: 8 channel models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 8	20 mV/div	5 GHz		0.595
		4 GHz limit		0.486
		3 GHz limit		0.475
		2 GHz limit		0.450
		1 GHz limit		0.425
		500 MHz limit		0.400
		350 MHz limit		0.385
		250 M GHz limit		0.325
		200 MHz limit		0.320
		20 MHz limit		0.310
	50 mV/div	5 GHz		1.4
		4 GHz limit		1.15
		3 GHz limit		0.975
		2 GHz limit		0.920
		1 GHz limit		0.900
		500 MHz limit		0.840
		350 MHz limit		0.770
		250 M GHz limit		0.675
		200 MHz limit		0.660
		20 MHz limit		0.560

Random Noise, High Res mode: 8 channel models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 8	100 mV/div	5 GHz		3.38

Random Noise, High Res mode: 8 channel models				
Performance checks			50 Ω	
Channel	V/div	Bandwidth	Test result (mV)	High limit (mV)
Channel 8	100 mV/div	4 GHz limit		2.71
		3 GHz limit		2.28
		2 GHz limit		2.10
		1 GHz limit		1.78
		500 MHz limit		1.74
		350 MHz limit		1.70
		250 M GHz limit		1.50
		200 MHz limit		1.45
		20 MHz limit		1.40
	1 V/div	5 GHz		28.1
		4 GHz limit		23.1
		3 GHz limit		21.4
		2 GHz limit		21.0
		1 GHz limit		19.2
		500 MHz limit		16.8
		350 MHz limit		16.1
		250 M GHz limit		15.8
		200 MHz limit		15.2
		20 MHz limit		13.0

Long term sample rate through AFG DC offset accuracy test records

Long Term Sample Rate			
Performance checks	Low limit	Test result	High limit
Long Term Sample Rate	9.999997 MHz		10.000003 MHz

AUX Out output voltage levels				
Performance checks	Vout	Low limit	Test result	High limit
Output levels, 1 M Ω input impedance	Max	≥ 2.5 V		n/a
	Min	n/a		≤ 700 mV
Output levels, 50 Ω Input Impedance,	Max	≥ 1.0 V		n/a
	Min	n/a		≤ 250 mV

DVM voltage accuracy (DC)					
Channel 1					
Vertical Scale	Input Voltage	Offset Voltage	Low limit	Test result	High limit
1	-5	-5	-5.125		-4.875
0.5	-2	-2	-2.06		-1.94
0.5	-1	-0.5	-1.06		-0.94
0.2	-0.5	-0.5	-0.5225		-0.4775
0.01	0.002	0	0.00097		0.00303
0.2	0.5	0.5	0.4775		0.5225
0.5	1	0.5	0.94		1.06
0.5	2	2	1.94		2.06
1	5	5	4.875		5.125
Channel 2					
Vertical Scale	Input Voltage	Offset Voltage	Low limit	Test result	High limit
1	-5	-5	-5.125		-4.875
0.5	-2	-2	-2.06		-1.94
0.5	-1	-0.5	-1.06		-0.94
0.2	-0.5	-0.5	-0.5225		-0.4775
0.01	0.002	0	0.00097		0.00303
0.2	0.5	0.5	0.4775		0.5225

DVM voltage accuracy (DC)					
0.5	1	0.5	0.94		1.06
0.5	2	2	1.94		2.06
1	5	5	4.875		5.125
Channel 3					
Vertical Scale	Input Voltage	Offset Voltage	Low limit	Test result	High limit
1	-5	-5	-5.125		-4.875
0.5	-2	-2	-2.06		-1.94
0.5	-1	-0.5	-1.06		-0.94
0.2	-0.5	-0.5	-0.5225		-0.4775
0.01	0.002	0	0.00097		0.00303
0.2	0.5	0.5	0.4775		0.5225
0.5	1	0.5	0.94		1.06
0.5	2	2	1.94		2.06
1	5	5	4.875		5.125
Channel 4					
Vertical Scale	Input Voltage	Offset Voltage	Low limit	Test result	High limit
1	-5	-5	-5.125		-4.875
0.5	-2	-2	-2.06		-1.94
0.5	-1	-0.5	-1.06		-0.94
0.2	-0.5	-0.5	-0.5225		-0.4775
0.01	0.002	0	0.00097		0.00303
0.2	0.5	0.5	0.4775		0.5225
0.5	1	0.5	0.94		1.06
0.5	2	2	1.94		2.06
1	5	5	4.875		5.125

DVM voltage accuracy (AC)				
All models				
Channel 1				
Vertical Scale	Input Signal	Low limit	Test result	High limit
5 mV	20 mV _{pp} at 1 kHz	9.700 mV		10.300 mV
10 mV	50 mV _{pp} at 1 kHz	24.25 mV		25.750 mV
100 mV	0.5 V _{pp} at 1 kHz	242.500 mV		257.500 mV
200 mV	1 V _{pp} at 1 kHz	485.000 mV		515.000 mV
1 V	5 V _{pp} at 1 kHz	2.425 V		2.575 V
Channel 2				
Vertical Scale	Input Signal	Low limit	Test result	High limit
5 mV	20 mV _{pp} at 1 kHz	9.700 mV		10.300 mV
10 mV	50 mV _{pp} at 1 kHz	24.25 mV		25.750 mV
100 mV	0.5 V _{pp} at 1 kHz	242.500 mV		257.500 mV
200 mV	1 V _{pp} at 1 kHz	485.000 mV		515.000 mV
1 V	5 V _{pp} at 1 kHz	2.425 V		2.575 V
Channel 3				
Vertical Scale	Input Signal	Low limit	Test result	High limit
5 mV	20 mV _{pp} at 1 kHz	9.700 mV		10.300 mV
10 mV	50 mV _{pp} at 1 kHz	24.25 mV		25.750 mV
100 mV	0.5 V _{pp} at 1 kHz	242.500 mV		257.500 mV
200 mV	1 V _{pp} at 1 kHz	485.000 mV		515.000 mV
1 V	5 V _{pp} at 1 kHz	2.425 V		2.575 V
Channel 4				
Vertical Scale	Input Signal	Low limit	Test result	High limit
5 mV	20 mV _{pp} at 1 kHz	9.700 mV		10.300 mV

DVM voltage accuracy (AC)				
10 mV	50 mV _{pp} at 1 kHz	24.25 mV		25.750 mV
100 mV	0.5 V _{pp} at 1 kHz	242.500 mV		257.500 mV
200 mV	1 V _{pp} at 1 kHz	485.000 mV		515.000 mV
1 V	5 V _{pp} at 1 kHz	2.425 V		2.575 V

Trigger frequency accuracy and trigger frequency counter maximum input frequency				
All models				
Channel 1				
Frequency	Low limit	Test result	High limit	Unit
100	99.99995		1000.0005	Hz
1000	999.9995		10000.005	Hz
10	9.999995		10.000005	kHz
100	99.99995		100.00005	kHz
1000	999.9995		1000.0005	kHz
10	9.999995		10.000005	MHz
100	99.99995		100.00005	MHz
1000	999.9995		1000.0005	MHz
2000	1999.999		2000.001	MHz
4000	3999.998		4000.002	MHz
8000	7999.996		8000.004	MHz

Trigger frequency accuracy and trigger frequency counter maximum input frequency				
All models				
Channel 2				
Frequency	Low limit	Test result	High limit	Unit
100	99.99995		1000.0005	Hz
1000	999.9995		10000.005	Hz
10	9.999995		10.000005	kHz

Trigger frequency accuracy and trigger frequency counter maximum input frequency				
100	99.99995		100.00005	kHz
1000	999.9995		1000.0005	kHz
10	9.999995		10.000005	MHz
100	99.99995		100.00005	MHz
1000	999.9995		1000.0005	MHz
2000	1999.999		2000.001	MHz
4000	3999.998		4000.002	MHz
8000	7999.996		8000.004	MHz

Trigger frequency accuracy and trigger frequency counter maximum input frequency				
MS064B				
Channel 3				
Frequency	Low limit	Test result	High limit	Unit
100	99.99995		1000.0005	Hz
1000	999.9995		10000.005	Hz
10	9.999995		10.000005	kHz
100	99.99995		100.00005	kHz
1000	999.9995		1000.0005	kHz
10	9.999995		10.000005	MHz
100	99.99995		100.00005	MHz
1000	999.9995		1000.0005	MHz
2000	1999.999		2000.001	MHz
4000	3999.998		4000.002	MHz
8000	7999.996		8000.004	MHz

Trigger frequency accuracy and trigger frequency counter maximum input frequency				
MS064B				
Channel 4				

Trigger frequency accuracy and trigger frequency counter maximum input frequency				
Frequency	Low limit	Test result	High limit	Unit
100	99.99995		1000.0005	Hz
1000	999.9995		10000.005	Hz
10	9.999995		10.000005	kHz
100	99.99995		100.00005	kHz
1000	999.9995		1000.0005	kHz
10	9.999995		10.000005	MHz
100	99.99995		100.00005	MHz
1000	999.9995		1000.0005	MHz
2000	1999.999		2000.001	MHz
4000	3999.998		4000.002	MHz
8000	7999.996		8000.004	MHz

Trigger frequency accuracy and trigger frequency counter maximum input frequency				
MS066B				
Channel 3				
Frequency	Low limit	Test result	High limit	Unit
100	99.99995		1000.0005	Hz
1000	999.9995		10000.005	Hz
10	9.999995		10.000005	kHz
100	99.99995		100.00005	kHz
1000	999.9995		1000.0005	kHz
10	9.999995		10.000005	MHz
100	99.99995		100.00005	MHz
1000	999.9995		1000.0005	MHz
2000	1999.999		2000.001	MHz

Trigger frequency accuracy and trigger frequency counter maximum input frequency				
MS066B				
Channel 4				
Frequency	Low limit	Test result	High limit	Unit
100	99.99995		1000.0005	Hz
1000	999.9995		10000.005	Hz
10	9.999995		10.000005	kHz
100	99.99995		100.00005	kHz
1000	999.9995		1000.0005	kHz
10	9.999995		10.000005	MHz
100	99.99995		100.00005	MHz
1000	999.9995		1000.0005	MHz
2000	1999.999		2000.001	MHz
4000	3999.998		4000.002	MHz
8000	7999.996		8000.004	MHz

Trigger frequency accuracy and trigger frequency counter maximum input frequency				
MS066B				
Channel 5				
Frequency	Low limit	Test result	High limit	Unit
100	99.99995		1000.0005	Hz
1000	999.9995		10000.005	Hz
10	9.999995		10.000005	kHz
100	99.99995		100.00005	kHz
1000	999.9995		1000.0005	kHz
10	9.999995		10.000005	MHz
100	99.99995		100.00005	MHz
1000	999.9995		1000.0005	MHz

Trigger frequency accuracy and trigger frequency counter maximum input frequency				
2000	1999.999		2000.001	MHz
4000	3999.998		4000.002	MHz
8000	7999.996		8000.004	MHz

Trigger frequency accuracy and trigger frequency counter maximum input frequency				
MS066B				
Channel 6				
Frequency	Low limit	Test result	High limit	Unit
100	99.99995		1000.0005	Hz
1000	999.9995		10000.005	Hz
10	9.999995		10.000005	kHz
100	99.99995		100.00005	kHz
1000	999.9995		1000.0005	kHz
10	9.999995		10.000005	MHz
100	99.99995		100.00005	MHz
1000	999.9995		1000.0005	MHz
2000	1999.999		2000.001	MHz

Trigger frequency accuracy and trigger frequency counter maximum input frequency				
MS068B				
Channel 3				
Frequency	Low limit	Test result	High limit	Unit
100	99.99995		1000.0005	Hz
1000	999.9995		10000.005	Hz
10	9.999995		10.000005	kHz
100	99.99995		100.00005	kHz
1000	999.9995		1000.0005	kHz
10	9.999995		10.000005	MHz

Trigger frequency accuracy and trigger frequency counter maximum input frequency				
100	99.99995		100.00005	MHz
1000	999.9995		1000.0005	MHz
2000	1999.999		2000.001	MHz

Trigger frequency accuracy and trigger frequency counter maximum input frequency				
MS068B				
Channel 4				
Frequency	Low limit	Test result	High limit	Unit
100	99.99995		1000.0005	Hz
1000	999.9995		10000.005	Hz
10	9.999995		10.000005	kHz
100	99.99995		100.00005	kHz
1000	999.9995		1000.0005	kHz
10	9.999995		10.000005	MHz
100	99.99995		100.00005	MHz
1000	999.9995		1000.0005	MHz
2000	1999.999		2000.001	MHz

Trigger frequency accuracy and trigger frequency counter maximum input frequency				
MS068B				
Channel 5				
Frequency	Low limit	Test result	High limit	Unit
100	99.99995		1000.0005	Hz
1000	999.9995		10000.005	Hz
10	9.999995		10.000005	kHz
100	99.99995		100.00005	kHz
1000	999.9995		1000.0005	kHz
10	9.999995		10.000005	MHz

Trigger frequency accuracy and trigger frequency counter maximum input frequency				
100	99.99995		100.00005	MHz
1000	999.9995		1000.0005	MHz
2000	1999.999		2000.001	MHz
4000	3999.998		4000.002	MHz
8000	7999.996		8000.004	MHz

Trigger frequency accuracy and trigger frequency counter maximum input frequency				
MS068B				
Channel 6				
Frequency	Low limit	Test result	High limit	Unit
100	99.99995		1000.0005	Hz
1000	999.9995		10000.005	Hz
10	9.999995		10.000005	kHz
100	99.99995		100.00005	kHz
1000	999.9995		1000.0005	kHz
10	9.999995		10.000005	MHz
100	99.99995		100.00005	MHz
1000	999.9995		1000.0005	MHz
2000	1999.999		2000.001	MHz
4000	3999.998		4000.002	MHz
8000	7999.996		8000.004	MHz

Trigger frequency accuracy and trigger frequency counter maximum input frequency				
MS068B				
Channel 7				
Frequency	Low limit	Test result	High limit	Unit
100	99.99995		1000.0005	Hz
1000	999.9995		10000.005	Hz

Trigger frequency accuracy and trigger frequency counter maximum input frequency				
10	9.999995		10.000005	kHz
100	99.99995		100.00005	kHz
1000	999.9995		1000.0005	kHz
10	9.999995		10.000005	MHz
100	99.99995		100.00005	MHz
1000	999.9995		1000.0005	MHz
2000	1999.999		2000.001	MHz

Trigger frequency accuracy and trigger frequency counter maximum input frequency				
MS068B				
Channel 8				
Frequency	Low limit	Test result	High limit	Unit
100	99.99995		1000.0005	Hz
1000	999.9995		10000.005	Hz
10	9.999995		10.000005	kHz
100	99.99995		100.00005	kHz
1000	999.9995		1000.0005	kHz
10	9.999995		10.000005	MHz
100	99.99995		100.00005	MHz
1000	999.9995		1000.0005	MHz
2000	1999.999		2000.001	MHz

AFG sine and ramp frequency accuracy			
Performance checks			
Waveform type	Minimum	Test result	Maximum
Sine, 1 MHz	0.999950 MHz		1.000050 MHz
Ramp, 500 KHz	499.975 kHz		500.025 kHz

AFG square and pulse frequency accuracy			
Performance checks			
Waveform type	Minimum	Test result	Maximum
Square, 1 MHz	0.999950 MHz		1.000050 MHz
Pulse, 1 MHz	0.999950 MHz		1.000050 MHz

AFG signal amplitude accuracy			
Performance checks			
Amplitude	Minimum	Test result	Maximum
30.0 mV _{PP}	28.55 mV _{PP}		31.45 mV _{PP}
300.0 mV _{PP}	294.5 mV _{PP}		305.5 mV _{PP}
800.0 mV _{PP}	787.0 mV _{PP}		813.0 mV _{PP}
1.500 V _{PP}	1.4765 V _{PP}		1.5235 V _{PP}
2.000 V _{PP}	1.9690 V _{PP}		2.0310 V _{PP}
2.500 V _{PP}	2.4615 V _{PP}		2.5385 V _{PP}

AFG DC offset accuracy			
Performance checks			
Offset	Minimum	Test result	Maximum
1.25 V	1.23025 Vdc		1.26975 Vdc
0 V	- 0.001 Vdc		+ 0.001 Vdc
-1.25 V	- 1.26975 Vdc		- 1.23025 Vdc

Performance tests

This section contains a collection of manual procedures for checking that the instrument performs as warranted. They check all the characteristics that are designated as checked in *Specifications*. (The characteristics that are checked appear with a ✓ in *Specifications*).

Prerequisites

The tests in this section comprise an extensive, valid confirmation of performance and functionality when the following requirements are met:

- The instrument must be in its normal operating configuration (no covers removed).
- You must have performed and passed the procedures under *Self Test*. (See [Self test](#) (on page 273).)
- A signal-path compensation must have been done within the recommended calibration interval and at a temperature within ± 5 °C (± 9 °F) of the present operating temperature. (If the temperature was within the limits just stated at the time you did the prerequisite *Self Test*, consider this prerequisite met). A signal-path compensation must have been done at an ambient humidity within 25% of the current ambient humidity and after having been at that humidity for at least 4 hours.
- The instrument must have been last adjusted at an ambient temperature between +18 °C and +28 °C (+64 °F and +82 °F), must have been operating for a warm-up period of at least 20 minutes, and must be operating at an ambient temperature as listed in the specifications. The warm-up requirement is usually met in the course of meeting the *Self Test* prerequisites listed above.
- The instrument must be powered from a source maintaining voltage and frequency within the limits described in the *Specifications* section.
- The instrument must be in an environment with temperature, altitude, humidity, and vibration within the operating limits described in the *Specifications* section.

Self test

This procedure verifies that the instrument passes the internal diagnostics and performs signal path compensation. No test equipment or hookups are required.

Equipment required	Prerequisites
None	Power on the instrument and allow a 20 minute warm-up period before performing this procedure.

1. *Run the System Diagnostics (may take a few minutes):*
 1. Disconnect all probes and/or cables from the oscilloscope inputs.
 2. Tap **Utility > Self Test**. This displays the **Self Test** configuration menu.
 3. Tap the **Run Self Test** button.
 4. The internal diagnostics perform an exhaustive verification of proper instrument function. This verification may take several minutes. When the verification is finished, the status of each self test is shown in the menu.
 5. Verify that the status of all tests is pass.
 6. Tap anywhere outside the menu to exit the menu.
2. *Run the signal-path compensation routine (may take 5 to 15 minutes per channel):*
 1. Tap **Utility > Calibration**. This displays the **Calibration** configuration menu.
 2. Tap the **Run SPC** button to start the routine.
 3. Signal-path compensation may take 5 to 15 minutes to run per channel.
 4. Verify that the **SPC Status** is **Passed**.
3. *Return to regular service:* Tap anywhere outside the menu to exit the **Calibration** menu.

The self test procedures are completed. If any of the above tests failed, run the tests again. If there are still failures, contact Tektronix Customer Support.

NOTE: You cannot run the remaining performance tests until the self tests pass and the SPC has successfully run.

Check input impedance

This test checks the input impedance on all channels.

1. Connect the output of the oscilloscope calibrator (for example, Fluke 9500) to the oscilloscope channel 1 input, as shown in the following illustration.

WARNING: Be sure to set the generator to Off or 0 volts before connecting, disconnecting, and/or moving the test hookup during the performance of this procedure. The generator is capable of providing dangerous voltages.

NOTE: Impedance measuring equipment that produces a voltage across the channel that exceeds the measurement range of the instrument may report erroneous impedance results. A measurement voltage exceeds the measurement range of the instrument when the resulting trace is not visible on the graticule.

2. Set the calibrator to measure 1 M Ω impedance.
3. Tap **File > Default Setup**.
4. *Test 1 M Ω input impedance as follows:*
 1. Tap the channel **1** button on the Settings bar.
 2. Double tap the **Ch 1** badge to open its menu.
 3. Set **Termination** to **1 M Ω** .
 4. Set the **Vertical Scale** to the value to test in the test record (first value is **10 mV/div**).
5. Use the calibrator to measure the input impedance of the oscilloscope and enter the value in the test record.
6. Repeat steps #STEP4 (on page) and #STEP5 (on page) for all vertical scale settings in the test record for the channel.
7. *Test 50 Ω input impedance as follows:*
 1. Set the calibrator impedance to measure 50 Ω impedance.
 2. Double-tap the **Ch 1** badge and set **Termination** to **50 Ω** .
 3. Repeat steps #STEP4 (on page) through #STEP6 (on page) for all vertical scale settings in the test record for the channel.
8. *Repeat the procedures for all remaining channels as follows:*
 1. Turn the calibrator output Off.
 2. Move the calibrator connection to the next channel to test.
 3. Double-tap the channel badge of the channel that you have finished testing and set **Display** to **Off**.
 4. Tap the channel button on the Settings bar of the next channel to test.
 5. Starting from step #INP-IMPD-CHECK-SET-CAL-TO-1MOHM (on page), repeat the procedures until all channels have been tested.

Check DC gain accuracy

This test checks the DC gain accuracy.

1. Connect the oscilloscope to a calibrated DC voltage source. If you are using the Fluke 9500 calibrator, connect the calibrator head to the oscilloscope channel to test.

WARNING: Set the generator output to Off or 0 volts before connecting, disconnecting, and/or moving the test hookup during the performance of this procedure. The generator is capable of providing dangerous voltages.

2. Tap **File > Default Setup**.
3. Double-tap the **Acquisition** badge and set **Acquisition Mode** to **Average**.
4. Set the **Number of Waveforms** to **16**.
5. Tap outside the menu to close the menu.

6. Double-tap the **Trigger** badge and set the trigger **Source** to **AC line**.
7. Tap outside the menu to close it.
8. Add the **Mean** measurement to the Results bar:
 - a. Tap the **Add New... Measure** button to open the **Add Measurements** menu.
 - b. Set the **Source** to **Ch 1**.
 - c. In the **Amplitude Measurements** panel, double-tap the **Mean** button to add the Mean measurement badge to the Results bar.
9. Tap outside the menu to close it.
10. Double-tap the **Mean** results badge.
11. Tap **Show Statistics in Badge**.
12. Tap **FILTER/LIMIT RESULTS** to open the panel.
13. Tap **Limit Measurement Population** to toggle it to **On**.
14. Tap outside the menu to close it.
15. Tap the channel button of the channel to test, to add the channel badge to the Settings bar.
16. Double tap the channel to test badge to open its menu and set the channel settings:
 - a. Set **Vertical Scale** to **1 mV/div**.
 - b. Set **Termination** to **50 Ω**.
 - c. Tap **Bandwidth Limit** and set to **20 MHz**.
 - d. Tap outside the menu to close it.
17. Record the negative-measured and positive-measured mean readings in the *Gain expected worksheet* as follows:
 - a. On the calibrator, set the DC Voltage Source to the V_{negative} value as listed in the 1 mV row of the worksheet.
 - b. Double-tap the **Acquisition** badge and tap **Clear** to reset the measurement statistics.
 - c. Enter the **Mean** reading in the worksheet as $V_{\text{negative-measured}}$.
 - d. On the calibrator, set the DC Voltage Source to V_{positive} value as listed in the 1 mV row of the worksheet.
 - e. Double-tap the **Acquisition** badge (if not open) and tap **Clear**.
 - f. Enter the **Mean** reading in the worksheet as $V_{\text{positive-measured}}$.

Gain expected worksheet

Digitizer Vertical Scale Setting	$V_{\text{diffExpected}}$	V_{negative}	V_{positive}	$V_{\text{negative-measured}}$	$V_{\text{positive-measured}}$	V_{diff}	Test Result (Gain Accuracy)
1 mV/div	7 mV	-3.5 mV	+3.5 mV				
2 mV/div	14 mV	-7 mV	+7 mV				
5 mV/div	35 mV	-17.5 mV	+17.5 mV				
10 mV/div	70 mV	-35 mV	+35 mV				
20 mV/div	140 mV	-70 mV	+70 mV				
50 mV/div	350 mV	-175 mV	+175 mV				
100 mV/div	700 mV	-350 mV	+350 mV				

Digitizer Vertical Scale Setting	V _{diffExpected}	V _{negative}	V _{positive}	V _{negative-measured}	V _{positive-measured}	V _{diff}	Test Result (Gain Accuracy)
200 mV/div	1400 mV	-700 mV	+700 mV				
500 mV/div	3500 mV	-1750 mV	+1750 mV				
1.0 V/div	7000 mV	-3500 mV	+3500 mV				
20 mV/div at 250 MHz	140 mV	-70 mV	+70 mV				
20 mV/div at Full bandwidth	140 mV	-70 mV	+70 mV				

18. Calculate Gain Accuracy as follows:

a. Calculate V_{diff} as follows:

$$V_{diff} = |V_{negative-measured} - V_{positive-measured}|$$

b. Enter V_{diff} in the worksheet.

c. Calculate Gain Accuracy as follows:

$$Gain\ Accuracy = ((V_{diff} - V_{diffExpected}) / V_{diffExpected}) \times 100\%$$

d. Enter the Gain Accuracy value in the worksheet and in the test record.

19. Repeat steps 16 through 18 for all vertical scale settings in the work sheet and the test record.

20. Repeat tests at 1 MΩ impedance as follows:

- Set the calibrator to **0** volts and **1 MΩ** output impedance.
- Double-tap the badge of the channel being tested.
- Set the **Termination** to **1 MΩ**
- Repeat steps 16 through 19 for all vertical scale settings in the test record.

21. Repeat the procedure for all remaining channels:

- Set the calibrator to **0** volts and **50 Ω** output impedance.
- Move the calibrator output to the next channel input to be tested.
- Double-tap the channel badge of the channel that you have finished testing and set **Display** to **Off**.
- Double-tap the **Mean** measurement badge.
- Tap the **Configure** panel.
- Tap the **Source 1** field and select the next channel to test.
- Starting from step 16, set the values from the test record for the channel under test, and repeat the above steps until all channels have been tested.

22. Touch outside a menu to close the menu.

Check DC offset accuracy

This test checks the offset accuracy at 50 Ω and 1 MΩ input impedances.

- Connect the oscilloscope to a calibrated DC voltage source. If you are using the Fluke 9500B calibrator as the DC voltage source, connect the calibrator head to the oscilloscope channel 1.

WARNING: Set the generator output to Off or 0 volts before connecting, disconnecting, or moving the test hookup during the performance of this procedure. The generator is capable of providing dangerous voltages.

2. Tap **File > Default Setup**.
3. Double-tap the **Acquisition** badge and set **Acquisition Mode** to **Average**.
4. Set the **Number of Waveforms** to **16**.
5. Tap outside the menu to close the menu.
6. Double-tap the **Trigger** badge and set the trigger **Source** to **AC line**.
7. Add the **Mean** measurement to the Results bar:
 - a. Tap the **Add New... Measure** button to open the **Add Measurements** menu.
 - b. Set the **Source** to **Ch 1**.
 - c. In the **Amplitude Measurements** panel, double-tap the **Mean** button to add the Mean measurement badge to the Results bar.
8. Tap outside the menu to close it.
9. Double-tap the **Mean** results badge.
10. Tap **Show Statistics in Badge**.
11. Tap **FILTER/LIMIT RESULTS** to open the panel.
12. Tap **Limit Measurement Population** to toggle it to **On**.
13. Tap outside the menu to close it.
14. Tap the channel button on the Settings bar to add the channel under test to the Settings bar.
15. Double-tap the channel under test badge to open its configuration menu and change the vertical settings:
 - a. Set **Vertical Scale** to **1 mV/div**.
 - b. Set **Offset** to **900 mV**.
 - c. Set **Position** to 0 by tapping **Set to 0**.
 - d. Set **Termination** to **50 Ω**.
 - e. Tap **Bandwidth Limit** and set to **20 MHz**.
 - f. Tap outside the menu to close it.
16. Set the calibrator output to **+900 mV**, as shown in the test record, and turn the calibrator output On.
17. Enter the Mean measurement value in the test record.
18. Double-tap the channel under test badge to open its configuration menu and change the **Offset** to **-900 mV**.
19. Set the calibrator output to **-900 mV**, as shown in the test record.
20. Enter the Mean measurement value in the test record.
21. Repeat step 15 through 20, changing the channel vertical settings and the calibrator output as listed in the test record for the channel under test.
22. *Repeat the channel tests at 1 MΩ impedance as follows:*
 - a. Set the calibrator output to Off or 0 volts.
 - b. Change the calibrator impedance to **1 MΩ** and voltage to **+900 mV**.
 - c. Turn the calibrator output On.
 - d. Repeat steps 15 through 20, changing the channel **Termination** to **1 MΩ** and the vertical Offset value and the calibrator output as listed in the 1 MΩ test record for the channel under test.
23. *Repeat the procedure for all remaining channels as follows:*

- a. Double-tap the **Mean** measurement badge.
- b. Tap the **Configure** panel.
- c. Tap the **Source 1** field and select the next channel to test.
- d. Set the calibrator to **0** volts and **50 Ω** output impedance.
- e. Move the calibrator output to the next channel input to test.
- f. Double-tap the channel badge of the channel that you have finished testing and set **Display** to **Off**.
- g. Tap the channel button on the oscilloscope Settings bar of the next channel to test.
- h. Starting from step , repeat the procedure until all channels have been tested.

Check analog bandwidth

This test checks the bandwidth at 50 Ω and 1 M Ω terminations for each channel. The typical bandwidth at 1 M Ω termination is checked on the products as a functional check.

1. Connect the output of the calibrated leveled sine wave generator to the oscilloscope channel 1 input as shown in the following illustration.

WARNING: Set the generator to off or 0 volts before connecting, disconnecting, and/or moving the test hookup during the performance of this procedure. The generator is capable of providing dangerous voltages.

2. Tap **File > Default Setup** to reset the instrument and add the channel 1 badge and signal to the display.
3. *Add the peak-to-peak measurement as follows:*
 - a. Tap the **Add New. Measure** button.
 - b. Set the **Source** to the channel under test.
 - c. In the **Amplitude Measurements** panel, double-tap the **Peak-to-Peak** measurement button to add the measurement badge to the Results bar.
 - d. Tap outside the menu to close it.
 - e. Double-tap the **Peak-to-Peak** results badge.
 - f. Tap **Show Statistics in Badge**.
 - g. Tap **FILTER/LIMIT RESULTS** to open the panel.
 - h. Tap **Limit Measurement Population** to toggle it to **On**.
 - i. Tap outside the menu to close it.
4. Set the channel under test settings:
 - a. Double-tap the badge of the channel under test to open its configuration menu.
 - b. Set **Vertical Scale** to **1 mV/div**.
 - c. Set **Termination** to **50 Ω** .
 - d. Tap outside the menu to close it.
5. Adjust the leveled sine wave signal source to display a waveform of 8 vertical divisions at the selected vertical scale with a set frequency of **10 MHz**. For example, at 5 mV/div, use a ≥ 40 mV_{p-p} signal; at 2 mV/div, use a ≥ 16 mV_{p-p} signal.

NOTE: At some V/div settings, the generator may not provide 8 vertical divisions of signal. Set the generator output to obtain as many vertical divisions of signal as possible.

6. Double-tap the **Horizontal** badge in the Settings bar.
7. Set the **Horizontal Scale** to **1 ms/division**.
8. Tap outside the menu to close it.
9. Record the **Peak-to-Peak** measurement in the **V_{in-pp}** entry of the test record.
10. Double-tap the **Horizontal** badge in the Settings bar.

11. Set the **Horizontal Scale** such that there are at least 10 cycles on screen at all frequencies.
12. Adjust the signal source to the maximum bandwidth frequency for the bandwidth and model being tested.
13. Record the *peak-to-peak measurement as follows*:
 - a. Record the **Peak-to-Peak** measurement at the new frequency in the V_{bw-pp} entry of the test record.
14. Use the values of V_{bw-pp} and V_{in-pp} recorded in the test record, and the following equation, to calculate the Gain at bandwidth:
$$Gain = V_{bw-pp} / V_{in-pp}.$$
To pass the performance measurement test, Gain should be ≥ 0.707 . Enter *Gain* in the test record.
15. Repeat steps 4 through 14 for all combinations of Vertical Scale settings listed in the test record.
16. Repeat the tests at 1 M Ω impedance as follows:
 - a. Set the calibrator output to Off or 0 volts.
 - b. Change the calibrator impedance to **1 M Ω** .
 - c. Double-tap the badge of the channel under test to open its menu.
 - d. Set the **Termination** to **1 M Ω** .
 - e. Repeat steps 4 through 16, but leave the termination set to **1 M Ω** .
17. Repeat the test for all remaining channels as follows:
 1. Set the calibrator to **0** volts and **50 Ω** output impedance.
 2. Move the calibrator output to the next channel input to be tested.
 3. Double-tap the channel badge of the channel that you have finished testing and set **Display** to **Off**.
 4. Tap the channel button on the oscilloscope Settings bar of the next channel to test.
 5. Double-tap the **Peak-to-Peak** measurement badge.
 6. Tap the **Configure** panel.
 7. Tap the **Source 1** field and select the next channel to test.
 8. Starting from step 4, repeat the procedure until all channels have been tested.

Check random noise, sample acquisition mode (10, 8, and 6 GHz options)

This test checks random noise at 50 Ω for each channel in Sample acquisition mode. You do not need to connect any test equipment to the oscilloscope for this test.

1. Disconnect everything from the oscilloscope inputs.
2. Tap **File > Default Setup**.
3. Add the **AC RMS** measurement:
 - a. Tap the **Add New... Measure** button.
 - b. Set the **Source** to the channel being tested.
 - c. In the **Amplitude Measurements** panel, double-tap the **AC RMS** measurement button to add the measurement badge to the Results bar.
 - d. Tap outside the menu to close it.
 - e. Double-tap the **AC RMS** measurement badge and tap **Show Statistics in Badge** to display statistics in the measurement badge.
 - f. Tap the **Filter / Limit Results** panel.

- g. Turn on **Limit Measurement Population**.
 - h. Set the limit to **100**.
 - i. Tap outside the menu to close it.
4. Set up the Horizontal mode:
 - a. Double-tap the **Horizontal** setting badge.
 - b. Set **Horizontal Mode** to **Manual**.
 - c. Set the **Sample Rate** to **25 GS/s** or **50G/S**.
 - d. Set the **Record Length** to **2 Mpts**.
 - e. Tap outside the menu to close it.
5. Double-tap the Channel badge of the channel being tested.
6. Set the **Vertical Scale** value to **1 mV**.
7. Check **50 Ω** termination as follows:
 - a. In the Channel badge, set **Termination** to **50 Ω** .
 - b. Tap the **Bandwidth Limit** field and select the highest frequency listed.
 - c. Set the channel vertical Position value to **340 mdivs**.
 - d. Once the measurement count (N) in the measurement badge reaches 100, record the AC RMS Mean value (the μ readout).
 - e. Set the channel vertical Position value to **360 mdivs**.
 - f. Once the measurement count (N) in the measurement badge reaches 100, record the AC RMS Mean value (the μ readout).
 - g. Average the two values and record the result in the **1 mV/div** row of the **50 Ω** column of the Test Result record.
8. Repeat step 7 for all frequencies above 4 GHz
9. *Repeat the 50 Ω test at all V/div settings for the current channel:*
 - a. In the Channel badge, set the **Vertical Scale** setting to the next value in the test record (2 mV, 5 mV, up to 1 V/div).
 - b. Repeat steps 7 through 8.
10. *Repeat all tests for the remaining input channels:*
 - a. Double-tap the **AC RMS** measurement badge.
 - b. Tap the **Configure** panel.
 - c. Tap the **Source 1** field and select the next channel to test.
 - d. Double-tap the channel badge of the channel that you have finished testing and set **Display** to **Off**.
 - e. Tap the channel button on the oscilloscope Settings bar of the next channel to test.
 - f. Double-tap the channel badge for the channel being tested.
 - g. Starting at step 6, repeat these procedures for each input channel.

Check random noise, High Res mode

This test checks random noise at 1 M Ω and 50 Ω for each channel in High Res acquisition mode. You do not need to connect any test equipment to the oscilloscope for this test.

1. Disconnect everything from the oscilloscope inputs.
2. Tap **File > Default Setup**.
3. Double-tap the **Acquisition** badge and set **Acquisition Mode** to **High Res**.
4. Add the **AC RMS** measurement:

- a. Tap the **Add New... Measure** button to open the **Add Measurements** menu.
 - b. Set the **Source** to the channel being tested.
 - c. In the **Amplitude Measurements** panel, double-tap the **AC RMS** button to add the measurement badge to the Results bar.
 - d. Tap outside the menu to close it.
 - e. Double-tap the **AC RMS** measurement badge and tap **Show Statistics in Badge** to display statistics in the measurement badge.
 - f. Tap the **Filter/Limit Results** panel.
 - g. Turn on **Limit Measurement Population**.
 - h. Set the limit to **100**.
 - i. Tap outside the menu to close it.
5. Set up the Horizontal mode:
- a. Double-tap the **Horizontal** setting badge.
 - b. Set Horizontal Mode to **Manual**.
 - c. Set the Sample rate to **25G/S, 12.5G/S, or 6.25G/S**.
 - d. Set the Record Length to **2 Mpts**.
 - e. Tap outside the menu to close it.
6. Check **1 M Ω** termination as follows:
- a. Double-tap the Channel badge of the channel being tested.
 - b. Set the **Vertical Scale** value to **1 mV**.
 - c. Set **Termination** to **1 M Ω** .
 - d. Tap the **Bandwidth Limit** field and select the highest frequency listed.
 - e. Set the channel **Position** value to **340 mdivs**.
 - f. Once the measurement count (N) in the measurement badge reaches 100, record the AC RMS Mean value (the μ readout).
 - g. Set the channel **Position** value to **-340 mdivs**.
 - h. Once the measurement count (N) in the measurement badge reaches 100, record the AC RMS Mean value (the μ readout).
 - i. Average the two values and record the result in the **1 mV/div** row of the **1 M Ω** column of the random noise, High Res mode Test Result record.
7. Repeat step 6 for all frequencies below 500 MHz
8. Check **50 Ω** termination as follows:
- a. In the Channel badge, set **Termination** to **50 Ω** .
 - b. Tap the **Bandwidth Limit** field and select 4 GHz or the highest frequency listed.
 - c. Set the channel **Position** value to **340 mdivs**.
 - d. Once the measurement count (N) in the measurement badge reaches 100, record the AC RMS Mean value (the μ readout).
 - e. Set the channel **Position** value to **-340 mdivs**.
 - f. Once the measurement count (N) in the measurement badge reaches 100, record the AC RMS Mean value (the μ readout).
 - g. Average the two values and record the result in the **1 mV/div** row of the **50 Ω** column of the random noise, High Res mode Test Result record.

9. Repeat step 6 for all frequencies below 4 GHz.
10. Repeat 1 M Ω and 50 Ω tests at all V/div settings for the current channel:
 - a. In the Channel badge, set the **Vertical Scale** setting to the next value in the test record (2 mV, 5 mV, up to 1 V/div).
 - b. Repeat steps 6 through 9.
11. Repeat all tests for the remaining input channels:
 - a. Double-tap the **AC RMS** measurement badge.
 - b. Tap the **Configure** panel.
 - c. Tap the **Source 1** field and select the next channel to test.
 - d. Double-tap the channel badge of the channel that you have finished testing and set **Display** to **Off**.
 - e. Tap the channel button on the oscilloscope Settings bar of the next channel to test.
 - f. Double-tap the channel badge for the channel being tested.
 - g. Starting at step 6, repeat these procedures for each input channel.

Check high offset AC RMS noise, sample acquisition mode (10, 8, and 6 GHz options)

This test high offset AC RMS noise at 50 Ω for each channel in Sample acquisition mode. You do not need to connect any test equipment to the oscilloscope for this test.

1. Disconnect everything from the oscilloscope inputs.
2. Tap **File > Default Setup**.
3. Add the **AC RMS** measurement:
 - a. Tap the **Add New... Measure** button.
 - b. Set the **Source** to the channel being tested.
 - c. In the **Amplitude Measurements** panel, double-tap the **AC RMS** measurement button to add the measurement badge to the Results bar.
 - d. Tap outside the menu to close it.
 - e. Double-tap the **AC RMS** measurement badge and tap **Show Statistics in Badge** to display statistics in the measurement badge.
 - f. Tap the **Filter / Limit Results** panel.
 - g. Turn on **Limit Measurement Population**.
 - h. Set the limit to **100**.
 - i. Tap outside the menu to close it.
4. Set up the Horizontal mode:
 - a. Double-tap the **Horizontal** setting badge.
 - b. Set **Horizontal Mode** to **Manual**.
 - c. Set the **Sample Rate** to **25 GS/s** or **50G/S**.
 - d. Set the **Record Length** to **2 Mpts**.
 - e. Tap outside the menu to close it.
5. Double-tap the Channel badge of the channel being tested.
6. Set the **Vertical Scale** value to **1 mV**.
7. Check **50 Ω** termination as follows:

- a. In the Channel badge, set **Termination** to **50 Ω**.
 - b. Tap the **Bandwidth Limit** field and select the highest frequency listed.
 - c. Set the channel vertical Position value to **4 div.**
 - d. Once the measurement count (N) in the measurement badge reaches 100, record the AC RMS Mean value (the μ readout).
 - e. Record the value in the **1 mV/div** row of the **50 Ω** column of the Test Result record.
8. Repeat step 7 for all frequencies above 4 GHz
9. *Repeat the 50 Ω test at all V/div settings for the current channel:*
- a. In the Channel badge, set the **Vertical Scale** setting to the next value in the test record (2 mV, up to 1 V/div).
 - b. Repeat steps 7 through 8.
10. *Repeat all tests for the remaining input channels:*
- a. Double-tap the **AC RMS** measurement badge.
 - b. Tap the **Configure** panel.
 - c. Tap the **Source 1** field and select the next channel to test.
 - d. Double-tap the channel badge of the channel that you have finished testing and set **Display** to **Off**.
 - e. Tap the channel button on the oscilloscope Settings bar of the next channel to test.
 - f. Double-tap the channel badge for the channel being tested.
 - g. Starting at step 6, repeat these procedures for each input channel.

Check high offset AC RMS noise, High Res mode

This test checks high offset AC RMS noise at 50 Ω for each channel in High Res acquisition mode. You do not need to connect any test equipment to the oscilloscope for this test.

1. Disconnect everything from the oscilloscope inputs.
2. Tap **File > Default Setup**.
3. Double-tap the **Acquisition** badge and set **Acquisition Mode** to **High Res**.
4. Add the **AC RMS** measurement:
 - a. Tap the **Add New... Measure** button to open the **Add Measurements** menu.
 - b. Set the **Source** to the channel being tested.
 - c. In the **Amplitude Measurements** panel, double-tap the **AC RMS** button to add the measurement badge to the Results bar.
 - d. Tap outside the menu to close it.
 - e. Double-tap the **AC RMS** measurement badge and tap **Show Statistics in Badge** to display statistics in the measurement badge.
 - f. Tap the **Filter/Limit Results** panel.
 - g. Turn on **Limit Measurement Population**.
 - h. Set the limit to **100**.
 - i. Tap outside the menu to close it.
5. Set up the Horizontal mode:
 - a. Double-tap the **Horizontal** setting badge.
 - b. Set Horizontal Mode to **Manual**.
 - c. Set the Sample rate to **25G/S, 12.5G/S, or 6.25G/S**.
 - d. Set the Record Length to **2 Mpts**.
 - e. Tap outside the menu to close it.


6. Check **50 Ω** termination as follows:

- a. In the Channel badge, set **Termination** to **50 Ω** .
 - b. Tap the **Bandwidth Limit** field and select 4 GHz or the highest frequency listed.
 - c. Set the channel **Position** value to **4 div**.
 - d. Once the measurement count (N) in the measurement badge reaches 100, record the AC RMS Mean value (the μ readout).
 - e. Record the value in the **1 mV/div** row of the **50 Ω** column of the random noise, High Res mode Test Result record.
7. Repeat step for all frequencies below 4 GHz.
8. Repeat 50 Ω tests at all V/div settings for the current channel:
- a. In the Channel badge, set the **Vertical Scale** setting to the next value in the test record (2 mV, up to 1 V/div).
 - b. Repeat steps 6 through 7.
9. Repeat all tests for the remaining input channels:
- a. Double-tap the **AC RMS** measurement badge.
 - b. Tap the **Configure** panel.
 - c. Tap the **Source 1** field and select the next channel to test.
 - d. Double-tap the channel badge of the channel that you have finished testing and set **Display** to **Off**.
 - e. Tap the channel button on the oscilloscope Settings bar of the next channel to test.
 - f. Double-tap the channel badge for the channel being tested.
 - g. Starting at step 6, repeat these procedures for each input channel.

Check long term samples rate and delay time accuracy

This test checks the sample rate and delay time accuracy (time base).

1. Connect a 50 Ω cable from the Aux Out connector to the frequency counter input as shown in the following figure.

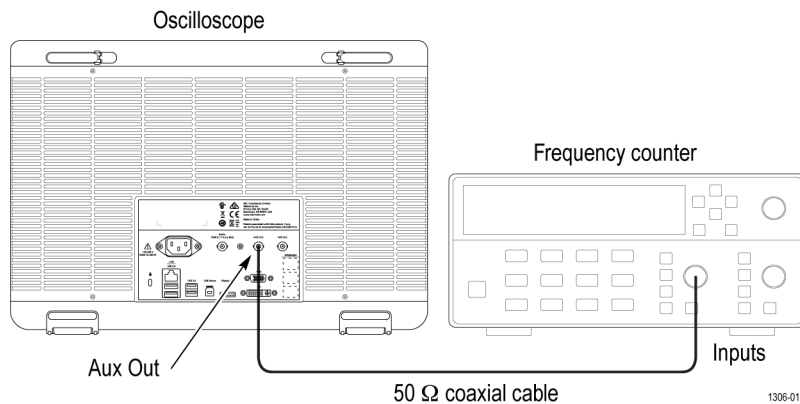

2. Tap **File > Default Setup**.
3. Tap **Utility > I/O**.
4. Tap **AUX OUT** to open its configuration menu.
5. Tap **Reference Clock** to send the clock to the **Aux Out** connector.
6. Check the reading on the frequency counter. Enter the value in the Test record.

Check digital threshold accuracy

This test checks the threshold accuracy of the logic probe digital channels D0-D7 at 0 V and 25 °C, for all oscilloscope input channels.

NOTE: Threshold Accuracy is a function of the logic probe only. It is a typical specification. The Threshold Accuracy test checks the typical logic probe performance, and may be considered a functional check of the oscilloscope digital input.

1. Connect the TLP058 digital probe to channel 1.
2. Connect the DC voltage source to digital channel **D0**.

WARNING: Set the generator output to Off or 0 volts before connecting, disconnecting, or moving the test hookup during the performance of this procedure. The generator is capable of providing dangerous voltages.

If you are using the Fluke 9500 calibrator as the DC voltage source, connect the calibrator head to the digital channel D0, using the BNC-to-0.1 inch pin adapter listed in the table. Be sure to connect channel D0 to both the corresponding signal pin and to a ground pin on the adapter.

3. Tap **File > Default Setup**. This resets the instrument and adds the channel 1 badge and signal to the display.
4. *Display the digital channels and set the thresholds as follows:*
 Double-tap the badge of the channel under test on the Settings bar.
 Double-tap the **Threshold** field at the bottom of the menu and set the value to **0 V**.
 Tap **Set All Thresholds**. All thresholds are now set for the 0 V threshold check.
 Tap outside the menu to close it.
5. Double-tap the **Horizontal** badge in the Settings bar.
6. Set the **Horizontal Scale** to **10 ns/div**.
7. Tap outside the menu to close it.
8. Set the calibrator DC voltage output (Vs) to **-400 mV**.
9. Wait 1 second. Verify that the logic level is low on **D0**.
10. Increment Vs by **+10 mV**. Wait 1 second and check the logic level of the channel D0 signal display.
 If the signal level is a logic low or is alternating between high and low, continue to increment Vs by +10 mV, wait 1 second, and check the logic level until the logic state is a steady high.
11. Record this Vs value as **Vs-** for D0 of the test record.
12. Double-tap the **Trigger** badge and set the **Slope** to **Falling** edge.
13. Set the DC voltage source (Vs) to **+400 mV**.
14. Wait 1 second. Verify that the logic level is high.
15. Decrement Vs by **-10 mV**. Wait 1 second and check the logic level of the channel D0 signal display.
 If the signal level is a logic high or is alternating between high and low, continue to decrement Vs by -10 mV, wait 1 second, and check the logic level until the logic state is a steady low.
16. Record this Vs value as **Vs+** for D0 of the test record.
17. Find the average using this formula: $V_{sAVG} = (V_{s-} + V_{s+})/2$.
18. Record the average as the test result for D0 in the test record. The test result should be between the low and high limits.
19. *Repeat the procedure for all remaining digital channels as follows:*
 - a. Connect the next digital channel to be tested (D1, D2, and so on) to the DC voltage source.
 - b. Repeat steps 8 through 19, until all digital channels have been tested for this input channel.
20. *Repeat the procedure for all remaining input channels as follows:*
 - a. Move the TLP058 digital probe from channel 1 to channel 2.
 - b. Set the generator output to 0 volts and Off.
 - c. Repeat steps starting at 2 for the channel being tested (channel 2, channel 3, and so on).

Check AUX Out output voltage levels

This test checks the output voltage levels from the AUX Out connector.

1. Use a 50 Ω cable to connect the AUX Out signal from the rear of the instrument to the channel 1 input of the same instrument, as shown in the following illustration.
2. Tap **File > Default Setup**. This resets the instrument and adds the channel 1 badge and signal to the display.
3. Double-tap the badge of the channel 1 badge to open its configuration menu.
4. Set the **Vertical Scale** to **1 V/div**.
5. Tap outside the menu to close it.
6. Double-tap the **Horizontal** badge in the Settings bar.
7. Set the **Horizontal Scale** to **400 ns/div**.
8. Tap outside the menu to close it.
9. *Record the Maximum and Minimum measurements at 1 M Ω termination as follows:*
 - a. Tap the **Add New... Measure** button.
 - b. In the Amplitude Measurements panel, set the **Source** to **Ch 1**.
 - c. Double-tap the **Maximum** button to add the measurement badge to the Results bar.
 - d. Double-tap the **Minimum** button to add the measurement badge to the Results bar.
 - e. Tap outside the menu to close it.
 - f. Double-tap the **Maximum** results badge.
 - g. Tap **Show Statistics in Badge**.
 - h. Tap **FILTER/LIMIT RESULTS** to open the panel.
 - i. Tap **Limit Measurement Population** to toggle it to **On**.
 - j. Tap outside the menu to close it.
 - k. Double-tap the **Minimum** results badge.
 - l. Tap **Show Statistics in Badge**.
 - m. Tap **FILTER/LIMIT RESULTS** to open the panel.
 - n. Tap **Limit Measurement Population** to toggle it to **On**.
 - o. Tap outside the menu to close it.
 - p. Enter the Maximum and Minimum measurement readings in the 1 M Ω row of the test record.
10. *Record the Maximum and Minimum measurements at 50 Ω termination as follows:*
 - a. Double-tap the **Ch 1** badge to open its configuration menu.
 - b. Set **Termination** to **50 Ω** .
 - c. Tap outside the menu to close it.
 - d. Enter the Maximum and Minimum measurement readings in the 50 Ω row of the test record.

Check DVM voltage accuracy (DC)

This test checks the DC voltage accuracy of the Digital Volt Meter (DVM) option. The DVM option is available for free when you register the instrument at tek.com.

1. Connect the oscilloscope to a DC voltage source to run this test. If using the Fluke 9500 calibrator as the DC voltage source, connect the calibrator head to the oscilloscope channel to test.

WARNING: Set the generator output to Off or 0 volts before connecting, disconnecting, or moving the test hookup during the performance of this procedure. The generator is capable of providing dangerous voltages.

2. Set the calibrator impedance to **1 M Ω** .
3. Tap **File > Default Setup**. This resets the instrument and adds the channel 1 badge and signal to the display.
4. *Set the channel settings:*
 - a. Double tap the badge of the channel under test to open its menu.
 - b. Check that **Position** is set to **0 divs**. If not, set the position to 0 divisions.
 - c. Confirm that **Termination** is set to **1 M Ω** .
 - d. Set the **Bandwidth Limit** to **20 MHz**.
5. Set the calibrator impedance to **1 M Ω** .
6. Double-tap the **Horizontal** badge and set **Horizontal Scale** to **1 ms/div**.
7. Tap outside the menu to close it.
8. Double-tap the **Acquisition** badge and set the **Acquisition Mode** to **Average**.
9. Verify or set the **Number of Waveforms** to **16**.
10. Tap outside the menu to close it.
11. Double-tap the **Trigger** badge and set the **Source** to **AC Line**.
12. Tap outside the menu to close it.
13. Tap the **DVM** button to add the DVM badge to the Results bar.
14. In the **DVM** menu, set **Source** to the channel to be tested.
15. Set **Mode** to **DC**.
16. Tap outside the menu to close it.
17. Set the calibrator to the input voltage shown in the test record (for example, -5 V for a 1V/div setting).
18. In the channel under test menu, set the **Offset** value to that shown in the test record (for example, -5 V for -5 V input and 1V/div setting).
19. Set the **Vertical Scale** field to match the value in the test record (for example, 1 V/div).
20. Enter the measured value on the DVM badge into the DVM Voltage Accuracy Tests record.
21. Repeat the procedure (steps 17, 18, 19 and 20) for each volts/division setting shown in the test record.
22. Repeat all steps, starting with step 4, for each oscilloscope channel to check. To set the next channel to test:
 - a. Double tap the badge of the channel under test to open its menu.
 - b. Set **Display** to **Off**.
 - c. Tap the channel button in the Settings bar of the next channel to test to add that channel badge and signal to the display.

Check DVM voltage accuracy (AC)

This test checks the AC voltage accuracy of the Digital Volt Meter (DVM) option. The DVM option is available for free when you register the instrument at tek.com.

1. Connect the output of the leveled square wave generator (for example, Fluke 9500) to the oscilloscope channel 1 input.

WARNING: Set the generator output to Off or 0 volts before connecting, disconnecting, or moving the test hookup during the performance of this procedure. The generator is capable of providing dangerous voltages.

2. Set the generator to **50 Ω** output impedance (50 Ω source impedance).
3. Set the generator to produce a square wave of the amplitude and frequency listed in the test record (for example, 20 mV_{pp} at 1 kHz).
4. Tap **File > Default Setup** to reset the instrument and add the channel 1 badge and signal to the display.
5. Tap the **DVM** button to add the DVM badge to the Results bar.
6. Set the DVM **Mode** to **AC RMS**.
7. In the DVM menu, set **Source** to the channel to be tested.
8. Double-tap the channel badge of the channel being tested to open its configuration menu.
9. Set **Termination** to **50 Ω** .
10. Use the **Vertical Scale** controls to set the signal height so that the signal covers between 4 and 8 vertical divisions on the screen.
11. Enter the DVM measured value in the test record.
12. Repeat steps 10 and 11 for each voltage and frequency combination shown in the record.
13. Repeat all steps to test all remaining oscilloscope channels. To set the next channel to test:
 - a. Double tap the badge of the channel under test to open its menu.
 - b. Set **Display** to **Off**.
 - c. Tap the channel button in the Settings bar of the next channel to test to add that channel badge and signal to the display.

Check trigger frequency accuracy and maximum input frequency

This test checks trigger frequency counter accuracy. The trigger frequency counter is part of the free DVM and trigger frequency option that is available when you register the instrument at tek.com.


1. Tap **File > Default Setup** to reset the instrument and add the channel 1 badge and signal to the display.
2. Connect the **10 MHz Reference out** from the time mark generator to the **Ref In** connector on the back of the oscilloscope.
3. Connect the output of the time mark generator to the oscilloscope channel input being tested using a 50 Ω cable. Set the time mark generator to a 50 Ω source and a fast rising edge waveform (≥ 3 mV/ns).
4. Set the time mark generator frequency to the first value shown in the test record, starting at **100 Hz**.
5. Set the mark amplitude to **1 V_{pp}**, which makes a 2 divisions high waveform.
6. Double-tap the channel badge being tested (starting with channel 1) and set **Termination** to **50 Ω** .
7. Set the channel **Vertical Scale** to **500 mV/div**.
8. Tap outside the menu to close it.
9. Double-tap the **Acquisition** badge and set the **Timebase Reference Source** to **External Reference**.
10. Tap outside the menu to close it.
11. Double-tap the **Horizontal** badge and use the **Horizontal Scale** controls to display at least 2 cycles of the waveform.
12. Tap outside the menu to close it.
13. Double-tap the **Trigger** badge to open its menu.

- a. Set the **Source** field to the input channel being tested.
 - b. Tap the **Set to 50%** button to obtain a stable display.
 - c. Tap the **Mode & Holdoff** panel to open the **Mode & Holdoff** configuration menu.
 - d. In the **Mode & Hold Off** menu, set the **Trigger Frequency Counter** to **On**. The trigger frequency readout is at the bottom of the Trigger badge.
 - e. Tap outside the menu to close it.
14. Double-tap the channel badge being tested (starting with channel 1) and use the **Position** controls to vertically center the time mark in the waveform graticule.
 15. Enter the value of the trigger frequency (**F** readout in the **Trigger** badge) in the test record for that frequency.
 16. Repeat this procedure for each frequency setting shown in the record. Make sure to adjust the Horizontal scale after each calibrator frequency change to show at least two cycles of the waveform on the screen.
 17. Repeat all these steps to test each oscilloscope channel.

Check AFG sine and ramp frequency accuracy

This test verifies the frequency accuracy of the arbitrary function generator. All output frequencies are derived from a single internally generated frequency. Only one frequency point of channel 1 is required to be checked.

1. Connect a 50 Ω cable from the **AFG Out** connector to the frequency counter input as shown in the following figure.

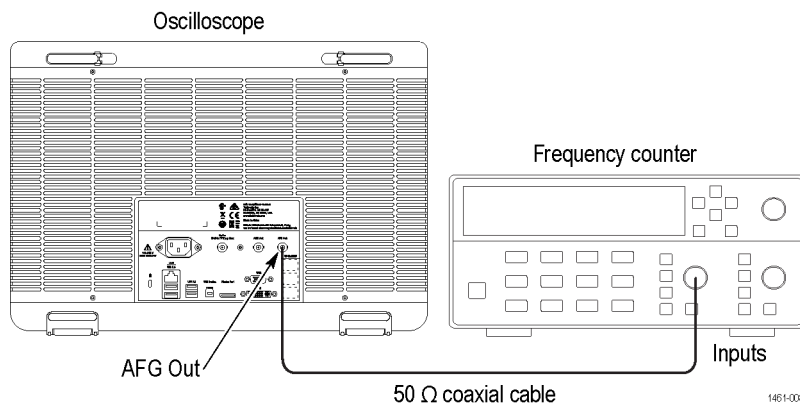

Frequency/period test

2. Tap **File > Default Setup** to set the instrument to the factory default settings.
3. Tap the **AFG** button to open the **AFG** menu.
4. Set the arbitrary function generator output as follows:

Select menu	Setting
Output	On
Waveform Type	Sine
Frequency	1.000000 MHz
Amplitude	1.00 V _{PP}

5. Turn on the frequency counter:
 - a. Double-tap the **Trigger** badge to open its menu.
 - b. Set the **Source** field to the input channel being tested.
 - c. Tap the **Set to 50%** button to obtain a stable display.

- d. Tap the **Mode & Holdoff** panel to open the Mode & Holdoff configuration menu
 - e. In the Mode & Hold Off menu, set the **Trigger Frequency Counter** to **On**. The trigger frequency readout is at the bottom of the Trigger badge.
 - f. Tap outside the menu to close it.
6. Check that the reading of the frequency counter is between **0.999950 MHz** and **1.000050 MHz**. Enter the value in the Test record.
 7. Set the arbitrary function generator output as follows:


Select menu	Setting
Waveform Type	Ramp
Frequency	500 kHz

8. Check that reading of the frequency counter is between **499.975 kHz** and **500.025 kHz**. Enter the value in the Test record.

Check AFG square and pulse frequency accuracy

This test verifies the frequency accuracy of the arbitrary function generator. All output frequencies are derived from a single internally generated frequency. Only one frequency point of channel 1 is required to be checked.

1. Connect the arbitrary function generator to the frequency counter as shown in the following figure.

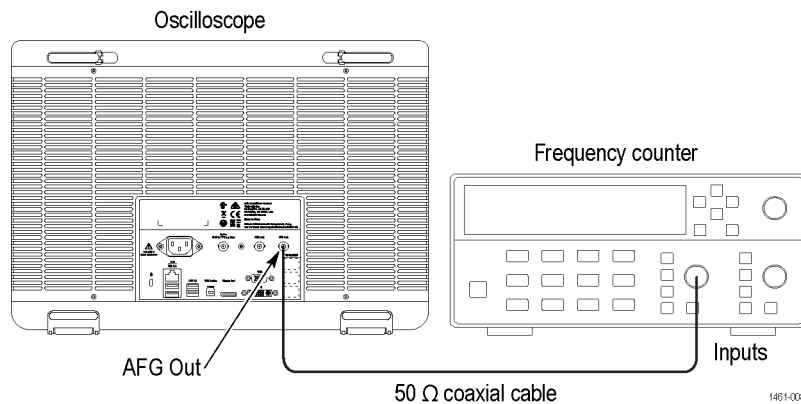

Frequency/period test

2. Tap **File > Default Setup** to set the instrument to the factory default settings.
3. Tap the **AFG** button to open the AFG menu.
4. Set the arbitrary function generator as follows:

Select menu	Setting
Waveform Type	Square
Frequency	1.000000 MHz
Amplitude	1.00 V _{PP}
Output	On

5. Turn on the frequency counter:

- a. Double-tap the **Trigger** badge to open its menu.
 - b. Set the **Source** field to the input channel being tested.
 - c. Tap the **Set to 50%** button to obtain a stable display.
 - d. Tap the **Mode & Holdoff** panel to open the Mode & Holdoff configuration menu
 - e. In the Mode & Hold Off menu, set the **Trigger Frequency Counter** to **On**. The trigger frequency readout is at the bottom of the Trigger badge.
 - f. Tap outside the menu to close it.
6. Check that the frequency counter readout is between **0.999950 MHz** and **1.00005 MHz**. Enter the value in the Test record.
 7. Set up the arbitrary function generator as follows:


Select menu	Setting
Waveform Type	Pulse

8. Check that reading of the frequency counter is between **0.999950 MHz** and **1.000050 MHz**. Enter the value in the Test record.

Check AFG signal amplitude accuracy

This test verifies the amplitude accuracy of the arbitrary function generator. All output amplitudes are derived from a combination of attenuators and 3 dB variable gain. Some amplitude points are checked. This test uses a 50 Ω terminator. It is necessary to know the accuracy of the 50 Ω terminator in advance of this amplitude test. This accuracy is used as a calibration factor.

1. Connect the 50 Ω terminator to the DMM as shown in the following figure and measure the resistance value.

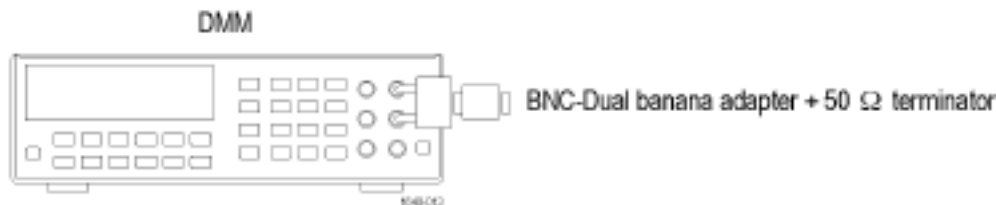

50 Ω terminator accuracy

2. Calculate the 50 Ω calibration factor (CF) from the reading value and record as follows:

$$\text{CF (Calibration Factor)} = 1.414 \times ((50 / \text{Measurement } \Omega) + 1)$$


Measurement (reading of the DMM)	Calculated CF
.	

Examples:

For a measurement of 50.50 Ω , $\text{CF} = 1.414 (50 / 50.50 + 1) = \mathbf{2.814}$.

For a measurement of 49.62 Ω , $\text{CF} = 1.414 (50 / 49.62 + 1) = \mathbf{2.839}$.

3. Connect the arbitrary function generator output to the DMM as shown in the following figure. Be sure to connect the 50 Ω terminator to the **AFG Out** connector.

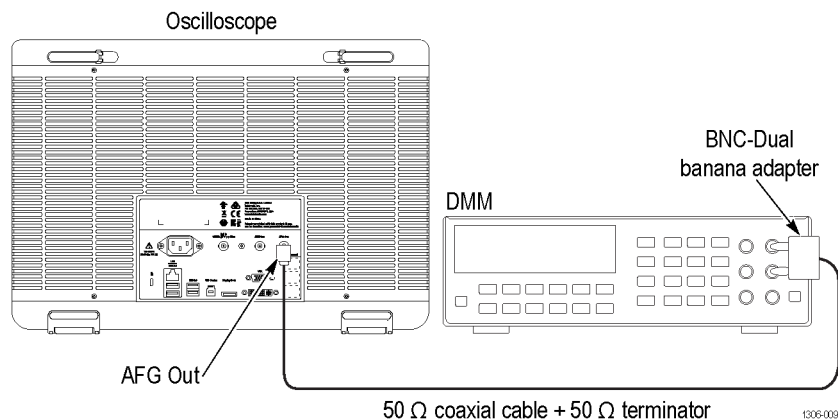

Amplitude test

4. Tap the **AFG** button and set up the arbitrary function generator output as follows:

Select menu	Setting
Waveform Type	Sine
Frequency	1.000000 kHz
Amplitude	30 mV _{PP}
Load Impedance	50 Ω
Output	On


5. Measure the **AC RMS** voltage readout on the DMM.
6. Multiply the DMM voltage by the calculated CF to get the corrected peak to peak voltage. Enter the resulting value in the Measurement field in the following table.
7. Change the AFG output amplitude to the next value in the table.
8. Repeat steps 5 through 7 for each amplitude value. Check that the peak to peak voltages are within the limits in the table below. Enter the values in the test record.

Waveform Type	Frequency	Amplitude	Measurement	Range
Sine	1.000 kHz	30.0 mV _{PP}		28.55 mV _{PP} - 31.45 mV _{PP}
Sine	1.000 kHz	300.0 mV _{PP}		294.5 mV _{PP} - 305.5 mV _{PP}
Sine	1.000 kHz	800.0 mV _{PP}		787.0 mV _{PP} - 813.0 mV _{PP}
Sine	1.000 kHz	1.500 V _{PP}		1.4765 V _{PP} - 1.5235 V _{PP}
Sine	1.000 kHz	2.000 V _{PP}		1.969 V _{PP} - 2.031 V _{PP}
Sine	1.000 kHz	2.500 V _{PP}		2.4615 V _{PP} - 2.5385 V _{PP}

Check AFG DC offset accuracy

This test verifies the DC offset accuracy of the arbitrary function generator. This test uses a 50 Ω terminator. It is necessary to know the accuracy of the 50 Ω terminator in advance of this test. This accuracy is used as a calibration factor.

1. Connect the 50 Ω terminator to the DMM as shown in the following figure and measure the resistance value.

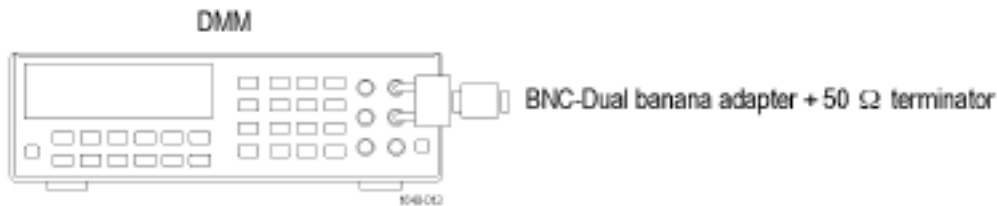

50 Ω terminator accuracy

2. Calculate the 50 Ω calibration factor (CF) from the reading value and record as follows:

3. **CF (Calibration Factor) = 0.5 × ((50 / Measurement Ω) + 1)**


Measurement (reading of the DMM)	Calculated CF

Examples:

For a measurement of 50.50 Ω, CF = 0.5 (50 / 50.50 + 1) = **0.9951**.

For a measurement of 49.62 Ω, CF = 0.5 (50 / 49.62 + 1) = **1.0038**.

4. Connect the arbitrary function generator output to the DMM as shown in the following figure. Be sure to connect the 50 Ω terminator to the arbitrary function generator **AFG Output** connector.

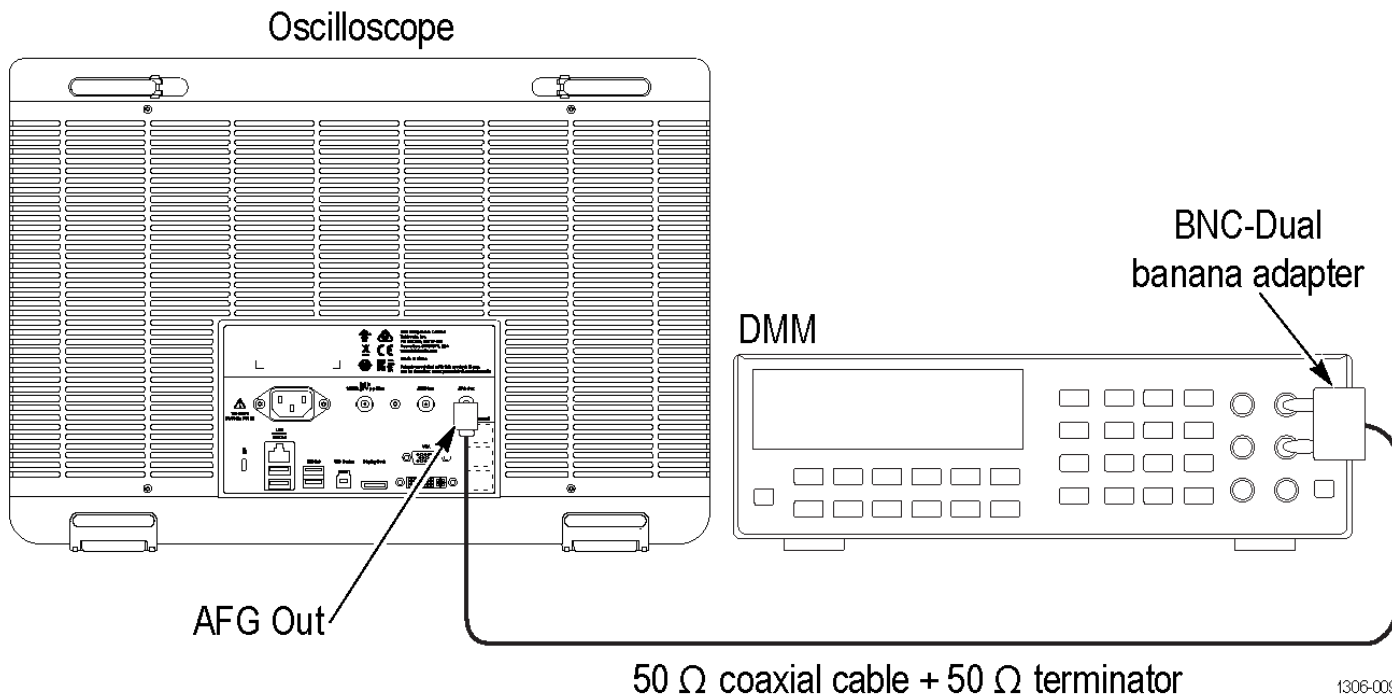

Amplitude test

5. Tap the **AFG** button and set up the arbitrary function generator as follows:

Select menu	Setting
Waveform Type	DC
Offset	+ 1.25 V
Output	On

6. Measure the voltage readout on the DMM.
7. Multiply the DMM voltage by the calculated CF to get the corrected offset voltage. Enter the resulting value in the Measurement field in the following table.

Function	Offset	Measurement	Range
DC	+ 1.25 Vdc	Vdc	1.23025 Vdc to 1.26975 Vdc
DC	0.000 Vdc	Vdc	- 0.001 Vdc to + 0.001 Vdc
DC	- 1.25 Vdc	Vdc	-1.26975 Vdc to -1.23025 Vdc

8. Change the AFG output amplitude to the next value in the table, measure the voltage readout on the DMM, multiply the DMM readout by the calculated CF to get the corrected offset voltage, and enter the resulting value in the Measurement field in the table.
9. Verify that the corrected offset measurements are within the range.