

5 μ H LISN for Tektronix EMC pre-compliance

EMI-LISN5UH (TEKBOX TBOH01 offered by Tektronix)



The EMI-LISN5UH is the TEKBOX TBOH01 5 μ H LISN. This device is required to set up conducted noise measurements of DC-powered devices and is designed to be used for EMC pre-compliance testing in the frequency range of 150 kHz to 110 MHz (according to the CISPR-25 standard, ISO 7637-2, ISO11452-2/4/5 and with limitations DO-160/ED-14G). The LISN is inserted into the supply line of the DUT (Device Under Test). Conducted noise that is present at the supply terminals of the DUT can be measured at the BNC connector using a spectrum analyzer or a measurement receiver. The source (supply) terminal and the DUT terminal are decoupled by a 5 μ H inductor.


Key features

- Frequency Range: 100 kHz to 110 MHz
- DC resistance: 40 m Ω
- Maximum current: 10 A
- Nominal operating voltage range: 0 to 60 V DC
- Built in surge protection
- Terminals suitable to clamp external source capacitors

Specifications

5 μ H LISN

Frequency range	100 kHz –110 MHz
DC resistance	40 m Ω
Maximum current	10 A
Nominal operating voltage range	10 to 60 V DC (1 GHz when insertion loss measured between DUT terminals and BNC connector; source terminals shorted)
Absolute maximum rating	200 V ¹
Impedance	

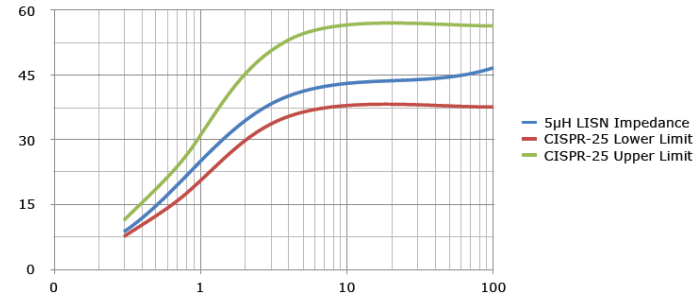

¹ The operating voltage range is limited to 60V DC for safety reasons. Though the component rating of the LISN is $\geq 200V$, the positive supply voltage could accidentally be connected to the negative terminal of the LISN and thereby to the LISN housing. Under this circumstance, a DC voltage > 60V could cause a lethal electric shock when touching the housing.

Ordering information

EMI-LISN5UH 5 μ H LISN

Item	Description
EMI-LISN5UH	5uH DC Line Impedance Stabilization Network (LISN)

Service

All service provided by TEKBOX Digital Solutions. Contact <https://www.tekbox.net/> for product information and service.

ASEAN / Australasia (65) 6356 3900
Belgium 00800 2255 4835*
Central East Europe and the Baltics +41 52 675 3777
Finland +41 52 675 3777
Hong Kong 400 820 5835
Japan 81 (3) 6714 3086
Middle East, Asia, and North Africa +41 52 675 3777
People's Republic of China 400 820 5835
Republic of Korea +822 6917 5084, 822 6917 5080
Spain 00800 2255 4835*
Taiwan 886 (2) 2656 6688

Austria 00800 2255 4835*
Brazil +55 (11) 3759 7627
Central Europe & Greece +41 52 675 3777
France 00800 2255 4835*
India 000 800 650 1835
Luxembourg +41 52 675 3777
The Netherlands 00800 2255 4835*
Poland +41 52 675 3777
Russia & CIS +7 (495) 6647564
Sweden 00800 2255 4835*
United Kingdom & Ireland 00800 2255 4835*

Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777
Canada 1 800 833 9200
Denmark +45 80 88 1401
Germany 00800 2255 4835*
Italy 00800 2255 4835*
Mexico, Central/South America & Caribbean 52 (55) 56 04 50 90
Norway 800 16098
Portugal 80 08 12370
South Africa +41 52 675 3777
Switzerland 00800 2255 4835*
USA 1 800 833 9200

* European toll-free number. If not accessible, call: +41 52 675 3777

For Further Information. Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit www.tek.com.

Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.

